



Building-resolving simulations of anthropogenic and biospheric CO_2 in the city of Zurich with GRAMM/GRAL

Dominik Brunner¹, Ivo Suter¹, Leonie Bernet¹, Lionel Constantin¹, Stuart K. Grange^{1,*}, Pascal Rubli¹, Junwei Li², Jia Chen², Alessandro Bigi³, and Lukas Emmenegger¹

Correspondence: Dominik Brunner (dominik.brunner@empa.ch)

Abstract. Urban areas are significant contributors to global CO_2 emissions, requiring detailed monitoring to support climate neutrality goals. This study presents a high-resolution modeling framework using GRAMM/GRAL, adapted for simulating atmospheric CO_2 concentrations from anthropogenic and biospheric sources and sinks in Zurich, Switzerland. The framework resolves atmospheric concentrations at the building scale, and it employs a detailed inventory of anthropogenic emissions as well as biospheric fluxes, which were calculated using the Vegetation Photosynthesis and Respiration Model (VPRM). Instead of simulating the full dynamics of meteorology and atmospheric transport, the dispersion of CO_2 is precomputed for more than 1000 static weather situations, from which the best match is selected for any point in time based on the simulated and measured meteorology in and around the city. In this way, time series over multiple years can be produced with minimal computational cost. Measurements from a dense network of mid-cost CO_2 sensors are used to validate the model, demonstrating its capability to capture spatial and temporal CO_2 variability. Applications to other cities are discussed, emphasizing the need for high-quality input data and tailored solutions for diverse urban environments. The work contributes to advancing urban CO_2 monitoring strategies and their integration with policy frameworks.

1 Introduction

Cities play a crucial role in tackling the challenge of climate change as they are responsible for close to 70% of global CO_2 emissions (Seto et al., 2014). Cities around the world have recognized their responsibility and set ambitious goals to reduce emissions in support of the Paris Climate Agreement. The city of Zurich, for example, aims to become climate neutral by 2040 following the public vote on the 'Net Zero 2040 Climate Protection Target'.

The Enhanced Transparency Framework of the Paris Agreement provides guidelines for countries on how to communicate their targets and collect and report their emissions. Due to these standardized procedures and the availability of comprehensive socioeconomic data, emission inventories are often quite accurate on a national scale. This is particularly true for CO₂ emissions, which are usually dominated by fossil fuel consumption, for which accurate national statistics exist. At the city level, in contrast, reliable statistical data are often lacking and domain boundaries are less clearly defined, for example, due

¹Empa, Swiss Federal Laboratories for Materials Science and Technology, Dübendorf, Switzerland

²Electrical and Computer Engineering, Technische Unversität München, Munich, Germany

³Dipartimento di Ingegneria "Enzo Ferrari", Universita degli Studi di Modena e Reggio Emilia, Modena, Italy

^{*}now at Queensland University of Technology, Brisbane, Australia



55



to commuter traffic and the consumption of energy produced outside the city. Although the Global Protocol for Community-Scale Greenhouse Inventories (GPC) offers a widely accepted emission reporting framework (Fong et al., 2014), most cities still follow their own procedures, which vary greatly in terms of detail and accuracy (Gurney et al., 2021; Ahn et al., 2023).

To track progress towards the reduction targets, consistent, reliable, and timely emission information is required. National and city-scale emission inventories are traditionally compiled "bottom-up" from statistical activity data and emission factors, or from fuel consumption data as in the case of CO₂. Depending on the quality and completeness of the input data and the resources available to process these data, the inventories may be associated with considerable uncertainty and are often delayed by several years. In a recent study, Gurney et al. (2021) compared Scope 1 greenhouse gas emissions reported by 48 cities in the U.S. with independent estimates from the Vulcan CO₂ emission data product. They found relative differences between -145.5% and 63.5%, which highlights the large uncertainty in self-reported city inventories.

It is therefore desirable to verify these inventories with independent data and to complement the estimates with more timely information. Such independent estimates can be provided by "top-down" methods that combine measurements of atmospheric concentrations with atmospheric transport simulations (Bergamaschi et al., 2018). Emissions from a city produce a gradient in atmospheric concentrations between regions upstream and downstream, which can be measured by a suitable measurement network. An atmospheric transport model is required to provide the quantitative link between emissions and measured concentrations. Starting from an a priori estimate of the emissions based on a bottom-up inventory, observations and the transport model information are then combined in a mathematical inversion. This process generates an a posteriori estimate that brings the simulated concentrations closer to the observations.

Top-down methods have been demonstrated for a number of cities including Indianapolis (Turnbull et al., 2018; Lauvaux et al., 2020), Los Angeles (Brioude et al., 2013), Boston (Sargent et al., 2018) and Paris (Nalini et al., 2022; Staufer et al., 2016). However, important questions remain regarding the suitability of different observation and modeling strategies. Cities vary greatly in terms of size, structure and topography and in terms of their natural, economic and societal environment. It is therefore unlikely that a single monitoring strategy optimally fits all cities.

Against this background, the EU Horizon 2020 Project ICOS-Cities / PAUL (Pilot Applications in Urban Landscapes) was initiated to evaluate different monitoring strategies in three European cities varying in size and complexity, namely Paris, Munich and Zurich. The study presented here focuses on Zurich, which is the smallest of the three cities but the largest agglomeration in Switzerland with 447,082 inhabitants (31 Dec 2023) within the city boundaries and an additional population of approximately 1,000,000 in the surrounding agglomerations. The city has a complex topography (see Fig. 1) with the Albis mountain ridge in the west (tallest elevation Üetliberg 870 m a.s.l.) and a series of hills further in the east aligned along a northwest to southeast axis with Hönggerberg (541 m a.s.l.), Käferberg (571 m a.s.l.), Zürichberg (676 m a.s.l) and Adlisberg (701 m a.s.l.). The main part of the city is in the Limmat Valley (valley floor at about 400 m a.s.l.) between Albis and this line of hills. Additional districts are in the Glatt Valley on the eastern side of the hills.

In order to account for the complex landscape and topography of Zurich, a dense network of low- and mid-cost CO_2 sensors has been set up providing measurements at street level and above rooftop. The network of mid-cost sensors, namely ZiCOS-M, is described in detail in Grange et al. (2024). The city network is complemented by three background sites, of which two are





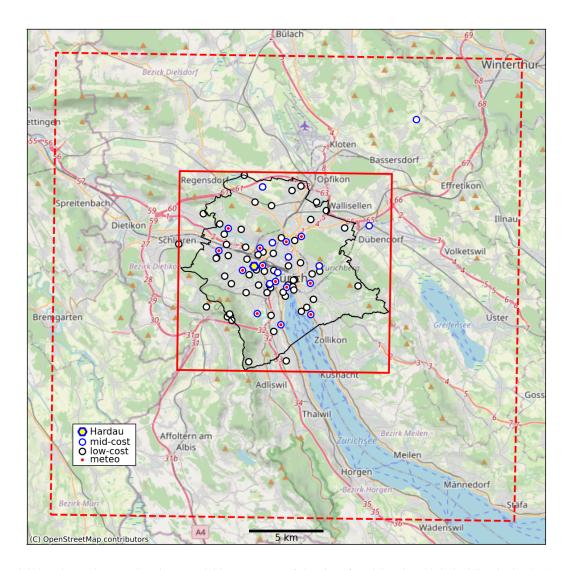


Figure 1. Model domains and sensor locations overlaid over a map of the city of Zurich. The red dashed line is the GRAMM domain, the red solid line the GRAL domain. The black solid line denotes the political boundaries of the city. Different types of sensors are shown with different symbols as indicated by the legend. Background map: © OpenStreetMap contributors 2024. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

equipped with high-precision Picarro instruments and one with a mid-cost sensor. As an alternative, an Eddy covariance system for direct CO_2 flux measurements was installed on a 16.5 m mast on top of one of the tallest (95.3 m) buildings in the city. These Eddy flux measurements will be discussed in a separate study.

To constrain the CO_2 emissions of the city, the measurements from the sensor network will be used in an inverse modeling framework together with high-resolution atmospheric transport models. Here, we describe one of these model systems,





GRAMM/GRAL, which was previously used for air pollution simulations in the city of Zurich (Berchet et al., 2017a, b) and adapted here for the simulation of CO_2 . The model operates at a high horizontal, building-resolving resolution of $10 \,\mathrm{m} \times 10 \,\mathrm{m}$, which is required to capture the situation at the low-cost sensor sites at street level, but it may also be an advantage to represent the CO_2 concentrations at rooftop level.

To take full advantage of GRAMM/GRAL, the CO_2 simulations need to be fed by emissions from an inventory of comparable resolution. The city of Zurich has developed a detailed GIS (Geographical Information System) inventory for air pollutants and CO_2 , which describes the emissions of 65 individual sectors as point, line or area sources. This inventory is used as input for GRAMM/GRAL to compute the distribution of anthropogenic CO_2 within the city at hourly resolution.

Urban CO_2 concentrations are not only affected by anthropogenic emissions, but also by the exchange of CO_2 with the biosphere. The impact of vegetation on urban CO_2 can be in a similar range as the anthropogenic signal, especially during the growing season when plants take up CO_2 by photosynthesis (Sargent et al., 2018). In order to isolate the anthropogenic signal, it is therefore imperative to also simulate the influence of vegetation.

The aim of this study is to provide a detailed description of the GRAMM/GRAL model system together with the input data required for the simulation of anthropogenic and biospheric CO₂ and to demonstrate its performance by comparing simulated and measures CO₂ concentrations. This study forms the basis for subsequent work on the assimilation of the observations in an inverse modeling framework with GRAMM/GRAL.

Sect. 2 discusses the model set-up, the measurement network, the emission inventories, as well as the representation of CO2 contributions from human respiration and vegetation. Sect. 3 describes the modeling chain applied to generate time series of CO₂ maps and station concentrations. Finally, Sect. 4 presents the performance of the model in terms of spatial distribution and temporal variability compared with in-situ measurements.

2 Data and methods

2.1 Low- and mid-cost sensor network

The sensor network consists of 61 sites with paired low-cost CO₂ sensors and 22 sites with mid-cost sensors (see Fig. 1). The total number of measurement locations is 77, since 6 of the 22 mid-cost sites are also equipped with low-cost sensors to better characterize their performance. The low-cost sensors are mostly mounted on lamp poles close to the ground (typically 3 - 5 m a.g.l.) and often adjacent to roads. The mid-cost sensors, in contrast, are primarily used for measurements at telecommunication antennas of the company Swisscom above rooftops (15 out of 22). The low-cost sensors are Senseair LP8 NDIR (Non-dispersive Infrared) sensors, which were integrated into a small housing with battery power and Low-Power Network (LoRaWan) communication by the commercial partner Decentlab. Their precision of about 10 ppm is sufficient to measure increments produced by local emissions such as nearby streets as well as accumulation of CO₂ in stable nocturnal boundary layers, but not to measure city-scale gradients. More details on the low-cost sensors and their calibration is presented in Müller et al. (2020). The calibration strategy has recently been revised to better incorporate information from the mid-cost sensors, which will be described in a forthcoming publication.



105

115

120

125



The mid-cost sensors are based on the same NDIR technique but with important differences: They are more sensitive, temperature-stabilized, mostly mounted inside air-conditioned rooms, and ambient air is actively drawn in by a pump, often through several tens of meters of sampling line from the inlet above rooftop. Furthermore, the sensors are calibrated daily by supplying air from two calibration gas cylinders with approximately 400 ppm and 600 ppm of CO₂ referenced to the WMO X2019 scale. Three different brands of mid-cost sensors are used: Senseair HPP, Vaisala GMP 343, and LI-COR 850, all integrated into the same housing assembled by Decentlab and equipped with LoRaWan communication for automated data transfer. Before deployment in the field, all low- and mid-cost sensors were characterized during outdoor measurements in parallel with a high-precision instrument (Picarro) at Empa, Dübendorf (see Fig. 1). The mid-cost sensor network and its performance are described in detail in Grange et al. (2024).

The city network was completed in early July 2022 and operated fully until September 2024, followed by a scale-down phase to optimize resources. Although the rooftop locations were carefully selected to be well above roof level and away from local sources, contamination by nearby chimneys and ventilation shafts could not always be avoided. In November 2022, many of the mid-cost sites were therefore equipped with additional meteorological sensors (wind, temperature, humidity, pressure) to better characterize the influence of nearby sources as a function of wind conditions and to flag contaminated observations. These sites, denoted with red circles in Fig. 1, provide invaluable wind information for the GRAMM/GRAL simulations.

Three sites at distances of 13 km to 33 km from the city center are used to characterize background levels of CO₂. Two of the sites (Beromünster, Lägern-Hochwacht) are equipped with high-precision Picarro G2401 instruments (Oney et al., 2015). They are located outside the map presented in Fig. 1 towards the southwest (Beromünster) and northwest (Lägern), respectively. The background site Breite-Birchwil is located to the northeast of Zurich (blue circle in the upper right part of Fig. 1) and is equipped with a LI-COR 850 mid-cost sensor.

2.2 GRAMM/GRAL model setup

The model system GRAMM/GRAL was developed at the Graz University of Technology and consists of the non-hydrostatic weather model GRAMM and the computational fluid dynamics and Lagrangian particle dispersion model GRAL, both at version v19.01. The dispersion of CO_2 from vegetation was computed later using version v23.11 of GRAL. We largely followed the setup presented by Berchet et al. (2017b) for the simulation of nitrogen oxides over Zurich. In particular, we applied the same catalogue approach, which allows simulating extended periods of time at affordable computational cost. Instead of simulating the dynamic evolution over a given period of time, the flow and CO_2 concentration fields are computed for a fixed set of weather situations representing different synoptic forcings (large-scale wind speed and direction) and atmospheric stabilities. For each situation, the dispersion of CO_2 is integrated until a steady-state concentration field is reached. It is assumed that the meteorological conditions and corresponding CO_2 dispersion of any hour of a year can be represented by a static situation from the catalogue. The most appropriate situation is selected by comparing the simulated flow fields with actually measured meteorological conditions (see Sect. 2.7). This approach allows long time series to be constructed at minimal computational cost.



140

145

150

155

160



The catalogue consist of 1120 predefined weather situations, which are combinations of 40 wind directions (40 directional sectors of 9°), 7 wind speed classes (0.25, 0.75, 1.5, 2.5, 4, 5.5, 7 m/s) and 7 Pasquill-Gifford-Turner stability classes (Turner, 1964) with classes A (most unstable) to G (most stable). Note that a large number of combinations, e.g. high stability and strong winds, are meteorologically not meaningful and were therefore excluded.

The generation of the catalogue involves three different types of simulations. First, the mesoscale flow over a domain of 30 km x 30 km centered over Zurich is computed with GRAMM at a horizontal resolution of 100 m x 100 m (see Fig. 1). The vertical resolution is 10 m near the ground and stretched with increasing height with a stretching factor of 1.2 up to around 2700 m above ground (22 levels in total). GRAMM accounts for the influence of the topography and land use (roughness, albedo, emissivity, soil moisture and heat capacity) on the mesoscale flow. It was specifically developed for simulations in steep, mountainous terrain, where many other mesoscale models become unstable (Oettl, 2021). All inputs required for the simulations with GRAMM or GRAL, including anthropogenic emissions and inputs required for the computation of biospheric fluxes, are listed in Table 1.

In GRAMM, vertical profiles of temperature and humidity as well as solar azimuth are prescribed according to the stability class. For stable conditions, for example, no solar radiation is assumed, which favors the formation of cold air drainage flows down the hills surrounding the city. An example of the flow at the second model level (centered at 16 m above surface) for a westerly forcing of 2.5 m s⁻¹ is presented in Fig. 2 for both a stable and an unstable situation. In both situations, winds are strongest on top of the hills and lower in the city center. However, there are also major differences. In the unstable situation, the flow is more strongly distorted due to the presence of thermally-induced wind systems such as up-slope winds along the hills and a lake breeze along the shores of Lake Zurich.

The second simulation is a GRAL flow simulation for a smaller domain of 13 km x 13 km at much higher horizontal (10 m x 10 m) and vertical resolution (2 m) in order to resolve the flow around buildings in the city. We used the more accurate but also more expensive option of GRAL to solve the flow prognostically. In this case, GRAL solves the Reynolds averaged Navier-Stokes (RANS) equations neglecting Coriolis and buoyancy forces and simulates turbulent mixing using a mixing-length approach as default option. Obstacles such as buildings are represented as square blocks, and the topography is represented as a sequence of 2 m tall steps. It should be noted that even at such a high resolution, the flow in narrow streets and backyards is not well represented, which limits the comparison with corresponding observations. The GRAL simulation is forced at its lateral (inflow) boundaries by the GRAMM flow simulated in step 1. GRAL uses the same topography without interpolation.

The third simulation is a CO_2 dispersion simulation with a Lagrangian particle dispersion model, again performed by GRAL. Virtual particles carrying a fixed mass of CO_2 are released from emission sources at a rate that is proportional to the source strength. They are then transported forward by the flow computed in the previous step and by stochastic dispersion depending on the stability class. Concentrations are computed by summing up the masses of all particles in a given volume. For further details on the GRAMM and GRAL models we refer to Oettl (2015) and the extensive documentation published online by the Graz University of Technology (2023).

Concentrations were written out at 10 m x 10 m horizontal resolution for 9 vertical layers at 2, 5, 10, 20, 30, 45, 60, 75 and 100 m above ground. In order to determine the contribution of different emission sectors and biospheric fluxes, CO₂ fields





Table 1. Input data for the GRAMM and GRAL simulations.

Purpose	Description	Source	Link
		GRAMM	
Orography	ASTER global digital	NASA JPL	https://search.earthdata.nasa.gov
	elevation model V003		
Land use	CORINE 2018	Copernicus Land	https://land.copernicus.eu/en/products/
		Monitoring Service	corine-land-cover/clc2018
	C	GRAL incl. Anthropogenic En	nissions
3D buildings	3D block model	City of Zurich, Geomatik +	https://opendata.swiss/de/dataset/
	(LoD 1)	Vermessung (GEOZ)	bauten-blockmodell-inkl-3d
Emissions in city	MapLuft 2020	City of Zurich, Umwelt und	https://www.stadt-zuerich.ch/geodaten/download/
		Gesundheitsschutz (UGZ)	Emissionskataster_Luftschadstoffe_und_Treibhausgase
Emissions outside	Swiss national inventory	BAFU/Meteotest/INFRAS	not publicly available
	2020 in rasterized form		
Human respiration	Residents and employees	Canton of Zurich,	https://www.geolion.zh.ch/geodatensatz/
	Quartieranalyse	Statistical Office	show?gdsid=485
		VPRM Biospheric Fluxe	s
Vegetation cover	Amtliche Vermessung 2024	Canton of Zurich,	https://geolion.zh.ch/geodatenprodukt/
		Statistical Office	show?gdpnummer=10016
Cropland	Urban Atlas 2018	Copernicus Land	https://land.copernicus.eu/en/
		Monitoring Service	products/urban-atlas/urban-atlas-2018
Vegetation height	Vegetationshöhenmodell	WSL, National	https://opendata.swiss/de/dataset/
	NFI 2021	Forest Inventory	vegetationshohenmodell-lfi
Tree type	Waldmischungsgrad	WSL, National	https://opendata.swiss/de/dataset/
	NFI 2021	Forest Inventory	waldmischungsgrad-lfi
Satellite indices	Sentinel-2	Copernicus Land	https://dataspace.copernicus.eu/explore-data/
		Monitoring Service	data-collections/sentinel-data/sentinel-2
Example	how we should do	first line	https://dataspace.copernicus.eu/explore-data/
		secondline	data-collections/sentinel-data/sentinel-2

were computed for 24 different source groups individually, of which 17 groups represent anthropogenic sources, 5 represent biospheric contributions and 2 human respiration (see Table A in the Appendix).

Since these concentration fields are representative for an annual average emission rate, they need to be scaled by the ratio of actual emissions to annual average emissions to compute the CO_2 distributions for any given hour of the year. Because the temporal profiles are source-specific, the scaling needs to be applied for each source sector separately.





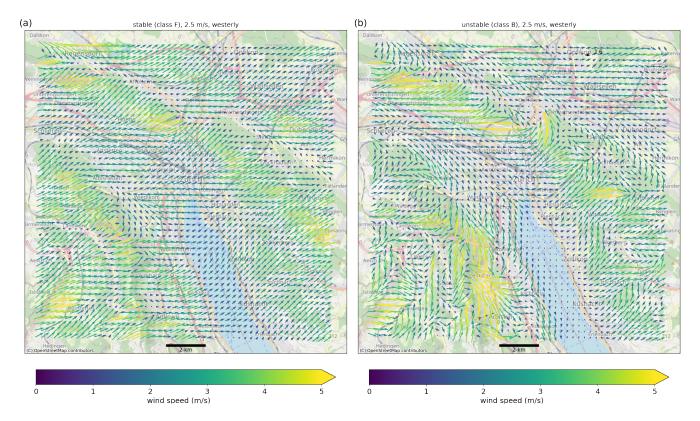


Figure 2. Example of GRAMM winds for (a) a stable (class F) and (b) an unstable (class B) situation, both forced at the lateral boundaries with a westerly flow of 2.5 m/s. The figure does not show the whole GRAMM domain but only a zoom into the area covered by GRAL. Background map: © OpenStreetMap contributors 2024. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

As also described by Berchet et al. (2017b), the simulated CO_2 concentration c for any given hour h and location \mathbf{x} is thus obtained as

$$c(h, \mathbf{x}) = c_{bg}(h) + \sum_{i \in sectors} \tau_i(h) \cdot c_i(\eta(h), \mathbf{x}), \tag{1}$$

where $\tau_i(h)$ is the temporal scaling factor for source sector $i, c_i(\eta(h), \mathbf{x})$ is the CO_2 concentration for catalogue entry $\eta(h)$ at location x, and $c_{bg}(h)$ is the background concentration. The temporal profiles applied for the different sectors and biospheric fluxes are described in Sect. 2.6. The procedure for identifying the catalogue entry $\eta(h)$ best matching the current hour h is presented in Sect. 2.7. The estimation of a suitable background $c_{bg}(h)$ is described in Sect. 2.8.

2.3 Anthropogenic emissions

The city of Zurich has developed a detailed inventory of point, line and area sources, called MapLuft. The inventory is currently available for the years 2010, 2015, 2020 and 2022. It covers 9 air pollutants (PM10, PM2.5, NO_x , CO, SO_2 , NH_3 , VOCs, soot,



180

185

190



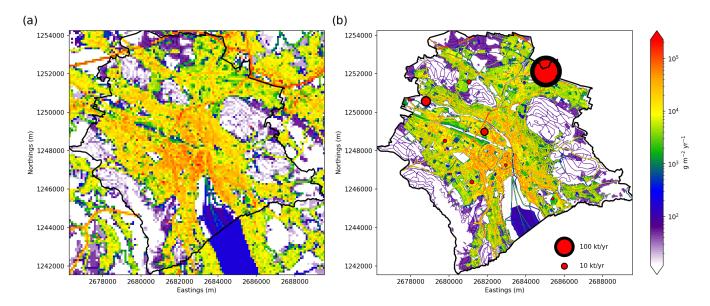


Figure 3. Anthropogenic CO_2 emissions from Zurich's MapLuft inventory in 2022 at (a) $100 \,\mathrm{m}$ x $100 \,\mathrm{m}$ and (b) $10 \,\mathrm{m}$ x $10 \,\mathrm{m}$ resolution (right). Panel (a) includes emissions from the gridded Swiss CO_2 inventory outside the city boundaries. Panel (b) also displays the 10 largest point sources as black/red circles with areas proportional to the emissions.

benzene) and 3 greenhouse gases (CO_2 , CH_4 , $\mathrm{N}_2\mathrm{O}$) divided into 65 different source sectors (see Appendix Table A). Here, we only use the inventory for CO_2 . Maps of the total CO_2 emissions from all sectors are presented in Fig. 3 in two different resolutions. The left panel shows emissions at 100 m resolution and includes emissions outside the city boundaries taken from the Swiss CO_2 inventory. The right panel shows the MapLuft emissions within the city boundaries at 10 m resolution with the ten largest point sources overlaid as circles with sizes proportional to emission strength. By far the largest point source accounting for 244.6 kt or 19.5% of total CO_2 emissions in 2022 is the waste-to-energy plant Hagenholz in the northeastern corner of the city. Note that the emissions were provided to GRAL directly as point, line or area sources rather than in a gridded format. Emissions from heating systems, for example, were released above roof level at the exact locations and altitudes of more than 24,000 chimneys in the city.

The processing of the GIS-inventory to the input format required by GRAL was performed using the python tool emiproc (Constantin et al., 2025). In order to save computation time, the 65 source sectors from MapLuft were lumped into 10 broader groups before simulating them in GRAL (see Appendix Table A). The grouping was based on two considerations: (a) Sectors should have similar temporal variability such that their activity can be represented by a single temporal profile. (b) Fossil and non-fossil sources should be in separate groups whenever possible. Three additional groups (IDs 71, 72, 74) were simulated to separate oil from other fossil heating systems and to distinguish between the two waste-to-energy power plants. Isolating oil heating systems was considered useful as their emissions are declining rapidly due to their replacement by gas and district





Table 2. Annual total anthropogenic emissions (excluding human respiration) in the city of Zurich per GNFR category.

Sector	CO ₂ fos (kt)	CO ₂ bio (kt)	CO ₂ fos (%)	CO ₂ bio (%)
A - Public Power	134.7	127.2	10.72	10.13
B - Industry	10	0	0.80	0.00
C - Other stationary combustion	554.2	21.5	44.12	1.71
D - Fugitives	0	0	0.00	0.00
E - Solvents & product use	0	0	0.00	0.00
F - Road transport	354.4	8.7	28.21	0.69
G - Shipping	0.9	0	0.07	0.00
H - Aviation	0	0	0.00	0.00
I - Off Road	16	0	1.27	0.00
J - Waste	27.8	0	2.21	0.00
K - AgriLivestock	0	0	0.00	0.00
L - AgriOther	0	0	0.00	0.00
R - Other	0.1	0.7	0.01	0.06
Total	1098.1	158.1	87.41	12.59

heating. Sector 74 represents only the emissions from the waste-to-energy plant Hagenholz, which allows separating it from a similar plant inside the city center that was turned off in summer 2021, before the start of the measurements.

Four more sectors (IDs 34-37) were added to represent emissions within the GRAL domain but outside the city boundaries. These were taken from the Swiss-wide Meteotest inventory available on a 100 m x 100 m grid. All data was provided in the Swiss coordinate system LV95, which is the system used for almost all geo-referenced data in Switzerland.

An overview of the absolute and relative contribution of different source sectors is presented in Table 2. For easier comparison with other inventories, the sources were grouped here according to the GNFR (Gridded Nomenclature For Reporting) classification. The percentage numbers refer to the total fossil + biogenic CO₂ emissions of 1256.2 kt in 2022. Biogenic sources made up a non-negligible fraction of 12.6% primarily due to the burning of waste in the Hagenholz plant, for which the study of Mohn et al. (2012) estimated a share of 52% to be non-fossil based on radiocarbon analysis. Other relevant biogenic sources were residential wood burning and biofuels in traffic. The three largest CO₂ source sectors were stationary combustion/heating (45.8%), traffic (28.9%) and public power (20.8%, dominated by Hagenholz).

2.4 Biospheric fluxes

200

205

210

The exchange of CO₂ with vegetation was simulated with the Vegetation Photosynthesis and Respiration Model (VPRM) (Mahadevan et al., 2008). VPRM parametrizes gross photosynthetic production (GPP) and respiration (RE) for different vegetation types using a simple set of equations with minimal parameters. The model requires inputs such as air temperature, solar radiation, and satellite-based indices to capture vegetation dynamics and soil water availability.



215

230

235



Although a version of VPRM tailored to urban environments is available (Hardiman et al., 2017), we used the original formulation of Mahadevan et al. (2008) but with updated parameters for the five vegetation types present in the city, i.e. deciduous trees, evergreen trees, mixed forest, grass and cropland (Appendix Table A). The parameters were generated following the method of (Glauch et al., 2025), and are identical to those presented in Stagakis et al. (2024). A detailed comparison with three other vegetation models and with observations collected in four urban parks in Zurich showed that this new set of parameters produces realistic GPP and RE fluxes (Stagakis et al., 2024).

Standard land cover products such as CORINE do not have sufficient resolution nor properly represent street trees. Therefore, a custom-made land and vegetation cover map (Fig. 4) was produced on the 10 m x 10 m resolution grid of GRAL by combining the following four data sources (see also Table 1):

- Land use cadaster (Amtliche Vermessung) of the Canton of Zurich, the official land registry of the Canton, which served
 as base map.
- The Urban Atlas 2018 from the Copernicus Land Monitoring Service was used to distinguish cropland from grassland,
 which was not possible with the land use cadaster alone.
- The Vegetation Height Model from the Swiss National Forest Inventory was used to identify trees, especially trees in street canyons and parks. This data set is based on a combination of stereo aerial images and Lidar observations.
 - Forest Mixture (Waldmischungsgrad) from the Swiss National Forest Inventory to distinguish deciduous from evergreen trees. This data set is based on Sentinel-1 and Sentinel-2 satellite observations and a machine learning classification algorithm. A forest mixture ratio above 80% was classified as deciduous, a ratio of 20% to 80% as mixed, and less than 20% as evergreen. Note however that a large majority of pixels classified as mixed inside the city are actually deciduous trees.

From each $10 \,\mathrm{m}$ x $10 \,\mathrm{m}$ pixel covered by a given vegetation type, CO_2 was released in GRAL at a fixed rate of $1.0 \,\mathrm{kg} \,\mathrm{h}^{-1}$ to compute the CO_2 distribution expected from a unit release of CO_2 from all pixels covered by that vegetation (e.g. grass). For any given hour, this distribution was then scaled by the ratio of the actual photosynthetic uptake and respiration of CO_2 computed with VPRM to the unit flux. Further details are provided in Sect. 2.6.2.

2.5 Human respiration

Human respiration is a non-negligible source of CO_2 in cities (Ciais et al., 2020). Based on the number of residents and employees from the Quartieranalyse of the Canton of Zurich (see Table 1) and an average emission rate of 1 kg CO_2 per person per day, total emissions in Zurich were estimated to 163 kt yr⁻¹, which is 13.0% of the total anthropogenic emissions of 1,256 kt yr⁻¹ listed in Table 2. A rate of 1 kg per day is close to other estimates, e.g. the global average of 0.903 kg per day suggested by Cai et al. (2022) or the average rate for Chinese citizens of 0.935 kg per day estimated by Wang et al. (2024).

The Quartieranalyse resolves the number of residents and employees at the district level. This information was then distributed over all buildings in the district proportional to building volume to produce the maps shown in Fig. 5. Lacking any





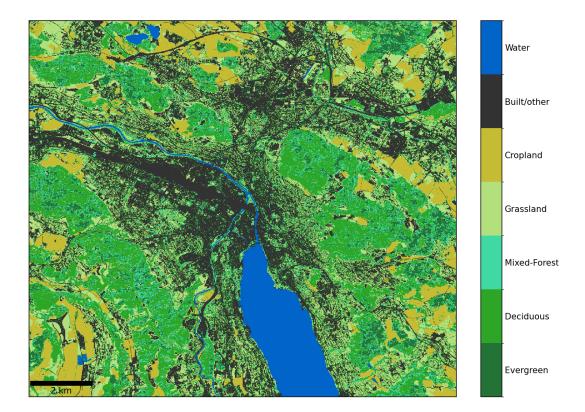


Figure 4. Custom-made land and vegetation cover map for Zurich.

information on where and at what altitude exactly CO₂ from human respiration is released to the atmosphere, we assumed that
these emissions occur at an altitude of 1 m above any surface within the district including roofs. This assumption is a major
simplification, but a more accurate treatment of human respiration would require a detailed modeling of the person's behavior
and mobility data and information of building ventilation systems, which is beyond the scope of the present study.

2.6 Temporal scaling of emissions and biospheric fluxes

As shown in Eq. 1, the CO_2 concentration simulated for any given hour h is obtained by scaling the concentration fields for each source group i with suitable temporal factors $\tau_i(h)$. Note that all emissions from a given source group are varied in the same way across the whole city. Possible temporal differences, for example, in traffic activity between the city center and outskirts cannot be accounted for in this way. The chosen temporal profiles for anthropogenic emissions, biospheric (VPRM) fluxes and human respiration are described in detail in the following.





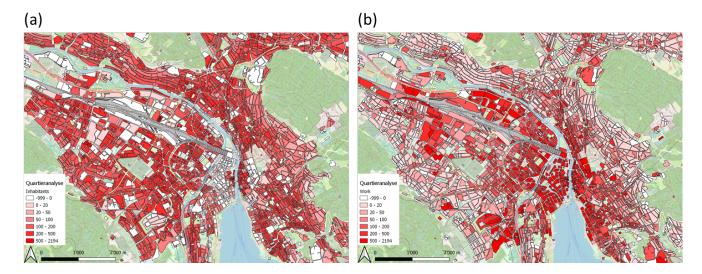


Figure 5. Number of (a) residents and (b) employees in units of persons per hectare. Background map: © OpenStreetMap contributors 2024. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.

2.6.1 Anthropogenic emissions and human respiration

Depending on the sector, temporal profiles were either derived from actual activity data or were standard profiles from Kuenen et al. (2014). Traffic (GNFR sector F) was scaled with the ratio of the actual hourly traffic intensity to the annual mean traffic deduced from 182 traffic counters distributed over the city. Unfortunately, the counters do not distinguish between different modes of transport, such that the same profiles had to be applied to both cars and trucks. The daily mean scaling factors for the period September 2022 to August 2023 and the mean diurnal cycles are shown in Fig. 6. The daily factors reveal a pronounced weekly cycle with reduced traffic on weekends and dips during holidays, especially in the Christmas and summer holiday seasons. The mean diurnal cycle shows a sharp increase in the early morning hours, a gradual growth during the day, and a rapid decrease in the evening hours. Note that local time is UTC+1 in winter and UTC+2 in summer, which leads to some smoothing of the annually averaged profiles when plotted against UTC.

Daily emissions from heating systems (GNFR sector C) were scaled with a heating degree days (HDD) approach, which describes the heating demand depending on the difference between indoor and outdoor temperatures. The daily average heating demand is calculated from a daily mean 2 m outdoor temperature T_{2m} as follows:

$$HDD(d) = \begin{cases} T_{in} - T_{2m}(d), & \text{if } T_{2m}(d) \le T_{min} \\ 0, & \text{otherwise} \end{cases}, \tag{2}$$

where T_{in} is the indoor temperature (set to 20°C) and T_{min} is a threshold temperature below which heating systems are activated (set to 12°C). The activity for a given day is then the ratio of the daily HDD(d) to the annual mean \overline{HDD}





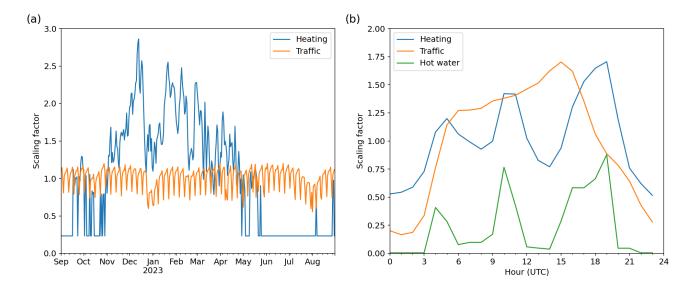


Figure 6. Temporal scaling factors for traffic and heating. (a) Daily mean factors for the period September 2022 - August 2023. (b) Mean diurnal cycles including the heating demand cycle for hot water production alone.

$$270 \quad a_{HDD}(d) = \frac{HDD(d)}{\overline{HDD}}.$$
 (3)

To obtain an hourly scaling factor, the daily activity is modulated by a diurnal (hour-of-day) activity profile p_{HDD} . Independent of outdoor temperatures, there is an additional heating demand for hot water production, which also has a diurnal profile p_{HW} . The final hourly heating activity was computed as

$$a_H(h) = (1 - f_{HW}) \cdot a_{HDD}(D) \cdot p_{HDD}(h) + f_{HW} \cdot p_{HW}(h), \tag{4}$$

with f_{HW} being the fraction of the total heating energy used for hot water production, which was set to 0.233. The diurnal profiles p_{HW} and p_{HDD} are provided in the supplementary material. These profiles and the fraction f_{HW} were derived from a detailed heating demand simulation for the entire city of Zurich performed with CESAR-P, an open-source building energy model (Orehounig et al., 2022). The diurnal profiles in CESAR-P are based on standard heating profiles defined by the Swiss Society of Engineers and Architects. We smoothed these idealized profiles with a 5 hour sliding average to better account for the variability in heating system operations and people's behaviors.

For all other sectors, a superposition of three fixed temporal profiles was used representing hour-of-day, day-of-week, and seasonal variability. The corresponding profiles are presented in Fig. 7.

Profiles for public transport and ship operations on Lake Zurich were deduced from published time schedules separately for weekdays, Saturdays and Sundays. Public transport is only a relevant source of CO₂ in the outskirts because in the city center



290

295

300



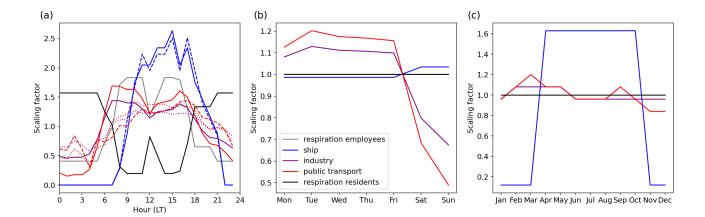


Figure 7. Temporal scaling factors (normalized to 1) for the sectors industry, public transport, shipping and human respiration from residents and employees. (a) Diurnal cycle of hourly factors, (b) day-of-week cycle of daily factors, (c) seasonal cycle of monthly factors. There are three different diurnal cycles for public transport and shipping reflecting differences between weekdays (solid line), Saturdays (dotted) and Sundays (dashed).

all busses (and trams) run on electric power. Shipping is mostly limited to the months of April to October. There are slightly more ship cruises during weekends. The profiles for industrial activities were taken from Kuenen et al. (2014).

Temporal variability of emissions from human respiration was simulated with two separate diurnal profiles, one for residents and one for employees. The profile for residents was deduced from a standardized building occupancy profile for residents from the Swiss Society of Engineers and Architects (black line in Fig. 7(a)). The profile for employees is simply a mirrored image of the profile for residents, assuming that persons being residents at night turn into employees during the day. The two opposing profiles are not only applied to different spatial distributions of residents and employees (see Fig. 5), but also to different total numbers of persons in each category. According to the Quartieranalyse, the number of employees in Zurich is larger than the number of residents, because more people are commuting into the city than in the opposite direction. This leads to overall higher total emissions from human respiration during daytime. An additional reduction at night would be expected from lower respiration during sleeping than during daytime activities (Cai et al., 2022), but this was not accounted for. For both residents and employees we assumed that the maximum occupancy was only 80% of the registered numbers (i.e. of the maximum capacity) to account for the fact that neither are all residents always at home nor all employees always at their workplaces.

2.6.2 Vegetation photosynthesis and respiration

Temporal variability of vegetation photosynthesis and respiration depends on plant phenology and environmental conditions. As explained earlier, these processes were simulated with VPRM. The main inputs to VPRM are ambient 2 m temperature, solar radiation, and two satellite-based indices, the Enhanced Vegetation Index (EVI) as a measure of greenness, and the Land Surface Water Index (LSWI) as a measure of soil water availability. Using these inputs, VPRM computes GPP and RE using vegetation-specific parameters for the type of vegetation present in the domain, which in our case was deciduous trees,



310

315



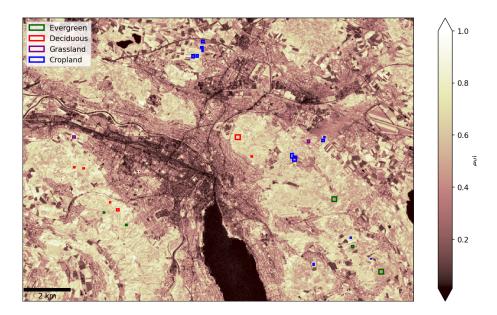


Figure 8. Enhanced Vegetation Index from Sentinel-2 on 3 June 2023. The patches used for scaling the fluxes of four different vegetation types are overlaid in different colors.

evergreen trees, mixed forest, grassland and cropland. The equations and parameters used here are provided in Stagakis et al. 305 (2024).

Because the catalogue approach requires a uniform scaling of the fluxes from a given vegetation type, we had to use a single time series of temperature, radiation, EVI and LSWI for the whole city. As a result, all pixels covered by a certain vegetation type had identical fluxes and the corresponding CO₂ concentration field calculated by GRAL was scaled uniformly by the ratio between the actual flux computed by VPRM and the unit flux. 2 m temperature and solar radiation were taken from the site Zurich Kaserne, which is an urban background site of the Swiss national air pollution monitoring network NABEL. EVI and LSWI were computed from 10 m resolution Sentinel-2 satellite images acquired every few days. An example of EVI on a cloud-free day in summer 2023 is presented in Fig. 8, which shows high values over the forested areas, grass and croplands, and low values over the densely built-up areas and water surfaces. To compute typical time series of EVI and LSWI, the values of representative patches for each vegetation type were averaged. These patches are marked as colored rectangles in Fig. 8. Due to frequent cloud cover, the time series had to be gap-filled using a robust interpolation combining outlier removal and cubic interpolation. We compared our flux estimates using this simplified approach with the detailed simulation accounting for spatially varying temperature, radiation, EVI and LSWI fields presented in Stagakis et al. (2024) and found differences in annual mean fluxes of GPP and RE of 3% and 26%, respectively, and RMSEs of the spatially and temporally resolved differences of about 36% and 42% of the annual mean.





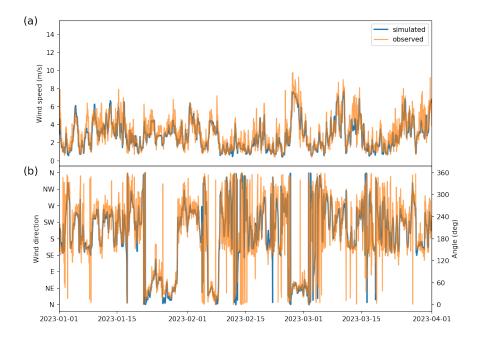


Figure 9. Comparison of hourly simulated wind speed and direction from the GRAL catalogue matching procedure with observations above rooftop at the site Stauffacherstrasse Werdplatz.

320 2.7 Catalogue entry selection

325

330

Once the GRAMM/GRAL catalogue is computed, a time series of concentration fields is quickly generated for any chosen period by selecting for each hour the entry best matching the actual meteorological situation and applying the temporal factors described above to scale the individual concentration fields. The selection of the best matching entry is primarily based on the comparison between simulated and observed winds at a selection of weather stations inside and around the city. We employed the approach proposed by May et al. (2024), which eliminates the tendency of the method of Berchet et al. (2017b) to select entries with on average too low wind speeds. In essence, the method computes a score for each measurement hour and catalogue entry based on deviations between measured and simulated wind speeds and directions at all sites, excluding entries where the measured radiation is not compatible with the corresponding stability class (Berchet et al., 2017a). We selected 18 sites within the GRAL domain, which are those presented in Fig. 1 plus a few sites operated by the city of Zurich, MeteoSwiss, and ETH Zurich. The complete list of sites including statistics of the performance of the model is presented in Table 3. Not all sites were used for the matching procedure because they were not located on a rooftop or, as in the case of Uetliberg, on a high mountain. A typical example of the comparison between simulated and observed winds is shown in Fig. 9 for the station Stauffacherstrasse-Werdplatz for the first three months in 2023. Both wind speeds and direction are generally matched very well illustrating the capability of the approach to accurately capture actual flow conditions.





Table 3. Comparison of simulated and observed winds: mean observed wind speed, root mean squared error (RMSE), mean bias (MB) and correlation (corr.) for wind speed and/or wind direction. The last column (match2obs) indicates whether the site was used for the catalogue entry selection.

Site	Full name	Obs. speed	RMSE speed	MB speed	corr. speed	RMSE dir.	MB dir.	match2obs
		(ms^{-1})	(ms^{-1})	(ms^{-1})	(ms^{-1})	(°)	(°)	
duesh	Dübendorf-Empa Schallhaus 2	2.24	0.84	-0.12	0.89	64.85	44.49	yes
ethh	ETH Messfeld Hönggerberg	1.51	0.82	0.18	0.81	50.76	33.20	yes
gub	Gubrist Gipfel	2.14	1.13	0.64	0.79	47.56	31.22	yes
hard	Hardau II	3.36	1.26	-0.88	0.86	47.42	29.00	yes
reh	Affoltern	1.65	0.86	-0.06	0.90	64.13	42.88	yes
sma	Fluntern	2.09	0.92	0.12	0.87	52.38	33.28	yes
ueb	Uetliberg Fernsehturm	6.75	2.06	-3.06	0.71	56.32	38.20	-
wspm	Wasserschutzpolizei Mythenquai	2.16	1.47	-1.85	0.47	93.46	78.73	-
wspt	Wasserschutzpolizei Tiefenbrunnen	1.18	1.29	-1.08	0.72	101.11	86.82	-
zbas	Badenerstrasse Farbhof	2.04	0.84	-0.19	0.85	57.18	41.05	yes
zgub	Güterbahnhof	2.18	0.83	-0.29	0.88	55.82	45.22	yes
zhab	Albisgüetli	2.11	0.98	-0.63	0.77	74.09	55.60	yes
zhhf	Kantonales Labor Zürich	1.76	0.74	-0.20	0.85	60.44	42.63	yes
zhhm	Hardturmstrasse Förrlibuck	2.39	0.91	-0.40	0.88	58.00	44.52	yes
zhmi	Schule Milchbuck	3.18	1.01	-0.60	0.88	51.93	37.02	yes
zhrgn	Rosengartenstrasse	0.54	0.65	-0.34	0.70	75.43	60.92	-
zhsf	Stauffacherstrasse Werdplatz	2.74	1.00	-0.66	0.84	48.68	31.77	yes
zhui	Universität Zürich Irchel	2.50	1.39	-1.62	0.73	79.55	68.31	-
zhwh	Wollishofen	2.47	0.99	-0.37	0.75	59.66	42.68	yes
zjho	Limmattalstrasse Höngg	1.53	0.79	-0.12	0.83	68.22	51.33	yes
zsch	Schimmelstrasse	0.80	0.56	-0.01	0.70	84.76	68.39	-
zsta	Stampfenbachstrasse	1.89	0.85	-0.35	0.81	56.26	38.12	-
ztie	Tiefenbrunnen Wildbachstrasse	2.93	1.20	-0.87	0.84	62.41	45.66	yes
ztle	Letzigraben Telefonzentrale	2.22	0.85	-0.38	0.89	50.51	33.57	yes
zubv	Bankenviertel Bleicherweg	2.12	0.92	-0.58	0.80	54.25	38.42	-
zuepk	Zürich Kaserne (Polizeikaserne)	2.27	0.86	-0.41	0.84	53.69	35.22	yes
mean		2.26	1.09	-0.54	0.8	62.65	46.09	



345

350

355

360



An important drawback of the catalogue approach is that the corresponding wind field represents a stationary flow situation that does not account for variations in speed and direction associated with gusts (Ashcroft, 1994) or calmer periods within the hour. As a result, the dispersion of the emitted trace gas is underestimated, which is best visible when analyzing the plumes downwind of point sources such as Hagenholz. When determining the CO₂ concentration field for a given hour, we therefore did not take one single catalogue entry but averaged over the five best scoring entries. This produces smoother concentration time series with less extreme values, which proved to be in much better agreement with the observations.

2.8 Background concentrations

The CO_2 concentration simulated for a given hour is composed of the sum of the contributions from sources and sinks in the city plus a background, which represents the CO_2 transported into the city through the model domain boundaries (see Equation 1). As mentioned in Sect. 2.1, three background sites located in different directions from the city are available. We constructed a background CO_2 time series as a weighted mean of the concentrations at these three sites with larger weights assigned to stations located upstream. For each hour, the weights were computed from the difference between the actual wind direction and the direction in which the sites are located relative to the city center using a Gaussian function with a width (1σ) of 30° .

Figure 10 presents an example of the CO_2 concentrations at the three sites together with the weighted mean background, again for the first three months in 2023. Although the overall trend with enhanced concentrations in late January, mid-February, and early March is very similar at the three sites, the station Breite-Birchwil reveals higher variability and many peaks not observed at the two other sites. Because the Swiss Plateau is located between two prominent mountain ridges, the Alps and the Jura, the large-scale flow around Zurich is usually channeled along a south-west to north-east axis (Oney et al., 2015). The most frequent situation is southwesterly to westerly winds, in which cases Lägern and Beromünster are located upstream of Zurich. In these situations, Breite-Birchwil is downstream of the city or the airport of Zurich, which likely explains some of the peaks. Breite-Birchwil is upstream only under so-called "Bise" conditions, which is another prominent weather situation in Switzerland featuring cool winds from an easterly to northeasterly direction. Pronounced Bise conditions occurred in late January and early March. These were associated with elevated CO_2 concentrations, possibly due to the air masses having spent more time over Europe than in the case of westerly winds. At the same time, the gradients between the three sites were rather small, probably due to the strong winds (Fig 10). Towards the end of the 3-month period, CO_2 started to show enhanced diurnal variability, most likely due to the vegetation becoming an active sink of CO_2 during daytime and a source at night with the start of the growing season. An analysis of background CO_2 levels over a two-years period and of the origin of high CO_2 episodes is presented in Grange et al. (2024).





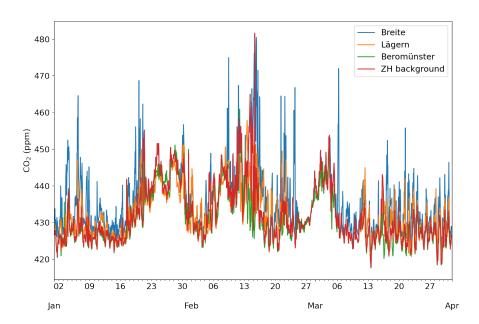


Figure 10. Time series of CO₂ concentrations at the three background sites Beromünster, Lägern and Breite-Birchwil and the constructed Zurich background time series for the first three months of 2023.

3 Results and Discussion

370

3.1 Mean CO₂ distributions

Maps of GRAMM/GRAL simulated CO₂ averaged over two full years (September 2022 to August 2024) are presented in Figures 11 and 12 for the sum of all sources and for the three largest sectors, road traffic, heating, and industry. Figure 11 shows CO₂ at the lowest model level of 2 m, whereas Figure 12 shows the 0-100 m column mean. At the lowest level, traffic CO₂ (Fig. 11b) is highest along the road network. Concentration hotspots are visible at large traffic junctions and tunnel portals. For the column-averages (Fig. 12b), the roads are still visible but the signal is strongly diluted.

Heating (GNFR sector C in Table 2) is the largest source, accounting for 46% of total emissions. Compared to traffic, however, CO_2 concentrations from heating are significantly more homogeneous at the 2 m level (Fig. 11c). This is because heating emissions are released above roof level, allowing them to disperse extensively before reaching the surface. In the vertical column (Fig. 12c), several point sources stand out, which correspond to combined power and heat production plants.

CO₂ from industrial sources is largest outside the city borders with some exceptions (Fig. 11d). At 2 m above ground, several localized sources are visible inside the city, which correspond to small industries, such as breweries, bakeries and crematoria. Emissions from construction work are also comprised in this category, which explains the high concentrations along a highway in the Schwamendingen district in the northeastern part of the city, where major construction work is being carried out to place the highway into an enclosure by 2025. In the vertical column (Fig. 12d), the waste-to-energy plant Hagenholz stands



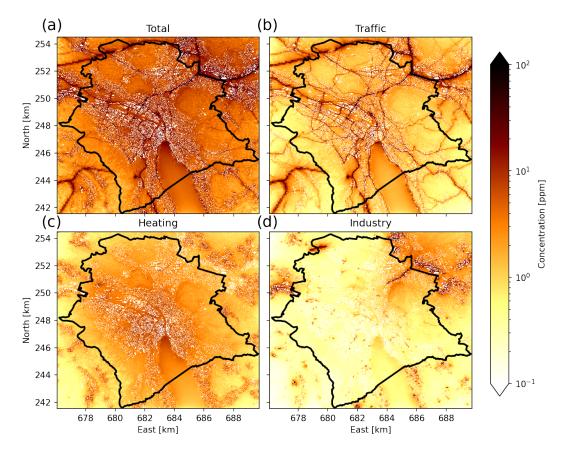


Figure 11. Maps of CO_2 without background at 2 m above ground averaged over the two-year period September 2022 - August 2024 for total emissions and the three largest sectors. (a) All anthropogenic sources (all sectors in Table A except 14, 50, 51, 52, 53, 54, 61, 62, 71, 72, (b) road traffic (sectors 6, 7, 9, 34), (c) heating (sectors 11, 12, 35, 36), (d) industry (sectors 15, 17, 37, 74)

out prominently. The radial pattern emerging from this source emphasizes the limitations of the catalogue approach producing static CO_2 fields for selected wind directions. The pattern also highlights the main wind directions in the city; winds were predominantly from westerly, southerly and northeasterly directions, whereas easterly to south-easterly directions were rare.

3.2 Comparison to measured CO_2

380

385

In this section, we present a first comparison of model simulations against observations from the mid-cost CO_2 sensors. The comparison is focused on time series of daily afternoon values at two selected sites and on mean diurnal cycles in different seasons averaged over all sites. A more quantitative evaluation will be presented in a forthcoming study, where measurements and simulations will be combined in a Bayesian emission inversion framework.



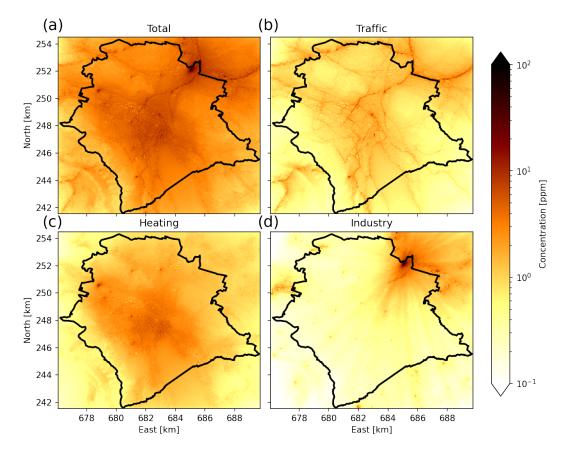


Figure 12. Same as Fig. 11 but for CO₂ averaged over the vertical column from 0-100 m above ground.

The time series of daily afternoon (12-16 UTC, i.e. 13-17 local time in winter) mean CO₂ concentrations at Zurich Kaserne, a station in the city center, is presented in Fig. 13. The top panel shows the comparison for two years from September 2022 to August 2024, the lower panel is a zoom into five months during the annual heating period, when anthropogenic emissions are highest and biospheric contributions smallest. The seasonal trend with a maximum in winter and a minimum in summer is dominated by variations in the background (gray line) that is estimated from the surrounding background stations. The concentrations observed inside the city (blue line) are generally higher than the background due to CO₂ added by urban activities. This is also true during summer when the biosphere is most active, suggesting that anthropogenic emissions outweigh biospheric uptake in the city even during the growing season. This is consistent with the analysis presented in Stagakis et al. (2024), which suggested that anthropogenic fluxes in the central parts of the city are roughly three times larger than the biospheric fluxes during summer.

The simulated values (red line), which are composed of the background plus CO₂ simulated by GRAMM/GRAL, closely track the observations both in terms of temporal variability and absolute values. As described by Grange et al. (2024), a



400

405



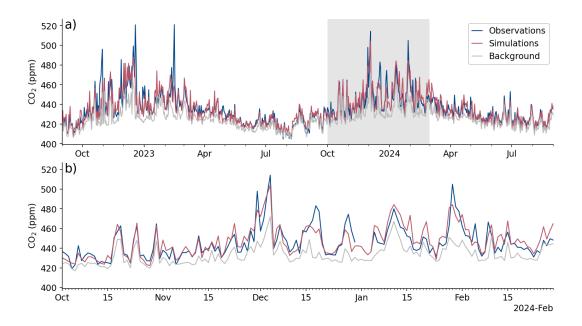


Figure 13. Time series of measured and simulated daily afternoon (12-16 UTC) mean CO₂ at the station Zurich Kaserne. (a) Full period of 2 years. (b) Zoom into five winter months from October 2023 to February 2024.

significant fraction of the observed variability is explained by the background, which does not only vary seasonally but also on synoptic time scales with changing weather conditions. The CO_2 emitted from the city adds to this variability, especially during winter, as highlighted in panel b. Periods of elevated concentrations such as the events around early December 2023 and late January 2024 are composed of both enhanced background CO_2 and enhanced CO_2 from the city. These periods are typically associated with stagnant high-pressure situations with low winds and shallow atmospheric boundary layers allowing CO_2 to build up both regionally and locally inside the city. This illustrates the critical importance of tracking the variability in background concentrations. Daily afternoon CO_2 concentrations in the city are on average about 10 ppm higher than the regional background, which is significantly larger than the uncertainty of the mid-cost sensors of about 1 ppm (Grange et al., 2024). In winter, these enhancements can reach up to 50 ppm.

The same situation at another station, Wollishofen, is presented in Fig. 14. Wollishofen is the southernmost station of the mid-cost network near the southwestern city border (see Figure 1). The CO₂ variability at this site is very similar to that at Kaserne, with some events even exceeding the magnitude of the enhancements at Kaserne. In comparison to Kaserne, the model's performance is lower. While many of the observed pollution episodes are tracked well, some events are significantly underestimated. The performance at other sites is very comparable to the two sites presented here.

While afternoon concentrations are well captured by the model, this is not true for other hours of the day. The seasonal mean diurnal cycle of observed and simulated CO_2 averaged over all sites is presented in Fig. 15. In all seasons, the minimum CO_2 concentration occurs in the afternoon due to the dilution of surface emissions within a deep atmospheric boundary layer.



420

425

430



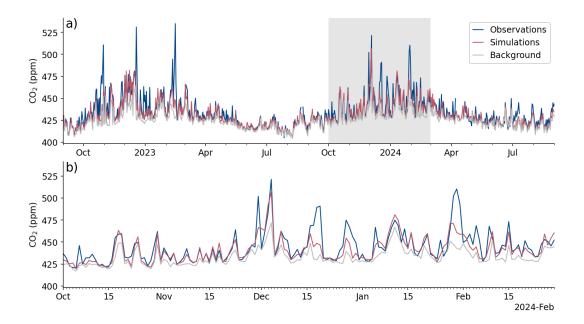


Figure 14. Same as Fig. 13 but at station Wollishofen.

During spring and summer, uptake by vegetation photosynthesis adds to this minimum. While the shape of the diurnal variation is well captured by the model in all seasons, the amplitude is substantially underestimated.

Although the anthropogenic emissions are smallest in summer, the amplitude of the diurnal cycle is much larger compared to winter. One explanation is the stronger contrast between daytime and nighttime boundary layers in summer. Another reason is the diurnal cycle of biospheric fluxes with net emissions during nighttime and net uptake during daytime. The underestimation of the amplitude during summer could thus be related to an underestimation of the diurnal variability in net ecosystem exchange. The analysis presented in Stagakis et al. (2024), however, showed that VPRM is in good agreement with other biospheric flux models and with measurements of soil and grass respiration. A further explanation could be that the temporal scaling factors used in GRAMM/GRAL (see Fig. 6 and 7) do not accurately represent the contrast between daytime and night-time emissions. The underestimation of nighttime CO₂ by the model suggests that nighttime emissions are too low. However, this may only be true for heating, since the traffic profile is based on actual traffic counts.

Another possible explanation is overly strong vertical mixing in the model at night, likely caused by an inaccurate representation of atmospheric stability. To investigate this hypothesis, Figure 16 presents seasonal mean diurnal cycles of the frequency distribution of stability and simulated wind speeds averaged over all sites. The figure suggests that the model, or more precisely the catalogue entry selection procedure described in Sect. 2.7, realistically represents the diurnal cycle of stability with neutral to unstable conditions (classes D to A) dominating during daytime and neutral to stable (classes D to G) during night. Very stable (F and G) and very unstable (A and B) conditions occur more frequently in spring and summer than in winter, which is consistent with the larger dynamics in atmospheric boundary layer depth and surface heat exchange during summer (Edwards et al., 2011; Brunner et al., 2015). There is thus no indication for a major misrepresentation of the atmospheric boundary layer





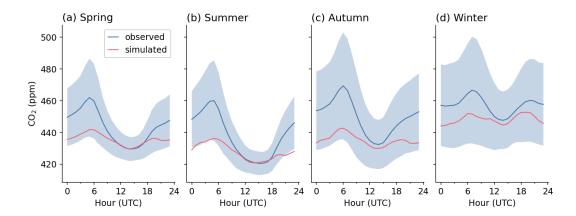


Figure 15. Seasonal mean diurnal cycle of CO_2 averaged over all mid-cost stations excluding the sites zjho, zsch, zhrgn, reck, hard2. The blue shaded area denotes the standard deviation of the hourly values.

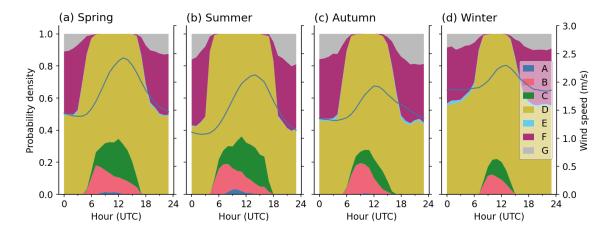


Figure 16. Seasonal mean diurnal cycle of the probability distribution of atmospheric stability and of the wind speed averaged over all sites. Atmospheric stability ranges from very unstable (A) to very stable (G), with D representing neutral conditions.

dynamics by the model. Further analyses will be needed to better understand the reasons for underestimating the amplitude in the CO₂ diurnal cycle and to resolve this issue. A possible way forward could be to use the Eddy flux tower measurements at Hardau to determine atmospheric stability instead of letting the model freely select the stability class based on the catalogue selection procedure.

4 Conclusions

Observation-based estimates of urban CO₂ emissions can help cities monitor their progress towards climate neutrality. However, there are many different monitoring strategies, ranging from measuring large-scale gradients between regions up- and



445

450

465

470



downstream to quantifying the 'urban CO_2 dome' with a network of sites within the city, and from measuring with a few high-precision instruments to measuring with a large number of low-cost sensors. The list of options also includes direct flux measurements using Eddy covariance (Stagakis et al., 2023), ground-based remote sensing (Dietrich et al., 2021), and airborne mass balance (Cambaliza et al., 2014). Furthermore, a given observation strategy needs to be supported by an appropriate modeling and emission estimation methodology.

In this study, we have presented a modeling framework tailored to support observations from a dense network of low- or mid-cost CO_2 sensors and suitable for cities with complex topography such as Zurich. The model is able to capture the mesoscale flow shaped by topography and land cover as well as the local flow around buildings, which is an advantage for representing gradients between different sensors that are more or less strongly influenced by nearby emissions. Instead of simulating the full temporal dynamics of meteorology and CO_2 dispersion, a catalogue of static situations is created, from which the dynamic evolution is reconstructed by selecting for a given hour the catalogue entry best matching the actual meteorology. Although producing the catalogue is computationally expensive, situation-matching and subsequent data processing are highly efficient, allowing the creation of concentration time series for an entire year within minutes.

Another advantage of the model is its ability to represent emissions at the highest possible level of spatial detail by treating them as either point, line or area sources. We have described the setup of the model for the city of Zurich, where we took advantage of the uniquely detailed inventory produced by the city administration. The CO₂ exchange was simulated with the highly parameterized but observation-driven Vegetation Photosynthesis and Respiration Model (VPRM), for which a detailed vegetation cover map was created down to the level of individual trees. The model was driven by measurements of ambient temperature and radiation, and by high-resolution satellite observations from Sentinel-2.

GRAMM/GRAL has been shown to capture very well the temporal variability and magnitude of the urban signal when compared against daily afternoon observations from the ZiCOS mid-cost CO₂ sensor network. This demonstrates the potential for a successful integration of observations and simulations for inverse emission estimation, which will be presented in a forthcoming study.

Despite the mature status of the model and the promising results, we have also identified a number of weaknesses that deserve more attention in the future. The first one is the limitations of the current catalogue approach. Instead of defining weather situations in a rigid parameter space of wind and stability conditions, it would likely be better to create a catalogue tailored to actually occurring weather situations. This would allow resolving the most frequent situations with more detail, for example with a finer spacing in wind directions, while removing situations that do not occur at all.

A second weakness is the inability to represent spatially inhomogeneous emission variations, since the same temporal scaling factors are applied uniformly across the city. To solve this problem, one could separate the CO_2 tracers not only by sector but also by region. This would significantly increase the number of tracers to be simulated, but it would have minimal impact on the computational cost because the number of Lagrangian particles to be followed would remain nearly unchanged.

A third weakness is the strong underestimation of CO_2 accumulation in stable low-wind situations, which typically occur at night. Tests with simulating such situations in a dynamic way instead of using the catalogue approach did not significantly improve the agreement between model results and observations. The static simulations used to produce the catalogue are



485

490



integrated until a steady-state is reached, which should properly account for the accumulation of CO_2 within the model domain in case of low winds, as confirmed by the good agreement between static and dynamic simulations. The reasons for the underestimation are thus not yet understood but need further investigation.

The GRAMM/GRAL model can be set up for any city, provided that suitable input data sets are available. For example, GRAMM/GRAL has already been set up for CO₂ simulations over the cities of Paris and Munich, where similar CO₂ sensor networks have been established as in Zurich within the ICOS-Cities project.

The most critical input is the emission inventory, which is often not available or not of sufficient quality and detail. One way to address this is by downscaling an existing inventory using spatial proxies (Valencia et al., 2022) or by creating a new inventory from open data, as demonstrated for the city of Amsterdam (Mijling, 2020). Open source tools such as emiproc (Constantin et al., 2025), which was used to prepare the Zurich inventory for GRAMM/GRAL, or HERMES (Guevara et al., 2020) can support this. Other data sets such as 3-D buildings, land use and vegetation cover can usually be obtained from publicly accessible sources. For Europe, for example, high quality data sets such as the Urban Atlas Building Height 2012 or the new CLC+ Land Information System are provided through the Copernicus Earth observation programme. The main issue with most land cover products is that urban vegetation, especially street trees, is not represented with sufficient accuracy. For Zurich, additional vegetation observations from high-resolution aerial imagery and Lidar scanning were therefore included.

Code availability. The emiproc python tool used for preparing all emission inputs including temporal profiles is publicly available at https://doi.org/10.5281/zenodo.14614229

Data availability. The mid-cost sensor data used in this work are described and available via the ICOS Cities data portal (https://citydata.icos-cp.eu/portal). The hourly averaged observations have been made publicly accessible in a persistent data repository (Grange, 2024a, https://doi.org/10.5281/zenodo.13759332). With a total size of about 5 TB, the GRAMM/GRAL catalogue of 3D wind and CO₂ concentration fields is too large to be shared publicly. It is stored at the Swiss supercomputing center CSCS and can be made available by the authors upon reasonable request.

Appendix A: Emissions

500 The following table provides an overview of the grouping of source sectors for the GRAL simulations.





Table A1: Source groups simulated with GRAL. Source groups are usually composed of multiple emission sectors of the original inventory. MapLuft is the inventory for all sources within the city boundaries, Meteotest the inventory for sources outside. Note that source groups 71, 72 and 14 were not used in this study.

ID	Source	Group Name	Inventory Sector
1	MapLuft	shipping	c1101_Linienschiffe
			c1102_PrivaterBootsverkehr
6	MapLuft	light duty traffic	c1301_Personenwagen
			c1303_Motorraeder
			c1306_StartStopTankatmung
			c1307_Lieferwagen
			c1308_Reisebusse
7	MapLuft	heavy duty traffic	c1302_Lastwagen
9	MapLuft	public transport	c1304_Linienbusse
11	MapLuft	heating - fossil	c2101_Oelheizungen
			c2102_Gasheizungen
			c2105_Warmwassererzeuger
			c2201_BHKW
12	MapLuft	heating - non-fossil	c2103_HolzheizungenLokalisiert
			c2104_HolzheizungenDispers
			c2401_Klaerschlammverwertung
14	MapLuft	waste-to-energy-plant	c2301_KHKWKehricht
			c2302_KHKWErdgas
			c2303_KHKWHeizoel
15	MapLuft	industry	c3201_Notstromanlagen
			c3301_Prozessenergie
			c3410_Bierbrauereien
			c3411_Brotproduktion
			c3414_Krematorium
			c3416_Tankstellen
17	MapLuft	construction	c3104_MaschinenTiefbau
			c3101_MaschinenHochbau
			c3419_IndustrielleFZ
			c4101_ForstwirtschaftlicheFZ
			c4201_LandwirtschaftlicheFZ





18	MapLuft	garden	c5201_Gruenabfallverbrennung
			c5301_HolzoefenKleingarten
			c5401_AbfallverbrennungHaus
34	Meteotest	traffic - CH	Strassenverkehr (evstr_co2)
			Zonenverkehr, Kaltstart/Verdampfung (evzon)
			Schifffahrt Seen (evsee)
35	Meteotest	heating - fossil CH	AWEL-Modell (ehfoe)
			Geschosshöhen Modell (ehgws)
			Gebäudetyp/AS (ehare)
36	Meteotest	heating - non-fossil CH	Holz und Kohle (ehfho)
37	Meteotest	industry and rest - CH	Haushalte andere Private etc (ehhan)
			Maschinen Garten und Hobby (ehmgh)
			Baumaschinen (eibau)
			Industriefahrzeuge (eifrz)
			Lösungsmittel Industrie (eilmi)
			Dienstleistungen Landschaftspflege (eipf)
			Feuerungen Dienstleistungen Öl und Gas (eiprd)
			Punktquellen KVA (eipkv)
			Schienenverkehr Bau-/Dienstzüge (evsch)
			Flugverkehr Zürich (evfzhr)
			landwirtschaftliche Maschinen (ellwm)
			forstwirtschaftliche Maschinen (elfwm)
			Verluste Gasnetz (eivgn)
			Flächenquellen Industrie (eipro)
50	Land cover	evergreen	Evergreen trees
51	Land cover	deciduous	Deciduous trees
52	Land cover	mixed	Mixture of evergreen and deciduous
53	Land cover	grassland	Land covered by grass
54	Land cover	cropland	Land covered by crops
61	QuartierAnalyse	respiration inhabitants	Human respiration inhabitants
62	QuartierAnalyse	respiration employees	Human respiration employees
71	MapLuft	heating - fossil oil	c2101_Oelheizungen
72	MapLuft	heating - fossil other	c2102_Gasheizungen
			c2105_Warmwassererzeuger
			c2201_BHKW



510



74 MapLuft waste-to-energy-plant Hagenholz only c2301_KHKWKehricht

Author contributions. DB authored the article and prepared tables and figures. IS performed most of the simulations, contributed to figures and prepared a first draft of the manuscript. LB and LC contributed to data analysis and production of figures. LC prepared the emission inputs for GRAL. AB evaluated the VPRM results. SKG, PR and LE installed and maintained the measurement networks. JL and JC developed the land cover map for VPRM. All authors edited the paper text.

505 Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. The authors have received funding from ICOS Cities, a.k.a. the Pilot Applications in Urban Landscapes – Towards integrated city observatories for greenhouse gases (PAUL) project, from the European Union's Horizon 2020 research and innovation program under grant agreement no. 101037319. We would like to acknowledge the Swiss Supercomputing Center CSCS for access to the Piz Daint high-performance computer under project em05. We would like to express our gratitude to the departement Umwelt- und Gesundheitsschutz (UGZ) of the city of Zurich for making the detailed emissions inventory available to this project. The company Swisscom is acknowledged for supporting the mid-cost sensor measurements by providing access to antenna and space on various buildings within the city. AB was supported by the Swiss National Science Foundation under the Scientific Exchanges program (IZSEZ0_22553). JC received funding from ERC consolidator grant CoSense4Climate (101089203).





References

525

530

535

540

- Ahn, D. Y., Goldberg, D. L., Coombes, T., Kleiman, G., and Anenberg, S. C.: CO2 emissions from C40 cities: citywide emission inventories and comparisons with global gridded emission datasets, Environmental Research Letters, 18, 034 032, https://doi.org/10.1088/1748-9326/acbb91, 2023.
 - Ashcroft, J.: The relationship between the gust ratio, terrain roughness, gust duration and the hourly mean wind speed, Journal of Wind Engineering and Industrial Aerodynamics, 53, 331–355, https://doi.org/https://doi.org/10.1016/0167-6105(94)90090-6, 1994.
- 520 Berchet, A., Zink, K., Muller, C., Oettl, D., Brunner, J., Emmenegger, L., and Brunner, D.: A cost-effective method for simulating city-wide air flow and pollutant dispersion at building resolving scale, Atmospheric Environment, 158, 181–196, https://doi.org/https://doi.org/10.1016/j.atmosenv.2017.03.030, 2017a.
 - Berchet, A., Zink, K., Oettl, D., Brunner, J., Emmenegger, L., and Brunner, D.: Evaluation of high-resolution GRAMM—GRAL (v15.12/v14.8) NO_x simulations over the city of Zürich, Switzerland, Geoscientific Model Development, 10, 3441–3459, https://doi.org/10.5194/gmd-10-3441-2017, 2017b.
 - Bergamaschi, P., Danila, A., Weiss, R., Ciais, P., Thompson, R., Brunner, D., Levin, I., Meijer, Y., Chevallier, F., Janssens-Maenhout, G., Bovensmann, H., Crisp, D., Basu, S., Dlugokencky, E., Engelen, R., Gerbig, C., Günther, D., Hammer, S., Henne, S., Houweling, S., Karstens, U., Kort, E., Maione, M., Manning, A., Miller, J., Montzka, S., Pandey, S., Peters, W., Peylin, P., Pinty, B., Ramonet, M., Reimann, S., Röckmann, T., Schmidt, M., Strogies, M., Sussams, J., Tarasova, O., Van Aardenne, J., Vermeulen, A., and Vogel, F.: Atmospheric monitoring and inverse modelling for verification of greenhouse gas inventories, JRC Science for Policy Report JRC111789, https://doi.org/10.2760/759928, 2018.
 - Brioude, J., Angevine, W. M., Ahmadov, R., Kim, S.-W., Evan, S., McKeen, S. A., Hsie, E.-Y., Frost, G. J., Neuman, J. A., Pollack, I. B., Peischl, J., Ryerson, T. B., Holloway, J., Brown, S. S., Nowak, J. B., Roberts, J. M., Wofsy, S. C., Santoni, G. W., Oda, T., and Trainer, M.: Top-down estimate of surface flux in the Los Angeles Basin using a mesoscale inverse modeling technique: assessing anthropogenic emissions of CO, NO_x and CO₂ and their impacts, Atmospheric Chemistry and Physics, 13, 3661–3677, https://doi.org/10.5194/acp-13-3661-2013, 2013.
 - Brunner, D., Savage, N., Jorba, O., Eder, B., Giordano, L., Badia, A., Balzarini, A., Baró, R., Bianconi, R., Chemel, C., Curci, G., Forkel, R., Jiménez-Guerrero, P., Hirtl, M., Hodzic, A., Honzak, L., Im, U., Knote, C., Makar, P., Manders-Groot, A., van Meijgaard, E., Neal, L., Pérez, J. L., Pirovano, G., San Jose, R., Schröder, W., Sokhi, R. S., Syrakov, D., Torian, A., Tuccella, P., Werhahn, J., Wolke, R., Yahya, K., Zabkar, R., Zhang, Y., Hogrefe, C., and Galmarini, S.: Comparative analysis of meteorological performance of coupled chemistry-meteorology models in the context of AQMEII phase 2, Atmospheric Environment, 115, 470–498, https://doi.org/10.1016j.atmosenv.2014.12.032, 2015.
 - Cai, Q., Zeng, N., Zhao, F., Han, P., Liu, D., Lin, X., and Chen, J.: The impact of human and livestock respiration on CO2 emissions from 14 global cities, Carbon Balance and Management, 17, 17, https://doi.org/10.1186/s13021-022-00217-7, 2022.
- Cambaliza, M. O. L., Shepson, P. B., Caulton, D. R., Stirm, B., Samarov, D., Gurney, K. R., Turnbull, J., Davis, K. J., Possolo, A., Karion, A., Sweeney, C., Moser, B., Hendricks, A., Lauvaux, T., Mays, K., Whetstone, J., Huang, J., Razlivanov, I., Miles, N. L., and Richardson, S. J.: Assessment of uncertainties of an aircraft-based mass balance approach for quantifying urban greenhouse gas emissions, Atmospheric Chemistry and Physics, 14, 9029–9050, https://doi.org/10.5194/acp-14-9029-2014, 2014.



555

560



- Ciais, P., Wang, Y., Andrew, R., Bréon, F. M., Chevallier, F., Broquet, G., Nabuurs, G. J., Peters, G., McGrath, M., Meng, W., Zheng, B., and
 Tao, S.: Biofuel burning and human respiration bias on satellite estimates of fossil fuel CO2 emissions, Environmental Research Letters,
 15, 074 036, https://doi.org/10.1088/1748-9326/ab7835, 2020.
 - Constantin, L., Brunner, D., Thanwerdas, J., Keller, C., Steiner, M., and Koene, E.: Emiproc: A Python package for emission inventory processing, Journal of Open Source Software, 10, 7509, https://doi.org/10.21105/joss.07509, 2025.
 - Dietrich, F., Chen, J., Voggenreiter, B., Aigner, P., Nachtigall, N., and Reger, B.: MUCCnet: Munich Urban Carbon Column network, Atmospheric Measurement Techniques, 14, 1111–1126, https://doi.org/10.5194/amt-14-1111-2021, 2021.
 - Edwards, J. M., McGregor, J. R., Bush, M. R., and Bornemann, F. J.: Assessment of numerical weather forecasts against observations from Cardington: seasonal diurnal cycles of screen-level and surface temperatures and surface fluxes, Quarterly Journal of the Royal Meteorological Society, 137, 656–672, https://doi.org/https://doi.org/10.1002/qj.742, 2011.
 - Fong, W. K., Sotos, M., Doust, M., Schultz, S., Marques, A., and Deng-Beck, C.: Global protocol for community-scale greenhouse gas emission inventories, Tech. rep., World Resources Institute., https://ghgprotocol.org/ghg-protocol-cities, 2014.
 - Glauch, T., Marshall, J., Gerbig, C., Botía, S., Gałkowski, M., Vardag, S. N., and Butz, A.: *pyVPRM*: A next-generation Vegetation Photosynthesis and Respiration Model for the post-MODIS era, EGUsphere, 2025, 1–45, https://doi.org/10.5194/egusphere-2024-3692, 2025.
 - Grange, S. K., Rubli, P., Fischer, A., Brunner, D., Hueglin, C., and Emmenegger, L.: The ZiCOS-M CO₂ sensor network: measurement performance and CO₂ variability across Zürich, EGUsphere, 2024, 1–41, https://doi.org/10.5194/egusphere-2024-2925, 2024.
- 565 Graz University of Technology: GRAZ Lagrangian Model, https://gral.tugraz.at/, [last accessed 14-08-2023], 2023.
 - Guevara, M., Tena, C., Porquet, M., Jorba, O., and Pérez García-Pando, C.: HERMESv3, a stand-alone multi-scale atmospheric emission modelling framework Part 2: The bottom–up module, Geoscientific Model Development, 13, 873–903, https://doi.org/10.5194/gmd-13-873-2020, 2020.
- Gurney, K. R., Liang, J., Roest, G., Song, Y., Mueller, K., and Lauvaux, T.: Under-reporting of greenhouse gas emissions in U.S. cities,

 Nature Communications, 12, 553, https://doi.org/10.1038/s41467-020-20871-0, 2021.
 - Hardiman, B. S., Wang, J. A., Hutyra, L. R., Gately, C. K., Getson, J. M., and Friedl, M. A.: Accounting for urban biogenic fluxes in regional carbon budgets, Science of The Total Environment, 592, 366–372, https://doi.org/https://doi.org/10.1016/j.scitotenv.2017.03.028, 2017.
 - Kuenen, J. J. P., Visschedijk, A. J. H., Jozwicka, M., and Denier van der Gon, H. A. C.: TNO-MACC_I Iemissioninventory; amulti year(2003-2009)consistenthigh-resolutionEuropeanemissioninventory for airquality modelling, Atmos. Chem. Phys., 14, 10963 10976, https://doi.org/10.5194acp 14 10963 2014, 2014.
- Lauvaux, T., Gurney, K. R., Miles, N. L., Davis, K. J., Richardson, S. J., Deng, A., Nathan, B. J., Oda, T., Wang, J. A., Hutyra, L., and Turnbull, J.: Policy-Relevant Assessment of Urban CO2 Emissions, Environmental Science & Technology, 54, 10237–10245, https://doi.org/10.1021/acs.est.0c00343, 2020.
 - Mahadevan, P., Wofsy, S. C., Matross, D. M., Xiao, X., Dunn, A. L., Lin, J. C., Gerbig, C., Munger, J. W., Chow, V. Y., and Gottlieb, E. W.: A satellite-based biosphere parameterization for net ecosystem CO2 exchange Vegetation Photosynthesis and Respiration Model (VPRM), Global Biogeochemical Cycles, 22, https://doi.org/10.10292006GB002735, 2008.
- May, M., Wald, S., Suter, I., Brunner, D., and Vardag, S. N.: Evaluation of the GRAMM/GRAL model for high-resolution wind fields in Heidelberg, Germany, Atmospheric Research, 300, 107 207, https://doi.org/https://doi.org/10.1016/j.atmosres.2023.107207, 2024.
 - Mijling, B.: High-resolution mapping of urban air quality with heterogeneous observations: a new methodology and its application to Amsterdam, Atmospheric Measurement Techniques, 13, 4601–4617, https://doi.org/10.5194/amt-13-4601-2020, 2020.





- Mohn, J., Szidat, S., Zeyer, K., and Emmenegger, L.: Fossil and biogenic CO2 from waste incineration based on a yearlong radiocarbon study, Waste Management, 32, 1516–1520, https://doi.org/https://doi.org/10.1016/j.wasman.2012.04.002, 2012.
- 585Müller, M., Graf, P., Meyer, J., Pentina, A., Brunner, D., Perez-Cruz, F., Hüglin, C., and Emmenegger, L.: Integration and calibration of non-dispersive infrared (NDIR) CO₂ low-cost sensors and their operation in a sensor network covering Switzerland, Atmospheric Measurement Techniques, 13, 3815–3834, https://doi.org/10.5194/amt-13-3815-2020, 2020.
 - Nalini, K., Lauvaux, T., Abdallah, C., Lian, J., Ciais, P., Utard, H., Laurent, O., and Ramonet, M.: High-Resolution Lagrangian Inverse Modeling of CO2 Emissions Over the Paris Region During the First 2020 Lockdown Period, Journal of Geophysical Research: Atmospheres, 127, e2021JD036 032, https://doi.org/https://doi.org/10.1029/2021JD036032, e2021JD036032 2021JD036032, 2022.
 - Oettl, D.: A multiscale modelling methodology applicable for regulatory purposes taking into account effects of complex terrain and buildings on pollutant dispersion: a case study for an inner Alpine basin, Environmental Science and Pollution Research, 22, 17 860–17 875, https://doi.org/10.1007/s11356-015-4966-9, 2015.
- Oettl, D.: Development of the Mesoscale Model GRAMM-SCI: Evaluation of Simulated Highly-Resolved Flow Fields in an Alpine and Pre-595 Alpine Region, Atmosphere, 12, https://doi.org/10.3390/atmos12030298, 2021.
 - Oney, B., Henne, S., Gruber, N., Leuenberger, M., Bamberger, I., Eugster, W., and Brunner, D.: The CarboCount CH sites: characterization of a dense greenhouse gas observation network, Atmospheric Chemistry and Physics, 15, 11 147–11 164, https://doi.org/10.5194/acp-15-11147-2015, 2015.
- Orehounig, K., Fierz, L., Allan, J., Eggimann, S., Vulic, N., and Bojarski, A.: CESAR-P: A dynamic urban building energy simulation tool, Journal of Open Source Software, 7, 4261, https://doi.org/10.21105/joss.04261, 2022.
 - Sargent, M., Barrera, Y., Nehrkorn, T., Hutyra, L. R., Gately, C. K., Jones, T., McKain, K., Sweeney, C., Hegarty, J., Hardiman, B., Wang, J. A., and Wofsy, S. C.: Anthropogenic and biogenic CO₂ fluxes in the Boston urban region, Proceedings of the National Academy of Sciences, 115, 7491–7496, https://doi.org/10.1073/pnas.1803715115, 2018.
- Seto, K. C., Dhakal, S., Bigio, A., Blanco, H., Carlo Delgado, G., Dewar, D., Huang, L., Inaba, A., Kansal, A., Lwasa, S., et al.: Human settlements, infrastructure, and spatial planning, in: Climate Change 2014: Mitigation of Climate Change. Contribution of Working Group III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change, Cambridge University Press, 2014.
 - Stagakis, S., Feigenwinter, C., Vogt, R., Brunner, D., and Kalberer, M.: A high-resolution monitoring approach of urban CO2 fluxes. Part 2 surface flux optimisation using eddy covariance observations, Science of The Total Environment, 903, 166 035, https://doi.org/https://doi.org/10.1016/j.scitotenv.2023.166035, 2023.
- 610Stagakis, S., Brunner, D., Li, J., Backman, L., Karvonen, A., Constantin, L., Järvi, L., Havu, M., Chen, J., Emberger, S., and Kulmala, L.: Intercomparison of biogenic CO₂ flux models in four urban parks in the city of Zurich, EGUsphere, 2024, 1–39, https://doi.org/10.5194/egusphere-2024-2475, 2024.
 - Staufer, J., Broquet, G., Bréon, F.-M., Puygrenier, V., Chevallier, F., Xueref-Rémy, I., Dieudonné, E., Lopez, M., Schmidt, M., Ramonet, M., Perrussel, O., Lac, C., Wu, L., and Ciais, P.: The first 1-year-long estimate of the Paris region fossil fuel CO₂ emissions based on atmospheric inversion, Atmospheric Chemistry and Physics, 16, 14703–14726, https://doi.org/10.5194/acp-16-14703-2016, 2016.
 - Turnbull, J. C., Karion, A., Davis, K. J., Lauvaux, T., Miles, N. L., Richardson, S. J., Sweeney, C., McKain, K., Lehman, S. J., Gurney, K. R., et al.: Synthesis of Urban CO₂ Emission Estimates from Multiple Methods from the Indianapolis Flux Project (INFLUX), Environmental Science and Technology, 53, 287–295, 2018.
- Turner, D. B.: A Diffusion Model for an Urban Area, Journal of Applied Meteorology and Climatology, 3, 83 91, 620 https://doi.org/https://doi.org/10.1175/1520-0450(1964)003<0083:ADMFAU>2.0.CO;2, 1964.





Valencia, V. H., Levin, G., and Ketzel, M.: Downscaling global anthropogenic emissions for high-resolution urban air quality studies, Atmospheric Pollution Research, 13, 101516, https://doi.org/https://doi.org/10.1016/j.apr.2022.101516, 2022.

Wang, P., Zhou, W., Niu, Z., Huo, D., Zhou, J., Li, H., Cheng, P., Wu, S., Xiong, X., and Chen, N.: An Approach for Assessing Human Respiration CO2 Emissions Using Radiocarbon Measurements and Bottom-Up Data Sets, Journal of Geophysical Research: Atmospheres, 129, e2023JD040578, https://doi.org/10.1029/2023JD040578, e2023JD040578, 2023JD040578, 2024.