

1 Identification of nighttime urban flood inundation extent using deep 2 learning

3 Jiaquan Wan^{1, 2, 3}, Xing Wang⁴, Yannian Cheng⁵, Cuiyan Zhang⁴, Fengchang Xue⁵, Tao Yang^{1, 2, 3}, Fei
4 Tong⁶ and Quan J. Wang⁷

5 ¹ College of Hydrology and Water Resources, Hohai University, Nanjing, 210098, China

6 ² The National Key Laboratory of Water Disaster Prevention, Hohai University, Nanjing, 210098, China

7 ³ Yangtze Institute for Conservation and Development, Hohai University, Jiangsu, 210098, China

8 ⁴ School of Computer Engineering, Nanjing Institute of Technology, Nanjing 211167, China

9 ⁵ School of Remote Sensing and Surveying Engineering, Nanjing University of Information Science & Technology, Nanjing
10 210044, China

11 ⁶ China Institute of Water Resources and Hydropower, Beijing, 100048, China

12 ⁷ Department of Infrastructure Engineering, Faculty of Engineering and Information Technology, The University of
13 Melbourne, Victoria 3010, Australia

14 *Correspondence to:* Xing Wang (jwangxing0719@163.com)

15 **Abstract.** With the acceleration of urbanization, the disaster of urban flooding has had a serious impact on urban
16 socio-economic activities and has become one of the important factors restricting social development in China. Accurate and
17 timely identification of urban flooding extents is crucial for decision-making. Traditional remote sensing technologies are
18 often limited by environmental factors, making them less suitable for application in complex urban terrains. With the
19 increase in urbanization and the development of emerging technologies, video imagery has become a significant data source
20 with great potential for urban flood identification. However, existing research has primarily focused on flood extent
21 identification in daytime scenarios, often neglecting the nighttime, a period of high flood occurrence. In this study, we
22 propose an efficient model (NWseg) to identify flood extents in nighttime scenes. Initially, we constructed a nighttime flood
23 inundation dataset consisting of 4,000 images. Subsequently, MobilenetV2 and ResNet101 networks were used to replace
24 the DeepLabv3+ backbone network and compared with the NWseg model. Next, the NWseg model was compared with
25 ResNet50-FCN, LRASPP and U-Net models to evaluate the performance of different models in nighttime urban flooding
26 extent identification. Finally, we verified the applicability and performance differences of each model in specific
27 environments. Overall, this study successfully demonstrates the effectiveness of the NWseg model for nighttime urban
28 flooding extent identification, providing new insights for nighttime flood monitoring in cities.

29 **Keywords:** Deep learning, Nighttime flooding extent identification, Urban flooding, NWseg

30 1 Introduction

31 In recent years, extreme rainfall events have been occurring frequently in the context of complex climate change (Burn and
32 Whitfield, 2023; Kim et al., 2024). Concurrently, with the acceleration of urbanization processes, the proportion of

33 impervious surfaces has been continuously expanding, resulting in serious urban flooding issues in many cities worldwide
34 (Ghosh et al., 2024; Liu et al., 2023; Kundzewicz et al., 2019). Urban flooding often coincides with multiple compounded
35 disasters and may even trigger secondary calamities, posing serious threats to the safety of urban residents, the normal
36 operation of city functions, and sustainable development. This exacerbates the vulnerability of urban socio-economic system
37 (Gu et al., 2025; Visser, 2014; Zheng et al., 2014). Therefore, achieving real-time and effective identification of urban
38 flooding extent has become a critical issue that urgently needs to be addressed.

39 Remote sensing technology has made significant advancements in the field of urban flood identification, providing new
40 perspectives for flood disaster identification through high spatial, temporal and spectral resolution data (Bofana et al., 2022).
41 However, despite its excellent performance at the macro scale, remote sensing technology has limitations in urban area
42 monitoring. Due to the limitations in temporal resolution and the impact of cloud cover and atmospheric variations, remote
43 sensing technology struggles to capture the dynamic changes of urban flooding, making real-time identification of rapidly
44 evolving flood events challenging (Mason et al., 2012). In addition, the complexity of the urban environment, especially the
45 dynamic changes of small-scale water bodies and localized waterlogging, further increases the difficulty of remote sensing
46 technology in urban flooding extent identification. Therefore, an intelligent and real-time urban flood monitoring method is
47 urgently needed to achieve more precise flood identification.

48 With technological advancements, the emerging fields of deep learning and computer vision have matured and engaged in
49 interdisciplinary collaborations, achieving significant performance that offer new technical approaches for urban flood
50 identification (Choi and Yoo, 2023). Particularly in image segmentation, deep learning's advantages in extracting global
51 features and contextual information make it highly promising for inundation detection (Liu et al., 2020). Simultaneously, the
52 increasing level of urbanization has led to the widespread deployment of video surveillance devices across urban areas,
53 particularly in highly urbanized areas (Muhadi et al., 2024; Hao et al., 2022). During rainfall, these cameras can fully record
54 the flooding process, providing real-time reflections of road inundation changes (Wang et al., 2024). Therefore, combining
55 deep learning with traffic cameras can effectively achieve the identification of urban flooding extent.

56 Existing research has demonstrated that deep learning excels in segmenting inundated areas. Sarp et al. (2020) applied the
57 Mask R-CNN model to automatically detect and segment floodwaters in urban, suburban, and natural scenes, achieving 99%
58 accuracy in the detection phase and 93% in the segmentation phase. Sazara et al. (2019) used a deep learning approach to
59 detect standing water on urban roads, in which a pre-trained VGG-16 network was used in the classification phase and a full
60 convolutional neural network was used in the segmentation task, and compared it with the traditional classifier and
61 extraction algorithms with manually-designed features, and the results showed that the deep learning approach has a more
62 obvious advantage in both the recognition and segmentation of standing water. Wang et al. (2024) used a deep convolutional
63 neural network (DCNN) for urban flood extent recognition based on video images acquired from surveillance cameras. Zeng
64 et al. (2024) proposed a DeepLabv3+ based flood image recognition method, which effectively improves the model

65 performance through image enhancement and the introduction of the super-resolution generative adversarial network.
66 However, current research focuses on daytime scenes, and the existing datasets lack diversity to cover flooding scenes at
67 night or under complex weather conditions. Meanwhile, some algorithms underperform when processing images in low-light
68 or adverse conditions, making flood extent identification at night or in challenging weather a technical challenge. This
69 limitation underscores the urgent need for accurate nighttime flood extent identification and the necessity for algorithm
70 improvements and dataset expansion.

71 To address the above challenges, this study proposes an efficient method for nighttime urban flood extent identification.
72 First, an urban flood inundation dataset for nighttime scenes is constructed to provide sufficient sample support for model
73 training. Subsequently, a NWseg model for nighttime image segmentation is proposed, which combines a Content-Light
74 Splitter with a Dual-Feature Integrator to enhance the model's performance in identifying flooding extent in low-light
75 environments. Meanwhile, given that the data are mainly sourced from urban road surveillance systems, the method is
76 particularly suitable for street (Street) and local area (District) scale flood detection. Finally, the robustness and performance
77 advantages of the NWseg model in nighttime urban flood recognition are verified through experimental comparison with
78 mainstream segmentation models. This study not only promotes the development of nighttime urban flood recognition
79 technology but also provides theoretical support and practical experience for future deep learning research in low-light
80 environments using nighttime.

81 Totally, the main contributions of this paper are as follows:

82 (1) Contributed a method for nighttime urban flooding extent identification based on urban surveillance cameras, aiming
83 at realizing efficient assessment of nighttime urban flooding areas and filling the gaps of research in this field at this stage.

84 (2) To support the generalization ability of the model in complex nighttime environments, this study constructs a
85 nighttime flood inundation dataset covering a variety of nighttime scenarios (e.g., different weather, illumination intensity,
86 and urban structure), which provides diverse sample resources required for training and testing.

87 (3) Replace the original DeepLabv3+ model network backbone with MobilenetV2 and ResNet101 networks and verify
88 the effect of different network backbones on the performance of the Deeplabv3+ model.

89 (4) An urban flood identification model NWseg for nighttime scenarios is proposed, and the significant advantages of the
90 model in terms of robustness, effectiveness and practicality are verified by comparing with other existing models, which
91 advances the research and development of nighttime urban flooding extent identification.

92 **2 Model**

93 **2.1 Nighttime Urban Segmentation Model**

94 Flood segmentation faces significant challenges in nighttime scenes. Insufficient illumination and interference from complex
95 artificial light sources such as streetlights and headlights result in blurring of texture, edge, and color information in flooded
96 regions, further exacerbating the difficulty of the segmentation task and severely affecting the robustness and accuracy of the
97 model. To address this challenge, this study proposed a flood extent recognition model specifically designed for low-light
98 nighttime scenes - the NWseg model, which aims to alleviate the impact of low illumination and complex lighting conditions
99 on segmentation performance. As shown in Figure 1, the NWseg model consists of two key modules: Content-Light Splitter
100 (CLS) and Dual-Feature Integrator (DFI).

101 The design of the CLS module is based on the Retinex theory, which states that an image can be decomposed into a
102 pixel-by-pixel product between a light-independent reflectance component (reflectance) and a light-related illumination
103 component (illumination) (Land. 1977). Based on this principle, the CLS module decomposes the night image into a
104 "reflectance map" and an "illumination map," which represent the inherent semantic information of the flood area and the
105 lighting distribution in the scene, respectively (Wei et al., 2023). Subsequently, a semantic guidance mechanism is
106 introduced to optimize the semantic segmentation loss during training (i.e., the difference between predicted pixel-level class
107 labels and true labels), enabling the reflectance map to learn clearer boundaries and stronger semantic expression, thereby
108 achieving accurate identification of the true contours of the flood areas. In addition, to addressing the interference from
109 artificial light sources (such as car headlights and traffic lights), NWseg further designs the DFI module to enhance
110 segmentation performance by adaptively fusing reflectance and illumination features. The DFI module first encodes the
111 reflectance and illumination features and then constructs an attention mechanism that learns the degree of dependency
112 between each pixel and the two feature types, enabling adaptive feature-weighted fusion at the pixel level (Li et al., 2024).
113 This process adopts a pixel-wise weighting strategy, effectively enhancing the model's ability to recognize light-dominated
114 categories. Finally, the DFI module introduces a dual semantic supervision mechanism: it not only applies semantic
115 segmentation supervision to the fused output but also imposes semantic loss on the illumination channel separately, to
116 enhance its independent discriminative ability and improve the model's overall generalization capability (Wei et al., 2023).

117 In summary, NWseg, through the collaborative design of the CLS and DFI modules, demonstrates superior semantic
118 understanding and segmentation ability in complex nighttime lighting scenarios. It shows significant robustness and
119 recognition advantages, particularly in high-reflection, low-contrast, and locally overexposed areas.

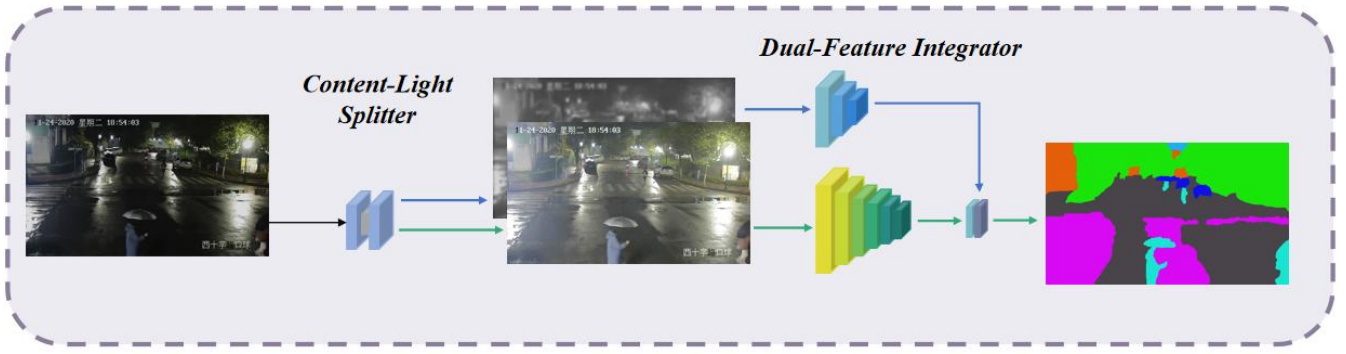


Figure 1: NWseg model inference process

2.2 Typical semantic segmentation model

DeepLabv3+ is an advanced model in the field of image segmentation, which significantly improves the accuracy and detail processing ability of image segmentation by introducing an encoder-decoder structure (Bai et al., 2023; Peng et al., 2023). The encoder part is responsible for extracting the high-level features of the image, while the decoder focuses on recovering the details of the image, thus realizing a more fine-grained segmentation effect (Fu et al., 2021). The model also employs the techniques of void convolution and Atrous Spatial Pyramid Pooling (ASPP), which can effectively capture the multi-scale information of the image and improve the processing capability of complex scenes and object boundaries (Wang et al., 2024; Peng et al., 2024). Cavity convolution enables the model to capture a larger range of image information without increasing the computational effort by introducing voids in the convolution kernel. It is particularly helpful in capturing the relationships between distant objects in an image (Yu et al., 2017). Atrous Spatial Pyramid Pooling (ASPP), on the other hand, enhances the recognition of objects of different sizes by using different scales of null convolution to extract multiple levels of image features, which helps the model to focus on both detailed and global information (He et al., 2014). In addition, DeepLabv3+ uses Xception as the backbone network, combined with depth-separable convolution to improve computational efficiency. Depth separable convolution divides the traditional convolution operation into two steps: first, each image feature is processed independently, and then the results are combined (Zhang et al., 2023). This approach effectively reduces computation and storage requirements, allowing the model to operate more efficiently while maintaining high accuracy. However, due to its relatively complex network structure, DeepLabv3+ is still slow in the inference stage.

To enhance the segmentation performance of DeepLabv3+ in urban flood scenes, this study designs a series of controlled experiments, systematically modifying or removing network components to verify the effectiveness of different backbone networks (i.e., ablation studies) and compares the results with the NWseg model. First, experiments were conducted on the original, unmodified DeepLabv3+ network as a baseline model. Then, we replaced the original DeepLabv3+ backbone network with the lightweight MobilenetV2, constructing an improved model (denoted as MobilenetV2-DeepLabv3+). MobilenetV2 is structurally optimized to compress the feature information while retaining the key information as much as possible, thus achieving a lightweight model while maintaining high accuracy (Jin et al., 2023). Finally, we replaced the

backbone network of DeepLabv3+ with the residual neural network ResNet101 to form another improved model (denoted as ResNet101-DeepLabv3+). ResNet101 adopts the residual connection mechanism so that part of the feature information can bypass the intermediate layer and be transmitted directly, which avoids the problems of “learning stagnation” or “training instability” during the training process (Wang et al., 2024).

The Fully Convolutional Network (FCN) is a deep learning model that divides images into different regions by assigning a specific label to each pixel. Traditional deep learning models typically provide only an overall classification result for an entire image. In contrast, FCNs improve upon these models by replacing the fully connected layers with convolutional operations, enabling the network to handle input images of any size and produce detailed, pixel-level predictions (Yang et al., 2017). FCNs progressively compress the spatial dimensions of the image to extract essential information and then restore the original size to achieve precise localization of different regions (Zhao et al., 2018). Additionally, FCNs combine information from both shallow and deep layers, further enhancing segmentation accuracy in complex areas, such as flood boundaries. In this study, ResNet50 was selected as the backbone network for FCN, referred to as ResNet50-FCN. ResNet50 is a deep neural network that effectively alleviates the gradient vanishing problem during training, improving stability and efficiency. By combining the depth of ResNet50 with the flexibility of FCN, the proposed model enhances the accurate detection of inundated areas in complex environments.

LRASPP (Lightweight Refine Atrous Spatial Pyramid Pooling) is a lightweight model designed for image segmentation tasks. The model adopts MobileNetV3 as the backbone network for extracting the base features of an image and fuses shallow features to enhance the retention of detailed information. To further enhance the inference efficiency, LRASPP reduces the number of convolutional operations in the structural design and streamlines the feature channels to effectively reduce the computational complexity. Ultimately, the model restores the feature map to the same size as the input image through the upsampling operation to achieve accurate prediction of each pixel category (Tang et al., 2024).

U-Net is a deep learning model commonly used for image segmentation tasks, and its structure is mainly composed of two parts: encoder and decoder (Siddique et al., 2021). The encoder is responsible for gradually reducing the image size and extracting key features, while the decoder recovers the detailed information by gradually enlarging the feature map, thus realizing the accurate classification of each pixel. In addition, to compensate for the information lost during the process of reducing the image size, U-Net introduces a jump-join mechanism, which passes the features extracted at different stages in the encoder directly to the corresponding decoder stage (Sengupta et al., 2025). This design enables the model to better preserve the detailed features in the image while maintaining overall semantic understanding (Yadabendra et al., 2022).

We conducted comparative experiments on the FCN, LRASPP, U-Net, and NWseg models, evaluating their performance using metrics such as Precision, Recall, Mean Intersection over Union (MIoU), and F1 Score. All models were initialized with pretrained weights for their backbone networks and trained on the nighttime urban flooding dataset. The models were

177 then evaluated on the test set, with relevant metrics calculated to determine the most suitable model for nighttime urban
178 flood recognition.

179 3 Design of experiments

180 3.1 Construction of dataset

181 In this study, we employed web crawler technology using Google Chrome to construct a comprehensive nighttime urban
182 waterlogging dataset by searching with the keyword "nighttime urban flooding." This dataset contains 4,000 images that
183 capture a wide range of nighttime waterlogging scenes, varying in extent and shape. To enhance the dataset's robustness and
184 comprehensiveness, we included images of complex scenes, such as strong lighting conditions and splashes caused by
185 vehicles, ensuring its applicability to diverse nighttime flooding situations. During the data selection process, careful
186 attention was given to the representativeness and balance of waterlogged areas across different scales, ranging from localized
187 ponding to large-scale flood events, to ensure broad coverage of possible urban flooding conditions (Du et al., 2025).

188 In addition, we employed Labelme, an open-source image annotation tool widely used in the field of computer vision, to
189 manually annotate the flooded regions in the images. Through its graphical interface, annotators can polygonally map the
190 inundated areas in an image and assign corresponding category labels to each area, thus generating high-quality semantic
191 segmentation data that can be used for deep learning model training (Zhang et al., 2023). Using this tool, we precisely
192 labeled the inundated areas in a total of 4,000 images. To ensure the accuracy and consistency of the annotations, three
193 graduate students with research backgrounds in urban flooding were recruited to independently perform the annotation work.
194 Specifically, each flood image was annotated separately by all three annotators, followed by a cross-review process to
195 identify potential discrepancies in the flood boundaries. In cases of inconsistency, the annotators engaged in multiple rounds
196 of collaborative discussion and iterative refinement, optimizing the boundaries based on image details. This process ensured
197 the overall quality and reliability of the dataset. Figure 2 presents a comparison between the original images and the labeled
198 images, where the inundated areas are marked in white and the non-inundated areas are marked in black.

199

200



Figure 2: Samples and the flood area labels in the dataset, the white marked range is the flood extent.

3.2 Evaluation metrics

In validation and testing, mean Intersection over Union (MIoU), F1score, precision and recall were used to assess the performance of the semantic segmentation models (Munawar et al., 2021).

The MIoU value is defined as the ratio of the intersection area of the predicted bounding box and the real bounding box to the concatenation area, and is calculated by averaging the results for each category. It is used to evaluate the accuracy of the location information of the predicted results of the target detection task. The larger the overlap area between the real and the presumed area of the object, the larger the calculated value of MIoU, and the more accurate the presumed target area. The calculation of the MIoU value follows the following formula:

$$MIoU = \frac{1}{k+1} \sum_{i=0}^k \frac{TP}{TP + FP + FN} \quad (1)$$

Precision, which is the proportion of samples predicted to be positive that are actually positive, is also known as the check rate, and can be expressed by the following formula:

$$Precision = \frac{TP}{TP + FP} \quad (2)$$

Recall, which is the proportion of actual positive samples that are predicted to be positive, is also known as the check all rate, and is given by the following formula:

$$Recall = \frac{TP}{TP + FN} \quad (3)$$

F1 score is the reconciled mean of precision and recall. The formula for each precision evaluation metric is as follows:

$$F1score = \frac{2 \times Precision \times Recall}{Precision + Recall} \quad (4)$$

In the above formula, TP is the number of actual situations that are true and predicted to be true; FP is the number of actual situations that are false and predicted to be true; FN is the number of actual situations that are true and predicted to be false; and TN is the number of actual situations that are false and predicted to be false.

3.3 Experimental configuration

All experiments were conducted using an operating system of Windows 10, a CPU model of Intel(R)Core(TM)i712700F@2.10GHz, a GPU model of NVIDIA GeForce RTX 3080, 32GB of operating memory, a programming language of Python 3.13, and a deep learning framework of PyTorch1.13, GPU acceleration is enabled during model training with CUDA 11.7 and cuDNN 8.4.1 to improve training efficiency. The input image resolution is 512*512 pixels, the training optimizer type is Adam, the weight decay index is 0.0001, and the initialized learning rate is 0.005. Parameters are shown in Table 1.

Table 1. Configuration table of the experiment

Project	Model
Operating System	Windows 10
Programming Language	Python3.13
GPU	NVIDIA GeForce RTX3080
GPU memory	32GB

4 Result

4.1 Ablation study

Table 2. NWseg and DeepLabv3+ series model training results

Models	P/%	R/%	F1 score/%	MIoU/%	Params/M
Mobilenetv2-DeepLabv3+	67.46	50.64	57.85	46.15	5.81
ResNet101-DeepLabv3+	67.74	57.24	62.05	51.98	59.34
DeepLabv3+	53.34	50.61	51.94	46.07	54.70
NWseg	95.99	94.8	95.39	91.46	122.6

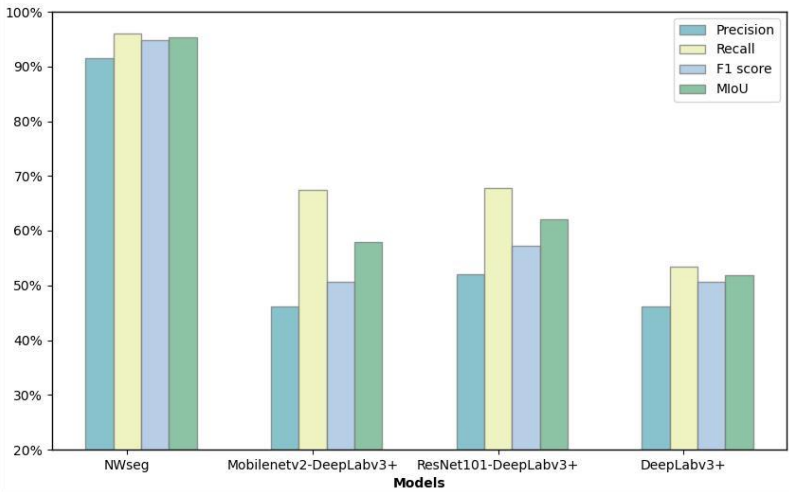


Figure 3. Comparison of experimental results between NWseg and DeepLabv3+ series of models

In this section, we present a comparative analysis of the DeepLabv3+ model with different backbone networks and compare it with the NWseg model. As shown in Table 2 and Figure 3, all evaluation metrics are improved after replacing the original

backbone network of DeepLabv3+ with Mobilenetv2 and ResNet101, respectively. Notably, when ResNet101 was used as the backbone, the model's performance improved even more, with Precision, F1 score, Recall, and MIoU increasing by 14.4%, 10.11%, 6.63%, and 5.91%, respectively, compared to the baseline model. However, all DeepLabv3+ variants still exhibited a significant performance gap when compared to NWseg. The NWseg model achieved 95.99% in Precision, 94.80% in Recall, 95.39% in F1 score, and 91.46% in MIoU, demonstrating its superior capability in nighttime urban flood extent recognition. Although NWseg has a relatively large number of parameters, it delivers outstanding accuracy and robustness.

4.2 Model performance experiments

Table 3. NWseg and other segmentation model training results

Models	P/%	R/%	F1 score/%	MIoU/%	Params/M
NWseg	95.99	94.8	95.39	91.46	122.6
ResNet50-FCN	85	77.23	80.93	82.7	35.31
LRASPP	80.17	25.39	38.57	59.21	3.22
U-Net	94.7	83.57	88.24	80.5	43.93

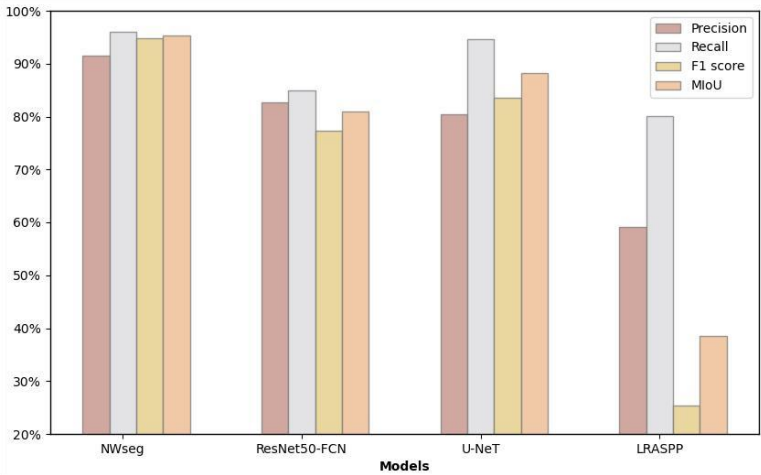


Figure 4. Comparison of experimental results between NWseg and other segmentation models

In this section, we present a comparative analysis of the experimental results of the NWseg model against other segmentation models. As shown in Table 3 and Figure 4, the NWseg model achieved optimal results on the test set of the nighttime flood inundation dataset, with a Precision of 95.99%, Recall of 94.8%, F1 score of 95.39%, and MIoU of 91.46%. These metrics are significantly higher than those of the other models, demonstrating superior accuracy and recall rates. Compared to the ResNet50-FCN model, the NWseg model exhibits superior performance across all indicators, with increases of 10.99% in Precision, 17.57% in Recall, 14.46% in F1 score, and an 8.76% improvement in MIoU. When compared with the U-Net model, while the NWseg's Precision is similar, it outperforms in other metrics, with Recall, F1 score, and MIoU higher by 11.23%, 7.15%, and 10.96% respectively. Additionally, compared to the lightweight LRASPP model, the NWseg model shows more pronounced advantages, with Precision increased by 15.82%, Recall significantly increased by 69.41%, F1 score improved by 56.82%, and MIoU enhanced by 32.25%. Although NWseg is higher in the

number of model parameters than the other comparative models, it still demonstrates significant advantages in several evaluation metrics. Future research will aim to further optimize the structure of the model while maintaining its performance to achieve a higher degree of lightweighting.


Overall, the NWseg model demonstrates superior performance across all evaluation metrics and also shows strong performance in real scenario tests. In contrast, although the ResNet50-FCN model performs well in precision and detail processing, it lacks efficacy in handling edge regions, leading to slightly insufficient performance in complex scenes. While LRASPP offers advantages in computational efficiency due to its lightweight design, it has limitations in the precise capture of details and boundaries. The U-Net model is comparable to NWseg in accurately detecting target areas but is somewhat less robust and consistent when processing complex scenes.

4.3 Real-world scenes prediction comparison

To validate the effectiveness and stability of each model under challenging scenes, we conducted tests on seven models using nighttime rainfall scenes and nighttime strong illumination scenes (Wan et al., 2025). As shown in Figure 5(a) presents the original scene where streetlights at night generate strong reflections and halos on the water surface. Additionally, the intense lighting affects the detailed features of the ground. By comparing the recognition results of each model, it is evident that the NWseg, ResNet50-FCN, and U-Net models accurately detected the flooding conditions in the scene. Notably, the NWseg model exhibited a more refined recognition ability in identifying water accumulation in road depressions. However, both ResNet50-FCN and U-Net showed certain false detections when recognizing the overall flooded areas. In contrast, the Mobilenetv2-DeepLabv3+, DeepLab, and LRASPP models could only sporadically identify small flooded regions and exhibited varying degrees of false detections. Although the ResNet101-DeepLabv3+ model recognized a larger flooded area, a comparison with the original image reveals a relatively high false detection rate, indicating deviations in prediction accuracy. Overall, the NWseg model outperformed the others in this scene recognition task, demonstrating superior capability in recognizing flooded areas under complex lighting conditions.



(A) The Original image

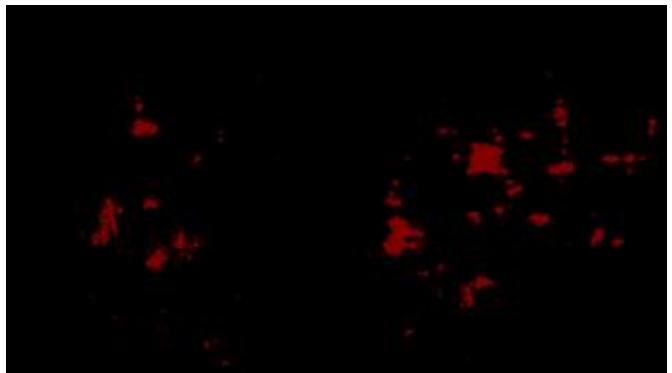

(B) Segmentation of Mobilenetv2-DeepLabv3+



(C) Segmentation of ResNet101-DeepLabv3+



(D) Segmentation of DeepLabv3+



(E) Segmentation of LRASPP



(F) Segmentation of U-Net



(G) Segmentation of ResNet50-FCN



(H) Segmentation of NWseg


Figure 5. Scene with nighttime strong illumination: (A) the original scene; (B) the segmentation result of Mobilenetv2-DeepLabv3+; (C) the segmentation result of ResNet101-DeepLabv3+; (D) the segmentation result of DeepLabv3+; (E) the segmentation result of LRASPP; (F) the segmentation result of U-Net; (G) the segmentation result of ResNet50-FCN; (H) the segmentation result of NWseg;

Furthermore, in the nighttime rainfall scene tests, we evaluated each model's performance to simulate urban flood recognition under real-world conditions. In such scenes, reflections from rainwater, slippery road surfaces, and interference from raindrops on the camera lens can adversely affect image clarity and the models' recognition accuracy (Zhao et al., 2025). As shown clearly in Figure 6, the NWseg, ResNet50-FCN, and U-Net models were able to correctly identify the flooded areas in the images, with the NWseg model providing the most detailed performance by accurately capturing the edges of the flooded regions. While ResNet50-FCN and U-Net also identified the extent of flooding relatively well, they were somewhat insufficient in recognizing the flood boundaries and exhibited some false detections.


300 In contrast, the other four models performed relatively poorly. Specifically, the LRASPP and Mobilenetv2-DeepLabv3+
301 models were almost unable to detect the flooding, indicating weaker recognition capabilities in nighttime rainfall scenes.
302 Although ResNet101-DeepLabv3+ and DeepLab could detect some flooded areas, comparison with the original images
303 revealed that the regions identified did not accurately reflect the actual flooding conditions and had high false detection rates.
304 Through comparative analysis, we further confirmed the challenges posed by nighttime rainfall environments for urban flood
305 recognition and demonstrated the superior performance of the NWseg model in handling complex conditions such as
306 nighttime rainfall.



307 (A) The Original image

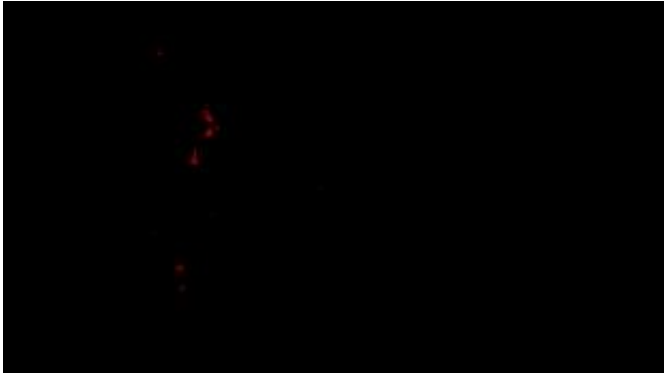


308 (B) Segmentation of Mobilenetv2-DeepLabv3+

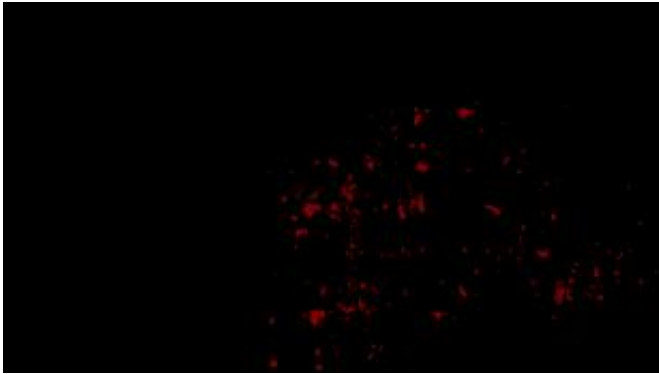

309 (C) Segmentation of ResNet101-DeepLabv3+



310 (D) Segmentation of DeepLabv3+



311 (E) Segmentation of LRASPP



312 (F) Segmentation of U-Net



(G) Segmentation of ResNet50-FCN



(H) Segmentation of NWseg

Figure 6. Scene with nighttime rainfall: (A) the original scene; (B) the segmentation result of Mobilenetv2-DeepLabv3+; (C) the segmentation result of ResNet101-DeepLabv3+; (D) the segmentation result of DeepLabv3+; (E) the segmentation result of LRASPP; (F) the segmentation result of U-Net; (G) the segmentation result of ResNet50-FCN; (H) the segmentation result of NWseg;

5 Discuss

In this study, a state-of-the-art model named NWseg is proposed to address the challenges of nighttime urban flood extent identification. Through a series of experimental validations, the NWseg model demonstrates superior performance with 95.99%, 94.8%, 95.39%, and 91.46% in Precision, Recall, F1 score, and MIoU, respectively. In the prediction comparison of real scenarios, the model also shows high accuracy and robustness, and effectively recognizes flooded areas in complex nighttime environments. In addition, NWseg achieves an inference speed of 37.8 FPS (i.e., approximately 26.5 milliseconds per image) under the NVIDIA GeForce RTX 3080 environment, demonstrating its potential for real-time applications in high-performance computing platforms. This study bridges the current research gap in flood extent recognition in nighttime scenarios, providing a technical reference for flood monitoring and emergency response.

Nevertheless, this study still has some limitations. First, the overall structure of NWseg is relatively complex, and the model parameters are large in scale, which limits its deployment capability on resource-constrained edge devices, [and its stability in complex scenarios needs to be further verified.](#) [Second](#), in nighttime scenarios with extremely low illumination or even complete power outage (e.g., the case of city blackout triggered by heavy rainfall), the model has difficulty in extracting effective edge and texture information, which leads to a significant degradation of the recognition performance. [In addition, the current model is primarily designed for nighttime flood extent recognition and is not yet capable of sensing or estimating flood depth. It also lacks the ability to perform reliably under all-weather conditions. Furthermore, although the NWseg model can identify flooded areas more accurately, it is still difficult to achieve accurate modeling and area quantification of inundated areas. Finally, the dataset used in this study is mainly collected from some typical cities in China, and although it has covered diverse nighttime environments and lighting conditions, the model's generalization ability may be limited by the influence of geographic concentration and the dependence on surveillance cameras, and there is a certain identification bias when facing areas with different urban structures and lighting conditions.](#)

In the future, the network structure will be further optimized to reduce the computational complexity of the model and improve the flexibility and efficiency of deployment. Meanwhile, the training dataset will be continuously expanded to enhance its diversity and representativeness in multiple dimensions, such as geographic distribution and urban structure. In addition, it is planned to introduce depth estimation technology to realize the accurate perception and quantification of the depth of the flood to meet more detailed flood monitoring needs. Finally, techniques such as infrared thermal imaging, microlight enhancement, and multimodal fusion will be combined to improve the robustness and adaptability of the model under extremely low light conditions. In subsequent practical applications, the NWseg model can be widely deployed in key scenarios such as urban emergency management, intelligent transportation monitoring, and disaster prevention and mitigation, especially for emergency response needs under extreme weather at night. By interfacing with existing traffic monitoring systems or urban sensing platforms, the model can automatically extract flooding information from the monitoring screen, and realize rapid identification and early warning push for waterlogged areas. Combined with the city scheduling platform, NWseg can assist government departments in flood risk assessment, dynamic allocation of emergency resources, and trend analysis of disaster evolution, which significantly improves the efficiency of urban response and risk management capabilities in extreme weather events.

~~In the future, we will further optimize the network structure to reduce the computational complexity of the model and improve deployment flexibility. In addition, we consider combining infrared thermal imaging, low-light image enhancement, or multimodal fusion methods to improve the robustness and generalization ability of the model under extreme low-light conditions.~~

6 Conclusions

This study successfully verified the excellent performance of the NWseg model in nighttime urban flood monitoring (Wan et al., 2024), which provides a new idea for multi-scene flood extent identification and helps to promote the flood monitoring system towards all-weather and all-scene intelligent identification. First, we constructed a representative dataset comprising 4,000 images of nighttime urban flooding scenes, covering various nighttime environments and diverse urban backgrounds. Second, a model for nighttime waterlogging recognition, NWseg, is proposed to address the limitations in nighttime waterlogging recognition due to insufficient lighting and complex lighting conditions. Furthermore, we replaced the backbone networks of the DeepLabv3+ model with MobilenetV2 and ResNet101 and conducted ablation experiments to validate the performance of DeepLabv3+ with different backbones in nighttime flood recognition. We also performed a comparative analysis between these DeepLabv3+ models and the NWseg model, as well as systematically analyzed the NWseg, ResNet50-FCN, U-Net, and LRASPP models. Based on this, we reached the following empirical findings:

369 (1) Within the DeepLab series, the DeepLabv3+ model using ResNet101 as the backbone outperformed other variants in
370 capturing water surface edges and shadow details. However, when compared to the NWseg model, there remains a
371 considerable performance gap.

372 (2) The NWseg, U-Net, and ResNet50-FCN models demonstrated excellent performance in recognizing large-scale
373 flooded areas, effectively capturing the overall contours of flood zones and exhibiting strong generalization capabilities.
374 Specifically, NWseg shows higher accuracy and robustness in complex scene tests, while ResNet50-FCN and U-Net have
375 some deficiencies and false detections in detecting edge details. In contrast, the lightweight LRASPP model showed limited
376 ability to recognize flooded areas in nighttime scenes, resulting in relatively poor performance.

377 (3) Through examining each model in complex scenes, we validated the NWseg model's effectiveness and stability in
378 diverse environments and conditions.

379 This study successfully demonstrates the superior performance of the NWseg model in nighttime urban flood
380 detection, filling the research gap in nighttime flood range identification. Our work not only promotes the development of
381 the field of nighttime urban flood identification but also provides a reference for future deep learning applications under
382 extreme lighting conditions (Wan et al., 2024). However, the model's decoupling and parsing process involves complex
383 decomposition of lighting components and adaptive fusion, leading to high computational resource demands, which
384 may impact its practical usability. Future work will focus on reducing the model's parameters and computational costs
385 while maintaining accuracy. Additionally, further optimization of the dataset and model improvements will be pursued
386 to enhance the overall performance of the NWseg model, broadening its potential applications.

387 **Acknowledgments.** This research was funded by the National Natural Science Foundation of China (NSFC)
388 (No.42405140), the China Postdoctoral Foundation (No. 2024M761383), the Open Grants of China Meteorological
389 Administration Radar Meteorology Key Laboratory (No. 2024LRM-A02), and the Talent Startup project of NJIT
390 (YKJ.202315).

391 **Data availability.** Data will be made available on request.

392 **Author contributions.** XW, JW, YC, CZ: Writing – original draft, Validation, Software, Methodology, Investigation.
393 XW, JW, YC: Writing – review & editing, Validation. TY: Writing – review & editing, Supervision. FX: Formal
394 analysis, Validation. FT: Data curation, Validation. QW: Data curation, Validation.

395 **Competing interests.** The contact author has declared that none of the authors has any competing interests.

- 397 Bai, Y., Li, J., Shi, L., Jiang, Q., Yan, B., and Wang, Z.: DME-DeepLabV3+: a lightweight model for diabetic macular edema extraction
398 based on DeepLabV3+architecture, *Frontiers in Medicine*, 10, 11, <http://doi.org/10.3389/fmed.2023.1150295>, 2023.
- 399 Bofana, J., Zhang, M., Wu, B., Zeng, H., Nabil, M., Zhang, N., Elnashar, A., Tian, F., Da Silva, J.M., Botˆao, A., Atumane, A., Mushore,
400 T.D., and Yan, N.: How long did crops survive from floods caused by Cyclone Idai in Mozambique detected with multi-satellite data,
401 *Remote Sens. Environ.*, 269, 112808, <https://doi.org/10.1016/j.rse.2021.112808>, 2022.
- 402 Burn, D. H., Whitfield, P. H.: Climate related changes to flood regimes show an increasing rainfall influence, *Journal of Hydrology*, 617,
403 13, <http://doi.org/10.1016/j.jhydrol.2023.129075>, 2023.
- 404 Choi, Y.H., and Yoo, S.J.: Quantized-state-based decentralized neural network control of a class of uncertain interconnected nonlinear
405 systems with input and interaction time delays, *Eng. Appl. Artif. Intel.*, 125, 106759, <https://doi.org/10.1016/j.engappai.2023.106759>,
406 2023.
- 407 Du, W., Qian, M., He, S., Xu, L., Zhang, X., Huang, M., and Chen, N.: An improved ResNet method for urban flooding water depth
408 estimation from social media images, *Measurement*, 242, 12, <http://doi.org/10.1016/j.measurement.2024.116114>, 2025.
- 409 Fu, H., Meng, D., Li, W., and Wang, Y.: Bridge Crack Semantic Segmentation Based on Improved Deeplabv3+, *Journal of Marine
410 Science and Engineering*, 9(6), 14, <http://doi.org/10.3390/jmse9060671>, 2021.
- 411 Ghosh, P., Sudarsan, J. S., and Nithiyanantham, S.: Nature-Based Disaster Risk Reduction of Floods in Urban Areas, *Water Resources
412 Management*, 38 (6), 1847-1866, <http://doi.org/10.1007/s11269-024-03757-4>, 2024.
- 413 Gu, Q., Chai, F., Zang, W., Zhang, H., Hao, X., and Xu, H.: A Two-Level Early Warning System on Urban Floods Caused by Rainstorm,
414 *Sustainability*, 17(5), 16, <http://doi.org/10.3390/su17052147>, 2025.
- 415 Hao, X., Lyu, H., Wang, Z., Fu, S., and Zhang, C.: Estimating the spatial-temporal distribution of urban street ponding levels from
416 surveillance videos based on computer vision, *Water Resources Management*, 36(6), 1799-1812,
417 <https://doi.org/10.1007/s11269-022-03107-2>, 2022.
- 418 He, K., Zhang, X., Ren, S. and Sun, J.: Spatial pyramid pooling in deep convolutional networks for visual recognition. In *Proceedings of
419 the 13th European Conference on Computer Vision (ECCV)*, 8691, 346-361, https://doi.org/10.1007/978-3-319-10578-9_23, 2014.
- 420 Jin, K., Zhang, J., Wang, Z., Zhang, J., Liu, N., Li, M., and Ma, Z.: Application of deep learning based on thermal images to identify the
421 water stress in cotton under film-mulched drip irrigation, *Agricultural Water Management*, 299, 108901,
422 <http://doi.org/10.1016/j.agwat.2024.108901>, 2024.
- 423 Kim, H., Villarini, G., Wasko, C., Trambly, Y.: Changes in the Climate System Dominate Inter-Annual Variability in Flooding Across
424 the Globe, *Geophysical Research Letters*, 51(6), <http://doi.org/10.1029/2023gl107480>, 2024.
- 425 Kundzewicz, Z.W., Su, B., Wang, Y., Xia, J., Huang, J., and Jiang, T.: Flood risk and its reduction in China. *Adv. Water Resour.*, 130, 37
426 – 45, <https://doi.org/10.1016/j.advwatres.2019.05.020>, 2019.
- 427 Land, E. H.: The retinex theory of color vision, *Scientific American*, 237(6), 108-28, <https://doi.org/10.1038/scientificamerican1277-108>,

1977.

- Li, X., Wang, W., Feng, X., and Li, M.: Deep parametric Retinex decomposition model for low-light image enhancement, *Computer Vision and Image Understanding*, 241, 14, <https://doi.org/10.1016/j.cviu.2024.103948>, 2024
- Liu, W., Feng, Q., Engel, B. A., Yu, T., Zhang, X., and Qian, Y.: A probabilistic assessment of urban flood risk and impacts of future climate change, *Journal of Hydrology*, 618, 11, <http://doi.org/10.1016/j.jhydrol.2023.129267>, 2023.
- Liu, X., Song, L., Liu, S., and Zhang, Y.: A review of deep-learning-based medical image segmentation methods, *Sustainability*, 13(3), 1224. <https://doi.org/10.3390/su13031224>, 2020.
- Mason, D. C., Davenport, I. J., Neal, J. C., Schumann, G. J. P., and Bates, P. D.: Near Real-Time Flood Detection in Urban and Rural Areas Using High-Resolution Synthetic Aperture Radar Images, *Ieee Transactions on Geoscience and Remote Sensing*, 50(8), 3041-3052, <http://doi.org/10.1109/tgrs.2011.2178030>, 2012.
- Muhadi, N. A., Abdullah, A. F., Bejo, S. K., Mahadi, M. R., Mijic, A., and Vojinovic, Z.: Deep learning and LiDAR integration for surveillance camera-based river water level monitoring in flood applications, *Natural Hazards*, 120(9), 8367-8390, <http://doi.org/10.1007/s11069-024-06503-6>, 2024.
- Munawar, H.S., Ullah, F., Qayyum, S., and Heravi, A.: Application of deep learning on UAV-based aerial images for flood detection, *Smart Cities*, 4 (3), 1220 – 1242. <https://doi.org/10.3390/smartcities4030065>, 2021.
- Peng, H., Xiang, S., Chen, M., Li, H., and Su, Q.: DCN-Deeplabv3+: A Novel Road Segmentation Algorithm Based on Improved Deeplabv3+, *Ieee Access*, 12, 87397-87406, <http://doi.org/10.1109/access.2024.3416468>, 2024.
- Peng, H., Zhong, J., Liu, H., Li, J., Yao, M., and Zhang, X.: ResDense-focal-DeepLabV3+enabled litchi branch semantic segmentation for robotic harvesting, *Computers and Electronics in Agriculture*, 206, 12, <http://doi.org/10.1016/j.compag.2023.107691>, 2023.
- Sarp, S., Kuzlu, M., Cetin, M., Sazara, C., and Guler, O.: Detecting floodwater on roadways from image data using Mask-R-CNN, 2020 International Conference on INnovations in Intelligent SysTems and Applications, Novi Sad, Serbia, 24-26, <http://doi.org/10.1109/INISTA49547.2020.9194655>, 2020.
- Sazara, C., Cetin, K., and Iftekharuddin, K.: Detecting floodwater on roadways from image data with handcrafted features and deep transfer learning, 2019 IEEE Intelligent Transportation Systems Conference, Auckland, New Zealand, 27-30, <http://doi.org/10.1109/ITSC.2019.8917368>, 2019.
- Sengupta, S., Chyrmang, G., Bora, K., Das, H. S., Li, A., Lemos, B., and Mallik, S.: Assessment of different U-Net backbones in segmenting colorectal adenocarcinoma from H&E histopathology, *Pathology Research and Practice*, 266, 11, <https://doi.org/10.1016/j.prp.2025.155820>, 2025.
- Siddique, N., Paheding, S., Elkin, C. P., and Devabhaktuni, V.: U-Net and Its Variants for Medical Image Segmentation: A Review of Theory and Applications, *Ieee Access*, 9, 82031-82057, <https://doi.org/10.1109/access.2021.3086020>, 2021.

458 Tang, Y., Tan, D, Li, H., Zhu, M., Li, X., Wang, X., Wang, J., Wang, Z., Gao, C., Wang, J., and Han, A.: RTC_TongueNet: An improved
459 tongue image segmentation model based on DeepLabV3 DIGITAL HEALTH, 10, 20552076241242773,
460 <http://doi.org/10.1177/20552076241242773>, 2024.

461 Visser, F.: Rapid mapping of urban development from historic Ordnance Survey maps: an application for pluvial flood risk in Worcester, J.
462 Maps., 10 (2), 276 – 288. <https://doi.org/10.1080/17445647.2014.893847>, 2014.

463 Wan, J., Qin, Y., Shen, Y., Yang, T., Yan, X., Zhang, S., Yang, G., Xue, F., and Wang, Q.: Automatic detection of urban flood level with
464 YOLOv8 using flooded vehicle dataset, Journal of Hydrology, 639, 131625, <http://doi.org/10.1016/j.jhydrol.2024.131625>, 2024.

465 Wan, J., Xue, F., Shen, Y., Song, H., Shi, P., Qin, Y., Yang, T., and Wang, Q. J.: Automatic segmentation of urban flood extent in video
466 image with DSS-YOLOv8n, Journal of Hydrology, 655, 12, <https://doi.org/10.1016/j.jhydrol.2025.132974>, 2025.

467 Wang, Y., Shen, Y., Salahshour, B., Cetin, M., Iftikharuddin, K., Tahvildari, N., Huang, G., Harris, D., Ampofo, K., and Goodall, J.:
468 Urban flood extent segmentation and evaluation from real-world surveillance camera images using deep convolutional neural network,
469 Environmental Modelling & Software, 173, 105939, <http://doi.org/10.1016/j.envsoft.2023.105939>, 2024.

470 Wang, Y., Yang, L., Liu, X., and Yan, P.: An improved semantic segmentation algorithm for high-resolution remote sensing images based
471 on DeepLabv3+, Scientific Reports, 14, 15, <http://doi.org/10.1038/s41598-024-60375-1>, 2024.

472 Wei, Z., Chen, L., Tu, T., Ling, P., Chen, H., and Jin, Y.: Disentangle then Parse: Night-time Semantic Segmentation with Illumination
473 Disentanglement, Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV), 21593-21603,
474 <https://doi.org/10.48550/arXiv.2307.09362>, 2023.

475 Yadavendra, and Chand, S.: Semantic segmentation of human cell nucleus using deep U-Net and other versions of U-Net models,
476 Network-Computation in Neural Systems, 33, 167-186, <http://doi.org/10.1080/0954898x.2022.2096938>, 2022.

477 Yang, Y., Zhuang, Y., Bi, F., Shi, H., and Xie, Y.: M-FCN: Effective Fully Convolutional Network-Based Airplane Detection Framework,
478 Ieee Geoscience and Remote Sensing Letters, 14, 1293-1297, <https://doi.org/10.1109/lgrs.2017.2708722>, 2017.

479 Yu, F., Koltun, V. and Funkhouser, T.: Dilated residual networks. In Proceedings of the 30th IEEE/CVF Conference on Computer Vision
480 and Pattern Recognition (CVPR), 636 – 644. <https://doi.org/10.1109/cvpr.2017.75>, 2017.

481 Zhang, L., Han, G., Qiao, Y., Xu, L., Chen, L., and Tang, J.: Interactive Dairy Goat Image Segmentation for Precision Livestock Farming,
482 Animals, 13(20), 17, <http://doi.org/10.3390/ani13203250>, 2023.

483 Zhao, J., Wang, X., Zhang, C., Hu, J., Wan, J., Cheng, L., Shi, S., and Zhu, X.: Urban Waterlogging Monitoring and Recognition in
484 Low-Light Scenarios Using Surveillance Videos and Deep Learning, Water, 17(5), 19, <http://doi.org/10.3390/w17050707>, 2025.

485 Zhao, W., Zhang, H., Yan, Y., Fu, Y., and Wang, H.: A Semantic Segmentation Algorithm Using FCN with Combination of BSLIC,
486 Applied Sciences-Basel, 8, 500, <http://doi.org/10.3390/app8040500>, 2018.

487 Zheng, F., Westra, S., Leonard, M., Sisson, S.A.: Modeling dependence between extreme rainfall and storm surge to estimate coastal
488 flooding risk, Water Resour. Res., 50 (3), 2050 – 2071, <https://doi.org/10.1002/2013WR014616>, 2014.

489 Zeng, Y., Chang, M., and Lin, G.: A novel AI-based model for real-time flooding image recognition using super-resolution generative
490 adversarial network, *Journal of Hydrology*, 638, 12, <https://doi.org/10.1016/j.jhydrol.2024.131475>, 2024.