

5 **Regional modeling of the impacts of tidal flooding in the context of**
average sea level rise in low-lying areas of Brazil's semi-arid
coast~~Regional modeling of the impacts of tidal flooding in the context~~
~~of mean sea level rise on low-lying in the Global South~~

Formatted: English (United States)

Thiago Cavalcante Lins Silva¹, Marco Túlio Mendonça Diniz^{1,3}, Paulo Victor do Nascimento Araújo²,
José Yure Gomes dos Santos³, Bruno Ferreira⁴, Jucielho Pedro da Silva^{3,5}

¹Department of Geography, Federal University of Rio Grande do Norte, Natal, 59078-970, Brazil.

²Campus Macau, Federal Institute of Education, Science and Technology of Rio Grande do Norte, Macau, 59500-000, Brazil.

³Department of Geography, Federal University of Rio Grande do Norte, Caicó, 59300-000, Brazil.

⁴Institute of Geography, Development and Environment, Federal University of Alagoas, Maceió, 57072-900, Brazil.

⁵Department of Geosciences, Federal University of Paraíba, João Pessoa 58051-900, Brazil.

Correspondence to: Thiago Cavalcante Lins Silva (thiago.lins.115@ufrn.edu.br)

Formatted: English (United States)

Abstract. This study assessed the risks and impacts of rising average sea levels on Brazil's semi-arid coastline in a low-lying coastal area with limited response potential, using freely available data and based on the central hypothesis that, even in conservative scenarios, there will be risks with significant impacts. The methodology integrated DEM calibration, geodetic validation of tide gauge data, flood modeling, and overlay with real estate grids to quantify damage. The results showed relative stability of astronomical tides, with projected extremes of up to 2.975 m and 3.454 m, respectively, for a 20-year return period. Meteorological tides showed low values (≈ 0.11 m), although with episodic variability. The modeling indicated that up to 14% of the total area (about 730 km²) could be affected in extreme scenarios, with progressive flooding of solar salt pans and low-lying urban areas. Cities such as Areia Branca, Macau, and Porto do Mangue are at the highest risk, with a 60–80% probability of flooded days in severe scenarios. Economic losses were estimated at approximately R\$ 36 million in residences ($\approx$ US\$ 6.7 million) and R\$ 158 million in land ($\approx$ US\$ 29 million), with Areia Branca being the most impacted municipality. Towns such as Barra, Cristóvão, and Baixa Grande also experienced significant risks and damage. The findings reinforce the usefulness of open data for regional risk analysis, even recognizing limitations in spatial resolution and vertical uncertainties. The methodology proved promising, replicable, and useful for supporting adaptive policies in regions with low institutional technical capacity.

1 Introduction

Climate change is increasingly becoming a global emergency, with coastal areas serving as a confluence of highly energetic processes, making them focal areas for impact studies and adaptive planning (Rouse et al., 2016; Powell et al., 2018; Hinkel et al., 2018; Becker et al., 2023; Cabana et al., 2023). The consequences of climate change have several dimensions, such as

changes in terrestrial thermal patterns, changes and fluctuations in rainfall distribution, systematic imbalance in the trophic regime of coastal ecosystems, intensification of socio-spatial inequalities, recurrence and increased intensity of extreme events, and rising average sea levels, which are the main global manifestations predicted by climate change (Arnell et al., 2019; González-Trujillo et al., 2023).

35 The mean sea level rise (MSLR), one of the most direct and significant consequences of the predicted changes, primarily threatens low-lying coastal environments through flooding and subsequent erosion (Le Cozannet et al., 2014; IPCC, 2022; Scardino et al., 2022). Furthermore, recent projections indicate that even conservative scenarios could result in significant losses of territory in areas that are already vulnerable from both an environmental and social perspective (Almaliki et al. 2023; López-Dóriga and Jiménez, 2020). Such impacts compromise not only environmental integrity but also the socioeconomic
40 security of coastal cities and populations (Araújo et al., 2021).

Developed coastal countries have increasingly implemented robust real-time monitoring and modeling systems, while many naturally vulnerable regions, especially in the Global South, remain unengaged in risk assessments, mainly due to data scarcity and limited institutional and financial capacity (Nagy et al., 2019; Moser et al., 2019; Cabana et al., 2023).

Small and medium-sized coastal cities in semi-arid areas often lack the financial and technical resources to implement local
45 climate adaptation strategies (Boehnke et al., 2019; Fila et al., 2023; Olczak & Hanzl, 2025). In Brazil, the northern coast of the state of Rio Grande do Norte is an example of this vulnerability. The region is composed of economically fragile municipalities located in low-lying coastal areas (Aguiar et al., 2019), where tidal dynamics cause recurrent flooding (Araújo et al., 2021; Aguiar et al., 2019; Rabelo et al., 2023), a highly dangerous combination. The worsening of climate processes and the consequent rise in sea level may make the intrusion of marine processes a chronic problem, increasing socio-environmental
50 stress and stress on poor urban infrastructure.

In this scenario, modeling for a regional context emerges as an interesting, viable, and low-cost approach to assess current and future exposures, provided that the data used are properly validated, geodetically consistent, and considering vertical errors when associated with global Digital Elevation Models (DEMs) (Muench et al., 2022). without careful validation, there may be an overestimation of flood-prone areas (Vernimmen & Hooijer, 2023). Although these products have natural limitations in
55 terms of spatial resolution, their wide availability and scalability make them useful tools in areas with technical and financial constraints (Ekeu-wei & Blackburn, 2018).

The central scientific question of this study is the construction of regional MSLR projection scenarios for the Brazilian Semi-Arid Coast (BSC), using open or low-cost aggregated data and mechanisms already implemented by the Brazilian Government to project scenarios from various sources, with the aim of identifying potentially impacted areas along the coastline. The
60 starting point is the hypothesis that, even under the most conservative scenarios, there will be impacts on homes and land in various municipalities, creating endemic risk zones with high financial damage to major cities and other regions.

The study strategically sought to provide initial, yet applicable, input for regional and municipal flood management by fulfilling the following objectives: (I) mapping areas susceptible to tidal flooding under the current regime; (II) analyzing the frequency of flooding using historical data series; (III) analyzing multiple MSLR projections and their frequencies; (IV) assessing risk

65 areas throughout the study area; (V) analyzing the impacts of risk areas, adopting as the study area the mouths of the Piranhas-Açu and Apodi-Mossoró rivers on the Brazilian Semi-Arid Coast.

Considering the high costs and low availability of detailed geospatial surveys, the proposed framework aimed to provide a holistic and integrated study with open data, designed using probabilistic logic based on abduction, which allowed for the preliminary identification of climate risks in the area, systematically updating previous projective studies (e.g.: Araújo et al., 2021; Aguiar et al., 2019; Santos et al., 2024). In addition, it established a general understanding and a starting point for the future development of high-resolution modeling for regional scenarios.

This study builds on the existing literature by proposing an integrated methodological framework specifically tailored to coastal regions with limited data availability in the Global South. Based on the use of open data and probabilistic logic, it combines the multi-criteria calibration of freely available DEMs with local geodetic validation, the systematic application of the bathtub technique under multiple sea-level rise scenarios, and the incorporation of real estate grids as proxies for economic exposure. This structured and replicable approach allows not only for improved physical risk assessment but also for the spatial quantification of potential financial impacts, representing a practical and scalable contribution to coastal risk analysis in regions with limited technical and institutional capacity.

2 Study Area

80 The study area is located in the Costa Branca region, on the northern coast of the state of Rio Grande do Norte, a region characterized by a semi-arid hydrological framework, with salinized plains and low slopes (Diniz & Oliveira, 2016). Rainfall is concentrated in a few months of the year, mainly at the end of summer and beginning of autumn, alternating between years with rainfall above 800 mm and prolonged droughts (Medeiros et al., 2022; Kelly & Lucio, 2014).

The spatial area covers approximately 10,600 km², stretching along approximately 142 km of coastline, encompassing the estuaries of the Piranhas-Açu and Apodi-Mossoró rivers. The area partially includes the boundaries of the municipalities of Grossos, Tibau, Areia Branca, Porto do Mangue, and Macau (Figure 1Figure 1), as well as villages near the coast. The municipalities in question have economic limitations and some are highly economically vulnerable, as verified by Macedo et al. (2025).

The area has a semi-diurnal mesotidal regime, with an average amplitude of around 2.66 m, reaching up to 2.85 m during periods of more intense tides, such as in spring (Vital, 2009). The astronomical aspect is the controlling vector of the region's hydraulic dynamics, directly influencing coastal morphodynamics and depositing several sandbanks. In addition, the sector is influenced by waves from the northeast and east, with heights varying between 10 and 80 cm and average periods between 4 and 8 seconds (Vital et al., 2011; Barbosa et al., 2018).

The predominant land use is characterized by the production of sea salt in several evaporation ponds, which is the main economic activity in the region (Diniz et al., 2015). The production process takes advantage of the flat environment of the

Formatted: English (United States)

hypersaline plains, high rates of potential evapotranspiration, and semi-arid hydroclimatic regime to produce sea salt (Diniz et al., 2017), making it the largest salt producer in Brazil.

The area is located in a low-lying coastal region (Eduardo et al., 2025), which is naturally vulnerable to flooding (Souza et al., 2021), a recurring phenomenon that has been documented in several publications (Aguar et al., 2019; Araújo et al., 2021; Rabelo et al., 2023; Silva et al., 2024). Low-lying coasts represent only about 2% of the world's coastlines (Nicholls et al., 2007), which makes the study area highly rare and exceptional. Due to their exceptional nature, these areas are frequently studied in international studies that seek to analyze the risks associated with this condition (Nicholls et al. 2007; Marfai & King, 2007; Dwarakish et al., 2009; Nicholls and Cazenave, 2010; Darsan et al., 2013; Boori et al., 2012; Busman et al., 2016; Stephens et al., 2021; Su et al., 2024), which makes the present study feasible and appropriate.

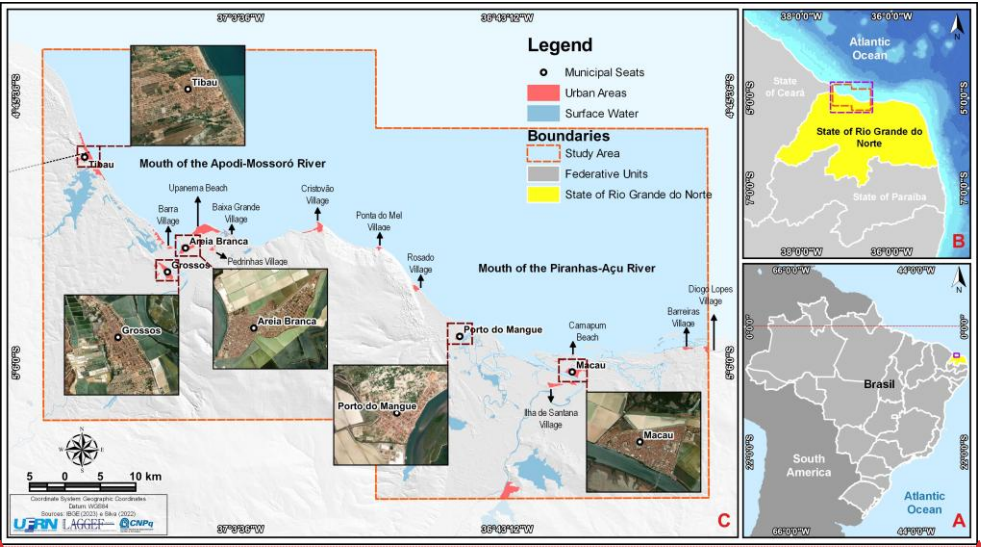


Figure 13: Study Area, with emphasis on the main urban centres in the area under analysis, the proximity to waterways is notable. Map created using data from the IBGE (2023) and a base map from Bing Maps (© Microsoft). Map prepared by the authors using data from IBGE (2023) and basemap data from Bing Maps (© Microsoft).

3 Material and methods

This study used the concept of risk as its central matrix, understood as the function between hazard and vulnerability (Kron, 2005; Wisner et al., 2012) (Eq.1), articulating physical, environmental, and social dimensions of the analyzed territory. Risk in this perspective is understood as a socio-environmental construct, influenced by both natural factors and social and territorial

115 inequalities (Blaikie et al., 1994; Smith, 2001; Turner et al., 2003). The study area in this condition is understood as a region
exposed to climate hazards due to its condition of human occupation (McGranahan et al., 2007; Voudoukas et al., 2018) The
operationalization of the concepts guided the methodological discussionsThis study used the concept of risk as its central
matrix, understood as the function between hazard and vulnerability (Kron, 2005; Wisner et al., 2012) (Eq.1), articulating
physical, environmental, and social dimensions of the analyzed territory. Risk in this perspective is understood as a socio-
environmental construct, influenced by both natural factors and social and territorial inequalities (Blaikie et al., 1994; Smith,
120 2001; Turner et al., 2003). The study area in this condition is understood as a region exposed to climate hazards due to its
condition of human occupation (McGranahan et al., 2007; Voudoukas et al., 2018). The operationalization of the concepts
guided the methodological discussions.

Risk = Hazard x Vulnerability,
(1)

125 In this study, risk was defined as the spatial combination of flood hazard and vulnerability, as shown in Eq. 1. Hazard was
defined based on an extreme hydrodynamic scenario, including the projected MSLR, extreme astronomical tide, extreme
meteorological tide, and the vertical uncertainty of the DEM (RMSE), incorporated as a conservative margin in the delineation
of potentially flood-prone areas. Vulnerability was estimated based on land use and land cover classification, with relative
susceptibility levels assigned to different classes, representing the physical response of land use to floodingIn this study, risk
130 was defined as the spatial combination of flood hazard and vulnerability, as shown in Eq. 1. Hazard was defined based on an
extreme hydrodynamic scenario, including the projected MSLR, extreme astronomical tide, extreme meteorological tide, and
the vertical uncertainty of the DEM (RMSE), incorporated as a conservative margin in the delineation of potentially flood-
prone areas. Vulnerability was estimated based on land use and land cover classification, with relative susceptibility levels
assigned to different classes, representing the physical response of land use to flooding.

135 Although not explicitly included as a multiplicative term in Eq. 1, exposure was considered in the spatial stage of the analysis
through the intersection between the potentially flood-prone areas and the urban property grid, allowing for the identification
of assets located in hazard zonesAlthough not explicitly included as a multiplicative term in Eq. 1, exposure was considered
in the spatial stage of the analysis through the intersection between the potentially flood-prone areas and the urban property
grid, allowing for the identification of assets located in hazard zones.

140 The methodology employed was designed in five main stages: (A) data collection; (B) data processing and validation; (C) data
analysis and modeling; (D) tidal flood risk mapping; and (E) final analysis, including a discussion of the tidal flood risk map
and identification of impacts (Figure 1). The stages and their sequence were designed with a view to achieving the objectives
and resolving scientific issuesThe methodology employed was designed in four main stages: (I) data collection; (II) data
processing and validation; (III) processing and modeling; (IV) data analysis; (V) MSLR modeling; (VI) construction of the
145 tidal flood risk map and identification of impacts. The stages and their sequence were designed with a view to achieving the
objectives and resolving scientific issues.

- Formatted: English (United States)
- Formatted: English (United States)
- Formatted: English (United States)
- Formatted: English (United States)
- Formatted: English (United States)

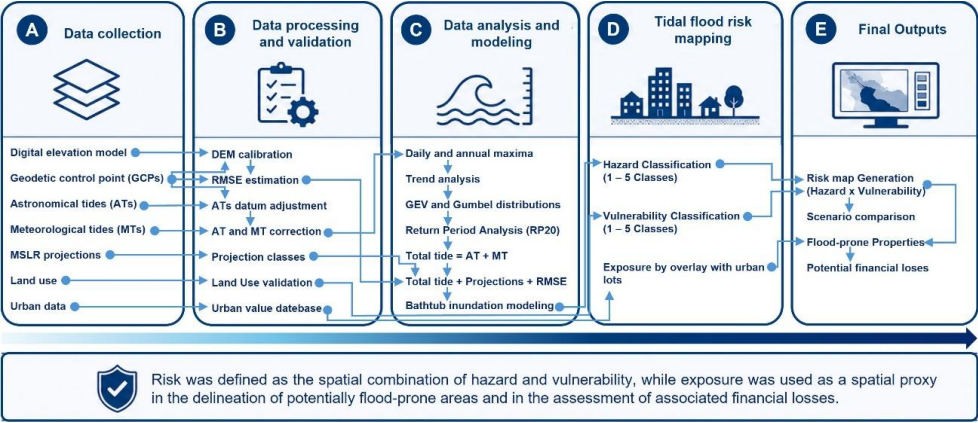


Figure 2: Study design flowchart and the strategic relationship between data, processes, and analyses. The arrows connecting the steps represent the dependencies between them.

3.1 Data collection (A)

Data collection began with a systematic literature review on climate change MSLR, and coastal risk modeling, aiming to establish the theoretical and methodological framework of the study. Subsequently, the datasets required for the construction of the risk model were compiled, including altimetric, oceanographic, climatic, environmental, and urban information. The dataset comprises: freely available digital elevation models; geodetic control points; historical data of astronomical and meteorological tides; MSLR projections at global, intermediate, and local scales; land use and land cover data; and urban cadastral information. Table 1 summarizes the main characteristics, sources, and applications of each dataset. The main spatial data can be visualized in the Figure 3. Data collection began with a systematic literature review on climate change, MSLR, and coastal risk modeling. The purpose of this review was to provide a theoretical basis for the research, identifying the main concepts, methodologies, and gaps in the literature. Next, the data necessary for the construction of the model were collected: (a) acquisition of altimetric data derived from freely accessible global DEMs; (b) survey of geodetic control points for DEM calibration; (c) obtaining historical tide gauge records; (d) compilation of MSLR scenarios and future projections, as established by leading scientific reports, such as IPCC projections; (e) land use data; and (f) urban data. The spatialization of the main data is presented in Figure 2.

Context	Data	Source	Spatial resolution	Temporal scale	Reference system	Data type	Application in the study	Collection point
Inputs								

Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: Space After: 10 pt, Line spacing: single
Formatted: Font: Bold

Formatted: Font: 10 pt, Not Bold, English (United States)
Formatted: Font: 10 pt, Not Bold, Check spelling and grammar
Formatted: Font: Not Bold, English (United States)
Formatted: Font: Not Bold
Field Code Changed

Formatted: English (United States)

<u>Elevation data (DEM)</u>	Copernicus DEM	<u>1</u>	30 m	Static (2021)	Normal height	Digital Elevation Model	Altimetric base, flood-prone area delineation, RMSE estimation	Study area
<u>Geodetic control points (GCPs)</u>	Open Geodetic Database	<u>2</u>		Static (2025)	Normal height	Geodetic control points	DEM altimetric calibration	Study area
		<u>3</u>	Point-based					
	Supplementary Geodetic Database	<u>4</u>		Static (2025)	Normal height	Geodetic control points	Refinement of DEM calibration	
<u>Astronomical Tides (AT)</u>	Astronomical Tides	<u>5</u>	Point-based	1940 – 2025	Mean sea level	Astronomical tide	Estimation of extreme astronomical tides for hazard assessment	<u>Port of Macau:</u> Lat: 5°07'16.10"S Long: 36°40'32.67"W <u>Port of Arcia Branca:</u> Lat: 4°58'11.32"S Long: 37°10'42.63"W
<u>Meteorological Tides (MT)</u>	Meteorological Tides	<u>6</u>	Point-based	1940 – 2020	Mean sea level	Meteorological tide	Estimation of extreme meteorological tides for hazard assessment	<u>Point in Macau:</u> Lat: 5°04'22.82"S Long: 36°44'38.41"W <u>Point in Arcia Branca:</u> Lat: 4°54'37.31"S Long: 37°10'05.58"W
	Regional Storm Surge	<u>7</u>	Regional	1940 – 2008	Mean sea level	Regional storm surge	Statistical calibration of extreme meteorological tides	<u>Point sampling:</u> Lat: 4°35'12.72"S Long: 36°49'56.14"W
<u>MSLR Projections</u>	Global Projection I	<u>8</u>	Global	Projection (2100)	Global mean sea level	Global Sea-level rise projections	Vertical increments for future scenarios	<u>Point sampling:</u> Lat: 3°38'03.81"S Long: 36°54'29.24"W
	Global Projection II	<u>9</u>	Global	Projection (2100) Rate (1992–2024)	Mean sea level	Satellite altimetry	Global sea-level rise trend	<u>Point sampling:</u> Lat: 4°32'00.21"S Long: 36°54'12.38"W
	Intermediate Projection	<u>10</u>	Intermediate	Projection (2100) Rate (1940–2008)	Mean sea level	Intermediate Sea-level rise projections	Intermediate sea-level rise trend	<u>Point sampling:</u> Lat: 4°35'12.72"S Long: 36°49'56.14"W
	Local Projection	<u>11</u>	Point-based	Projection (2100) Rate (2008–2020)	Mean sea level	Local Sea-level rise projections	Local sea-level rise trend	<u>Port of Mucuripe:</u> Lat: 3°15'21.77"S Long: 38°52'07.05"W
<u>Land Use</u>	Land Use	<u>12</u>		Static (2025)	SIRGAS 2000	Land use and land cover	Vulnerability assessment	Study area
		<u>13</u>	30 m					
<u>Urban Data</u>	Urban Data	<u>14</u>	Vector (1:500)	Static (2025)	SIRGAS 2000	Urban cadastral data	Exposure analysis and asset identification	Study area

Table J: Datasets used in the study and their main methodological characteristics. Data source list: 1 – European Space Agency (ESA, 2021); 2 – Brazilian Geodetic Database (BGD, 2025); 3 – REDEGEO (2025); 4 – Soares & Amaro (2011); 5 – Field Sampling GNSS RTK (CHCNAV 190); 6 – Brazilian Navy Directorate of Hydrography and Navigation (DHN, 2025); 7 – Yang et al. (2025); 8 – Sistema de Modelagem Costeira (SMC-Brasil, 2025); 9 – Sixth Assessment Report (AR6) of the Intergovernmental Panel on Climate Change (IPCC, 2022); 10 – Copernicus Climate Change Service (C3S, 2025); 11 – Silva et al. (2025); 12 – Permanent Tide Gauge Network for Geodesy (RMPG/IBGE, 2025); 13 – MapBiomias (2025); 14 – Souza et al. (2020); 15 – Geoprocessing and Physical Geography Laboratory at the Federal University of Rio Grande do Norte (GPGL, 2025).

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Space After: 10 pt

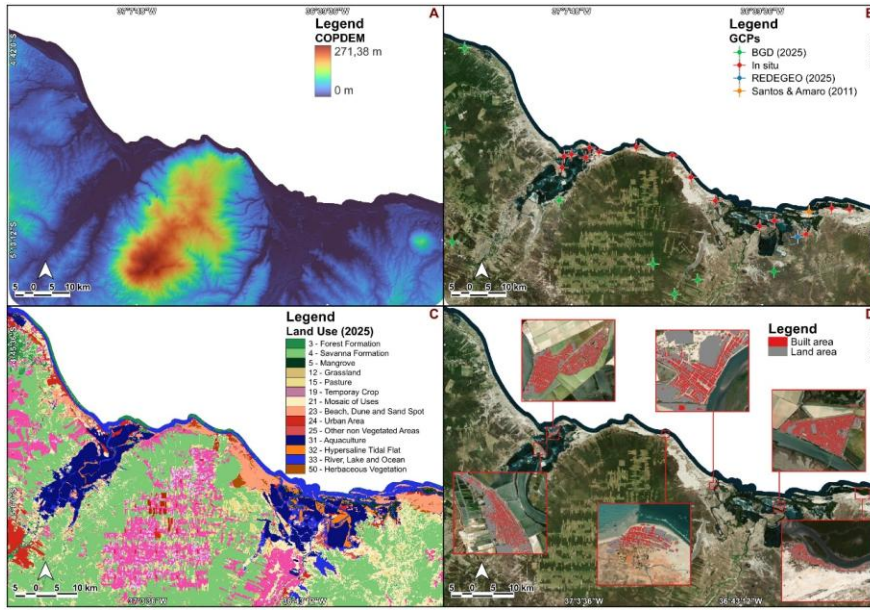


Figure 3: List of spatial data. **A** – Digital elevation model used; **B** – Geodetic control points used; **C** – Original land use and land cover data used; **D** – Urban cadastral data used, with some areas shown at different scales in certain urban areas.

It is worth noting that this study incorporated projections of average sea-level rise at different spatial scales: global (AR6/IPCC and C3S trends), intermediate (SMC-Brasil trends), and local (RMPG trends). These projections were applied as vertical increments in the definition of flood levels, enabling a comparison of the scenarios projected for 2100 and an assessment of the hazards associated with different probabilistic scenarios, considering the degree of uncertainty in the projections.

Formatted: Centered

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Space After: 10 pt

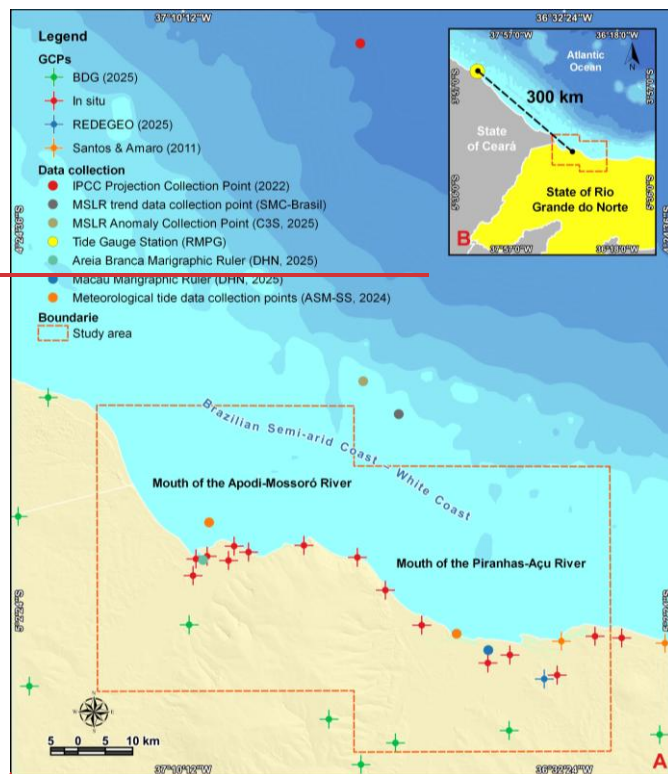


Figure 2: Spatialization of data collected and used in the study. A – context of the study area with the nearest data collection points; B – map showing the location of the RMPG tide gauge station. Map created using data from the IBGE (2023). Map prepared by the authors (2025).

Formatted: English (United States)

Formatted: Caption

3.1.1 Elevation data

The DEM used in this study was the Copernicus DEM (COPDEM), a free global model derived from the TanDEM-X mission, launched in 2010. COPDEM was developed under the coordination of the European Space Agency (ESA) as part of the European Union's Copernicus Program (ESA, 2021) and has a spatial resolution of 30 meters.

For this study, the data were obtained via ESA's open access platform, with a specific cutout for the area of interest. COPDEM was chosen due to its proven ability to accurately represent land surfaces, especially in flat environments. In preliminary tests with geodetic control points, the product presented, for the analytical cutout, a native Root Mean Square Error (RMSE) of 0.643 m, a value much lower than the nominal vertical error indicated by the manufacturer (<4 m), confirming its suitability as an altimetric base in areas with low data availability.

3.1.2 Geodetic control points (GCPs)

195 In the survey of GCPs, valid geodetic references were selected, forming a structured network with representative coverage of the main sectors of the study area. In total, 28 level references were used: 10 points from the Geodetic Database (BDG, 2025) of the Brazilian Institute of Geography and Statistics (IBGE); 15 points surveyed in the field with a Real-Time Kinematic GNSS receiver (CHCNAV 190), in static 2-hour sessions; 2 points from Soares & Amaro (2011); and 1 point from REDEGEO (2025). The latter three were strategically inserted to fill geodetic gaps and increase altimetric reliability in the most sensitive coastal areas. These points were essential for the altimetric calibration of the DEM and for the geodetic adjustment of the tide gauges used in the validation of astronomical data.

200 In this sense, for the present study, it was agreed to adopt normal altitude as the altimetric reference, ensuring geodetic consistency between the different data sets used.

3.1.3 Astronomical Tides (AT)

205 The astronomical tide base was obtained from deterministic forecasts by the Hydrography and Navigation Directorate (DHN), derived from harmonic analysis of historical series from 1940 to 2025, with hourly intervals. Data were also collected from the tide gauges in Macau and Areia Branca, with a view to linking the data and validating them geodetically. In addition, technical visits were made to verify the integrity of the gauges and their link to local level references.

3.1.4 Meteorological Tides (MT)

210 The tide gauge data associated with storm events were obtained from the Yang et al (2025) database, derived from Global Extreme Sea Level Analysis version 3 (GESLA-3) reanalysis data, with cross-validated meteorological data extraction, covering the period from 1940 to 2020. Two data points were extracted, one in Macau and the other in Areia Branca, in the middle portions of the estuaries.

215 The data were calibrated using meteorological tide data from SMC Brazil (2025), called Global Ocean Surge (GOS), ensuring greater regional representativeness due to its adjustment based on several local tide gauges. The calibration consisted of a statistical comparison between observed data and GOS, with correction by linear regression and bias calibration using the base data. The process resulted in a reduction in the under/overestimation of the data, promoting an adjustment of around 0.02 to 0.03 m, applied to the two series analyzed.

3.1.5 Projections for MSLR

220 The study systematized the main MSLR projections applicable to the study area, on global, intermediate, and regional scales, with a time horizon to 2100.

225 On a global scale, climate projections from the Sixth Assessment Report (AR6) of the Intergovernmental Panel on Climate Change (IPCC, 2022) were used, adjusted and spatialized by the National Aeronautics and Space Administration (NASA, 2021), considering a 50% probability of occurrence in scenarios SSP1-1.9, SSP1-2.6, SSP2-4.5, SSP3-7.0, and SSP5-8.5. In addition, sea level anomaly (SLA) data from the Copernicus Climate Change Service (C3S, 2025) were incorporated, derived from satellite altimetry from multiple missions (TOPEX-Poseidon, Jason-1/2/3, Sentinel-3, Sentinel-6, among others) for the period 1992 to 2024. From the western tropical Atlantic data grid, an average elevation rate of 4.06 mm/y was obtained, calculated via linear regression.

230 At the intermediate scale, the long-term trends of the SMC Brazil obtained by Silva et al (2025) for the region were considered, calculated from astronomical (AT) and meteorological (MT) tides in the period from 1948 to 2008, with an average elevation rate of 2.10 mm/y, resulting from linear regression adjustment.

At the regional level, data from the Permanent Tide Gauge Network for Geodesy (RMPG/IBGE) station in the city of Fortaleza, State of Ceará, about 300 km west of the study area, were used, whose consolidated averages (2008 to 2020) indicate a rate of 1.30 mm/y, representing the closest and most continuous instrumental record available.

3.1.6 Land use data

235 The land use and land cover data for this study were obtained from the MapBiomass project (2025), which annually maps land use dynamics in Brazil and other Latin American countries. The project uses Landsat images (30 m spatial resolution), processed with automated algorithms and validated by a broad collaborative network of experts to detect and correct inconsistencies. The

methodological robustness and scientific credibility of the products ensure high reliability, making them widely applicable in environmental and territorial planning studies (Souza et al., 2020).

3.1.7. Urban data

Urban data on residential areas and land plots were collected for the study area on a scale of 1:500. The data were derived from a systematic survey using Unmanned Aerial Vehicles (UAVs) in the municipalities of the region under study.

3.2 Data processing and validation (HB)

During data processing, COPDEM was calibrated by comparing elevation values with GCPs, yielding the mean error, the RMSE, and a linear regression-based fit equation, similar to the method used by Araújo et al. (2018). The application of the calibration equation (Eq. 02) improved the DEM's accuracy, reducing the mean error by 4% and resulting in an RMSE of 0.612 m, considered satisfactory for a global DEM. The error distribution by elevation classes showed consistent behavior, with a standard deviation of 0.363 m and better performance below 20 m in elevation, where the maximum RMSE reached 0.30 m. In data processing, COPDEM calibration was performed by comparing the model's altimetric quotas and GCPs, obtaining metrics such as mean error, RMSE, and simple linear regression to derive a specific adjustment equation, following the approach recommended by Araújo et al. (2018). The application of the calibration equation (Eq. 02) resulted in a significant gain in accuracy, with a 4% reduction in mean error and an overall RMSE of 0.612 m, a satisfactory value for global products. The distribution of errors by altimetric classes showed consistent behavior, with a standard deviation of 0.363 m and better performance at altitudes below 20 m, where the maximum RMSE was 0.30 m.

Calibration Equation = 0.2041 + (DEM * 0.9939), (2)

In the calibration equation, 0.2041 represents the linear coefficient associated with the fixed adjustment, DEM corresponds to the original elevation from the Digital Elevation Model, and 0.9939 represents the slope coefficient responsible for the correction factor applied to the DEM value.

Subsequently, the reduction level (RL) was adjusted to the Brazilian Geodetic System (BGS) to ensure consistency between the astronomical tide data and the geodetic reference system adopted in the study, since tide gauge measurements follow reference planes specific to the DHN. This adjustment was performed using validated reference points, geodetically linked to SIRGAS2000 and positioned near the tide gauges.

In Macau, the reference derived by Araújo et al. (2021) was used, based on GNSS surveys of the RN-2 (DHN) near the Port of Macau. In Areia Branca, the IBGE Level Reference (code LR 2404X) was adopted, linked to RN-3 (DHN) near the Port of Areia Branca and previously used by Aguiar et al. (2019). These references allowed for the calculation of RL elevations relative to the geodetic plane, as illustrated in Figure 4, to Macau (Eq. 3) and Areia Branca (Eq. 4). Subsequently, the reduction level (RL) was adjusted to the Brazilian Geodetic System (SGBBGS), a fundamental step in reconciling the astronomical data with the altimetric plane adopted in the study. This adjustment is necessary because tide gauge measurements originally follow the DHN's own reference system, which is geared toward measuring bathymetric depths for navigation and is incompatible with the geodetic system used in the study.

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Indent: First line: 0 cm

Formatted: English (United States)

To equalize the vertical planes, two valid quoted points were used, adjusted to the SGB BGS and referenced in SIRGAS2000, inserted near the tide gauge rules. In Macau, the point obtained by Araújo et al. (2021) was used, derived from the GNSS survey of the RN-2 (DHN) reference, in the vicinity of the Port of Macau. In Areia Branca, the official IBGE Level Reference (LR) (code 2404X) was used, geodetically linked to RN-3 (DHN), located next to the Port of Areia Branca, also used by Aguiar et al. (2019).

Based on the references surveyed, it was possible to calculate the RL elevations in relation to the geodetic plane, as illustrated in Figure 3, to Macau (Eq. 3) and Areia Branca (Eq. 4).

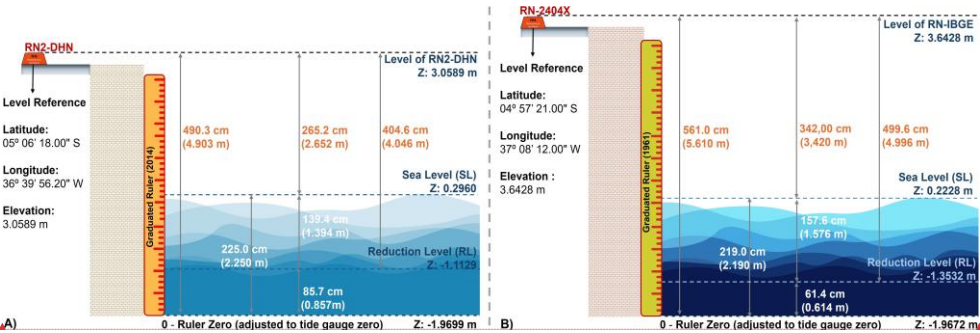


Figure 43: Schematic representation of the tide gauge stations with the validated elevations and reference coordinates. A - Ruler associated with the Port of Macau; B - Ruler for the Port of Areia Branca. It can be seen that despite the unevenness, the reduction levels are close. Prepared by the authors using data from DHN (2025).

These reduction factors were essential for correcting the maximum values of the astronomical tides, allowing the tidal elevations to be adjusted to the geodetic reference plane adopted in the study. The two reduction levels were essential for projecting the correction factor for the maximum astronomical values obtained, in order to weight the tide levels to the actual values in the preferred plane chosen.

$$Hm(RL) = H(LRm) - 4.046 \text{ m} = 3.0589 \text{ m} - 4.046 \text{ m} = -1.1129 \text{ m}, \quad (3)$$

$$Hab(RL) = H(LRab) - 4.996 \text{ m} = 3.6428 \text{ m} - 4.996 \text{ m} = -1.3532 \text{ m}, \quad (4)$$

Equations 3 and 4 convert the validated level-reference elevations to the reduction level (RL). Here, $Hm(RL)$ and $Hab(RL)$ represent the RL elevations for Macau and Areia Branca, $H(LRm)$ and $H(LRab)$ are the respective geodetic reference elevations, and 4.046 m and 4.996 m are the vertical offsets applied to obtain the RL. Where $Hm(RL)$ and $Hab(RL)$ are the Reduction-Level (RL) quotas adjusted for Macau and Areia Branca; $H(LRm)$ and $H(LRab)$ represent the geodetic altitudes

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

295 obtained by the level references near the tide gauges; and 4.046 m and 4.996 m are the official distances to the reduction level
disclosed by the DHN for Macau and Areia Branca. The subtraction adjusts the tide plane to the geodetic system of the study.
Land use and land cover data from MapBiomias (2025) were cross validated to correct classification errors in the study area,
particularly confusion between urban areas, water bodies, and salt flats. A 1 km × 1 km inspection grid was applied, resulting
in the correction of more than 80,000 incorrectly classified pixels.

Formatted: Indent: First line: 0 cm

300 Urban data were processed to estimate land value per square meter through the systematic collection of real estate listings
using web scraping techniques. More than 1,000 listings from the 2023–2025 period were compiled, following approaches
similar to those proposed by Jach (2021), Bricongne et al. (2022), and Harten et al. (2020). In remote communities without
market references, values were estimated through spatial interpolation with nearby areas, allowing for the construction of real
estate benchmarks used in the analysis. The land use and land cover data obtained by MapBiomias underwent cross-validation,
305 which was necessary to correct inconsistencies in the study area. Confusions between urban areas and water bodies were
identified and adjusted, in addition to the resizing of salt ponds often misclassified as water. The procedure used a 1 km × 1
km cell grid for detailed inspection, resulting in the correction of more than 80,000 pixels of incorrect classes.
Urban data were processed to estimate the value per square meter of the region through the systematic collection of real estate
advertisements using web scraping techniques, collecting more than 1,000 advertisements in the period 2023–2025, in a process
310 similar to Jach, (2021), Bricongne et al. (2022), and Harten et al. (2020). In remote settlements, as there are no concrete market
thresholds, interpolation with nearby areas was required for estimation. This estimate allowed us to construct real estate
benchmarks used in the study.

3.4.3 Data analysis and modeling (CHH)

315 The tide analysis employed statistical methods applied to time series to characterize astronomical and meteorological
influences and identify extreme patterns for flood level definition. Total tide was considered as the sum of astronomical (AT)
and meteorological tides (MT), which were analyzed independently to allow more realistic projections. Hourly AT and MT
series were processed to extract daily and annual maxima, followed by the application of descriptive statistics, the Mann-
Kendall trend test (Mann, 1945; Kendall, 1975), and the Morlet wavelet transform (Morlet et al., 1982), enabling the detection
of monotonic trends and cyclical variability.

Formatted: Indent: First line: 0 cm

320 Extreme value analysis was performed using the Generalized Extreme Value distribution to estimate non-exceedance
probabilities and the Gumbel distribution to obtain water levels associated with different return periods. The 20-year return
period (RP20) was adopted as a reference for integration with MSLR scenarios, incorporating natural variability into future
projections.

325 MSLR modeling followed two complementary principles: event frequency, based on the recurrence of average annual floods,
and total flooding, based on the maximum potential event, both addressing uncertainties in flood occurrence.

The study area was divided into two modeling domains, Macau and Areia Branca, based on the availability of tide gauges and
the interpretation of the predominance of marine processes proposed by Silva et al. (2025). The division into sectors considered

the change in hydraulic transport dynamics west of the village of Ponta do Mel, in Areia Branca, using this point as the boundary between the domains.

Flood modeling was performed using the “bathtub” approach (passive model), which simulates the expansion of the water surface over the DEM in a GIS environment. This method was selected due to the regional scale of the analysis, the lack of high-resolution bathymetric data, and its applicability in contexts with limited data. In this study, it was applied as a screening tool to identify areas potentially prone to flooding and not as a substitute for physics-based hydrodynamic modeling. Its limitations, particularly the omission of hydrodynamic processes and the potential overestimation of flood extent, are acknowledged, as is the lack of simulation of hydraulic flow, connectivity between flood-prone areas, and energy dissipation (Yunus et al., 2016; Anderson et al., 2018; Gesch, 2018; Williams & Lück-Vogel, 2020; Terres de Lima et al., 2021; Shen et al., 2022; Juhász et al., 2023; Croteau et al., 2023; Sanders et al., 2024; Huang & Merwade, 2023; Kasmalkar et al., 2024; Pasquier et al., 2026).

Despite these limitations, the method remains a rapid and low-cost approach suitable for regional-scale screening, particularly in tidal coastal settings.

Frequency modeling followed a procedure analogous to Kaden’s (2022) flooding sector schematization, compartmentalizing the DEM into elevation levels and estimating flood frequency (Eq. 5) using the following variables: daily total tide maximums (AT + MT), MSLR projections, and the RMSE. These components were applied to the calibrate DEM by adding the water column to the terrain, thereby enabling the estimation of flood recurrence for each elevation band.

The total flooding scenarios were developed based on the work of Araújo et al. (2021) and Aguiar et al. (2019), using a multivariate weighting (Eq. 6) with the following variables: DEM, model RMSE, MSLR projections, and extreme values of AT and MT (RP20). Adding these values to the calibrated DEM allows for an integrated assessment of coastal dynamics and a preliminary identification of flood-related impacts. The tide analysis was conducted using statistical approaches applied to time series, aiming to understand the astronomical and meteorological influence and characterize extreme patterns for defining flood levels. The modeling considered the notion of total tide (FT), composed of astronomical (AT) and meteorological (MT) components, requiring independent analysis of both for more realistic projections.

The hourly AT and MT series were processed to extract daily and annual maximums. Descriptive statistics, the Mann-Kendall trend test (Mann, 1945; Kendall, 1975), and the Morlet et al. (1982) wavelet transform were then applied, methods that allowed the identification of monotonic trends and cyclical patterns.

In the probabilistic stage, the Generalized Extreme Value (GEV) distribution was used to estimate non-exceedance probabilities, and the Gumbel distribution was used to obtain the quotas associated with different return periods. The 20-year return period (RP20) was adopted as a reference for sea level rise scenarios, aiming at greater analytical consistency. This approach integrated natural variability into future projections, resulting in consistent and technically sound analyses.

3.5 Modeling of sea level rise (IV)

The MSLR modeling in this study was conducted based on two principles: event frequency, based on the recurrence of average annual floods; and total flooding, based on the maximum potential event. Both approaches allow for dealing with uncertainties associated with the occurrence of floods.

The study area was divided into two domains for modeling: Macau and Areia Branca, defined based on the availability of tide gauge data and the interpretation of marine process dominance proposed by Silva et al. (2025). The sectorization considered the change in the dynamic factors of hydraulic transport identified west of the village of Ponta do Mel, in Areia Branca, as a process divider, adopting it as the boundary between the two domains, but the interpretation will be integrated considering the study area as a whole.

The modeling was processed using the bathtub technique (passive model), which simulates, in a GIS environment, the expansion of the water surface over the DEM.

The adoption of the bathtub approach is justified by the regional scale of the analysis, the absence of high-resolution bathymetric data, and the focus on applicability in data-scarce contexts. In this study, it was employed as a preliminary screening tool to identify potentially flood-prone areas and to enable comparative assessment between different DEMs, rather than as a substitute for physics-based hydrodynamic modeling. Its limitations, particularly the potential overestimation of inundation extent due to the lack of hydrodynamic processes, are acknowledged and considered in the study.

This is a widely discussed method (Feenstra, 1998; Cartwright et al., 2008; Schmid, 2013; Yunus et al., 2016; Anderson et al., 2018; Gesch, 2018; Williams & Lück-Vogel, 2020; Terres de Lima et al., 2021; Shen et al., 2022; Juhász et al., 2023; Croteau et al., 2023; Sanders et al., 2024), with recent variations that include filtering by hydraulic connectivity and consideration of DEM uncertainties and MSLR projections. Even so, the model itself has some significant limitations, such as the simplification of physical processes by considering only the static relationship between water level and topography, as well as the lack of simulation of hydraulic flow, connectivity between flood-prone areas, and energy dissipation. These limitations can lead to an overestimation of flooded areas and have direct implications for products at the level of detail, especially in local analyses (Huang & Merwade, 2023; Kasmalkar et al., 2024; Pasquier et al., 2026).

Nevertheless, it is a quick and low-cost technique, suitable for screening vulnerable areas, especially in settings with technical and financial constraints. At the regional level and in contexts involving tidal beaches, where simplifications are acceptable, the model can be used effectively. Despite limitations, such as the absence of hydraulic flow simulation and hydrogeological constraints, it is a fast, low-cost technique suitable for screening vulnerable areas, especially in scenarios with technical and financial constraints. In addition, it is highly applicable in contexts of tide-dominated beaches.

Frequency modeling was implemented using a technique similar to Kaden's (2022) flood sector schematization, which compartmentalizes the DEM into altimetric levels and calculates the flood frequency based on daily time series of water levels.

The processing inputs include the series of daily total tide maximums (daily AT + daily MT), MSLR projections, calibrated DEM, and its RMSE, generating scenarios for each projection.

395 The total flooding followed the proposal by Araújo et al. (2021) and Aguiar et al. (2019), applying multivariate weighting based on the sum of hydrodynamic processes: DEM RMSE, MSLR projection, maximum meteorological tide (RP20), and maximum astronomical tide (RP20). The procedure was replicated for all scenarios, allowing for integrated analysis of coastal dynamics and preliminary identification of associated problems.

$$Flood\ frequency = AT^{Max\ daily} + MT^{Max\ daily} + Projection + RMSE, \tag{5}$$

$$Total\ Flood = AT^{RP20} + MT^{RP20} + Projection + RMSE, \tag{6}$$

400 In Equations 5 and 6, AT and MT represent, respectively, the daily maximum in Eq. 5 and the values projected for the 20-year return period (RP20) in Eq. 6. RMSE represents the root mean square error of the model's elevation values. The variable projection corresponds to MSLR projections, considering different scenarios: local, using RMPG values; intermediate, using the SMC-Brasil Trend; global, using the SLA Trend (C3S); and global, IPCC rate, using the SSP1-1.9, SSP1-2.6, SSP2-4.5, SSP3-7.0, and SSP5-8.5 scenarios. Each level was delineated on the DEM by sectorizing its zones.

3.6.4 Tidal flood risk mapping (V)

405 The risk map was constructed based on a probabilistic quantitative risk approach, defined by the relationship between hazard (destructive potential) and physical vulnerability (degree of environmental loss). The hazard was classified based on total flood modeling (Eq. 6) in the different projected scenarios, segmented into five classes (1 to 5), from extremely low to extremely high (Table 2). Physical vulnerability was defined based on validated land use, grouped into six vulnerability units (0 to 5), ranging from “no vulnerability” to “extremely high”.

410 The risk calculation procedures were performed in a GIS environment using raster algebra. The raster layers classified for vulnerability and hazard were assigned values according to Table 2. The weighted combination of these variables resulted in a tidal flood risk map, organized into five classes (1 to 25). Based on this, the practical implications associated with the defined risk thresholds were discussed.

415 The risk map was constructed based on a probabilistic quantitative risk approach, defined by the relationship between hazard (destructive potential) and physical vulnerability (degree of environmental loss). The hazard was classified based on total flood modeling in the different projected scenarios, segmented into five classes (0 1 to 5), from extremely low to extremely high (Table 1). Physical vulnerability was defined based on land use, grouped into five vulnerability units (0 1 to 5), ranging from “no vulnerability” to “extremely high”.

The weighted combination of these variables resulted in a tidal flood risk map, organized into five classes (0 1 to 25). Based on this, the practical implications associated with the defined risk limits were discussed. Finally, the map was overlaid with the region's real estate grid, quantifying the possible financial impacts and adjusting the losses per square meter by region.

420 Finally, the data were visualized by spatially overlaying the risk map with the region's exposed real estate grid. This process made it possible to identify properties located in high-risk areas, quantify the potential financial impacts, and calculate the estimated losses per square meter, based on the compiled market values of properties in each sector analyzed.

Formatted: English (United States)

Formatted: English (United States)

Formatted: Space Before: 6 pt, After: 6 pt

Formatted: English (United States)

Formatted: English (United States)

Formatted: Indent: First line: 0 cm

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Vulnerability Map			Hazard Map		
Categories of Use	Value	Class Name	Projected Scenarios	Value	Class Name
Urban Area	5	Extremely High	Present	5	Extremely High
Aquaculture	4	High	SMC-Brasil Trend	4	High
Pasture	3	Moderate	RMPG IBGE	3	Moderate
Mosaic of Uses	3	Moderate	SLA	3	Moderate
Other Temporary Crops	3	Moderate	IPCC SSP1-1.9	3	Moderate
Other Perennial Crops	3	Moderate	IPCC SSP1-2.6	3	Moderate
Forest Formation	2	Low	IPCC SSP2-4.5	2	Low
Savanna Formation	2	Low	IPCC SSP3-7.0	2	Low
Mangrove	2	Low	IPCC SSP5-8.5	1	Extremely Low
Grassland	2	Low	Risk Map		
Hypersaline Tidal Flat	2	Low	Risk	Range	
Beach, Dune and Sand Spot	1	Extremely Low	Extremely high	20 to 25	
Other Non Vegetated Areas	1	Extremely Low	High	15 to 20	
Herbaceous Sandbank Vegetation	1	Extremely Low	Moderate	10 to 15	
River, Lake	0	No Vulnerability	Low	5 to 10	
Ocean	0	No Vulnerability	Extremely low	0-1 to 5	

Table 24: Set of classes and assigned values of hazard, vulnerability and risk.

4 Results

The presentation of the results was organized to reflect the methodological logic and meet the study's objectives, ensuring a sequential and coherent reading of the findings. Initially, statistical analyses of historical tide series are shown, focusing on trends and extreme patterns. Next, the projected MSLR scenarios are presented, both in terms of frequency and total flooding. Finally, the flood risk map and its resulting impacts are discussed, allowing for a spatial reading of the associated risks and their implications.

4.1 Statistical analysis of tide gauge data

Statistical analysis of data from Macau and Areia Branca provided a clear and robust understanding and characterization of some of the coastal processes in the region, as revealed by statistical data and interpretations, distinguishing between astronomical and non-astronomical processes in the context of the two estuaries.

The ATs of Macau (ATM) varied between 2.82 and 2.94 m (Table 3Table 2), with an average of 2.90 m and low dispersion (St. Dev = 0.031), indicating stability over time, with more sporadic maximums. In Areia Branca (ATAB), the values ranged from 3.19 to 3.40 m, with an average of 3.33 m, reflecting greater astronomical amplitude in the western sector, including more recurrent maximums. For MT, the maximum values were 0.14 m in Macau (MTM) and 0.11 m in Areia Branca (MTAB), confirming the low magnitude typical of this forcing in the Brazilian semiarid region, in addition to its episodic and irregular behavior, characteristic of this process in the tropics.

The Mann-Kendall test revealed no significant trends in almost all series, indicating a pattern of stability, except for MTAB (p = 0.042; Tau = -0.154), which showed a statistically significant downward trend. This result may indicate a gradual

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

445

reduction in local meteorological influence, possibly associated with large-scale atmospheric modulation and/or limitations in data reconstruction, an important aspect to be discussed in methodological terms.

Descriptive Statistics							
DatesData	Min (m)	Max (m)	Med (m)	Mean (m)	St. Dev (m)	Var (m)	Range (m)
ATM	2.820	2.940	2.900	2.894	0.031	0.001	0.120
ATAB	3.190	3.400	3.330	3.318	0.052	0.003	0.210
MTM	0.032	0.141	0.070	0.070	0.018	0.000	0.109
MTAB	0.040	0.112	0.072	0.073	0.016	0.000	0.072
Mann-Kendall test							
DatesData	Trend	Significant (h)	p-value	Z-Score	Tau	Var (S)	Denominator (S)
ATM	no trend	False	0.432	-0.786	-0.057	73491.333	-214271.093
ATAB	no trend	False	0.730	-0.346	-0.025	73914.333	-95271.872
MTM	no trend	False	0.935	-0.082	-0.006	60042.333	-21245.035
MTAB	decreasing	True	0.042	-2.032	-0.154	60042.333	-498245.035

Table 32: Descriptive statistics and Mann–Kendall test results for astronomical and meteorological tide series in Macau and Areia Branca. Initially, differences can be noted between the different processes in the region.

450

Inspection of the complete time series between 1940 and 2025 shows relative stability in AT and greater dispersion in MT, especially in Macau (Figure 5Figure-4). The histograms confirm the concentration of values around the calculated means, while the non-exceedance probability (NEP) curves indicate percentages up to 95% below the mean, reinforcing that extreme events are rare but of high magnitude when compared to the maximum values obtained.

455

The expected maximums for the 20-year return period (RP20) were reasonably above the maximums of the time series. For ATM, a maximum tide of 2,975 m is expected, while for ATAB, values of 3,454 m are expected. The expected values are close to those obtained in similar studies in the same area, such as those conducted by Araújo et al. (2021) and Aguiar et al. (2019).

460

The non-astronomical effects presented quotations associated with RP20 of 0.110 m for Macau (MTM) and 0.109 m for Areia Branca (MTAB). These values are close to the 10 cm threshold already reported by Frota et al. (2016), Rodríguez et al. (2016), and Melo Filho (2017) in studies on meteorological tides in Brazil and nearby regions. This convergence reinforces the methodological consistency of this work, highlighting results that are in line with the literature and supported by previous empirical bases.

465

The Morlet wavelet transform applied to the series of annual maximum quotas (Figure 6Figure-5) revealed contrasting patterns between Macau and Areia Branca. In the ATs, it showed persistent energy on decadal scales (≈ 10 to 20 years), with low interannuality. In Areia Branca, the energy is predominantly short interannual (≈ 3 to 6 years) and less pronounced in the long periodicity bands. In a joint analysis of the data, the ATM is more susceptible to decadal oscillations that can potentiate extreme events when combined with atmospheric forcings.

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

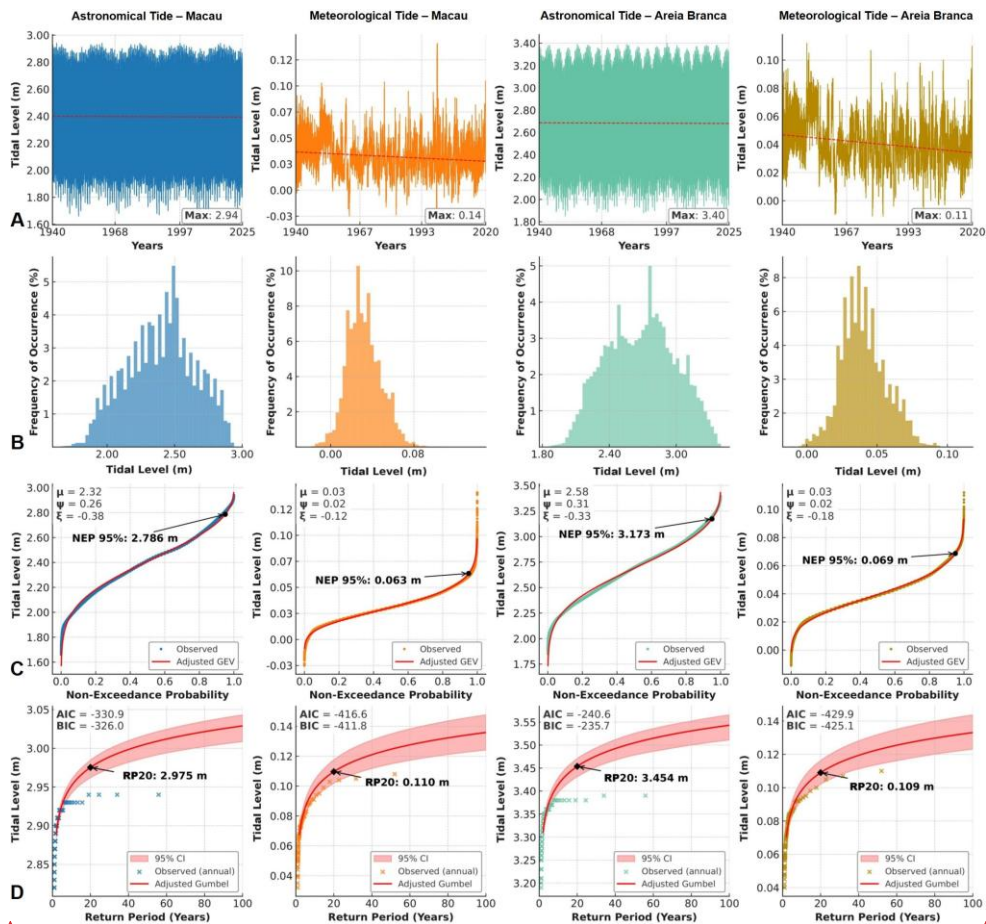


Figure 54: Time series (A), frequency distributions (B), non-exceedance probability curves (C), and return period estimates (D) of maximum astronomical and meteorological tides at Macau and Areia Branca. Each column in the graphs represents a location and the type of tide analysed. Prepared by the authors (2025).

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

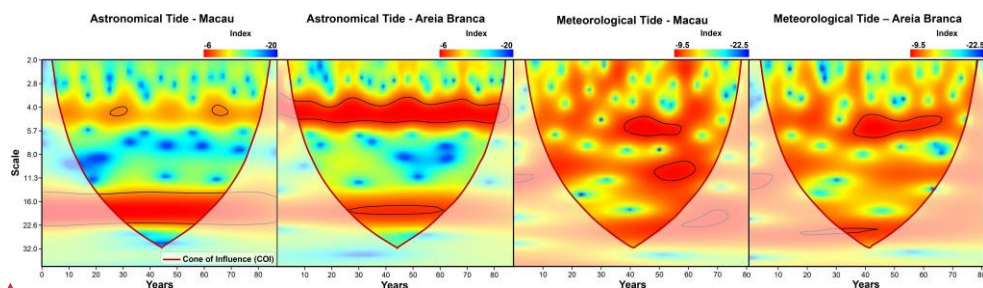


Figure 65: Continuous spectral analysis (Morlet wavelet) applied to maximum tide series. The Cone of Influence (COI) is indicated by the red line limiting the reliable region of the analysis. The black line indicates the significance level $p = 0.05$. The vertical axis (Scale) shows the temporal decomposition: short cycles (2–4 years, high frequency) are concentrated at the top, while long oscillations (16–32 years, low frequency) are located at the bottom. *Prepared by the authors (2025).*

In a general analysis, ATs showed persistent energy in interannual and decadal bands, confirming their forced and predictable nature. Macau has a higher occurrence of energetic extremes in interdecadal cycles, while Areia Branca has more energetic interannual cycles.

In MTs, the signals are more irregular, without a clear cyclicity. In Macau, the energy is episodic with irregular annual peaks (≈ 4 to 6 years), with irregular occurrences in ≈ 8 to 10 years, but without robustness. In Areia Branca, there is greater persistence in concerted annual cycles of ≈ 4 to 8 years and significant recurrence close to ≈ 20 years, suggesting modulation by regional-scale climate variability. However, it is important to note that the smoothing nature of the data tends to underrepresent actual meteorological peaks, smoothing out energy extremes, as stated by the creators of the base data (Yang et al., 2025).

The combination of AT and MT in years of higher interannual/interdecadal energy can combine energies and generate a mixed effect, intensifying potential extremes. Even though events combining meteorological and astronomical maxima are quite peculiar.

The AT quotas validated in the [Brazilian Geodetic System \(SGBBGS\)](#), marked by the reduction level quotas (Macau: -1.1129 m; Areia Branca: -1.3532 m), allowed the RP20 quotas of 1,862 m for Macau and 2,101 m for Areia Branca to be obtained. The values found are slightly similar to the maximum elevations obtained from the Global Ocean Tides (GOT) and [Global Ocean Surge \(GOS\)](#) data from SMC-Brazil, found by Silva et al (2025), which estimates a maximum regime close to 2 meters for medial portions of the area.

Obtaining quotas is essential for weighing up the proposed coastal process packages.

3.2 MSLR scenario modeling

The different MSLR scenarios presented virtually similar patterns, varying essentially in the intensity of flooding, which changes significantly across the multiple scenarios ([Figure 7](#)[Figure 6](#)), increasing the potential for stacking of projected daily levels in low-lying areas, progressively increasing the probability of hazards in the time frame.

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

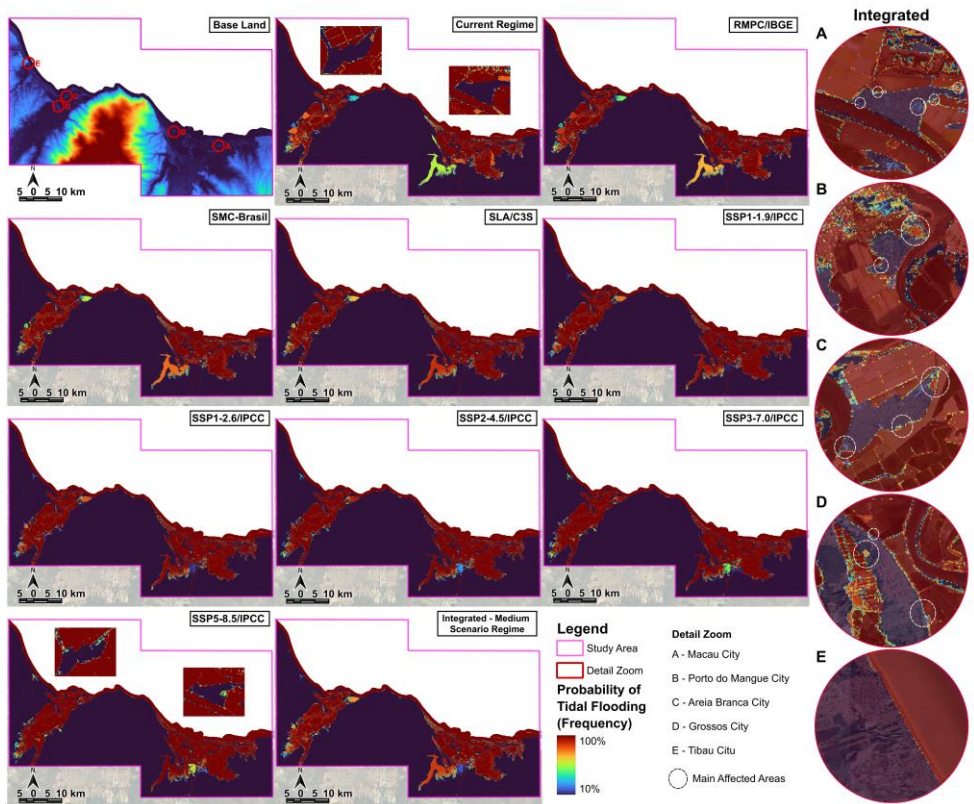


Figure 26: Probability scenarios for flood hazard events obtained through frequency modeling. Each plot represents a modeled scenario, with the natural terrain quadrant representing the baseline scenario used for modeling. The side portion shows a zoom-in view of only the main urban agglomerations in the study area. [Mapa uses the base map data from Bing Maps \(© Microsoft\). Map prepared by the authors \(2025\) using basemap data from Bing Maps \(© Microsoft\).](#)

In the projected frequency scenarios, the salt flats and their operational structures were considerably affected, with up to 100% of days flooded in almost all projections, a fact already expected due to the nature of the activity. However, based on SSP1-1.9, the dikes that surround the ponds ([Figure 8Figure 7A](#)) overlap with a 100% probability of continuous flooding, which represents a critical point, since these dikes control the internal water levels of the salt flats and estuaries. The imbalance of these systems can cause occasional flooding due to hydraulic decompression or even flash floods, processes not represented

Formatted: English (United States)

Formatted: English (United States)

Formatted: Centered

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

by the model but recurring in the region, as reported in local news (Mossoró Hoje, 2024), were observed to overlap with a 100% probability of continuous flooding, which represents a critical point, as these dikes control the internal levels of the salt pans and estuaries, where their imbalance can cause occasional flooding due to decompression or even flash floods, a process not captured by the model but which is recurrent in the region (Figure 7B).

Urban areas, in turn, showed a low probability of flooding under the current regime, restricted to a few localized features in the center of Macau and Areia Branca, but quite sporadic. However, in progressively more severe scenarios such as SSP5-8.5, these sectors will experience probabilities of 60% to 70% of flooded days by 2100 in occupied areas, respectively.



Figure 27: Flood relations. A—Aerial image of downtown Grossos, showing the dikes that control the levels of salt flats on the outskirts of the urban area. B—News report on a collapsed dike in Grossos in 2024. Panel A photograph by the authors (2025). Panel B adapted from Mossoróhoje (2024). © Mossoróhoje.

The integrated analysis, based on the average of all scenarios, shows that critical flooding points are concentrated in the main urban areas of Areia Branca, Macau, and Porto do Mangue, which have a probability of flooding ranging from 60% to 80% of days in at least three occupied sectors. This condition is particularly relevant, as it suggests that maximum daily levels would already be sufficient to impact urban areas in at least six simulated scenarios. In contrast, cities such as Tibau and Grossos showed resilience even in pessimistic scenarios, with very low daily flooding, indicating that their hazard to marine intrusion remains limited.

In the context of a maximum event, total flooding was estimated based on sea level projection values linked to the geodetic plane for 2100 (Table 4Table 3). In a comparison between the river mouths, different behaviors were observed: in the Piranhas-Açu River, there is lateralization of the water surface in all scenarios (Figure 9Figure 8), while in the Apodi-Mossoró River, the advance is internalized, revealing distinct flooding patterns conditioned by topography and river dynamics. Considering

Formatted: English (United States)

Formatted: English (United States)

Formatted: Centered

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

the total area, an overlap of 14% of the analysis area (about 730 km²) was obtained, which could reach 16% (849 km²) in the most pessimistic scenario.

On a detailed scale, [Figure 10](#) shows the direct overlap on urban areas already under the current regime, especially in Areia Branca and Porto do Mangue. Recent occupations were observed in subdivisions and official roads located in areas of recurrent flooding, confirmed by field checks. Although other cities have proven relatively resistant in the initial scenarios, SMC-Brasil trends indicate progressive intensification, with significant damage in Macau and isolated occurrences in Grossos, becoming even more critical in the most extreme IPCC scenario (2022).

535

Macau domain – RL: -1.1129 m						
Scenarios	Projection (m)	ATtr20 (m)	ATrp20 (BGS) (m)	NAErp20 (m)	RMSE (m)	FL (m)
Present	-	2.975	1.862	0.110	0.612	2.584
RMPG IBGE	0.104	2.975	1.862	0.110	0.612	2.688
SMC-Brasil Trend	0.193	2.975	1.862	0.110	0.612	2.777
SLA	0.309	2.975	1.862	0.110	0.612	2.893
IPCC SSP1-1.9	0.409	2.975	1.862	0.110	0.612	2.993
IPCC SSP1-2.6	0.460460	2.975	1.862	0.110	0.612	3.044
IPCC SSP2-4.5	0.593	2.975	1.862	0.110	0.612	3.177
IPCC SSP3-7.0	0.716	2.975	1.862	0.110	0.612	3.300
IPCC SSP5-8.5.	0.800	2.975	1.862	0.110	0.612	3.384

Areia Branca domain – RL: -1.3532 m						
Scenarios	Projection (m)	ATtr20 (m)	ATrp20 (BGS) (m)	NAErp20 (m)	RMSE (m)	FL (m)
Present	-	3.454	2.101	0.109	0.612	2.822
RMPG IBGE	0.104	3.454	2.101	0.109	0.612	2.926
SMC-Brasil Trend	0.193	3.454	2.101	0.109	0.612	3.015
SLA	0.309	3.454	2.101	0.109	0.612	3.130
IPCC SSP1-1.9	0.409	3.454	2.101	0.109	0.612	3.231
IPCC SSP1-2.6	0.460	3.454	2.101	0.109	0.612	3.282
IPCC SSP2-4.5	0.593	3.454	2.101	0.109	0.612	3.415
IPCC SSP3-7.0	0.716	3.454	2.101	0.109	0.612	3.538
IPCC SSP5-8.5.	0.800	3.454	2.101	0.109	0.612	3.622

Table 43: Projected flood levels linked to the geodetic reference plane. ATrp20 corresponds to the astronomical tide projected for a 20-year return period, while ATrp20 (BGS) represents the same level adjusted and validated on the geodetic plane. NAErp20 refers to the meteorological tide projected for the same return period. The RMSE expresses the average error of the digital elevation model used as a basis, and FL corresponds to the final flood elevation resulting from the combination of these parameters.

In the segmentation by hazard classes, 731 km² were identified as being at extremely high risk, corresponding to 14% of the study area. The urban areas of Areia Branca and Porto do Mangue stood out as the most affected, with about 10% of the urban grid compromised, with the city of Areia Branca being the most impacted with 0.21 km² ([Table 5](#)[Table-4](#)). Macau and Grossos presented specific areas of extreme hazard, affecting only specific infrastructure sectors. Tibau was the only less vulnerable city, with less than 1% overlap, reinforcing its lower exposure to climate risk. Locations such as Upanema beach and Povoado Cristovão (Areia Branca), Povoado Rosado (Porto do Mangue), and Ilha de Santana village (Macau) also presented critical areas, but less than the urban centers listed.

550

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)


Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

555

The patterns identified corroborate previous findings, such as in Grossos, where the results confirm less intense projections, but spatially similar to those of Silva et al. (2024). In Macau, the overlap was lower than that observed by Araújo et al. (2021), but occurred in the same low-lying urban areas. In Areia Branca, the affected areas coincided exactly with those evidenced by Aguiar et al. (2019). In Tibau, low exposure confirmed the resilience delimited by Rabelo et al. (2023) when analyzing conservation areas near the municipality. These parallels reinforce the consistency of the results and the validity of the mapping in identifying endemic areas of hazard.

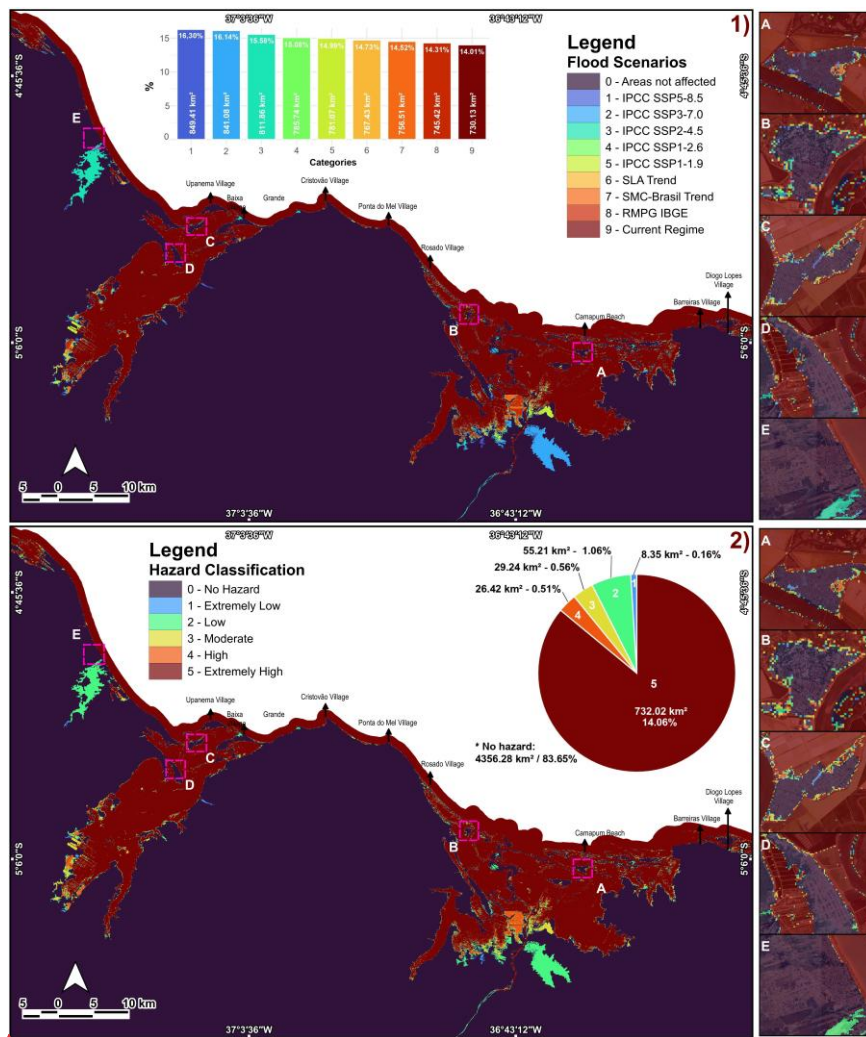

560 **Figure 28:** Classification of MSLR scenarios in the study area (A1) and classification of tidal flooding hazards (B2) by sector. The far-right column shows the scale zones in the cities of the study area. The graphs on the maps indicate the percentages of the total area occupied. Map uses the base map data from Bing Maps (© Microsoft). Map prepared by the authors (2025) using basemap data from Bing Maps (© Microsoft).

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)



Figure 109: Photographic records of the main areas indicated by the model as extremely high risk. It is noteworthy to observe the lowering of the mapped areas, especially Areia Branca, where flooding was verified in the field. A - section of the urban area of Macau with the most susceptible area; B - section of the urban area of Porto do Manguê with a low-lying portion prone to flooding; C - urban area of Areia Branca with flooding boundaries; and D - urban area of Grossos with channels prone to overflowing. Photographs by the authors (2025).

Urban Area	Urban Area (km²)	Flood Area (km²)	Flood (%)
Porto do Manguê	0.732	0.080	10.884
Macau	1.530	0.023	1.489
Areia Branca	2.052	0.211	10.278
Grossos	1.449	0.039	2.677
Tibau	4.523	0.030	0.545

Table 54: Percentage of major urban areas at extreme risk of tidal flooding.

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

4.3 Risk of tidal flooding

The validated land use showed the predominance of savanna formations, which correspond to Caatinga environments, occupying a total area of 47% (Figure 11Figure 10) in relation to the study area. Next, pasture areas (13%) and mosaics of

diverse uses (14%) stand out, comprising the second and third groups. Among specific uses, salt pans, the main activity in the region, deserve mention, representing 7% of the area, as do urban areas, which total 2%.


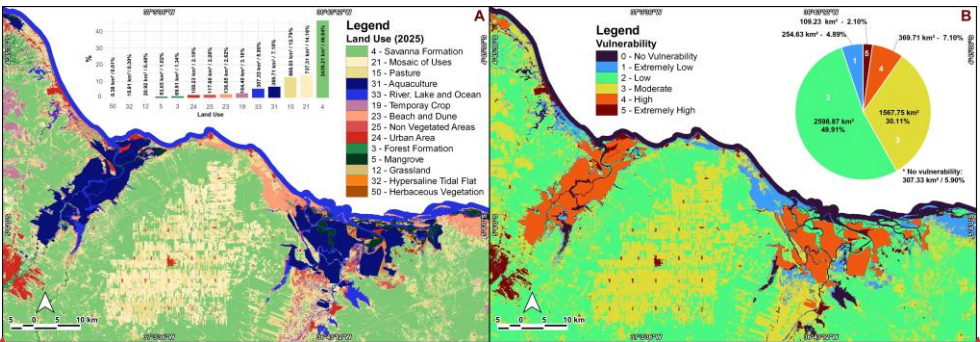


Figure 1140: Land use in the study area (A) and vulnerability classification (B). The graphs at the top indicate the percentages of areas occupied by each class. Map Map prepared by the authors (2025) using data from Mabpiomas (2025).

With regard to vulnerability, the sectorization indicated 478.94 km² classified as high and extremely high vulnerability, equivalent to 9.20% of the area. In contrast, most of the territory (60.70%) was classified as low to no vulnerability, revealing a strong spatial contrast between high-risk zones and more stable areas.

The combination of the results of the hazard and vulnerability mapping resulted in the final tidal flood risk map. The spatia lized risk classes showed largely predictable patterns, considering the previous analyses. The high risk class stands out, corresponding to 6.37% of the total area, while the extremely high risk category, although small (0.04% overall), was concentrated in critical areas, especially in urban sectors of the cities of Porto do Mangue, Macau, Areia Branca, and Grossos, in addition to communities such as Ponta do Mel, Rosado, Diogo Lopes, and Upanema, with considerable percentages, especially the villages of Baixa Grande in Areia Branca, Ilha de Santana in Macau, and Barra in Grossos, which had percentages of affected urban areas close to 20% (Table 6Table 5).

The spatial distribution of risk areas can be seen in Figure 12Figure 11, the areas of very high flooding closely resemble the findings of Borri et al. (2012) in Areia Branca. In addition, occurrences were identified in most of the villages, extending beyond urban limits and highlighting the vulnerability of coastal communities in the region. This pattern broadens the interpretation of the data beyond urban centers, reinforcing the diffuse nature of the risk associated with tidal flooding. These communities are mostly traditional fishing communities that play an important social and economic role in the region.

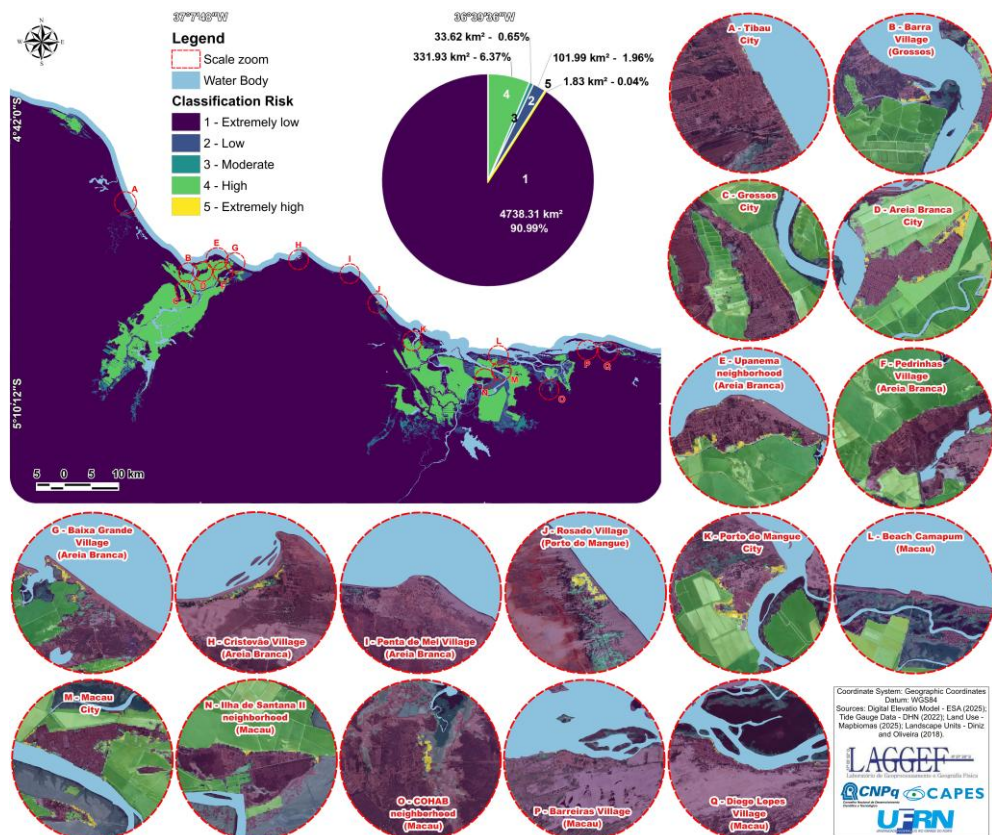

615 **Figure 12.14:** spatialization of quantified risks for the study area and surrounding area, on a general scale and in detail, for cities and villages. Map-Map uses the base map data from Bing Maps (© Microsoft), prepared by the authors (2025) using basemap data from Bing Maps (© Microsoft).

620 The modeling carried out, in general, with the projection of future scenarios and the identification of financial damages, demonstrates the urgency of adaptive and mitigating measures, since even with impacts localized at the regional level, the outbreak of a potentially destructive event can seriously compromise the environmental and socioeconomic stability of coastal municipalities, directly affecting the quality of life of the population. The scale of the estimated damage makes it clear that addressing coastal climate risk requires prior planning and institutional mobilization, under penalty of irreversible losses.



Figure 1312: Spatial distribution of risk areas and their relationship with residences in urban areas and villages. Map uses the base map data from Bing Maps (© Microsoft). Map prepared by the authors (2025) using basemap data from Bing Maps (© Microsoft).

Location	Homes Affected	Lands Affected	Damaged Area(m²) (Homes)	Damaged Area (m²) (Land)	% Damage (Homes)	% Damage (Land)	Price/m²	Losses (Homes)	Losses (Land)
Grossos	15	33	994	9620.397	34%	26%	120	R\$ 119,272.21	R\$ 1,154,447.68
Barra	40	43	5812	18966.35	94%	82%	170	R\$ 988,062.50	R\$ 3,224,279.25
Porto do Mangue	116	178	9363	82702.38	74%	66%	220	R\$ 2,059,765.54	R\$ 18,194,522.65
Rosado	35	46	4405	40831.85	82%	72%	200	R\$ 880,955.84	R\$ 8,166,369.33
Macau	165	199	27321	87332.40	72%	67%	400	R\$ 10,928,251.89	R\$ 34,932,959.48
Ilha de Santana I	184	257	15827	50078.76	77%	75%	60	R\$ 949,624.01	R\$ 3,004,725.75
Ilha de Santana II	8	25	299	16944.94	62%	48%	50	R\$ 14,949.03	R\$ 847,247.14
COHAB	23	36	1601	10473.78	92%	87%	100	R\$ 160,065.47	R\$ 1,047,378.20
Barreiras	13	13	1290	1993.81	94%	94%	147	R\$ 189,615.98	R\$ 293,089.82
Diogo Lopes	35	39	1295	2115.17	45%	37%	150	R\$ 194,312.21	R\$ 317,275.31
Areia Branca	215	304	30742	109244.28	72%	71%	450	R\$ 13,834,003.18	R\$ 49,159,924.79
Upanema	63	119	7538	54941.56	65%	51%	280	R\$ 2,110,632.14	R\$ 15,383,636.90
Baixa Grande	51	78	9941	34758.68	70%	69%	200	R\$ 1,988,266.33	R\$ 6,951,735.26
Cristovão	35	67	5803	52054.79	85%	64%	300	R\$ 1,740,994.68	R\$ 15,616,437.85
Ponta do Mel	4	7	692	1367.85	99%	61%	220	R\$ 152,221.66	R\$ 300,928.00
Pedrinhas	6	13	164	1034.98	38%	38%	100	R\$ 16,388.27	R\$ 103,497.87
Total	1,008	1,457	123087	574461.97	72%	63%	-	R\$ 36,327,380.93	R\$ 158,698,455.28

Figure Table 1413: Quantification of Affected Areas, Percentage of Damage, and Economic Losses (Homes and Land) by Location. For the villages of Rosado, Barra, Ponta do Mel, Pedrinhas, and the COHAB neighborhood, estimates were made by interpolation because they had few or no data samples.

Formatted: English (United States)
Formatted: English (United States)

Formatted: English (United States)
Formatted: English (United States)
Formatted Table
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)
Formatted: English (United States)

5 Discussion

The analyses showed that tidal flooding risks are mainly concentrated in the urban areas of Areia Branca, Macau, and Porto do Mangue, with field validations of sections that are already susceptible under the current regime. The integrated damage estimate pointed to significant structural losses, reaching approximately R\$ 36 million in buildings and R\$ 158 million in land. In addition, a potential flooding event would directly compromise the salt production activity strategically concentrated in the rural area and main economic base of these municipalities, which would potentially amplify the impacts. Areia Branca stands out as the municipality most affected in terms of built-up areas. These figures confirm the hypothesis that, even in conservative scenarios, the financial and social impacts tend to be significant and spatially concentrated.

The combination of low topography and recurring maximum astronomical levels reinforced critical flooding patterns. In severe scenarios, there was an increase in the frequency of flooded days in already occupied areas, as well as an increase in maximum levels, which increased urban exposure. Interannual and decadal processes add variability, and the coincidence of astronomical and meteorological extremes, although rare, can potentiate critical events. This reading reinforces the notion that coastal risks in the Semi-Arid Coast are not limited to the trend of sea level rise, but result from a combination of multiple hydrodynamic factors.

The results obtained corroborate previous mappings in the region: in Areia Branca, areas coinciding with those of Aguiar et al. (2019) were identified; in Macau, patterns similar to those of Araújo et al. (2021) were found, albeit with different magnitudes; in Tibau, low exposure was comparable to that of Rabelo et al. (2023); and in Grossos, less intense but spatially consistent projections confirm the findings of Silva et al. (2024). This bibliographic convergence indicates the spatial robustness of the method and strengthens its regional applicability. The difference here lies in integrating physical risk with localized economic losses, offering a useful comparative framework for decision-making, using tools and techniques with very low aggregate costs.

The recurrence of flooding in the region reinforces the natural susceptibility of the cities studied, many of which are located in low-lying areas on estuarine islands. These naturally flood-prone areas have already suffered significant impacts in the past, as in the case of Macau, whose current urban center is the result of relocation after its old center was submerged, swallowed by the tides in the 19th century (Araújo, 2020; IBGE, 2025). This history shows that floods are not unprecedented phenomena, but rather recurring events, and that their effects will be exacerbated by projected MSLR scenarios. In the short term, strict control of saltpan dikes tends to mitigate more frequent flooding, but remains limited in the face of extreme events, which, according to projections, will tend to become more recurrent, posing new challenges for urban adaptation and territorial management.

From a conceptual point of view, the findings reinforce probabilistic approaches to coastal risk that weigh frequency and maximum events within a validated geodetic framework. Risk maps and their readings are tools for territorial screening and strategic mobilization, supporting priority measures such as coastal protection and management, land use guidelines in low-

Formatted: English (United States)

lying areas, and urban contingency plans. Although limited by 30 m resolution and vertical uncertainties, the products are methodologically consistent and practical, fulfilling their role as a starting point for public policy.

It should be noted, however, that the results should be interpreted as a reference for regional hydrodynamic trends, not as exact representations of reality, even though some results have successfully represented actual processes. Interpretations should be considered with caution, especially due to the limitations imposed by the 30-meter spatial resolution of the DEM, the inherent simplification of the model used, which does not consider lateral processes and tidal damping, and the interpolation of real estate data in settlements with an incipient market, facts that naturally impose considerable margins of error. Nevertheless, by demonstrating that open data allows for consistent and auditable analyses, with real-world validations in the field, the study advances the central hypothesis that it is possible to project regional MSLR scenarios and identify endemic risk areas with strong applied value.

Looking ahead, it is recommended that new models be constructed for the area at the local level, using DEMs with greater accuracy and resolution to capture microtopography, complete real estate databases, and periodic field campaigns to refine hotspots. It would also be very valuable to adopt a methodology that incorporates the combined effect, covering not only coastal flooding (by tides) but also its interaction with river flooding events from the two main rivers in the study area.

Explicit trends for advancing research in the region should move toward integrating more sophisticated dynamic modeling with updated socioeconomic data, allowing for a better understanding of the interaction between hydrodynamic processes and social vulnerabilities. Overall, the advances made in this study point to an alarming scenario: all the municipalities analyzed are vulnerable to climate change and at high or extremely high risk of flooding, which contrasts with their low financial capacity to address the risks associated with MSLR, reinforcing the urgency of climate adaptation plans to protect coastal communities and their critical infrastructure.

The cities in the region were historically built on slightly higher ground, serving as a real front line against imminent flooding. However, part of their urban areas and land remains in extremely high-risk zones, as do the solar salt flats, the main local economic activity. This is one of the lowest-lying coasts on the planet, where salt pan dikes could play a strategic role in containing flooding events in the near future. However, this planning needs to be refined through coordination between public authorities and the salt industry in order to ensure greater territorial and economic resilience.

6 Conclusions

In summary, the main findings indicate a concentration of coastal risk in low-lying urban areas and salt flats, with occasional validation in the field, and significant potential economic losses across the region, particularly in Areia Branca. The probabilistic approach adopted, anchored in the geodetic plane and free data, provides a comparable and actionable regional framework for adaptive planning, even recognizing the vertical uncertainty and hydrodynamic simplification of the model.

Thus, the data and insights obtained by the study suggest that adaptation policies focused on land use planning and response plans in already susceptible sectors can reduce future losses and, to a certain extent, facilitate climate change mitigation.

The methodology has proven to be effective and easy to replicate, allowing for dynamic risk and loss assessment at low cost, provided that there is skilled labor available for the operation. It is especially useful in regions where climate change mitigation strategies are lacking, offering quick and consistent support for mobilizing coastal adaptation policies.

Regarding the prospects for this work, it is important to mention that, in order to make progress, it is crucial to conduct new studies to develop robust models; invest in real-time tide gauge data collection systems and systematic geodetic validations in the field, keeping in mind the logic of iteration: models generate hypotheses; the field confirms/adjusts them, and new rounds refine the risk on a fine scale. These processes contribute to the generation of increasingly accurate data, which is extremely useful for mitigating and adapting to the impacts of climate change~~These processes contribute to the generation of increasingly accurate data, which is extremely useful in addressing climate change.~~

Acknowledgments

The authors are grateful for the financial support provided by the National Council for Scientific and Technological Development (CNPq) and the Coordination for the Improvement of Higher Education Personnel (CAPES – Funding Code 001). The authors also thank the Graduate Program in Geography at the Federal University of Rio Grande do Norte (UFRN) for its organizational support, which provided essential academic and institutional support for the completion of this study.

Author contribution

TCLS and MTMD designed the study. TCLS, JPS, and PVNA acquired the geodetic data. TCLS processed the data. MTMD and PVNA performed the final data verification. BF and JYGS made the final adjustments to the study. All authors reviewed this article.

References

Aguiar, L. S., Amaro, V. E., Araújo, P. V. N., and Santos, A. L. S.: Low cost geotechnology applied to flood risk assessment in coastal urban areas in climate change scenarios, *Anuário Inst. Geociênc.*, 42, 267–290, https://doi.org/10.11137/2019_1_267_290, 2019.

Ahmed, T., Creedon, L., and Gharbia, S.: Low-cost sensors for monitoring coastal climate hazards: a systematic review and meta-analysis, *Sensors*, 23, 1717, <https://doi.org/10.3390/s23031717>, 2023.

Almaliki, A. H., Zerouali, B., Santos Silva, A. A., Sherif, , and Ali, E.: Assessing coastal vulnerability and land use to sea level rise in Jeddah province, Kingdom of Saudi Arabia, *Heliyon*, 9, e18508, <https://doi.org/10.1016/j.heliyon.2023.e18508>, 2023.

Anderson, T. R., Fletcher, C. H., Barbee, M. M., Romine, B. M., Lemmo, S., and Delevaux, J. M. S.: Modeling multiple sea level rise stresses reveals up to twice the land at risk compared to strictly passive flooding methods, *Sci. Rep.*, 8, 1, <https://doi.org/10.1038/s41598-018-32658-x>, 2018.

Antonioli, F., De Falco, G., Lo Presti, V., Moretti, L., Scardino, G., Anzidei, M., Bonaldo, D., Carniel, S., Leoni, G., Furlani, S., et al.: Relative sea-level rise and potential submersion risk by 2100 in 16 Mediterranean coastal plains, *Water*, 12, 2173, <https://doi.org/10.3390/w12082173>, 2020.

Araújo, P. V. N.: Geotecnologias de alta precisão no mapeamento de georisco a inundações frente às mudanças climáticas, PhD thesis, Universidade Federal do Rio Grande do Norte, Natal, 157 pp., 2020.

Araújo, P. V. N., Amaro, V. E., Alcoforado, A. V. C., and Santos, A. L. S.: Vertical accuracy and calibration of digital elevation models (DEMs) for the Piranhas-Assu River Basin, Rio Grande do Norte, *Anuário Inst. Geociênc.*, 41, 351–364, https://doi.org/10.11137/2018_1_351_364, 2019.

Araújo, V. N., Amaro, V. E., Aguiar, L. S., Lima, C. C., and Lopes, A. B.: Tidal flood area mapping in the face of climate change scenarios: case study in a tropical estuary in the Brazilian semi-arid region, *Nat. Hazards Earth Syst. Sci.*, 21, 3353–3366, <https://doi.org/10.5194/nhess-21-3353-2021>, 2021.

Arnell, N. W., Lowe, J. A., Bernie, D., Nicholls, R. J., Brown, S., Challinor, A. J., and Osborn, T. J.: The global and regional impacts of climate change under representative concentration pathway forcings and shared socioeconomic pathway scenarios, *Environ. Res. Lett.*, 14, 084046, <https://doi.org/10.1088/1748-9326/ab35a6>, 2019.

Barbosa, M. A., Boski, T., Bezerra, F. H. R., Lima-Filho, F. P., Gomes, M. P., Pereira, L., and Maia, R. P.: Late Quaternary infilling of the Assu River embayment and related sea level changes in NE Brazil, *Mar. Geol.*, 405, 23–37, <https://doi.org/10.1016/j.margeo.2018.07.014>, 2018.

Becker, M., Karpytchev, M., and Hu, A.: Increased exposure of coastal cities to sea-level rise due to internal climate variability, *Nat. Clim. Change*, <https://doi.org/10.1038/s41558-023-01603-w>, 2023.

Blaikie, P., Cannon, T., Davis, I., and Wisner, B.: *At risk: natural hazards, people’s vulnerability and disasters*, Routledge, London, 1994.

Boehnke, R. F., Hoppe, T., Brezet, H., and Blok, K.: Good practices in local climate mitigation action by small and medium-sized cities; exploring meaning, implementation and linkage to actual lowering of carbon emissions in thirteen municipalities in The Netherlands, *J. Clean. Prod.*, 207, 630–644, <https://doi.org/10.1016/j.jclepro.2018.09.264>, 2019.

Boori, M. S., Amaro, V. E., and Targino, A.: Coastal risk assessment and adaptation of the impact of sea-level rise, climate change and hazards: a RS and GIS based approach in Apodi-Mossoró estuary, Northeast Brazil, *Int. J. Geomatics Geosci.*, 2, 815–832, https://www.academia.edu/download/48334525/Coastal_risk_assessment_and_adaptation_o20160826-2730-1d66a7o.pdf, 2012.

Bricongne, J.-C., Meunier, B., and Pouget, S.: Web-scraping housing prices in real-time: the Covid-19 crisis in the UK, *J. Hous. Econ.*, 59, 101906, <https://doi.org/10.1016/j.jhe.2022.101906>, 2022.

Formatted: English (United States)

Formatted: English (United States)

Busman, D. V., Amaro, V. E., and Souza-Filho, P. W. M.: Análise estatística multivariada de métodos de vulnerabilidade física em zonas costeiras tropicais, *Rev. Bras. Geomorfol.*, 17, 499–516, <https://doi.org/10.20502/rbg.v17i3.912>, 2016.

755 Cabana, D., Rölfer, L., Evadzi, P., and Celliers, L.: Enabling climate change adaptation in coastal systems: a systematic literature review, *Earth’s Future*, 11, <https://doi.org/10.1029/2023ef003713>, 2023.

Cappucci, S., Carillo, A., Iacono, R., Moretti, L., Palma, M., Righini, G., Antonioli, F., and Sannino, G.: Evolution of coastal environments under inundation scenarios using an oceanographic model and remote sensing data, *Remote Sens.*, 16, 2599, <https://doi.org/10.3390/rs16142599>, 2024.

760 ~~Cartwright, A., Brundrit, G., and Fairhurst, L.: Global climate change and adaptation — a sea level rise risk assessment, Phase Four: adaptation and risk mitigation measures for Cape Town, Stockholm Environment Institute, Stockholm, [https://resource.capetown.gov.za/documentcentre/Documents/City%20research%20reports%20and%20review/Phase%203%20-%20A%20Sea-Level%20Rise%20Risk%20Assessment%20\(SLRRA\).pdf](https://resource.capetown.gov.za/documentcentre/Documents/City%20research%20reports%20and%20review/Phase%203%20-%20A%20Sea-Level%20Rise%20Risk%20Assessment%20(SLRRA).pdf), 2008.~~

Copernicus Climate Change Service (C3S): Global Ocean Gridded L4 Sea Surface Heights and Derived Variables Reprocessed, dataset SEALEVEL_GLO_PHY_CLIMATE_L4_MY_008_057, <https://doi.org/10.48670/moi-00145>, 2025.

765 Croteau, R., Pacheco, A., and Ferreira, Ó.: Flood vulnerability under sea level rise for a coastal community located in a backbarrier environment, Portugal, *J. Coast. Conserv.*, 27, 4, <https://doi.org/10.1007/s11852-023-00955-x>, 2023.

Darsan, J., Asmath, H., and Jehu, A.: Flood-risk mapping for storm surge and tsunami at Cocos Bay (Manzanilla), Trinidad, *J. Coast. Conserv.*, 17, 679–689, <https://doi.org/10.1007/s11852-013-0276-x>, 2013.

770 De Lima, L. T., Fernández-Fernández, S., Weiss, C. V. C., Bitencourt, V., and Bernardes, C.: Free and open-source software for geographic information system on coastal management: a study case of sea-level rise in southern Brazil, *Reg. Stud. Mar. Sci.*, 48, 102025, <https://doi.org/10.1016/j.rsma.2021.102025>, 2021.

Déguénon, M., Adade, R., Teka, O., Aheto, D. W., and Sinsin, B.: Sea-level rise and flood mapping: a review of models for coastal management, *Nat. Hazards*, 120, 2155–2178, <https://doi.org/10.1007/s11069-023-06225-1>, 2023.

775 Depsky, N., Bolliger, I., Allen, D., Choi, J. H., Delgado, M., Greenstone, M., Hamidi, A., Houser, T., Kopp, R. E., and Hsiang, S.: DSCIM-Coastal v1.1: an open-source modeling platform for global impacts of sea level rise, *Geosci. Model Dev.*, 16, 4331–4366, <https://doi.org/10.5194/gmd-16-4331-2023>, 2023.

Diniz, M. T. M., Vasconcelos, F. P., and Martins, M. B.: Technological innovation in Brazilian sea salt production and the resulting socio-territorial changes: an analysis from the perspective of Schumpeter’s theory of entrepreneurship, *Soc. Nat.*, 27, 421–437, <https://doi.org/10.1590/1982-451320150305>, 2015.

780 Diniz, M. T. M. and Vasconcelos, F. P.: Natural conditions for the sea salt production in Brazil, *Mercator (Fortaleza)*, 16, <https://doi.org/10.4215/rm2017.e16013>, 2017.

Diniz, M. T. M. and Oliveira, G. P. de: Proposal for meso-scale compartmentalization of the Northeastern Brazilian coast, *Rev. Bras. Geomorfol.*, 17, <https://doi.org/10.20502/rbg.v17i3.844>, 2016.

Dwarakisha, G. S., Vinaya, S. A., Natesan, U., Asano, T., Kakinuma, T., Venkataramana, K., Pai, B. J., and Babita, M. K.: Coastal vulnerability assessment of the future sea level rise in Udupi coastal zone of Karnataka state, west coast of India, *Ocean Coast. Manage.*, 52, 467–478, <https://doi.org/10.1016/j.ocecoaman.2009.07.007>, 2009.

Eduardo, F., Matheus, , Túlio, M., and Pereira, P.: Coastal geoheritage and sustainability: a study in the low coast of Costa Branca, Rio Grande do Norte, Brazil, *Sustainability*, 17, 6709, <https://doi.org/10.3390/su17156709>, 2025.

Eilander, D., Couasnon, A., Leijnse, T., Ikeuchi, H., Yamazaki, D., Muis, S., Dullaart, J., Haag, A., Winsemius, H. C., and Ward, P. J.: A globally applicable framework for compound flood hazard modeling, *Nat. Hazards Earth Syst. Sci.*, 23, 823–846, <https://doi.org/10.5194/nhess-23-823-2023>, 2023.

Ekeu-wei, I. T. and Blackburn, G. A.: Applications of open-access remotely sensed data for flood modelling and mapping in developing regions, *Hydrology*, 5, 39, <https://doi.org/10.3390/hydrology5030039>, 2018.

European Space Agency (ESA): Copernicus DEM GLO-30: global digital elevation model at 30-meter resolution, Copernicus Open Access Hub, <https://scihub.copernicus.eu/>, 2021.

IBGE – Banco de Dados Geodésicos (BDG): <http://www.bdg.ibge.gov.br/appbdg/>, 2025.

Feenstra, J. F.: ~~Manual of methods for impact assessment and adaptation strategies to climate change, United Nations Environment Programme, Nairobi, <https://research.vu.nl/ws/portalfiles/portal/73664742/fl>, 1998.~~

Fila, D., Fünfgeld, H., and Dahlmann, H.: Climate change adaptation with limited resources: adaptive capacity and action in small- and medium-sized municipalities, *Environ. Dev. Sustain.*, <https://doi.org/10.1007/s10668-023-02999-3>, 2023.

Frota, F. F., Truccolo, E. C., and Schettini, C. A. F.: Tidal and sub-tidal sea level variability at the northern shelf of the Brazilian Northeast region, *An. Acad. Bras. Ciênc.*, 88, 1371–1386, <https://doi.org/10.1590/0001-3765201620150162>, 2016.

Gesch, D. B.: Best practices for elevation-based assessments of sea-level rise and coastal flooding exposure, *Front. Earth Sci.*, 6, <https://doi.org/10.3389/feart.2018.00230>, 2018.

Geoprocessing and Physical Geography Laboratory, Federal University of Rio Grande do Norte (UFRN): ~~Urban cadastral vector dataset derived from UAV orthomosaics for the northern coast of Rio Grande do Norte, Brazil (scale 1:500), institutional technical archive, unpublished dataset, 2025.~~

González-Trujillo, J. D., Román-Cuesta, R. M., Muñoz-Castillo, A. I., et al.: Multiple dimensions of extreme climate events and their impacts on biodiversity, *Clim. Change*, 176, 155, <https://doi.org/10.1007/s10584-023-03622-0>, 2023.

Harten, J. G., Kim, A. M., and Brazier, J. C.: Real and fake data in Shanghai’s informal rental housing market: ground-truthing data scraped from the internet, *Urban Stud.*, <https://doi.org/10.1177/0042098020918196>, 2020.

Hinkel, J., Aerts, J. C. J. H., Brown, S., Jiménez, J. A., Lincke, D., Nicholls, R. J., Scussolini, P., Sanchez-Arcilla, A., Vafeidis, A., and Addo, K. A.: The ability of societies to adapt to twenty-first-century sea-level rise, *Nat. Clim. Change*, 8, 570–578, <https://doi.org/10.1038/s41558-018-0176-z>, 2018.

Huang, T., Merwade, V.: ~~Uncertainty analysis and quantification in flood insurance rate maps using Bayesian model averaging and hierarchical BMA, *Journal of Hydrologic Engineering*, 28, <https://doi.org/10.1061/jhyeff.heeng-5851>, 2022.~~

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

IBGE: Monitoramento da variação do nível médio do mar nas estações da Rede Maregráfica Permanente para Geodésia: 2001–2020, Coordenação de Geodésia, Rio de Janeiro, <https://biblioteca.ibge.gov.br/visualizacao/livros/liv101890.pdf>, 2021.

IBGE: História de Macau – Rio Grande do Norte (RN), <https://cidades.ibge.gov.br/brasil/rn/macau/historico>, 2025.

820 IPCC: Climate change 2022: impacts, adaptation and vulnerability, Contribution of Working Group II to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change, Pörtner, H.-O., Roberts, D. C., Tignor, M., Poloczanska, E. S., Mintenbeck, K., Alegria, A., Craig, M., Langsdorf, S., Löschke, S., Möller, V., Okem, A., and Rama, B. (Eds.), Cambridge Univ. Press, <https://doi.org/10.1017/9781009325844>, 2022.

Jach, T.: Web scraping methods used in predicting real estate prices, in: Communications in Computer and Information Science, 375–387, https://doi.org/10.1007/978-3-030-88113-9_30, 2021.

825 Juhász, L., Xu, J., and Parkinson, R. W.: Beyond the tide: a comprehensive guide to sea-level-rise inundation mapping using FOSS4G, *Geomatics*, 3, 522–540, <https://doi.org/10.3390/geomatics3040028>, 2023.

Kaden, U. S.: Floodplain-Inundation-Calculator plugin for QGIS 3, version 0.1, GitHub repository, <https://github.com/usk92/Floodplain-Inundation-Calculator>, <https://doi.org/10.5281/zenodo.6375580>, 2022.

830 [Kasmalkar, I., Wagenaar, D., Bill-Weilandt, A., Choong, J., Manimaran, S., Lim, T. N., Rabonza, M., Lallemand, D.: Flow-tub model: a modified bathtub flood model with hydraulic connectivity and path-based attenuation, *MethodsX*, 12, 102524, <https://doi.org/10.1016/j.mex.2023.102524>, 2024.](https://doi.org/10.1016/j.mex.2023.102524)

Kelly, B. and Lucio, P. S.: Characterization of risk/exposure to climate extremes for the Brazilian Northeast—case study: Rio Grande do Norte, *Theor. Appl. Climatol.*, 122, 59–67, <https://doi.org/10.1007/s00704-014-1275-z>, 2014.

835 Kendall, M. G.: Rank correlation methods, 4th Edn., Charles Griffin, London, 1975.

Kron, W.: Flood risk = hazard • values • vulnerability, *Water Int.*, 30, 58–68, <https://doi.org/10.1080/02508060508691837>, 2005.

Le Cozannet, G., Garcin, M., Yates, M., Idier, D., and Meyssignac, B.: Approaches to evaluate the recent impacts of sea-level rise on shoreline changes, *Earth-Sci. Rev.*, 138, 47–60, <https://doi.org/10.1016/j.earscirev.2014.08.005>, 2014.

840 Miller, B. B. and Carter, C.: The test article, *J. Sci. Res.*, 12, 135–147, <https://doi.org/10.1234/56789>, 2015.

López-Dóriga, U. and Jiménez, J. A.: Impact of relative sea-level rise on low-lying coastal areas of Catalonia, NW Mediterranean, Spain, *Water*, 12, 3252, <https://doi.org/10.3390/w12113252>, 2020.

Macedo, Y. M., Felipe, Marinho, A. O., and Victor, P. V. N.: Socio-environmental vulnerability in coastal areas: a case study in the municipality of Macau-RN, Brazil, *Rev. Geociênc. Nordeste*, 11, 708–721, [https://doi.org/10.21680/2447-](https://doi.org/10.21680/2447-3359.2025v11n1id38277)

845 [3359.2025v11n1id38277](https://doi.org/10.21680/2447-3359.2025v11n1id38277), 2025.

Mann, H. B.: Nonparametric tests against trend, *Econometrica*, 13, 245–259, <https://doi.org/10.2307/1907187>, 1945.

MapBiomas: Coleção 9 da série anual de mapas de cobertura e uso da terra do Brasil, <https://brasil.mapbiomas.org/colecoes-mapbiomas/>, last access: 31 July 2025, 2023.

Marfai, M. A. and King, L.: Potential vulnerability implications of coastal inundation due to sea level rise for the coastal zone

850 of Semarang city, Indonesia, *Environ. Geol.*, 54, 1235–1245, <https://doi.org/10.1007/s00254-007-0906-4>, 2007.

- McGranahan, G., Balk, D., and Anderson, B.: The rising tide: assessing the risks of climate change and human settlements in low elevation coastal zones, *Environ. Urban.*, 19, 17–37, <https://doi.org/10.1177/0956247807076960>, 2007.
- Medeiros, F. J., Gomes, R. dos S., Coutinho, M. D. L., and Lima, K. C.: Meteorological droughts and water resources: historical and future perspectives for Rio Grande do Norte state, Northeast Brazil, *Int. J. Climatol.*, <https://doi.org/10.1002/joc.7624>, 2022.
- Melo Filho, E.: Meteorological tide at the Brazilian coast, Full Professor thesis, Federal University of Rio Grande, https://sistemas.furg.br/sistemas/sab/arquivos/conteudo_digital/000008808.pdf, 2017.
- Morlet, J., Arens, G., Fourgeau, E., and Giard, D.: Wave propagation and sampling theory—Part I: complex signal and scattering in multilayered media, *Geophysics*, 47, 203–221, <https://doi.org/10.1190/1.1441328>, 1982.
- Moser, S. C., Ekstrom, J. A., Kim, J., and Heitsch, S.: Adaptation finance archetypes: local governments’ persistent challenges of funding adaptation to climate change and ways to overcome them, *Ecol. Soc.*, 24, 28, <https://doi.org/10.5751/ES-10980-240228>, 2019.
- Mossoró Hoje: Dique de salina se rompe e alaga casas na cidade de Grossos (RN), available at: <http://mossorohoje.com.br/noticias/49703-dique-de-salina-se-rompe-e-alaga-casas-na-cidade-de-grossos-rn> (last access: 29 April 2026), 2024.
- Muench, R., Cherrington, E., Griffin, R., and Mamane, B.: Assessment of open access global elevation model errors impact on flood extents in southern Niger, *Front. Environ. Sci.*, 10, <https://doi.org/10.3389/fenvs.2022.880840>, 2022.
- NASA Sea Level Projection Tool: IPCC AR6 sea-level-rise projections visualization and data download, <https://sealevel.nasa.gov/ipcc-ar6-sea-level-projection-tool>, last access: 2025, 2021.
- Nagy, G. J., Gutiérrez, O., Brugnoli, E., Verocai, J. E., Gómez-Erache, M., Villamizar, A., Olivares, I., Azeiteiro, U. M., Leal Filho, W., and Amaro, N.: Climate vulnerability, impacts and adaptation in Central and South America coastal areas, *Reg. Stud. Mar. Sci.*, 29, 100683, <https://doi.org/10.1016/j.rsma.2019.100683>, 2019.
- Nicholls, R. J., Wong, P. P., Burkett, V. R., Codignotto, J., Hay, J., McLean, R., Ragoonaden, S., and Woodroffe, C. D.: Coastal systems and low-lying areas, in: *Climate Change 2007: Impacts, Adaptation and Vulnerability, Contribution of Working Group II to the Fourth Assessment Report of the IPCC*, Parry, M. L., Canziani, O. F., Palutikof, J. P., van der Linden, P. J., and Hanson, C. E. (Eds.), Cambridge Univ. Press, Cambridge, 315–356, <https://www.ipcc.ch/site/assets/uploads/2018/02/ar4-wg2-chapter6-1.pdf>, 2007.
- Nicholls, R. J. and Cazenave, A.: Sea-level rise and its impact on coastal zones, *Science*, 328, 1517–1520, <https://doi.org/10.1126/science.1185782>, 2010.
- Olczak, B. and Hanzl, M.: Adaptation to climate change—a challenge for small towns, in: *The urban book series*, 497–520, https://doi.org/10.1007/978-3-031-77752-3_25, 2025.
- [Pasquier, U., Nicholls, R. J., Lincke, D., Hinkel, J., Toimil, A., Heslop, J., Camila.: Beyond the bathtub: assessment of broad-scale coastal inundation modeling with flood attenuation, Coastal Research Library, 455–461, https://doi.org/10.1007/978-3-032-15477-4_69, 2026.](#)

- 885 Powell, E. J., Tyrrell, M. C., Milliken, A., Tirpak, J. M., and Staudinger, M. D.: A review of coastal management approaches to support the integration of ecological and human community planning for climate change, *J. Coast. Conserv.*, 23, 1–18, <https://doi.org/10.1007/s11852-018-0632-y>, 2018.
- Rabelo, T. O., Túlio, M., Gabriela, I., Luiza, M., Queiroz, L. S., Paulo, , and Pereira, P.: Risk of degradation and coastal flooding hazard on geoheritage in protected areas of the semi-arid coast of Brazil, *Water*, 15, 2564, <https://doi.org/10.3390/w15142564>, 2023.
- 890 REDEGEO – App para Rede Geodésica Digital: <http://labsim.unipampa.edu.br/redegeo>, 2020.
- Soares, M. and Amaro, V. E.: Geodetic network for coastal monitoring of setentrional littoral of Rio Grande do Norte state, *Bol. Ciênc. Geodésicas*, 17, 571–585, <https://doi.org/10.1590/S1982-21702011000400005>, 2011.
- Rodríguez, M. G., Nicolodi, J. L., Gutiérrez, O. Q., Cánovas Losada, V., and Espejo Hermosa, A. E.: Brazilian coastal processes: wind, wave climate and sea level, in: *Brazilian Beach Systems*, Short, A. D. and Klein, A. H. da F. (Eds.), Coastal Research Library, vol. 17, Springer, Cham, 37–66, https://doi.org/10.1007/978-3-319-30394-9_2, 2016.
- 895 Rouse, H., Bell, R., Lundquist, C., Blackett, P., Hicks, D., and King, D.-N.: Coastal adaptation to climate change in Aotearoa-New Zealand, *N. Z. J. Mar. Freshw. Res.*, 51, 183–222, <https://doi.org/10.1080/00288330.2016.1185736>, 2016.
- Sanders, B. F., Oliver, , and Bates, P. D.: Flooding is not like filling a bath, *Earth’s Future*, 12, e2024EF005164, <https://doi.org/10.1029/2024EF005164>, 2024.
- 900 Scardino, G., Anzidei, M., Petio, P., Serpelloni, E., De Santis, V., Rizzo, A., Liso, S. I., Zingaro, M., Capolongo, D., Vecchio, A., Refice, A., and Scicchitano, G.: The impact of future sea-level rise on low-lying subsiding coasts: a case study of Tavoliere delle Puglie (southern Italy), *Remote Sens.*, 14, 4936, <https://doi.org/10.3390/rs14194936>, 2022.
- Scheiber, L., Hoballah Jalloul, M., Jordan, C. de, Nguyễn, H. Q., and Schlurmann, T.: The potential of open-access data for flood estimations: uncovering inundation hotspots in Ho Chi Minh City, Vietnam, through a normalized flood severity index, *Nat. Hazards Earth Syst. Sci.*, 23, 2313–2332, <https://doi.org/10.5194/nhess-23-2313-2023>, 2023.
- 905 Shen, Y., Tahvildari, N., Morsy, M. M., Huxley, C., Chen, T. D., and Goodall, J. L.: Dynamic modeling of inland flooding and storm surge on coastal cities under climate change scenarios: transportation infrastructure impacts in Norfolk, Virginia USA as a case study, *Geosciences*, 12, 224, <https://doi.org/10.3390/geosciences12060224>, 2022.
- 910 ~~Schmid, K.: Mapping and portraying inundation uncertainty of bathtub-type models, *J. Coast. Res.*, 30, 548–561, <https://doi.org/10.2112/JCOASTRES-D-13-00118.1>, 2013.~~
- Smith, K.: *Environmental hazards: assessing risk and reducing disaster*, 3rd Edn., Routledge, London, 2001.
- Silva, J.P., Araújo, P.V.N., Diniz, M. T. M., and Santos, J. Y.: Projection and assessment of the physical impacts resulting from sea-level rise by the year 2100 in the urban area of Grossos, *Rev. Geociênc. Nordeste*, 10, 206–214, <https://doi.org/10.21680/2447-3359.2024v10n2id37699>, 2024.
- 915 Silva, T.C.L., Diniz, M. T. M., Araújo, P.V.N., and Ferreira, B.: Marine hydraulic process modelling using SMC-Brasil on the semi-arid Brazilian coast, *Geosciences*, 15, 344, <https://doi.org/10.3390/geosciences15090344>, 2025.

- SMC-Brasil – Sistema de Modelagem Costeira: coastal modeling system and data for the Brazilian coast, Environmental Hydraulics Institute (Universidad de Cantabria) / Ministério do Meio Ambiente (Brazil), <http://smcbrasil.ihcantabria.com/downloads/>, last access: 2024, 2025.
- Soares, Campos, C. C., Bastos, P., Barroso, H. S., Rozane Valente Marins, Teixeira, C., Ozileia, M., de, L., de, M., Caroline Vieira Feitosa, Jorge Iván Sánchez-Botero, Ernesto, L., Cristina, Matthews-Cascon, H., de, F., Adryane Gorayeb, Mariany Sousa Cavalcante, Moro, M., Rossi, S., and Belmonte, G.: Challenges and perspectives for the Brazilian semi-arid coast under global environmental changes, *Perspect. Ecol. Conserv.*, 19, 267–278, <https://doi.org/10.1016/j.pecon.2021.06.001>, 2021.
- Souza, C. M., Shimbo, J. Z., Rosa, M. R., Parente, L. L., Alencar, A., Rudorff, B. F. T., Hasenack, H., Matsumoto, M., Ferreira, L. G., Souza-Filho, P. W. M., de Oliveira, S. W., Rocha, W. F., Fonseca, A. V., Marques, C. B., Diniz, C. G., Costa, D., Monteiro, D., Rosa, E. R., Vélez-Martín, E., and Weber, E. J.: Reconstructing three decades of land use and land cover changes in Brazilian biomes with Landsat archive and Earth Engine, *Remote Sens.*, 12, 2735, <https://doi.org/10.3390/rs12172735>, 2020.
- Stephens, S. A., Paulik, R., Reeve, G., Wadhwa, S., Popovich, B., Shand, T., and Haughey, R.: Future changes in built environment risk to coastal flooding, permanent inundation and coastal erosion hazards, *J. Mar. Sci. Eng.*, 9, 1011, <https://doi.org/10.3390/jmse9091011>, 2021.
- Su, W.-R., Chen, Y.-H., Fu, H.-S., Chang, T.-Y., and Chen, W.-B.: Assessing the inundation risk of cultural heritages along the southwestern coast of Taiwan: present and future, *Reg. Environ. Change*, 24, 2, <https://doi.org/10.1007/s10113-024-02204-9>, 2024.
- Terres de Lima, L., Fernández-Fernández, S., Gonçalves, J. F., Magalhães Filho, L., and Bernardes, C.: Development of tools for coastal management in Google Earth Engine: uncertainty bathtub model and Bruun rule, *Remote Sens.*, 13, 1424, <https://doi.org/10.3390/rs13081424>, 2021.
- Turner, B. L., Matson, P. A., McCarthy, J. J., Corell, R. W., Christensen, L., Eckley, N., Kaspersen, R. E., Luers, A., Lovejoy, T., and Martello, M. L.: A framework for vulnerability analysis in sustainability science, *Proc. Natl. Acad. Sci. USA*, 100, 8074–8079, <https://doi.org/10.1073/pnas.1231335100>, 2003.
- Ukoba, K., Onisuru, O. R., Jen, T.-C., Madyira, D. M., and Olatunji, K. O.: Predictive modeling of climate change impacts using artificial intelligence: a review for equitable governance and sustainable outcome, *Environ. Sci. Pollut. Res.*, <https://doi.org/10.1007/s11356-025-36356-w>, 2025.
- Vernimmen, R. and Hooijer, A.: New LiDAR-based elevation model shows greatest increase in global coastal exposure to flooding to be caused by early-stage sea-level rise, *Earth's Future*, 11, <https://doi.org/10.1029/2022EF002880>, 2023.
- Vital, H.: The mesotidal barriers of Rio Grande do Norte, in: *Geology and Geomorphology of Holocene Coastal Barriers of Brazil*, Muehe, D. (Ed.), Springer, 107, 227–260, https://doi.org/10.1007/978-3-540-44771-9_9, 2009.
- Vital, H., Rocha, G. R., and Plácido, J. S.: Morphodynamics of Arrombado tidal inlet, Macau-RN (NE Brazil), *Proc. Coast. Sediments*, 2011, 327–338, https://doi.org/10.1142/9789814355537_0025, 2011.

Vousdoukas, M. I., Mentaschi, L., Voukouvalas, E., Verlaan, M., Jevrejeva, S., Jackson, L. P., and Feyen, L.: Global probabilistic projections of extreme sea levels show intensification of coastal flood hazard, *Nat. Commun.*, 9, 2360, <https://doi.org/10.1038/s41467-018-04692-w>, 2018.

Williams, L. L. and Lück-Vogel, M.: Comparative assessment of the GIS-based bathtub model and an enhanced bathtub model for coastal inundation, *J. Coast. Conserv.*, 24, 2, <https://doi.org/10.1007/s11852-020-00735-x>, 2020.

Wisner, B., Gaillard, J. C., and Kelman, I. (Eds.): *Handbook of hazards and disaster risk reduction*, Routledge, <https://doi.org/10.4324/9780203844236>, 2012.

Yang, L., Jin, T., and Jiang, W.: ASM-SS: the first quasi-global high-spatial-resolution coastal storm surge dataset reconstructed from tide gauge records, *Earth Syst. Sci. Data*, 17, 2793–2807, <https://doi.org/10.5194/essd-17-2793-2025>, 2025.

Yunus, A., Avatar, R., Kraines, S., Yamamuro, M., Lindberg, F., and Grimmond, C.: Uncertainties in tidally adjusted estimates of sea-level rise flooding (bathtub model) for Greater London, *Remote Sens.*, 8, 366, <https://doi.org/10.3390/rs8050366>, 2016.