

Evidence of Vertical Soil Hydraulic Heterogeneity Regulating Hydrothermal Simulations in Qinghai–Tibetan Plateau Wetlands

Rong Liu^{1,2}, Xin Wang¹, Zuoliang Wang¹, Yongjie Pan¹ and Yan Song²

¹ State Key Laboratory of Cryospheric Science and Frozen Soil Engineering, Northwest Institute of Eco–Environment and Resources, Chinese Academy of Sciences, Lanzhou 730000, China.

² Department of City and Regional Planning, University of North Carolina at Chapel Hill, Chapel Hill, North Carolina 27599, USA.

Correspondence: Rong Liu Email: rongliu0420@gmail.com

1. Introduction

The Qinghai–Tibetan Plateau, known as the “Asian Water Tower,” hosts extensive wetlands that play a vital role in water conservation and carbon storage. These wetlands regulate the regional climate via evapotranspiration and land atmosphere energy exchanges and influence the downstream river hydrology at the basin scale (Yang et al., 2018). Compared with mineral soils of sand, silt, and clay, plateau wetlands form under persistently low temperature and near saturation. Sphagnum and woody residues create a loose, porous, three dimensional network with large surface area. Surface macropores drive preferential flow, rapid infiltration, and drainage, whereas the matrix retains water mainly in mesopores and micropores (Holden, 2009). Consequently, unsaturated hydraulic conductivity and pore connectivity respond strongly to water status and show pronounced heterogeneity, dual porosity, preferential flow, and hydraulic hysteresis (McCarter et al., 2020). Although these characteristics have been widely investigated in soil physics, their responses and impacts in land surface modeling remain insufficiently explored (Rezanezhad et al., 2009; Yang et al., 2018). This limitation is not confined to specific regions but represents a general problem in global land surface

models. Recent research has shown that current Earth system models have structural and parameterization deficiencies in terms of representing soil hydrological processes (Vereecken et al., 2022). Soils are often treated as homogeneous media, making it difficult for models to describe the multiscale pore structures and unsaturated flow, and many soil hydraulic parameters are derived empirically rather than constrained by physical measurements. These issues lead to systematic biases when simulating water–energy processes in complex ecosystems. Therefore, considering the unique hydraulic features of wetland soils, assessing how soil hydraulic properties and parameterization schemes contribute to uncertainties in current land surface simulations is essential.

Soil hydraulic properties are key factors that control the exchange of water and energy between the land surface and the atmosphere. In land surface models (LSMs), these properties are typically represented by the water retention curve (WRC) and the hydraulic conductivity curve (HCC). Although they are mathematically expressed as simple functional relationships, these properties control almost all of the processes related to soil water movement, including the infiltration and drainage rates, vertical soil moisture distribution, capillary recharge capacity, and evapotranspiration intensity (Shao and Irannejad, 1999). In other words, the parameterization of the water retention and hydraulic conductivity curves largely determines the model’s performance when simulating hydrothermal processes, and improving these functions is therefore critical for reducing simulation bias.

Widely used soil hydraulic parameterizations in LSMs include those of Brooks Corey (BC; Brooks and Corey, 1964), Clapp–Hornberger (CH; Clapp and Hornberger,

1978), van Genuchten (VG; van Genuchten, 1980), and Kosugi (1994). BC assumes that the soil remains fully saturated up to the air entry pressure. Beyond that threshold, the hydraulic conductivity and matric potential decrease according to power laws. The scheme is simple but introduces a discontinuity across the wet–dry transition. VG represents the relationship between water potential and water content relation with a smooth, continuous function and is often coupled with the Mualem conductivity model (Mualem, 1976). It performs well over a wide suction range and fits data accurately, but it uses more parameters and relies strongly on measurements. Assuming a lognormal distribution of pore radii, the Kosugi model yields closed form expressions for the retention and conductivity curves. It has a stronger physical basis and captures the multiscale pore structure, but it is computationally heavier and harder to parameterize. CH describes the water retention and hydraulic conductivity curves with power laws using only a few parameters (index b , saturated water content θ_s , air entry suction ψ_s and saturated hydraulic conductivity K_s). It is efficient, needs fewer inputs, and can be initialized from texture lookup tables, which is useful when observations or computing resources are limited. Because of this simplicity and efficiency, CH has been widely implemented in mainstream LSMs such as Noah-MP and CLM and is used at global and regional scales for soil hydrothermal simulations, particularly where data are scarce (Dai et al., 2003; Niu et al., 2011).

While more physically based options (e.g., VG and Kosugi) are available, many operational LSM configurations still default to simplified empirical hydraulic functions for reasons of efficiency and data availability. In such settings, CH is a common choice.

69 However, as an empirical statistical formulation, CH provides only a limited physical
70 representation of the pore size distribution and connectivity (Vereecken et al., 2022).
71 Near saturation, it cannot capture preferential flow driven by macropores or the
72 associated rapid infiltration and drainage. In the dry range, its steep power law tail tends
73 to overestimate matric suction and underestimate water retention (Durner, 1994; Tuller
74 and Or, 2001). Three-dimensional X-ray CT (including micro-CT) analyses are
75 consistent with this picture: macropore networks dominate drainage and infiltration
76 under wet conditions, whereas meso- and micropores control retention and slow release
77 under dry conditions (Wildenschild and Sheppard, 2013; Gharedaghloo et al., 2018).
78 Consequently, prescribing a single b value according to the texture class or uniformly
79 across the soil profile, as is common in many LSMs, fails to represent the interlayer
80 variations caused by the vertical heterogeneity in pore size and connectivity. Although
81 the measured water retention curve, hydraulic conductivity curve, and pore size
82 distribution (PSD) can reveal these vertical structural features and their mechanisms, a
83 CH parameterization with a uniform b value still cannot adequately represent the
84 properties of highly organic, multiscale wetland soils (Van Looy et al., 2017).

85 Global evaluations indicate that the performance of Noah-MP is highly sensitive
86 to the choice of parameterizations. Soil hydraulic schemes, in particular, strongly affect
87 soil water availability, surface energy partitioning, and performance in arid regions (Li
88 et al., 2022; Vereecken et al., 2022). In addition, global high-resolution datasets of soil
89 hydraulic properties and improved pedotransfer functions (PTFs) support regional
90 scheme selection and parameter assignment (Dai et al., 2019; Van Looy et al., 2017).

For grasslands and sparsely vegetated areas (including semiarid and desert margins), refining the hydraulic parameterization, together with capillary recharge and plant hydraulics, has been shown to systematically improve the GPP, soil moisture, and surface energy flux simulations (Li et al., 2021; Farmani et al., 2025). For peat and other organic soils, implementing relationships that are specific to peat and including a dynamic shallow water table in LSMs markedly improves water table dynamics and energy fluxes (Chadburn et al., 2015; Largeron et al., 2018). Multisource evaluation of Noah-MP over China further reveals better performance in humid regions than in arid and cold regions, yet substantial biases remain there as well, with soil hydraulic parameterization and input accuracy being major contributors (Liang et al., 2019).

On the Qinghai–Tibetan Plateau, many field studies have investigated how grazing, land degradation, and freeze–thaw cycles affect the soil pore structure, saturated hydraulic conductivity, and the shape of the water retention curve. For example, moderate degradation or a denser root mat can increase the near surface water retention and steepen the retention curve, whereas heavy grazing markedly reduces the surface porosity and saturated conductivity (Li et al., 2006; Zeng et al., 2013; Pan et al., 2017). Studies that combine eddy covariance fluxes with deep soil moisture profiles have also shown that grazing decreases the leaf area and transpiration, allowing deeper layers to retain more water during dry periods and helping to sustain higher productivity (Zhang et al., 2019). However, most of this work focuses on mechanisms of change in hydraulic properties. Few studies have explicitly inserted measured or inversely estimated hydraulic parameters into LSMs to systematically test their impact on simulated

hydrothermal fluxes. Recent research highlights that uncertainty in soil hydrology is now a key bottleneck for model accuracy (Vereecken et al., 2022); thus, to improve the physical consistency, we need datasets of measured and inversely estimated hydraulic parameters and model tests that verify the applicability of empirical schemes. A further issue concerns soil classification. Plateau soils may be labeled as loamy sand on the basis of particle size fractions from sieve analysis. However, their high organic matter and humus contents make their thermal, mechanical, and rheological behaviors very different from those of mineral soils. If hydraulic parameters are assigned from lookup tables based on soil texture that were developed for mineral soils, large errors can arise.

Building on the above background, this study focuses on the typical alpine wetland soils of the Qinghai–Tibetan Plateau. We conducted laboratory isothermal evaporation experiments to obtain the measured water retention and hydraulic conductivity curves for layered soils. From these data, we inversely estimated key CH parameters, including b , θ_s , and K_s , and derived the PSD and pore radius. We then embedded the measured surface and subsurface layer parameters into Noah-MP. Sensitivity experiments were designed for the full summer season and for representative wet and dry episodes. These experiments quantify the impact of parameterization by layer on latent heat flux (LHF) and sensible heat flux (SHF), and a joint analysis of the WRC, HCC, and PSD clarifies how vertical heterogeneity in pore structure governs model performance. The results provide quantitative evidence and a physical basis for incorporating more mechanistic soil hydraulic schemes into LSMs and offer a verifiable pathway to improve regional

hydrothermal simulations over the Qinghai–Tibetan Plateau and similar complex ecosystems.

2. Study area and methods

2.1 Site description

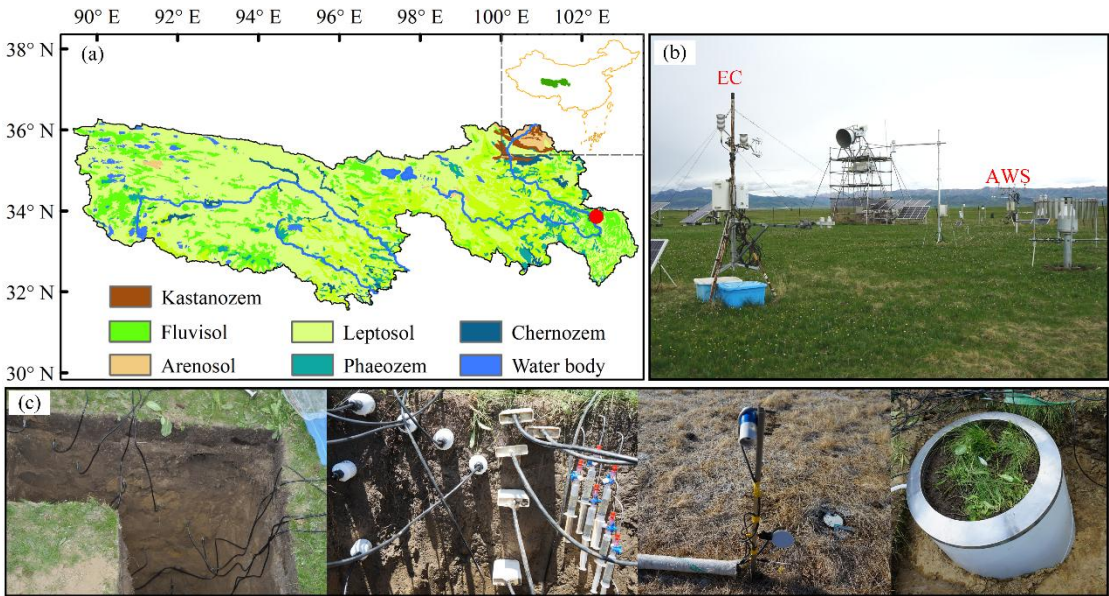


Fig. 1. Soil classification in the Sanjiangyuan region and overview of the observation site. (a) Spatial distribution of main soil types in the Sanjiangyuan region; (b) summer view of the station and main observation systems, including the eddy covariance (EC) and automatic weather station (AWS); (c) soil profile and monitoring instruments at the observation site, including soil temperature and moisture profile sensors, infrared surface temperature sensors, and a lysimeter.

The Sanjiangyuan region, located in the interior of the Qinghai–Tibetan Plateau, is the headwater area of the Yellow, Yangtze, and Lancang Rivers and is a major ecological barrier in China. The region covers $\sim 3.6 \times 10^5 \text{ km}^2$ ($89^\circ\text{--}103^\circ\text{E}$, $32^\circ\text{--}36^\circ\text{N}$), with a mean elevation exceeding 3000 m. The wetlands are widespread, and according to the hydrologic classification of Vepraskas and Craft (2016), most are surface-water-fed systems. In studies of wetlands at high latitudes, the term peat is often used to denote wetland soils rich in organic matter. It is a broad ecological term rather than a strict soil taxon (Mitsch and Gosselink, 2015). Based on the FAO/UNESCO Soil Map of the

World, hydric soils and Leptosols account for 12.88% and 71.51% of the area, respectively, with water bodies constituting 6.54% and other soils constituting 9.07% (Fig. 1a) of the area. Hydric soils indicate mature wetland environments, whereas Leptosols have shallow profiles and weak pedogenesis.

Field observations were conducted at the Sanjiangyuan Land Surface Process Observation Station (denoted by the red dot in Fig. 1a), which is located in Maqu County (33.5° N, 101.9° E; elevation 3436 m). For 1967–2017, the mean annual precipitation was ~604 mm, and the mean air temperature was 1.8 °C. The near surface soils are characterized by abundant plant residues, high porosity, low bulk density and high organic matter content (Fig. 3c). The study site is located within this typical alpine wetland setting and is therefore representative of wetlands with similar hydro-pedological characteristics in the eastern Qinghai–Tibetan Plateau (Wang et al., 2024).

~~To characterize the vertical soil structure, a total of 11 undisturbed soil cores were collected along the profile at different depths.~~ To characterize the vertical soil structure, a total of 11 undisturbed soil cores were collected from 11 depth intervals, with one core collected from each interval ($n = 1$ per depth). The lack of within-depth replication limits the quantification of local spatial variability. Therefore, the observed vertical patterns should be interpreted as profile-scale evidence from the study site.

The instrumentation includes the eddy covariance (EC), an automatic weather station, infrared radiometers, and soil temperature/moisture profiles (Fig. 1b), where the EC system comprised an EC150 open path gas analyzer, CSAT3 sonic anemometer, and NR01 four component radiometer, together with HMP155A air

temperature/relative humidity sensors (Campbell Scientific, USA). The soil profiles were monitored by using CS616 volumetric water content probes and 109L temperature sensors. In addition, infrared surface temperature sensors, soil heat flux plates, and an evaporation lysimeter were deployed to monitor the surface energy and water processes (Fig. 1c). The variables used in this study included the LHF and SHF, air temperature and relative humidity at 2 m, surface temperature, soil water content at 5/10/20/40/80 cm, and precipitation.

All eddy-covariance fluxes underwent standardized quality control, including Webb–Pearman–Leuning (WPL) correction, three-dimensional coordinate rotation, time lag compensation, stationarity tests, and turbulence intensity screening, to remove biases from the sensor response delays, wind direction misalignment, and nonstationary turbulence. Regarding the capacitive/dielectric soil moisture sensors, which are often underestimated at high water contents or near saturation, we conducted concurrent gravimetric sampling and derived calibration curves relating the sensor outputs to the gravimetric volumetric water content, and the raw soil moisture data were then statistically corrected. These procedures ensured the physical consistency and uniform spatiotemporal resolution of the dataset, providing a reliable basis for subsequent model evaluation and analysis.

2.2 CH hydraulic scheme

The CH parameterization represents the soil hydraulic properties by using a variant of the Brooks–Corey model. The water retention curve is expressed as a power law relationship between the soil matric potential (ψ) and volumetric water content (θ):

$$|\psi| = \psi_s \left(\frac{\theta}{\theta_s} \right)^{-b} \quad (1)$$

where ψ (cm H₂O) is the matric potential (taken as positive), which represents the capillary suction of the soil; ψ_s (cm H₂O) is the air entry suction, which defines the critical suction at the onset of drainage; $\theta(-)$ is the volumetric water content; $\theta_s(-)$ is the saturated volumetric water content; and $b(-)$ is the empirical exponent, which controls the slope of the water retention curve in the dry range and indirectly reflects the concentration of the soil pore size distribution.

The corresponding hydraulic conductivity curve is expressed as follows:

$$K(\theta) = K_s \left(\frac{\theta}{\theta_s} \right)^{2b+3} \quad (2)$$

where $K(\theta)$ (cm/s) is the unsaturated hydraulic conductivity, K_s (cm/s) is the saturated hydraulic conductivity, and the other variables are as defined above. This equation is derived from a simplified form of the Mualem model, assuming that the conductivity decreases exponentially with decreasing θ . The exponent term $(2b + 3)$ reflects both the pore connectivity and tortuosity, where the constant “3” represents a fixed baseline and “ $2b$ ” scales with the sensitivity to the pore size distribution.

In Noah-MP, the CH scheme is used to simulate unsaturated flow and coupled heat and water transport by combining the water retention and hydraulic conductivity curves formulations. However, it neglects certain processes, such as thin film flow under very dry conditions, and does not explicitly represent the multimodal pore size distributions, which may lead to systematic biases when simulating water and energy fluxes, particularly in wetland soils rich in organic matter.

2.3 Physicochemical measurements

A total of 11 undisturbed soil cores were collected along the soil profile, covering depths from the surface to 160 cm. Each core corresponds to a specific depth interval, as summarized in Table 3, forming a complete vertical sampling framework for subsequent measurements.

The soil organic carbon (SOC) was measured by the potassium dichromate oxidation method with external heating. Specifically, 2 g of soil with fibers removed was weighed, mixed with 0.4 mol/L $\text{K}_2\text{Cr}_2\text{O}_7\text{-H}_2\text{SO}_4$ solution, and heated to boiling in an oil bath. A small amount of o-phenanthroline indicator was added, and the residual solution was titrated with 0.1 mol/L standard ferrous sulfate solution. The amount consumed was obtained from the back titration and converted into the SOC content.

The fiber content (FC) was determined using the von Post method (Page et al., 1982) together with manual fiber separation. The fibrous material was isolated by hand rubbing and sieving, the nonfibrous fractions were removed, and the fibers were dried in an oven and weighed.

The bulk density (BD) was measured with the ring core method. Saturated intact cores were dried in an oven at 105 °C for 48 h, and the BD was calculated as the dry mass divided by the ring volume. The units were kept consistent across samples. The particle size distribution was determined by the hydrometer method. The soil samples were dispersed into a suspension and allowed to settle at a constant temperature, and hydrometer readings were taken at prescribed times to calculate the percentages of sand, silt, and clay.

2.4 Measurements of K_s and θ_s



Fig. 2. Laboratory measurement instruments. (a) KSAT Hydraulic conductivity measurement; (b) HYPROP 2 Evaporation experiment; (c) WP4C Dew point water potential meter.

The K_s was measured with the falling head method based on Darcy's law (Fig. 2a). A standpipe of constant cross section was connected to the soil core, and we recorded the decline in the hydraulic head over time. The volumetric flow through the sample was computed from the record of head versus time, and K_s was obtained accordingly. Undisturbed field cores were placed in 250 cm³ rings. The water level was kept slightly above the sample surface, and the cores were degassed for 6 h to ensure saturation. An initial head was then applied. The instrument recorded the exponential decay of the head in automatic mode until the stop criterion was met. The KSAT has precision pressure sensors with an resolution of 1 Pa (approximately 0.01 cm water column) and a temperature sensor. The software applied temperature and viscosity correction. K_s was calculated from an exponential fit using:

$$K_s = \frac{A_{bur}}{A_{sample}} L \cdot b \quad (3)$$

where A_{bur} is the cross sectional area of the standpipe, A_{sample} is the cross sectional area of the soil core, L is the sample length, and b is the fitted slope of the exponential head decline. The procedure was highly automated to avoid manual reading errors and is suitable for soils with a wide range of permeability.

The θ_s was determined by a gravimetric procedure. After degassing and

saturation, the intact cores were allowed to equilibrate for 24 h, dried in an oven at 75 °C for 48 h and weighed with an analytical balance. The gravimetric water content was computed as the increase in mass due to water (saturated mass minus the mass after oven drying) divided by the mass after oven drying. The BD was obtained as the mass after oven drying divided by the ring volume, and the θ_s was then calculated as the gravimetric water content multiplied by the BD.

2.5 Evaporation experiment and simplified evaporation method

We estimated the ψ_s and index b required by the CH scheme by using a transient evaporation experiment combined with the simplified evaporation method (SEM) (Peters et al., 2008; Peters et al., 2015). The SEM relied on four simplifying assumptions during the experiment: (i) the matric potential and water content vary linearly with depth; (ii) the vertical water flux varies linearly with depth; (iii) over short time steps, the suction changes linearly with time; and (iv) the evaporation rate remains approximately constant over short time steps. These assumptions provided the basis for inverting the unsaturated hydraulic conductivity from a limited number of tensiometer readings and concurrent mass loss data.

To obtain the near saturated (low suction) segment of the water retention curve , we used a HYPROP-2 system (Fig. 2b) to monitor the matric potential and sample mass during free evaporation of the intact cores under controlled temperature and wind speed. Two tensiometers installed at depths Z_1 and Z_2 recorded the matric potentials h_1 and h_2 in real time, while an electronic balance simultaneously logged the sample mass. These

measurements were used to derive the temporal evolution of the average volumetric water content (θ_i) and evaporation flux (q).

The average volumetric water content (θ_i) was obtained as the arithmetic mean as follows:

$$\bar{\theta}_{i-1/2} = \frac{\theta_i + \theta_{i-1}}{2} \quad (4)$$

To improve the accuracy of the mean suction $\bar{h}_{i-1/2}$ at intermediate suction stages, the average soil water potential $\bar{h}_{i-1/2}$ was computed by using the geometric mean:

$$\bar{h}_{i-1/2} = \frac{\sqrt{(h_{1,i} + h_{1,i-1}) \cdot (h_{2,i} + h_{2,i-1})}}{2} \quad (5)$$

Assuming that the evaporation flux varies approximately linearly with depth, the flux at the sample center $\hat{q}_{c,i-1/2}$ was taken as half of the total evaporation flux.

$$\hat{q}_{c,i-1/2} = \frac{q_{0,i-1/2}}{2} = \frac{L}{2} \frac{\theta_i - \theta_{i-1}}{\Delta t_{i-1/2}} \quad (6)$$

The suction gradient was derived from the difference between the mean suctions measured by two tensiometers as follows:

$$\nabla H_{i-1/2} = \frac{\bar{h}_{1,i-1/2} - \bar{h}_{2,i-1/2}}{z_2 - z_1} - 1 \quad (7)$$

The unsaturated hydraulic conductivity was then calculated by using the Darcy–Buckingham law.

$$K_{i-1/2} = \frac{-\hat{q}_{c,i-1/2}}{\nabla H_{i-1/2}} \quad (8)$$

Because the measurement range of HYPROP-2 covers only the near saturated domain (low suction range), additional data for the dry range (–0.1 MPa to –300 MPa) were obtained by using a WP4C dew point potentiometer (Fig. 2b2c), corresponding to the transition from capillary to adsorbed water under low moisture conditions. After merging the HYPROP-2 and WP4C datasets, the continuous water retention and

hydraulic conductivity curves were inversely estimated using a single run of the shuffled complex evolution (SCE-UA) global optimization algorithm. The potential non-uniqueness and uncertainty of the inferred parameter sets were subsequently assessed using a Markov chain Monte Carlo (MCMC) approach (Duan et al., 1992; Wang et al., 2024).

2.6 Calculation of the analysis metrics

Based on the water retention and hydraulic conductivity curves obtained for the surface and subsurface soils, this study derived two diagnostic indices, the effective power law exponent and the near saturated connectivity index, to characterize the state dependence and interlayer variability of the soil hydraulic properties and to clarify the role of parameter specification when shaping the model responses.

The effective power law exponent (b_{eff}) was computed by following the local logarithmic slope method proposed by Peters et al. (2015), with saturation defined as $S = \theta/\theta_s$. Based on the CH formulation, it is expressed as:

$$b_{eff}(S) = -\frac{d\ln|\psi|}{d\ln S} \quad (9)$$

The derivatives were calculated by using a central difference scheme combined with Savitzky–Golay filtering for smoothing.

Following the conceptual framework of Assouline and Or (2013) regarding near saturated hydraulic connectivity, we introduced a near saturated connectivity index (NSC), defined as follows:

$$NSC = \frac{K_{90}}{K_{50}} \quad (10)$$

where K_q denotes the geometric mean hydraulic conductivity at the q -th percentile (± 0.05 range) of saturation, which represents the degree of pore connectivity under near saturated conditions. The physical interpretation of the NSC is analogous to the ratio $K_{s, str}/K_{s, tex}$ proposed by Fatichi et al. (2020), as both describe the contribution of macropore connectivity to the total conductivity. The difference is that the NSC is derived from measured conductivity variations within the same soil sample under near saturated and intermediate moisture conditions, whereas Fatichi's ratio separates the structural and textural controls on saturated conductivity through parameter decomposition.

2.7 Equivalent pore radius and pore size distribution

The equivalent pore radius (r) was calculated from the soil matric potential (h) by using the Young–Laplace equation (Hillel, 1988):

$$r = -\frac{2\sigma \cos \varphi}{\rho gh} \quad (11)$$

where r is the equivalent radius (cm), σ is the surface tension of water (0.072 N/m), φ is the contact angle (assumed to be perfectly wetting, i.e., $\cos \varphi = 1$), ρ is the density of water (1.0 g/cm³), g is the gravitational acceleration (980 cm/s²), and h is the matric potential (cm, negative for suction). Under these constants and assumptions, Eq. (11) can be simplified as follows:

$$r \approx \frac{0.149}{|h|} \quad (12)$$

The equivalent radius represents an idealized one-to-one correspondence between the suction and pore diameter when the soil pores are conceptualized as cylindrical capillaries. It therefore characterizes the statistical scale of the pore sizes rather than

their actual geometric form.

The PSD was derived from the water retention curve. First, the soil matric potential (h) in the water retention curve was converted to the equivalent pore radius (r) by using the Young–Laplace equation. Subsequently, the derivative of the volumetric water content with respect to $\log r$ was obtained as follows:

$$PSD = -\frac{d\theta(r)}{d(\log_{10} r)} \quad (13)$$

The peaks of the resulting PSD curve correspond to different pore size modes.

2.8 Model experimental design

To evaluate the influence of the soil hydraulic parameters on the simulation of hydrothermal processes in alpine wetlands, a series of single point sensitivity experiments were conducted by using the offline version of the Noah-MP land surface model (v5.0). The model was driven and initialized with field observations from the Land Surface Process Observation Station. A temporal resolution of 30 min meteorological forcing data included the precipitation, air temperature, relative humidity, wind speed, and downward shortwave and longwave radiation, and all forcing data were uniformly formatted, temporally aligned, and screened for outliers, with missing values filled via linear interpolation. The initial soil moisture and temperature profiles were obtained directly from in situ measurements to ensure that the initial state of the model was consistent with the observations. The 2023 precipitation, air temperature, and observed soil-moisture conditions remained within the interannual range of variability at the site, indicating that 2023 provided a climatically representative background for the model forcing and evaluation. All

simulations are conducted within a single-point framework, and no spatial extrapolation of soil hydraulic parameters is performed.

With the exception of the parameters perturbed in the sensitivity experiments, all of the other physical processes retained their default Noah-MP values. The major physical process configurations are summarized in Table 1. As the primary objective was to assess the impacts of the soil hydraulic parameters on the summer hydrothermal dynamics in alpine wetlands, the default physics options in Noah-MP were retained to ensure that any model differences arose mainly from changes in the soil hydraulic parameters.

~~Although the frozen-soil process was enabled by default in the model, its direct effect on the surface energy and water balance was negligible during the summer period.~~ Frozen-soil processes were represented using the Niu and Yang (2006) parameterizations for supercooled liquid water and frozen-soil permeability. The sensitivity experiments were restricted to June–August to minimize the influence of active freeze–thaw processes, which were not separately evaluated in this study.

~~Similarly, s~~ Snow processes played only a transient role at the beginning and end of the simulation year, without influencing the summer sensitivity analysis. The vegetation process used the Jarvis stomatal conductance scheme with default lookup table parameters, and the root water uptake and plant physiological parameters were not modified to minimize the influence of the vegetation dynamics on soil moisture and surface fluxes, thereby isolating the direct regulatory effect of soil hydraulic properties.

Table 1. Main physical process configurations in the Noah-MP model

Process type	Scheme name	Reference
Canopy conductance	Jarvis stomatal conductance scheme	Jarvis (1976)
Radiation transfer	Two stream scheme	Niu et al. (2011)
Snowpack process	Single layer snowpack scheme	Yang et al. (1997)
Soil thermal process	Explicit finite difference scheme	Niu and Yang (2006)
Soil moisture movement	Mixed form Richards equation	Niu et al. (2011)
Surface energy balance	Semi-tile scheme	Niu et al. (2011)
Soil hydraulic scheme	Noah-MP default scheme	-

A control experiment (CTL) and six sensitivity experiments were designed (Table 2). A one-at-a-time (OAT) sensitivity approach was adopted in which only one parameter of the CH scheme was replaced in each sensitivity experiment, while all other parameters were kept identical to those in the control run. This design isolated the individual influence of each parameter variation on the simulated hydrothermal processes. Table 2 also summarizes the source, corresponding governing equation, and derivation method of each hydraulic parameter used in the sensitivity experiments.

Table 2. Design of model sensitivity experiments and corresponding parameter sources

Experiment ID	Modified parameter	Parameter value	Description	Source / Equation
CH_CTL	–	Noah-MP default ($b = 4.260$, $K_s = 5.21 \times 10^{-6} \text{ m} \cdot \text{s}^{-1}$, $\psi_s = 0.036 \text{ m}$, $\theta_s = 0.41 \text{ m}^3 \cdot \text{m}^{-3}$)	Control experiment	Noah-MP default
CH_b1	b	3.215	Fitted b value of surface layer	Derived from HYPROP 2 based curve fitting/ (Eq. 1+Eq.2)
CH_b2	b	5.0761	Fitted b value of subsurface layer	
CH_Ks1	K_s	$4.233 \times 10^{-7} \text{ m} \cdot \text{s}^{-1}$	Moderate hydraulic conductivity	Direct measurement

CH_Ks2	K_s	$4.628 \times 10^{-8} \text{ m} \cdot \text{s}^{-1}$	Extremely low hydraulic conductivity	using falling-head method / (Eq. 2)
CH_ ψ_s	ψ_s	0.5155 m	Fitted air-entry suction	Derived from HYPROP 2 based curve fitting/ (Eq. 1)
CH_ θ_s	θ_s	$0.70 \text{ m}^3 \cdot \text{m}^{-3}$	Measured saturated water content	Measured from saturated soil cores

The model outputs included 30-min time series of the soil moisture at depths of 0–10 cm and 10–40 cm, the LHF, and the SHF. The simulated results were compared with the observations, and statistical metrics, including the root mean square error (RMSE), mean bias (Bias), and coefficient of determination (R^2), were calculated. The effects of different hydraulic parameters on the accuracy of the simulated surface hydrothermal processes were evaluated separately under three conditions: the entire season, the wet event, and the dry event.

3. Results

3.1 Soil physical properties

To better understand the structural features of wetland soil, both microscopic imaging and macroscopic characterization were used. The CT scan of a 5 cm surface soil sample from the observation site, which visualizes the complexity of the pore structure, is shown in Fig. 3 (top). The image on the left is a millimeter scale horizontal CT slice showing the cross section of the soil core, and the differences in gray level indicate variations in particle density and porosity. Bright areas represent a compact soil matrix, while dark spots and cracks correspond to pores of different sizes. The color image on the right is a 3-D cylindrical reconstruction based on approximately 3000 CT

slices; the color gradient from blue to red quantifies the pore volume (mm^3), where blue indicates small micropores and red indicates large macropores. The soil clearly shows vertical heterogeneity. The upper layer (0–4 cm) is dominated by micropores and appears dense, while below 4 cm, macropores become more frequent and partly connected.

This multiscale pore structure is shaped by high organic matter content and partially decomposed plant residues. It maintains both a strong water retention capacity and rapid drainage. Large pores, such as cracks and root channels, promote rapid infiltration and preferential flow during the early infiltration stage, accelerating the drainage and solute transport. In contrast, the micropores retain water with capillary forces in later stages, maintaining the soil moisture and affecting evaporation. If the contrasting roles of multiscale soil pores are ignored in the LSMs, it may not only cause biases in soil moisture memory but also disturb the surface energy partitioning, leading to inaccurate simulations of the LHF and SHF and consequently affecting the accuracy of the surface temperature, evaporation rate, and the representation of the wet–dry cycles.

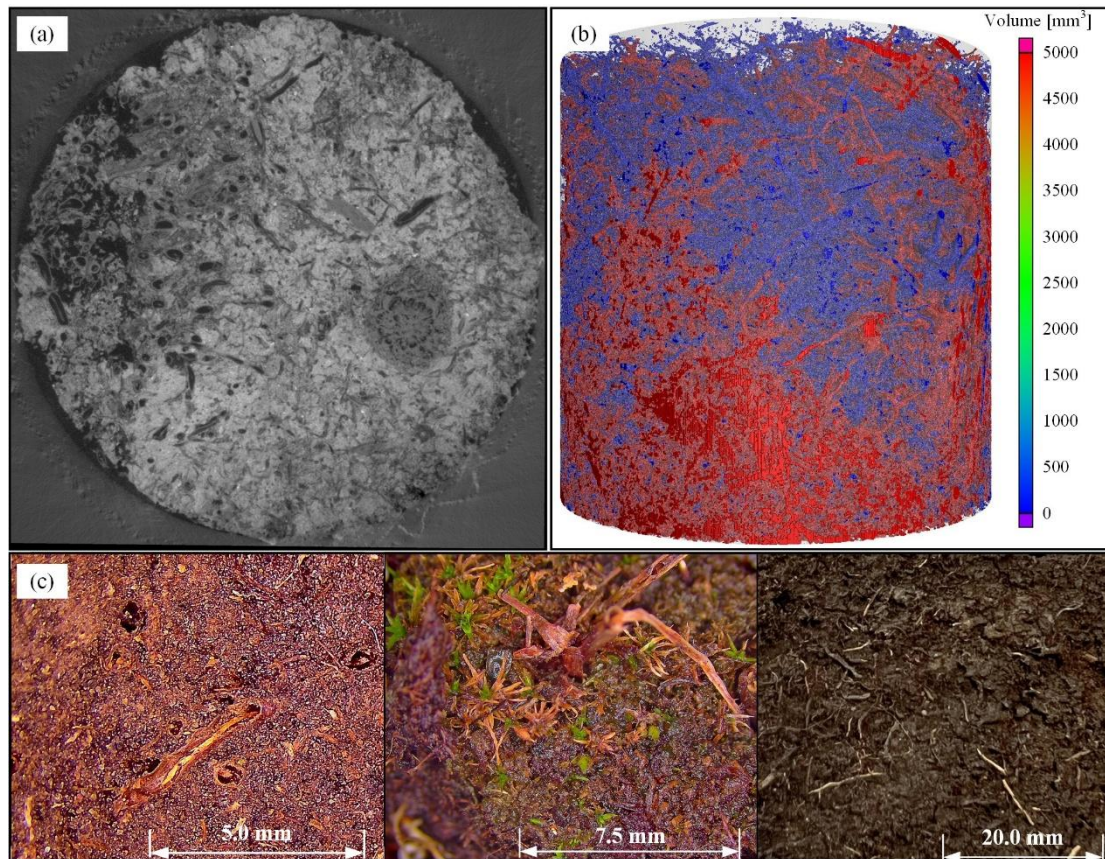


Fig. 3. CT imaging and detailed views of the surface hydric soil in the wetland.

The macroscopic structure of the surface hydric soil in the Qinghai–Tibetan Plateau wetland at different observation scales is shown in Fig. 3 (bottom). At the 5.0 mm scale, elongated root channels and surrounding loose pores are visible, mostly formed by partially decomposed roots. These slender conduits tend to serve as preferential flow paths under alternating wet and dry conditions. At the 7.5 mm scale, densely intertwined sedge roots, litter, and fine plant residues combine with the soil matrix to form many connected biopores, which promote rapid surface infiltration and enhance linkage with macropore networks. At the 20 mm scale (moist state), the soil has a dark-brown to black in which fine root residues and humus are tightly bound, forming a stable micropore network that provides a strong water retention capacity. The

structural features observed at different scales correspond well with the multiscale pore distribution revealed by CT imaging, together forming the hydraulic foundation of the wetland soil's distinctive water flow response.

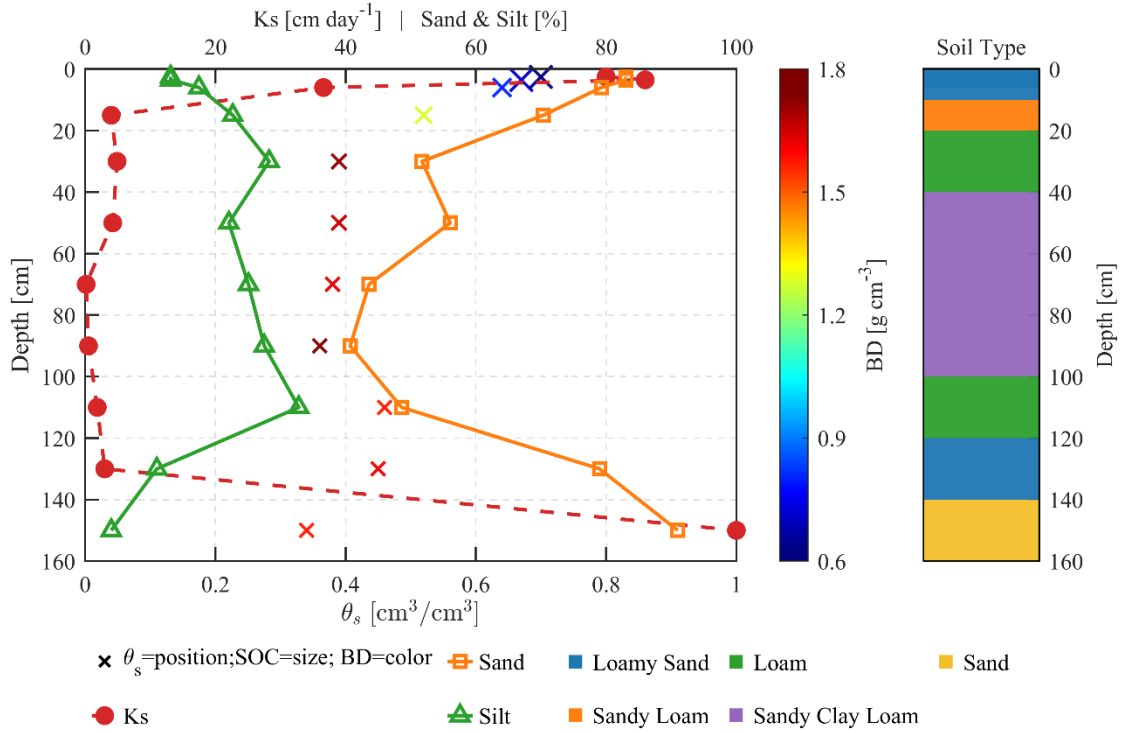


Fig. 4. Vertical distribution of hydraulic properties in the wetland soil (Crosses indicate sampling positions of θ_s ; cross size represents SOC content, and color corresponds to BD. Red circles denote K_s ; orange squares and green triangles represent sand and silt contents, respectively. The colored blocks on the right show the distribution of soil types at different depths (Loamy Sand, Loam, Sand, Sandy Loam, Sandy Clay Loam)).

The vertical distribution of the soil hydraulic properties at the wetland observation site is shown in Fig. 4. In the surface layer (0–8 cm), the θ_s ranged from 0.64–0.70, which is much higher than the typical value of most mineral soils (<0.50). This high θ_s mainly results from the accumulation of organic matter, which increases the porosity and pore connectivity. High θ_s values also enhance water storage and capillary redistribution in the surface layer, delaying surface drying after rainfall and forming a natural water buffer zone. In contrast, mineral soils with closely packed particles have limited water retention capacity and tend to drain quickly after rainfall, leading to rapid

moisture loss. With increasing depth, θ_s decreased to 0.34–0.46 with local fluctuations, approaching the characteristics of mineral soils. This outcome reflects a decrease in organic matter and an increase in mineral particle content with depth, which reduces porosity and accelerates downward percolation.

The K_s in the surface layer ranged from 36.6 to 86 cm/day, much higher than that of typical mineral soils (<10 cm/day). This result indicates the high permeability of the loose and porous organic layer. Such high K_s values allow rapid drainage during rainfall events, reduce surface ponding, and promote water exchange between the surface runoff and shallow groundwater in the wetland microtopography. In contrast, the compact structure and poor pore connectivity of mineral soils limit infiltration and may lead to surface water retention. In the deeper layers, K_s sharply decreased to 0.14 to 4.89 cm/day, indicating a transition from a highly permeable layer to a low permeable layer, similar to a compacted mineral horizon. This gradient plays an important role in regulating water retention and vertical redistribution: the upper layer responds quickly to rainfall, while the lower layer retains water for a longer time but may limit the water supply to deep roots.

The distributions of the BD and SOC further support these observations. The surface layer had a low BD of 0.63 to 0.81 g/cm³ and a high SOC of 45 to 99 g/kg, indicating loose and porous structure rich in organic matter that favors infiltration and root growth. In contrast, the deeper layer had a higher BD (1.57–1.74 g/cm³) and lower SOC (0.88–8.97 g/kg), indicating dense mineral soil with limited water and gas exchange. In terms of particle composition, the surface soil contained high amounts of

sand (40.7–91%) and low amounts of silt (13–17%), forming coarse pores and fast drainage channels, whereas the deeper layer contained lower amounts of sand and higher amounts of silt (22–32.8%), increasing water retention but reducing permeability. This transition from coarse to fine texture is consistent with the decreasing trends of K_s and θ_s .

Overall, the wetland soil clearly has a vertical gradient characterized by high θ_s , high K_s , low BD, and high SOC in the surface layer. Compared with mineral soils, it has stronger water storage and faster hydraulic conductivity, while the deeper layer gradually approaches the physical characteristics of mineral soils. This pronounced vertical gradient controls the wetland's response to rainfall events and provides direct field evidence for the introduction of depth-dependent hydraulic parameterization in land surface models. The variations in these properties also influence key parameters in the CH model, such as the index b and ψ_s , providing a physical basis for the parameter inversion discussed in Section 3.2.

3.2 Hydraulic parameters derived from the evaporation experiment

For each depth specific soil core, the hydraulic parameters are derived from HYPROP 2 based curve fitting rather than from averaging multiple samples, while WP4C measurements are used to validate the dry end behavior of the water retention curves. Fig. 5 shows the vertical distribution of key hydraulic parameters in the CH model, namely the power law index b and the ψ_s , which were derived from the evaporation experiment. The b parameter exhibited pronounced heterogeneity along the

profile: 3.215 in the surface layer (0–6 cm), peaking at 5.076 in the subsurface (10–20 cm), and gradually decreasing with depth to 1.053 at 130–150 cm. In contrast, ψ_s exhibited a partially opposite pattern, with larger absolute values near the surface (–0.378 m), a minimum at the subsurface (–0.071 m), and an increase again in the deeper layer (–0.518 m). Compared with the Noah-MP default loamy sand parameters ($b = 4.26$, $\psi_s = -0.036$ m), the measured results reveal pronounced vertical variability.

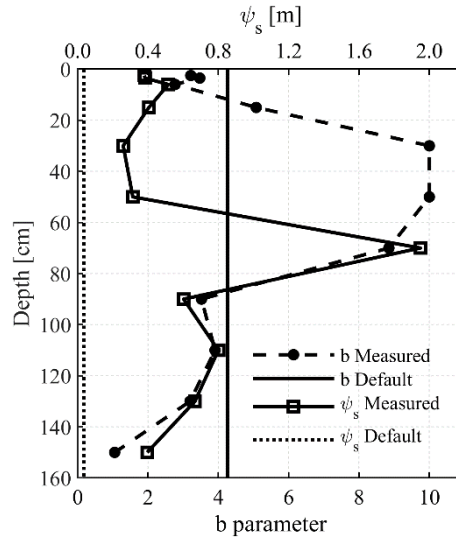


Fig. 5. Comparison of the ψ_s and the index b obtained from evaporation experiments with the Noah-MP default parameters.

In the CH formulation, b governs the slope of the water retention curve in the drying range, whereas ψ_s defines the onset of the near saturated segment. The combination of lower b and higher $|\psi_s|$ in the measured profiles produces a flatter water retention curve near saturation and a gentler slope under drying conditions, indicating a strong water retention and slow release behavior. This pattern is in agreement with the physicochemical characteristics described in Section 3.1. The surface and deep layers, which are enriched in SOC and exhibit low BD, contain a highly porous structure that enhances capillary water retention. In contrast, the elevated b and reduced

ψ_s in the subsurface may reflect its higher BD, greater silt fraction, and narrower pore size distribution.

Quantitatively, deviations in b from the default values can alter the water retention curve slope by 30–50% in the intermediate moisture range ($\theta \approx 0.2\text{--}0.4 \text{ m}^3 \text{ m}^{-3}$), whereas the increase in ψ_s substantially prolongs the transition from saturated to unsaturated conditions. The default parameters fail to capture this structurally driven water retention mechanism in wetland soils, leading to potential overestimation of the drying range storage capacity and misplacement of the water retention curve onset, thereby impairing the accuracy of the simulated evapotranspiration and land–atmosphere hydrothermal fluxes.

3.3 Relationships between the physical properties and hydraulic parameters

The Pearson correlations between the soil physical properties and the CH model parameters are shown in Fig. 6. Pearson correlations were calculated from 11 depth-based paired observations across the soil profile. The correlation patterns reveal the coupled evolution of the soil water retention and conductivity along the vertical profile. The b parameter was significantly negatively correlated with the sand content ($r = -0.631$, $p = 0.037$), indicating that layers with coarse grains (e.g., the surface and deep layers with 79–91% sand) generally exhibited lower b values (1.053–3.472). Such layers feature flatter water retention curves, weaker nonlinear water retention, and greater water loss potential. In contrast, b was positively correlated with silt ($r = 0.565$, $p = 0.070$), where the elevated silt fraction (22–32.8%) in the middle layer enhanced

the water retention capacity, leading to higher b values (5.076–10) and steeper water retention curves with slower desaturation. In addition, b exhibited a positive correlation with BD ($r=0.427$, $p=0.190$), suggesting that a denser soil structure increases the water retention curve curvature and delays water release. In contrast, its weak negative correlation with the SOC ($r=-0.288$, $p=0.391$) implies that abundant surface organic matter may buffer the increase in b , maintaining smoother moisture dynamics. Overall, the vertical variation in b indicates a transition from rapid water release near the surface to stronger retention in the subsurface, reflecting a heterogeneous retention mechanism characteristic of wetland soils.

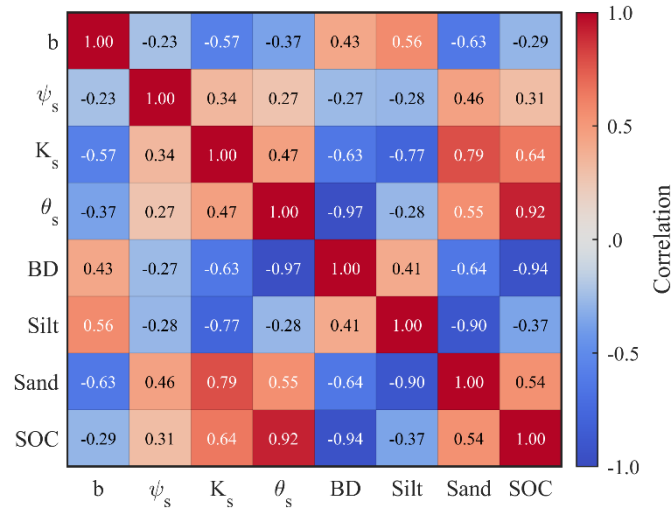


Fig. 6. Correlations between soil physical properties and hydraulic parameters.

The ψ_s was positively correlated with sand ($r = 0.460$, $p = 0.154$), implying that a coarse texture reduces capillary retention (smaller $|\psi_s|$) and weakens near saturated water holding but favors rapid drainage. ψ_s was also positively correlated with the SOC ($r = 0.310$, $p = 0.353$), indicating that high surface organic matter content (45–99 g kg^{-1}) enhances micropore suction, resulting in more negative ψ_s (-0.379 to -0.515

m) and stronger water retention. Its weak negative correlation with silt ($r = -0.276$, $p = 0.412$) suggests that the contribution of fine particles to the increase in suction is limited. Notably, ψ_s was positively correlated with K_s ($r = 0.344$, $p = 0.301$), indicating that weaker suction (smaller $|\psi_s|$) facilitates higher hydraulic conductivity. For example, in the surface layer where $\psi_s \approx -0.378$ m, K_s reached 86–100 cm/day, whereas in the middle layer ($\psi_s \approx -1.949$ m), K_s decreased to 0.143 cm/day. This relationship highlights a shift from efficient drainage near the surface to slower percolation in the subsurface.

Finally, the negative correlation between b and ψ_s ($r = -0.231$, $p = 0.494$) indicates that the surface layers typically exhibit low b values and more negative ψ_s (e.g., $b = 2.770$ – 3.472 ; $\psi_s = -0.379$ to -0.515 m), which enhances the near saturated water retention but accelerates moisture loss under dry conditions. Conversely, the middle layer has a high b (5.076–10) and more negative ψ_s (-1.949 m), reflecting stronger nonlinearity in water retention curve behavior with enhanced retention but suppressed conductivity. These relationships jointly reveals a distinct hydraulic gradient: low b and small $|\psi_s|$ near the surface promote rapid infiltration ($K_s = 36.6$ – 100 cm/day), whereas high b and large $|\psi_s|$ in the middle layer suppress water movement ($K_s < 5$ cm day⁻¹).

Overall, the wetland soil profile exhibits a vertically coupled hydraulic mechanism characterized by dynamic water release in the surface layer and strong retention in the subsurface. The conductivity correspondingly transitions from efficient drainage near the surface to slow percolation with depth. This covariation in hydraulic parameters, which is jointly controlled by the soil texture, organic matter, and compaction, provides

an intrinsic buffering capacity under uneven precipitation–evapotranspiration conditions and imposes higher demands on land surface model parameterization and vertical discretization.

3.4 Analysis of the soil hydraulic properties

The measured and default water retention and hydraulic conductivity curves of wetland soils at different depths are shown in Fig. 7. Each curve represents the fitted hydraulic response of a single undisturbed soil core at a specific depth, rather than an average across multiple samples. Panel (1) simultaneously displays the WRC and the PSD, while Panel (2) shows the HCC. The CTL denotes the Noah-MP default parameterization. In Panel (1), the lower x-axis represents the matric potential (pF), and the upper x-axis corresponds to the equivalent pore radius (radius, μm). The y-axis in Panel (1) denotes the volumetric water content θ (m^3/m^3), and in Panel (2), it denotes the hydraulic conductivity K (cm/day). The letters (A to K) in the upper right corners correspond to the soil layers at different depths, as summarized in Table 3.

Table 3. Depth intervals corresponding to the layer labels used in Fig. 7 (Vertical profiles of measured vs. default WRC and HCC in wetland soil).

Depth (cm)	Label in Fig. 7
0–5	A
1–6	B
2–10	C
10–20	D
20–40	E
40–60	F
60–80	G
80–100	H
100–120	I
120–140	J
140–160	K

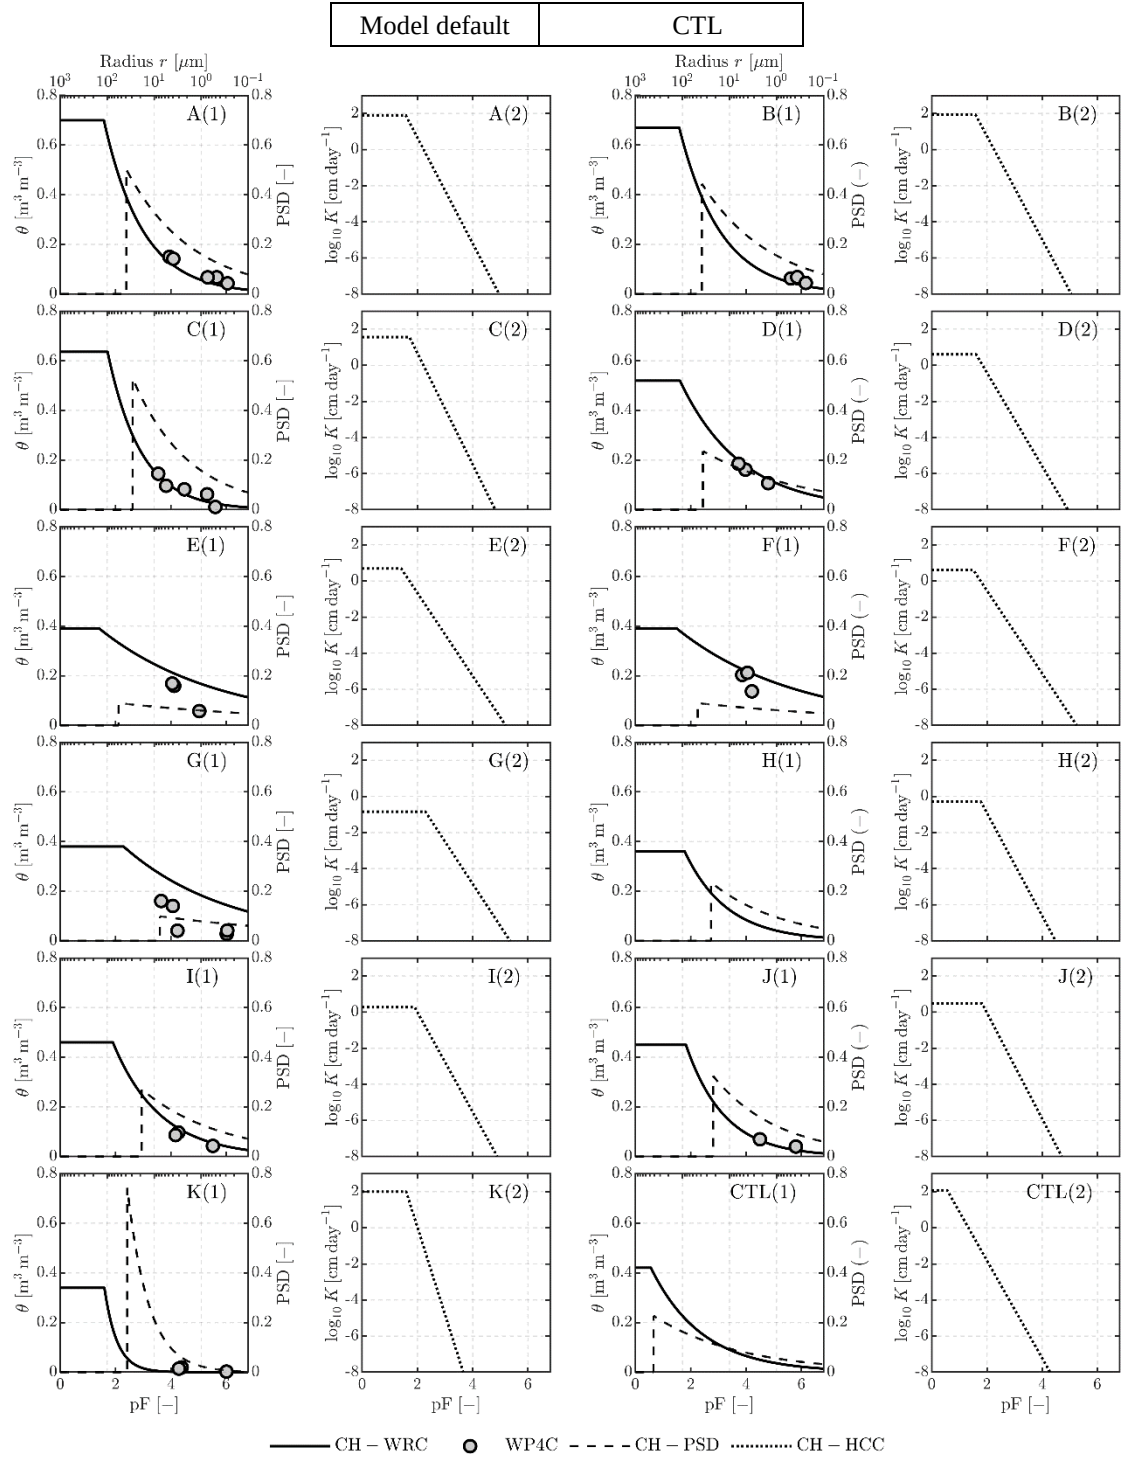


Fig. 7. Vertical profiles of measured and modeled WRC, PSD, and HCC for different soil depths (solid line: CH–WRC; dashed line: CH–PSD; dotted line: CH–HCC; gray circles: WP4C measurements).

The water retention and hydraulic conductivity curves at various depths further confirm the variations in the key parameters b and ψ_s identified in Fig. 5 and reveal the vertical differentiation of the water retention and release mechanisms in wetland

soils. In the surface layer (A–C, 0–10 cm), the initial water content θ at the near saturated end is markedly greater than that in the middle layer (D–F, 10–60 cm), indicating a higher drainable porosity and better macropore connectivity. Its hydraulic conductivity curve remains relatively high and declines slowly in the low suction range, reflecting strong permeability and sustained hydraulic conductivity. As desaturation begins, the surface layer drains more rapidly, whereas the middle layer, with narrower pores, is characterized by stronger water retention and a faster decrease in conductivity. In the middle layer (D–F, 10–60 cm), the water retention curve becomes markedly steeper within the moderate suction range ($pF \approx 2\text{--}3$), where the volumetric water content decreases sharply from approximately 0.50 to 0.25 m³/m³, indicating a higher proportion of mesopores and a slower dehydration rate. Moreover, the hydraulic conductivity curve decreases abruptly from 10^{−4} m/s to 10^{−6} m/s over the same range, suggesting weak connectivity between flow pathways. Together, these features demonstrate a pronounced increase in water retention and a decrease in conductivity in the middle layer. In the deeper layers (G–K, 60–160 cm), the water retention curve decreases steeply in the wet range, and the hydraulic conductivity curve exhibits almost no plateau, indicating a micropore-dominated structure with strong capillary suction but low hydraulic efficiency. Notably, the CH model has a limited ability to resolve macropore drainage under low suction conditions, leading to an underestimation of the macropore contributions and a curve shape biased toward medium and small pores. Therefore, the interpretation of the near saturated θ and its physical meaning in the surface layer should be supported by a combined analysis of θ_s , the BD, and the pore

structure imaging. Overall, both the water retention and hydraulic conductivity curves exhibit a clear vertical transition from rapid drainage dominated by macropores to slow release governed by finer pores, reflecting the stratified mechanisms of water retention and transmission in wetland soils.

The WP4C measurements (gray circles) show overall consistency with the CH-modeled water retention curves across depths, confirming the reliability of the inversion parameters. The fitting accuracy is higher in the middle layers (D–F, 10–60 cm) and the deep layers (G–K, 40–160 cm). The model reproduces the relationship between water content and matric potential well, indicating that the retrieved b and ψ_s are physically representative in intervals dominated by fine pores. However, slight deviations appear in the surface layer (A–C, 0–10 cm) near saturation, reflecting the CH model’s limited ability to resolve macropore drainage and its tendency to underestimate the surface hydraulic potential. These results verify the validity of the inversion parameters while revealing the structural limitations of the CH model under near saturated conditions.

The comparison between the measured water retention and hydraulic conductivity curves at different depths and the Noah-MP default results reveals systematic biases arising from parameterization assumptions when simulating soil hydraulic responses. The default water retention curve decreases slowly in the medium-to-high suction range, and the hydraulic conductivity curve maintains a high conductivity plateau near saturation, reflecting an idealized representation of the macropore structures. In contrast, the measured curves in the middle and deep layers are generally steeper and exhibit lower hydraulic conductivity, indicating stronger water retention and pronounced

stagnation. The surface layer curves are closer to the default results; however, the limited ability of the CH model to resolve macropore drainage under low suction conditions likely underestimates the surface hydraulic potential, leading the default parameters to overestimate the near surface conductivity and underestimate the subsurface water retention. Particularly for the hydraulic conductivity curve, the default parameterization produces significantly higher conductivities in the middle and deep layers, which may cause the model to overpredict the soil moisture response during dry periods, thereby weakening the wetland's slow release and stable storage behavior. These discrepancies highlight the necessity of optimizing hydraulic parameterization schemes based on the measured pore structure characteristics to improve land surface model simulations of soil moisture dynamics.

The PSD features at different depths can be observed from the upper x-axis of Fig. 7(1), which represents the equivalent pore radius (radius, μm). The surface layer exhibits PSD peaks concentrated in the larger pore range (approximately 10–100 μm), indicating a higher proportion of macropores and greater connectivity that facilitate rapid drainage and evaporative replenishment.

In the middle layer, the pores become finer and are distributed mainly within 1–10 μm , indicating that smaller pores dominate, that drainage pathways narrow, and that the water holding capacity increases, which is consistent with higher b and $|\psi_s|$ values. In the deeper layer, the PSD peaks further shift toward radii $< 1 \mu\text{m}$, indicating micropore dominance with strong capillary suction but poor permeability. The deepest layer has a slightly flatter PSD, implying a more uniform structure with low but stable

conductivity. Overall, the pore radius decreases with depth but then slightly increases, reflecting a vertical transition in wetland soils from rapid drainage in the surface layer to gradual release in the middle layer and stable storage in the deep layer. This stratified hydraulic structure underpins the dynamic hydrological responses of wetland soils under varying hydrometeorological conditions and highlights the importance of accounting for vertical heterogeneity in the pore size distribution when parameterizing land surface models.

3.5 Results of the analytical indicators

The distribution of the effective exponent b_{eff} across soil layers under different degrees of saturation ($S = 0.1\text{--}0.9$) is shown in Fig. 8. Overall, b_{eff} clearly varies with saturation, showing strong state dependence. In the intermediate moisture range ($S \approx 0.3\text{--}0.6$), most layers maintain values of 2–5, reflecting water retention and slow release governed by mesopores. In the range near saturated ($S \geq 0.8$), b_{eff} in the surface and middle layers increases sharply, reaching 15 to 20 in some cases, indicating enhanced macropore connectivity and more rapid infiltration and drainage. In contrast, the deep layers (> 100 cm) have lower and more stable b_{eff} values, suggesting the dominance of micropores and compact structures with limited dynamic conductivity. The missing values at $S = 0.1$ or 0.2 result from the limited number of WP4C samples in the dry range, leading to insufficient coverage at the very dry end. To avoid uncertainties caused by extrapolation, these intervals were retained as NaN, and the interlayer comparisons were performed mainly for $S = 0.2\text{--}0.9$.

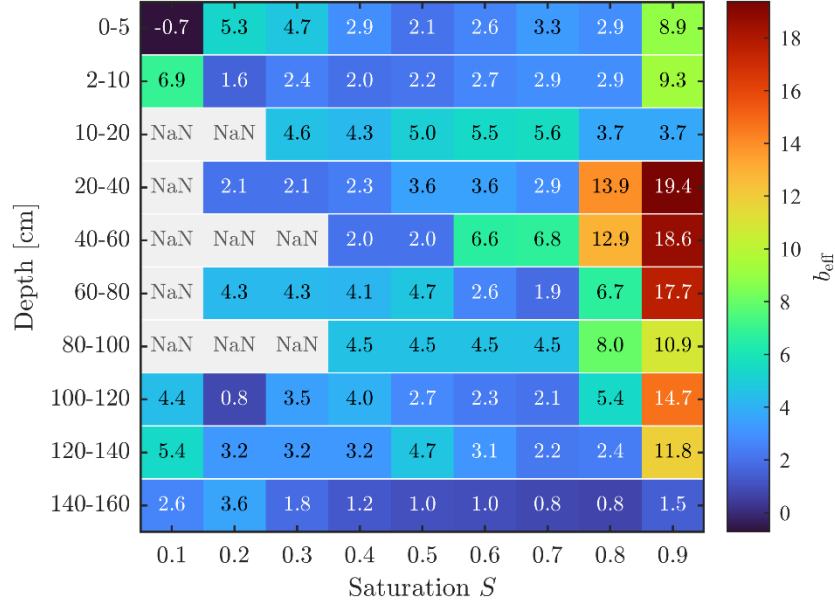


Fig. 8. Two-dimensional distribution of effective exponent $b_{eff}(S)$ across soil depths.

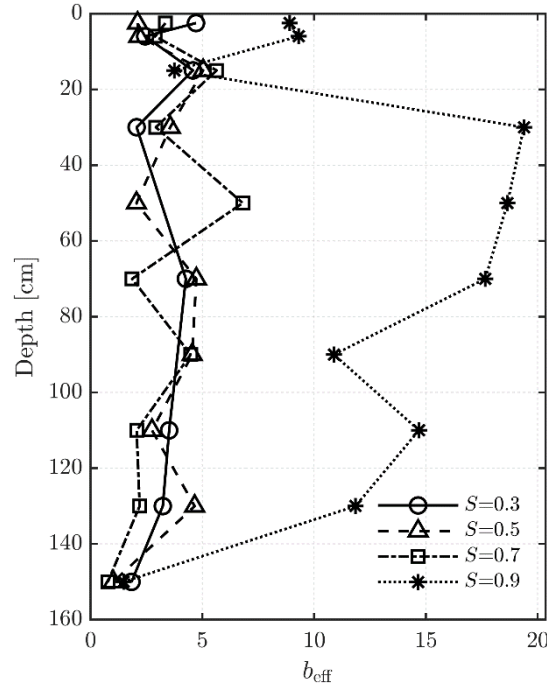


Fig. 9. Vertical profiles of b_{eff} under typical saturation levels ($S = 0.3, 0.5, 0.7, 0.9$).

The vertical distribution of the effective exponent b_{eff} under typical saturation levels ($S = 0.3, 0.5, 0.7$, and 0.9) is shown in Fig. 9, highlighting the differences among soil layers. Under intermediate moisture conditions ($S = 0.3$ and 0.5), the b_{eff} in the subsurface layer (10–40 cm) is significantly greater than that in the surface and deep

layers, indicating pronounced mesopore-controlled water retention and slow release, which serve as the main contributors to soil moisture maintenance and sensible heat regulation during dry periods. Under wetter to near saturated conditions ($S = 0.7$ and 0.9), the b_{eff} in the surface and middle layers (0–60 cm) increases sharply, reflecting the dominant role of macropores in facilitating rapid infiltration and drainage following rainfall—an essential control on the enhanced LHF during wet periods. The deep layer (> 100 cm) maintains consistently low values of b_{eff} across all S levels, suggesting limited hydraulic conductivity and primarily providing background soil moisture storage. Overall, the results indicate that different layers play distinct roles in water regulation under varying moisture states and that a single constant b cannot simultaneously capture this state dependence and vertical heterogeneity.

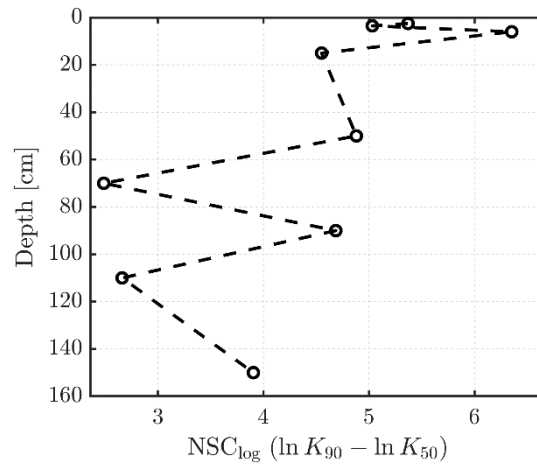


Fig. 10. Vertical profiles of near saturated connectivity (NSC-log).

To facilitate direct comparisons of connectivity near saturation among soil layers, we adopted the logarithmic form of NSC, $NSC_{log} = \ln(K_{90}/K_{50})$. Fig. 10 shows the vertical distribution. Overall, the shallow and middle layers exhibit markedly higher conductivities near saturation than at intermediate moisture, with NSC_{log} values

mostly ranging from 2.4 to 3.9.

These results indicate strong macropore connectivity, enabling rapid water drainage and preferential flow during rainfall or rewetting events. The 60–80 cm and 100–120 cm layers exhibit the most pronounced increase, with NSC_{log} values of approximately 2.5 and 2.7, respectively. The deeper layer (140–160 cm) also displays a relatively high NSC_{log} (~3.9), primarily due to the extremely low conductivity in the intermediate range, which amplifies the ratio effect. At certain depths (e.g., 120–140 cm), the NSC could not be reliably computed due to the lack of sufficient data points in the intermediate moisture range. Overall, the NSC_{log} profile highlights that macropore flow dominates water transport under wet conditions in the shallow and middle layers, whereas the deep soil, despite its low absolute conductivity, still exhibits a relative macropore effect.

Notably, the high NSC_{log} values observed in the 60–120 cm interval do not imply a higher absolute conductivity than that in the surface layer but rather a greater relative increase in conductivity under near saturated conditions. This finding is consistent with the pore structure analysis showing rapid macropore drainage in the surface layer and water retention mediated by mesopores in the subsurface. Although macropores are more abundant near the surface, the intermediate range conductivity there remains high, resulting in a less pronounced NSC ratio. In contrast, the subsurface layer experiences a sharp decrease in conductivity at intermediate saturation, leading to a higher ratio and an apparent increase in NSC_{log}. Together, these results indicate that the surface layer governs absolute conductivity, whereas the subsurface layer exhibits

greater relative hydraulic enhancement, reaffirming the state dependence and vertical heterogeneity of wetland soil hydraulic behavior.

3.6 Noah-MP simulation of surface hydrothermal processes

3.6.1 Overall summer simulation differences

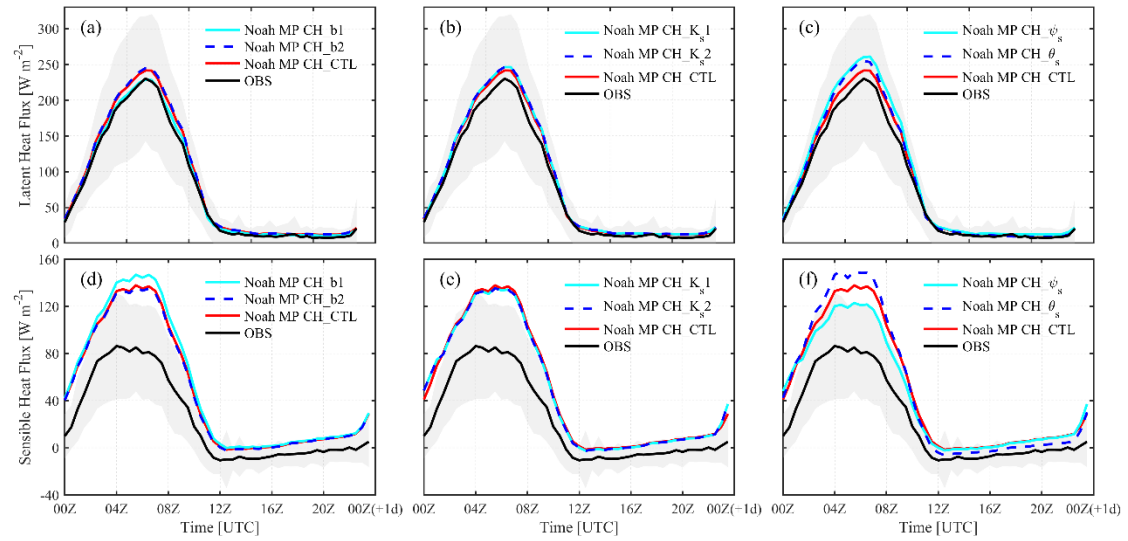


Fig. 11. Modeled diurnal variations of LHF and SHF under different soil hydraulic parameter scenarios, averaged for June–August 2023. (Panels (a,d) show sensitivity experiments for the b parameter; panels (b,e) for K_s ; and panels (c,f) for ψ_s and θ_s . All times are in Coordinated Universal Time (UTC, Z). Local time = UTC + 8 h).

To examine the influence of the soil hydraulic parameters on the simulation of surface hydrothermal processes in alpine wetlands, sensitivity experiments were conducted by using the Noah-MP model. The calibrated parameters (b , K_s , ψ_s , and θ_s) were individually substituted, and their effects on the diurnal variations in the LHF and SHF during summer (June–August) were analyzed (Fig. 11).

As shown in Fig. 11a, the b parameter has the strongest influence on the LHF. Compared with the default scheme (CTL, $b = 4.26$, and RMSE = 9.45 W/m²), the use of the surface layer value (CH_b1, $b = 3.215$) significantly improved the simulation

accuracy, especially from early morning to noon (03–09Z), reducing the RMSE to 3.87 W/m². In contrast, applying the middle layer value (CH_b2, $b = 5.0761$) increased the deviation (RMSE = 11.06 W/m²). Physically, b controls the slope of the water retention curve, representing pore size distribution characteristics. A lower b indicates a higher proportion of macropores and faster water release, enhancing the evapotranspiration potential, whereas a higher b implies more micropores and slower release, increasing the water retention capacity. The excessive water retention of CH_b2 led to a higher simulated LHF, whereas CH_b1 better captured the rapid response of the surface pores. The corresponding SHF (Fig. 11d) exhibited the opposite pattern: CH_b2 substantially suppressed daytime SHF peaks but produced an overall overestimation (Bias = +28 W m⁻²). This compensatory pattern of enhanced LHF and suppressed SHF highlights the key role of b in regulating surface energy partitioning.

As shown in Fig. 11b and 11e, the sensitivity of K_s is relatively weak. When the default value (5.21×10^{-6} m/s) was replaced by the measured values CH_Ks1 (4.23×10^{-7} m/s) and CH_Ks2 (4.63×10^{-8} m/s), the changes in the LHF and SHF were minimal, with RMSEs of 11.7 and 11.8 W m⁻², respectively, indicating no improvement when compared with the CTL. Only a slight shift was observed during the early morning period (03–09Z). As the dominant parameter in the hydraulic conductivity curve, K_s represents the soil's ability to conduct water under saturated conditions. However, under the wet summer background, surface evapotranspiration was mainly controlled by capillary water, and the saturated pathways were not significantly activated. Thus, K_s exhibited low sensitivity. These findings indicate that K_s plays a secondary role in

regulating energy fluxes unless extreme drought or heavy rainfall occurs.

The effects of ψ_s and θ_s are shown in Figs. 11c and 11f, respectively. Overall, both parameter schemes simulated higher fluxes than those observed. Regarding the LHF, compared with the CTL (RMSE = 9.45 W/m²), the adjustments to CH_ ψ_s and CH_ θ_s further increased the daytime bias. With respect to the sensible heat (H), CH_ ψ_s was closest to the observations (RMSE = 23.6 W/m²), while CH_ θ_s produced the greatest deviation (RMSE = 34.1 W/m²). These results suggest that modifying ψ_s slightly improved the fit of H, whereas adjusting θ_s amplified the overestimation. Physically, ψ_s affects the initial curvature of the water retention curve, enhancing capillary water retention and delaying surface drying, thereby helping to mitigate positive bias. In contrast, θ_s defines the upper limit of the soil water storage; under wet conditions, its increase raises the available water content, further amplifying the overestimation of both the LHF and SHF.

Overall, the sensitivity ranking of the four parameters to energy fluxes was $b > \psi_s > \theta_s > K_s$. Among them, b and ψ_s are structural parameters that directly describe the pore structure and water release dynamics, exerting the strongest control on the LHF and SHF. In contrast, θ_s and K_s are boundary parameters and exhibited limited influence under the conditions of this study. The effects of b and ψ_s were most pronounced during the high flux period (06–10Z), emphasizing the importance of accurately representing the segment of the water retention curve near saturation in the model. Detailed error metrics for each parameter scheme are provided in Appendix A1.

3.6.2 Simulation results for wet and dry periods

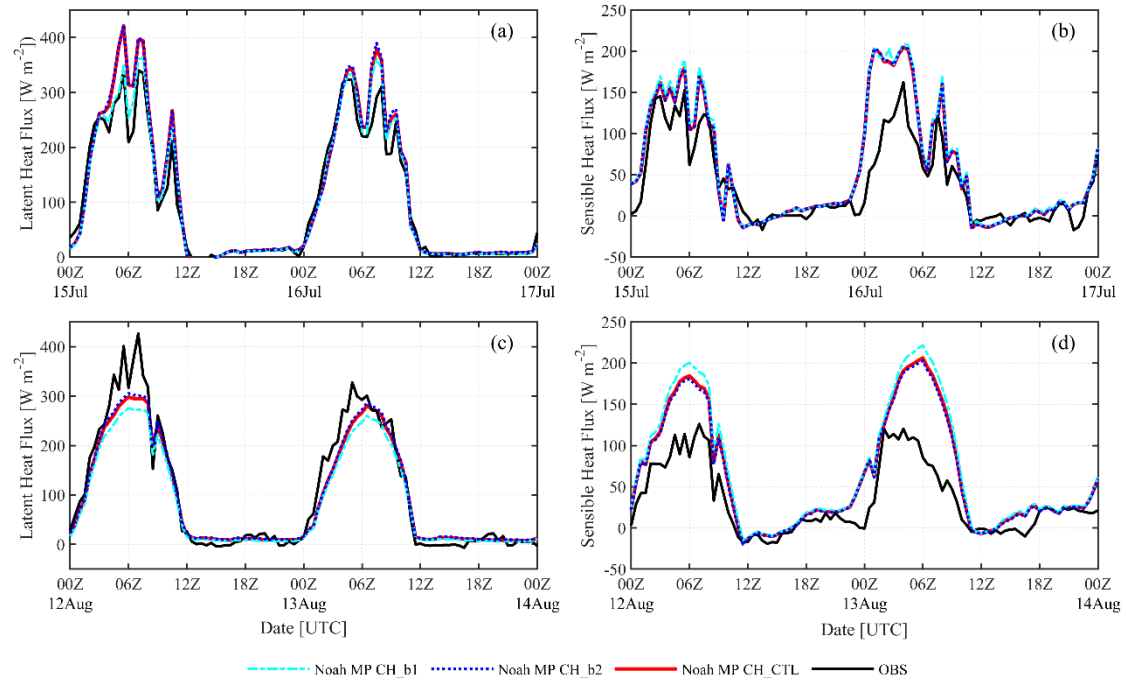


Fig. 12. Simulation results for wet (15–16 July 2023) and dry (12–13 August 2023) periods.

To analyze the regulatory effects of the soil hydraulic parameters on surface hydrothermal processes under extreme hydrometeorological conditions, scenarios based on events were used to avoid the effects of seasonal averaging, which may mask the variability. Based on observations of the precipitation, soil moisture, and the Bowen ratio, the wet and dry periods were identified to be 15–16 July and 12–13 August 2023, respectively. As the previous sensitivity analysis indicated that the b parameter exerts the greatest influence on energy fluxes, this section focuses on event error comparisons among different b schemes.

The simulated LHF and SHF for the wet and dry periods are shown in Fig. 12, and detailed error statistics for each scheme are provided in Appendix A2. During the wet period, the soil was nearly saturated, and the macropores were fully filled and rapidly drained, with water release primarily driven by gravity. The effect of b was most

pronounced under these conditions. A lower b value (CH_b1, $b = 3.215$) indicates a greater proportion of macropores, enhancing rapid drainage and facilitating quick transformation of shallow soil water into evapotranspiration fluxes. As a result, the simulated LHF peak matched the observations better, with the RMSE decreasing from approximately 42 W/m² in CTL to approximately 28 W/m². Moreover, rapid drainage reduced the soil heat capacity, making the ground temperature more responsive and leading to higher SHF (Bias = +28 W/m²). In contrast, a higher b (CH_b2, $b = 5.0761$) increased the micropore proportion and water retention, resulting in stronger waterlogging and an overestimated LHF peak (RMSE = 47 W/m²), whereas SHF was further suppressed. These results indicate that under high moisture conditions, b regulates energy partitioning between the LHF and SHF by altering the balance between the macropores and micropores.

During the dry period, most surface macropores were empty, and the soil moisture was governed primarily by capillary and micropore retention, with the hydraulic conductivity decreasing exponentially with increasing water content. The low b scheme still exhibited strong sensitivity, and when rainfall occurred, rapid refilling of the macropores and high conductivity enabled the soil to respond quickly, improving the LHF peak significantly (the RMSE decreased from 46 to 31 W/m², and Bias fell from +35 to +20 W/m²). The simulated SHF peaks also aligned more closely with the observations, indicating that low b strengthens the mechanism of rapid recharge followed by fast evapotranspiration after rainfall. However, the soil moisture in CH_b1 declined too rapidly, intensifying the underestimation under dry conditions and

suggesting that the model failed to represent the capillary retention of wetland soils at low water contents. In contrast, a higher b improved the soil moisture retention trend but weakened the flux response, resulting in slower energy release and the underestimation of short term evapotranspiration after rainfall.

Comparison of the wet and dry conditions reveals contrasting mechanisms. Under wet conditions, macropore drainage drives water fluxes, with low b enhancing the LHF but increasing Bias, whereas high b improves the retention but overestimates the peaks. Under dry conditions, capillary storage is dominant, low b captures rainfall–evapotranspiration events rapidly, whereas high b enhances storage but decreases the flux accuracy. These results indicate that the single power law structure of the CH model cannot simultaneously represent the rapid response driven by macropores and the slow release governed by micropores, leading to opposite biases under wet and dry conditions.

4. Discussion

4.1 Vegetation parameters and their effects

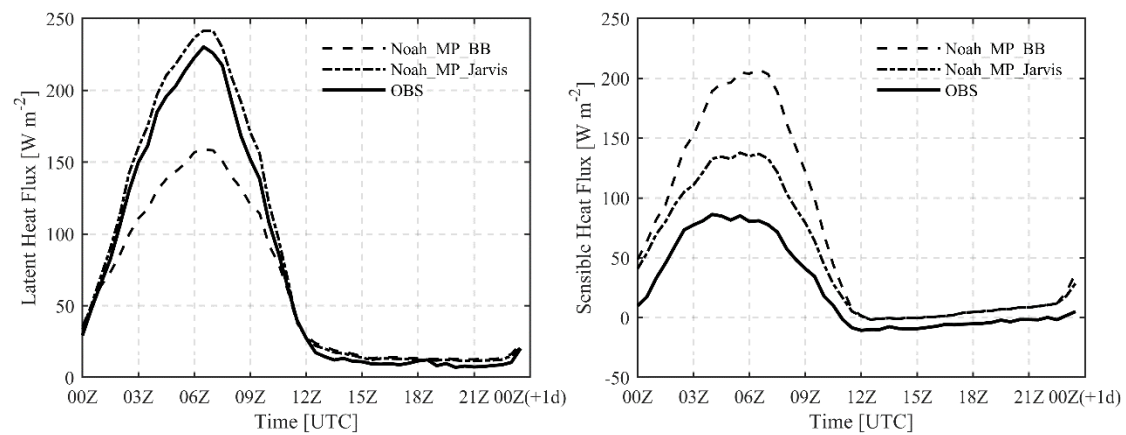


Fig. 13. Impact of the Jarvis and Ball Berry schemes on the simulated mean diurnal cycle.

A sensitivity analysis revealed that the perturbations from the stomatal conductance schemes are much smaller than those from the soil hydraulic parameters. Fig. 13 compares the Ball–Berry (BB) and Jarvis schemes in terms of simulating the LHF and SHF, and the detailed error metrics listed in Appendix A3. The numerical results indicate that the BB scheme yields larger errors: in the LHF simulations, the RMSE exceeds 22 W/m², and Bias exceeds +14 W/m², thus underestimating the evapotranspiration peaks; for SHF, Bias is even greater (+48 W/m²) and substantially overestimates the heat fluxes. In contrast, the Jarvis scheme performs better, with an RMSE of 13 W/m² and Bias of approximately +5 W/m² for the LHF and an RMSE of 35 W/m² for SHF. Although positive bias remains, the overall improvement is evident. The Jarvis model regulates conductance as an exponential function of the radiation, temperature, and vapor pressure deficit, allowing for a simple structure and fast response, whereas the BB model couples the stomatal conductance with the photosynthetic rate and CO₂ concentration and relies heavily on physiological parameters. In the Tibetan Plateau wetlands, where the LAI is typically < 1 and the photosynthetic potential is low, the BB model tends to overestimate transpiration and amplify the energy partitioning errors, whereas the Jarvis scheme provides more stable results with smaller bias. Therefore, the Jarvis scheme was adopted for subsequent simulations to minimize disturbances related to vegetation and to emphasize the dominant role of soil processes.

From a mechanistic perspective, land–atmosphere exchanges in plateau wetlands are constrained mainly by the soil water availability, capillary transport, and pore

connectivity rather than by the stomatal control of transpiration. Under sparse vegetation ($LAI < 1$), shallow roots, and low photosynthetic capacity, the BB assumption of root-regulated transpiration is invalid, leading to pronounced diurnal biases in the LHF and SHF. The Jarvis scheme, which directly responds to meteorological drivers, avoids overdependence on plant physiological parameters and produces more reasonable diurnal amplitudes. Nevertheless, the amplitude remains governed by the soil saturated hydraulic conductivity and porosity, and during the afternoon drying period, the soil hydraulic conductivity is the key factor controlling the evapotranspiration dynamics.

Previous studies in sparse or semiarid ecosystems have reached similar conclusions: evapotranspiration is more strongly controlled by the soil water supply than by stomatal regulation (Koster et al., 2004; Seneviratne et al., 2006; Yang et al., 2011). Further simulations revealed that in Tibetan grassland ecosystems, the contribution of vegetation water content to the hydrogen signal detected by cosmic ray neutron sensing (CRNS) is less than 1%, whereas the sensitivity of the CRNS is limited mainly to the upper 0–20 cm soil layer. The 0–7.5 cm layer alone stores 9.7–17.4 mm of the soil water and thus dominates the surface hydrological response (Wang et al., 2025). Other studies have also confirmed that under sparse vegetation, the surface hydrogen variability is governed primarily by the shallow soil moisture, and vegetation interference can be reasonably neglected (Köhli et al., 2015; Schrön et al., 2017).

In summary, in the Tibetan Plateau wetlands, where soil moisture processes dominate, vegetation parameter perturbations have a limited influence on energy fluxes

and hydrogen sources. Instead, soil hydraulic parameters are the primary determinants of the water–heat exchange accuracy. Therefore, within the framework of hydraulic sensitivity analysis, adopting the Jarvis scheme for stomatal conductance to minimize vegetation disturbances is a physically sound and scientifically justified choice.

4.2 Limitations of the hydraulic scheme

The CH model represents the relationship between the water content and matric potential with a power law and uses the saturated water content and the empirical exponent b to describe the water retention curve. The scheme is simple, and its parameters are easy to obtain; thus, it is widely used in large scale simulations. However, its physical basis is weak, and it cannot capture the strong heterogeneity of wetland soils. Furthermore, it does not explicitly include the residual water content or a capillary break, so it fails to reproduce the “bend” of the water retention curve. The monotonic power law form also limits the fit to the nonlinear release behavior of multi-pore structures. In wetlands, abundant organic matter and multiscale pore networks amplify these issues and hinder the recovery of the joint action of macro- and micropores.

In the saturated to near saturated range (low suction), the CH fit is especially weak. When $|\psi| < |\psi_s|$, the curve is simplified to a constant θ_s plateau with a zero derivative, and a pore size distribution based on the Young–Laplace relation cannot represent macropore drainage. Even when evaporation experiments capture the rapid dewatering stage, the inversion still struggles to resolve the macropore contributions because of this defect, and the inferred PSD shifts toward medium and small pores ($\text{pf} > 5.0$). The experimental design adds bias as well. To obtain continuous records of θ over time,

sampling is concentrated at $|\psi| \approx 10^2 - 10^4$ cm, whereas macropore drainage at low suction often occurs within minutes and is missed because of limited sampling frequency and sensitivity. These structural and coverage limitations create a blind spot near saturation. The inverted parameters fit the range from mid suction to high suction but miss the segment near saturation, and numerical simulations confirm this deficiency.

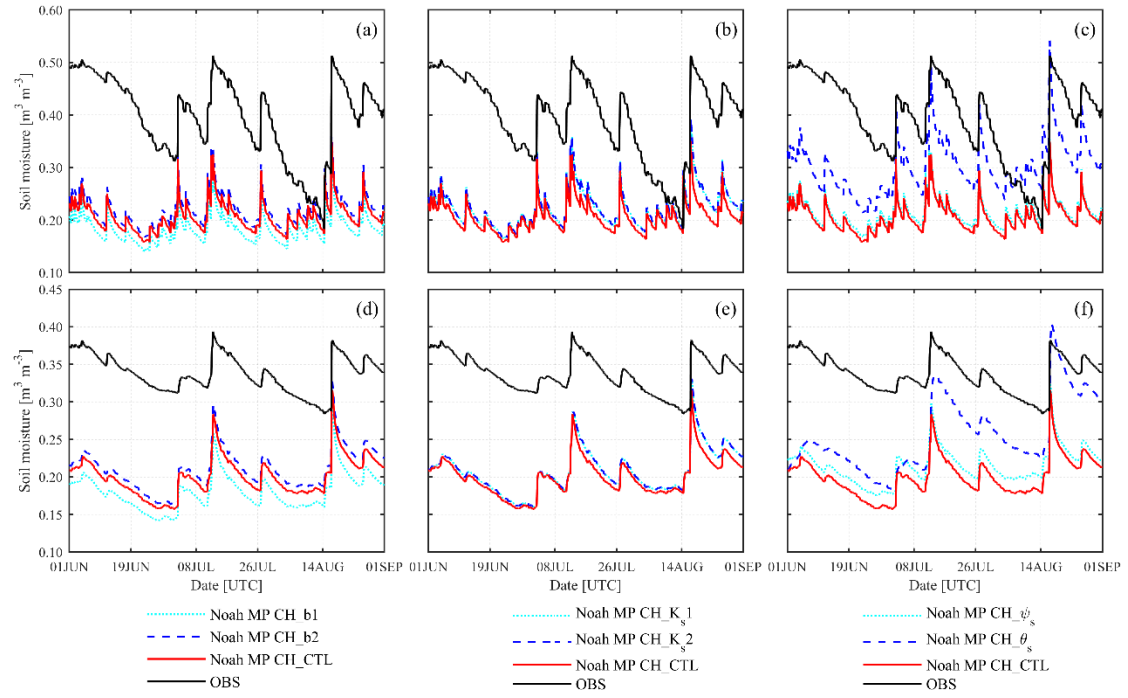


Fig. 14. Simulated diurnal soil moisture at two depths over June–August, 2023.

(Panels (a, d) show b sensitivity experiments, panels (b, e) show K_s sensitivity experiments, and panels (c, f) show ψ_s and θ_s sensitivity experiments).

The modeled surface and subsurface soil moisture, interpolated to 5 cm and 20 cm, are compared with the observations in Fig. 14, and the detailed error metrics are provided in Appendix A4. Overall, all of the schemes exhibit a systematic negative bias of approximately -0.05 to -0.08 m^3/m^3 and fail to reproduce the observed diurnal amplitude and water accumulation. In the b experiments, CH_b1 ($b = 3.215$) yields an RMSE of 0.072 m^3/m^3 at 5 cm, which is greater than that of the CTL (0.058), indicating faster drainage and weaker retention. CH_b2 ($b = 5.0761$) improves the 20 cm layer

with an RMSE of 0.051, which is better than that of the CTL (0.063), indicating that a higher b enhances storage. In the K_s experiments, CH_Ks1 and CH_Ks2 are nearly identical to the CTL, with RMSE differences < 0.01 , indicating a very weak influence by the saturated conductivity on shallow moisture under wet summer conditions. In the ψ_s and θ_s experiments, θ_s markedly improved the 20 cm layer, reducing the RMSE from 0.063 to 0.047 and reflecting the role of storage capacity in retention. ψ_s yields only small improvements at both depths (RMSE reductions of approximately 0.01–0.015) and does not eliminate the overall underestimation. In summary, the soil moisture simulations highlight the joint control of the structural parameters (b , ψ_s) and the capacity-related parameter θ_s , while K_s shows the weakest sensitivity.

For comparison, the Noah-MP default parameters are not based on measurements from this site, however, their small ψ_s values (e.g., $|\psi_s| = 0.036$ m for loamy sand) induce earlier water retention curve desaturation and higher hydraulic conductivity curve conductivity near saturation, partly capturing macropore drainage and partly offsetting the inversion parameters' blind spot at low suction. This phenomenon partly represents macropore drainage and compensates for the inversion blind spot at low suction. In our experiments, CH simulations produce larger soil temperature biases than they do for moisture and energy fluxes, indicating simplifications in the heat capacity and heat conduction. Future wetland hydrothermal modeling should adopt more physically based pore–water–heat coupling frameworks, such as the VG or VG-PDI, with explicit multi-pore representation, to better describe the near saturated hydrothermal dynamics.

4.3 VG/VG-PDI integration outlook

The results show that the CH scheme, as a statistical formulation, cannot represent the nonlinear release near saturation or the multiscale pore response in wetland soils. Parameter tuning, such as lowering or increasing b , can improve some variables under very wet or very dry conditions, but it does not eliminate systematic bias. A more physically based parameterization is needed to improve wetland hydrothermal simulations.

The van Genuchten (VG) model provides a continuous water retention curve near saturation and is generally considered more physical than the BC or CH. Its parameters α and n flexibly capture the nonlinear relationship between water content and matric potential, and it represents macropore drainage at low suction and transitions smoothly to capillary retention. Studies such as that by Farmani et al. (2025) report that the VG reduces the overestimation of the shallow soil moisture memory in Noah-MP and causes the nonlinear hydraulic response to be closer to observations. The VG still assumes a single pore size distribution but often misses the bimodal or multimodal structures typical of wetlands, especially in organic-rich and highly heterogeneous soils. Its fit near saturation remains limited.

To address these limitations, Wang et al. (2024) proposed and validated the VG-PDI (Peters–Durner–Ida) model, which combines the VG framework with film flow and capillary flow. The two pathways represent diffusion along micropore films and macropore capillary drainage, and they relax the single-distribution assumption. The VG-PDI improves the fit of the water retention and hydraulic conductivity curves at

high suction ($pf > 4$), and it captures the typical bimodal pore sizes in wetlands (macropores of approximately 100 μm and micropores of approximately 1 μm) and achieves higher accuracy ($R^2 > 0.95$) than the standard VG ($R^2 \sim 0.85$). These results indicate that the VG-PDI better represents the nonlinear release and pore structure effects near saturation and at high suction. It offers a practical route to improving hydraulic parameterization in land surface models, especially for the organic-rich and heterogeneous wetlands in the Tibetan Plateau.

By inverting the CH parameters and conducting sensitivity tests, this study delineates and quantifies the applicability limits of the CH in wetlands and clarifies the roles of b and ψ_s that depend on hydrologic conditions in terms of energy fluxes and soil moisture. Building on these validated findings, we recommend adopting the VG to improve the continuity and nonlinearity of the water retention curve and exploring the VG-PDI with film flow and the dual-domain pore structure to further enhance the representation of complex water and heat transport in alpine wetland land surface models.

5. Conclusion

This study focuses on a typical alpine wetland in the Tibetan Plateau. By using laboratory evaporation experiments, physicochemical measurements, and CT imaging, we obtained vertical profiles of key CH hydraulic parameters (θ_s , K_s , b , ψ_s) and then conducted Noah-MP sensitivity experiments to quantify their impacts on simulations of surface hydrothermal processes. Following a workflow of observation, inversion, and simulation, this study reveals both the mechanisms and the structural limitations by

which wetland soil hydraulic parameters control energy and water fluxes. From an ecohydrological perspective, wetland soils show a stratified transmission pattern with rapid drainage in the surface layer, slow release in the middle layer, and stable storage in the deep layer. This vertical heterogeneity provides strong buffering and retention in alpine wetlands, underpins hydrologic stability during alternating precipitation and evapotranspiration, and offers key constraints for land surface model parameterization.

1. The measured parameters show pronounced vertical heterogeneity. Surface soils have high θ_s and K_s ($\theta_s > 0.65 \text{ m}^3/\text{m}^3$, $K_s > 30 \text{ cm/day}$) with a high SOC and low BD, indicating the development of macropores and a loose, porous structure. With depth, θ_s and K_s decrease, and the pore network becomes finer, leading to strong retention in the middle layer and stable storage in the deep layer. Evaporation-experiment inversion shows clear vertical contrasts in b (surface ≈ 3.2 , middle ≈ 5.1 , deep approaching 1.0), and ψ_s is correlated with the SOC and particle-size composition, indicating that the pore structure and physicochemical properties jointly shape hydraulic behavior.

2. Sensitivity experiments reveal the different roles of the parameters. b is the most sensitive, as a lower b improves the peak representation of the LHF during wet periods but increases the underestimation of the shallow soil moisture. A higher b enhances storage and improves the accuracy of SHF during dry periods. Adjusting θ_s markedly reduces the RMSE of the soil moisture at 20 cm ($0.063 \rightarrow 0.047 \text{ m}^3/\text{m}^3$), reflecting the regulation of the storage upper bound on the retention and wet-dry response. Adjusting ψ_s partly alleviates the bias in SHF. Finally, under wet summer

conditions, K_s is almost insensitive.

3. There is a division of control among parameter types. Structural parameters (b , ψ_s) affect the pore distribution and release dynamics and therefore govern energy partitioning and water retention. The capacity-related parameter (θ_s) sets the storage upper bound and is key to improving SM simulations, while K_s plays a limited role under high moisture.

Overall, the power law structure of the CH model cannot simultaneously capture rapid macropore drainage and micropore capillary retention, which leads to structural biases in the water retention and hydraulic conductivity curves. Parameter tuning can improve specific cases but does not eliminate systematic errors. ~~On the basis of the observational evidence and numerical verification in this study, we recommend adopting a more physically based VG formulation in land surface models, such as Noah-MP, and further integrating the VG-PDI with film flow and a bimodal pore structure to better represent multiscale pores and nonlinear hydraulic responses and thereby improve hydrothermal simulations for alpine wetlands and broader cold region ecosystems.~~ On the basis of the observational evidence and numerical verification at this site, we recommend further evaluating more physically based VG and VG-PDI formulations in Noah-MP to better represent multiscale pores and nonlinear hydraulic responses in alpine wetlands with similar hydro-pedological characteristics.

CRediT authorship contribution statement

Rong Liu: Writing – review & editing, Writing – original draft, Investigation, Funding acquisition, Formal analysis, Conceptualization. **Xin Wang:** Investigation, Methodology, Resources, Data curation, Validation, Conceptualization. **Zuoliang**

Wang: Software, Methodology, Visualization, Conceptualization. **Yongjie Pan:** Data curation, Visualization. **Yan Song:** Conceptualization.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgments

This work was funded by the Natural Science Foundation of China (42575094 and 52539002); the program of the State Key Laboratory of Cryospheric Science and Frozen Soil Engineering(CSFSE-ZZ-2407).

Data availability

All data used in this study, including soil measurements, model inputs (initial conditions and forcing), and simulation outputs, are available on the online platform Figshare (Liu, 2026).

Appendix A. Supplementary data

Table A1. Error metrics for diurnal variations of LHF and SHF during the summer period.

Variable	Scheme	RMSE (W/m ²)	Bias (W/m ²)	MAE (W/m ²)	R ²
LHF	b1	3.86602271	2.658468428	3.128941297	0.997636707
	b2	11.05897606	8.870969475	8.878904871	0.980661684
	K _s 1	11.74636631	9.419112336	9.419112336	0.978182956
	K _s 2	11.84059292	9.499160242	9.499160242	0.97783153
	ψ _s	18.53310243	13.58704776	13.59032376	0.945689341
	θ _s	13.62074726	8.767285455	9.278469758	0.97066469
	CTL	9.449534226	7.449647615	7.533339531	0.985880815
SHF	b1	34.31620781	28.04863136	28.04863136	0.077189237

b2	28.6479838	23.61750164	23.61750164	0.356864922
K _s 1	29.11438513	24.03116008	24.03116008	0.335753433
K _s 2	29.06286185	23.98311612	23.98311612	0.338102367
ψ _s	23.5982524	20.15755039	20.15755039	0.563611038
θ _s	34.12439867	25.15939485	25.15939485	0.087476438
CTL	29.64592102	24.51941095	24.51941095	0.311277981

1063

1064 Table A2. Error metrics for simulations during representative wet and dry episodes.

Period	Variable	Scheme	RMSE (W/m ²)	Bias(W/m ²)	MAE (W/m ²)	R ²
wet event	LHF	LHF -b1	20.81498005	4.234253291	11.98097883	0.9662963
	LHF	LHF -b2	32.7524928	12.52915433	19.36318377	0.9165524
	LHF	LHF -CTL	30.8303713	11.20661216	18.02807935	0.9260594
	SHF	SHF -b1	39.19428238	21.9429109	25.44507205	0.378897
	SHF	SHF -b2	37.13929804	19.19942852	23.64384071	0.4423194
	SHF	SHF -CTL	37.00625508	19.41040494	23.67575681	0.4463077
drought event	LHF	LHF -b1	38.46218121	-18.22952106	25.30516745	0.9064257
	LHF	LHF -b2	29.20373841	-7.608108582	19.56716389	0.9460532
	LHF	LHF -CTL	30.95565898	-10.3250386	20.48085748	0.9393866
	SHF	SHF -b1	53.03542811	37.42585137	37.65824321	-0.558675
	SHF	SHF -b2	43.76955679	30.08374872	30.60886066	-0.061617

	SHF	SHF -CTL	45.52383834	31.68974533	32.04037772	-0.148421
--	-----	----------	-------------	-------------	-------------	-----------

1065

1066 Table A3. Error metrics of LHF and SHF under different stomatal conductance schemes (Ball–Berry

1067 and Jarvis).

Variable	Scheme	RMSE (W/m ²)	Bias (W/m ²)	MAE (W/m ²)	R ²
LHF	Noah_MP				
	BB	30.25772064	-14.80368045	19.57435255	0.85523578
	Noah_MP				
	Javis	9.449534226	7.449647615	7.533339531	0.985880815
SHF	Noah_MP				-
	BB	61.22870706	44.76739523	44.76739523	1.937813692
	Noah_MP				
	Javis	29.64592102	24.51941095	24.51941095	0.311277981

1068

1069

1070 Table A4. Error metrics of modeled surface and subsurface soil moisture against observations.

Depth	Scheme	RMSE(m ³ /m ³)	Bias(m ³ /m ³)	MAE(m ³ /m ³)	R ²
5cm	b1	0.222776106	-0.211699209	0.211784167	-7.353384
	b2	0.190335412	-0.177368375	0.177647367	-5.097677
	K _s 1	0.186518827	-0.174303836	0.174522145	-4.855589
	K _s 2	0.185811342	-0.173591149	0.173812544	-4.811251
	ψ _s	0.194942188	-0.181807432	0.18203321	-5.396419

	θ_s	0.1168388	-0.094607497	0.105453859	-1.297732
	CTL	0.201715317	-0.189474052	0.189637541	-5.848618
20cm	b1	0.158084963	-0.15709824	0.15709824	-40.05613
	b2	0.129016917	-0.127619844	0.127619844	-26.34577
	K _s 1	0.131574956	-0.129989913	0.129989913	-27.4409
	K _s 2	0.131343817	-0.12973625	0.12973625	-27.34107
	ψ_s	0.123682558	-0.122217269	0.122217269	-24.13123
	θ_s	0.091828861	-0.082202525	0.082858899	-12.85337
	CTL	0.138359228	-0.137138448	0.137138448	-30.44946

1071

References

1072

- 1073 Assouline, S., Or, D. 2013. Conceptual and parametric representation of soil hydraulic properties: A review. *Vadose*
1074 *Zone J.* 12(4). <https://doi.org/10.2136/vzj2013.07.0121>
- 1075 Brooks, R.H., Corey, A.T., 1964. Hydraulic properties of porous media. *Hydrol. Pap.* 3. Colorado State Univ., Fort
1076 Collins, CO, USA.
- 1077 Chadburn, S., Burke, E., Essery, R., Boike, J., Langer, M., Heikenfeld, M., Cox, P., Friedlingstein, P., 2015. An
1078 improved representation of physical permafrost dynamics in the JULES land-surface model. *Geosci. Model*
1079 *Dev.*, 8, 1493–1508, <https://doi.org/10.5194/gmd-8-1493-2015>
- 1080 Clapp, R.B., Hornberger, G.M., 1978. Empirical equations for some soil hydraulic properties. *Water Resour. Res.*
1081 14, 601–604. <https://doi.org/10.1029/WR014i004p00601>.
- 1082 Cuo, L., Zhang, Y., Zhu, F., Liang, L., 2014. Characteristics and changes of streamflow on the Tibetan Plateau: A
1083 review. *J. Hydrol. Reg. Stud.* 2, 49–68. <https://doi.org/10.1016/j.ejrh.2014.08.004>.
- 1084 Dai, Y., Zeng, X., Dickinson, R.E., Baker, I., Bonan, G.B., Bosilovich, M.G., Denning, A.S., Dirmeyer, P.A., Houser,
1085 P.R., Niu, G., Oleson, K.W., Schlosser, C.A., Yang, Z.L., 2003. The Common Land Model. *Bull. Am.*
1086 *Meteorol. Soc.* 84, 1013–1024. <https://doi.org/10.1175/BAMS-84-8-1013>.
- 1087 Dai, Y., Xin, Q., Wei, N., Zhang, Y., Shangguan, W., Yuan, H., Zhang, S., Liu, S., Lu, X., 2019. A Global High-
1088 Resolution Data Set of Soil Hydraulic and Thermal Properties for Land Surface Modeling. *J. Adv. Model.*
1089 *Earth Syst.* 11(9), 2996–3023. <https://doi.org/10.1029/2019MS001784>
- 1090 Duan, Q., Sorooshian, S., Gupta, V.K., 1992. Effective and efficient global optimization for conceptual rainfall-
1091 runoff models. *Water Resour. Res.* 28(4), 1015–1031. <https://doi.org/10.1029/91WR02985>.
- 1092 Durner, W., 1994. Hydraulic conductivity estimation for soils with heterogeneous pore structure. *Water Resour. Res.*
1093 30(2), 211–223. <https://doi.org/10.1029/93WR02676>

1094 Farmani, M.A., Behrangi, A., Gupta, A., Tavakoly, A., Geheran, M., Niu, G.-Y., 2025. Do land models miss key
1095 soil hydrological processes controlling soil moisture memory? *Hydrol. Earth Syst. Sci.* 29, 547–566.
1096 <https://doi.org/10.5194/hess-29-547-2025>.

1097 Fatichi, S., Or, D., Walko, R., Vereecken, H., Young, M.H., Ghezzehei, T.A., Hengl, T., Kollet, S., Agam, N.,
1098 Avissar R., 2020. Soil structure is an important omission in Earth System Models. *Nat. Commun.* 11, 522.
1099 <https://doi.org/10.1038/s41467-020-14411-z>

1100 Gharedaghloo, B., Price, J.S., Rezanezhad, F., Quinton, W.L., 2018. Evaluating the hydraulic and transport
1101 properties of peat soil using pore network modeling and X-ray micro computed tomography. *J. Hydrol.* 561,
1102 494–508. <https://doi.org/10.1016/j.jhydrol.2018.04.007>.

1103 Hillel, D., 1998. *Environmental Soil Physics*. Academic Press, San Diego, CA.

1104 Holden, J., 2009. Flow through macropores of different size classes in blanket peat. *J. Hydrol.* 364(3-4), 342-348.
1105 <https://doi.org/10.1016/j.jhydrol.2008.11.010>.

1106 Jarvis, P.G., 1976. The interpretation of the variations in leaf water potential and stomatal conductance found in
1107 canopies in the field. *Phil. Trans. R. Soc. Lond. B.* 273, 593–610. <https://doi.org/10.1098/rstb.1976.0035>

1108 Kosugi, K., 1994. Three-parameter lognormal distribution model for soil water retention. *Water Resour. Res.* 30(4),
1109 891–901. <https://doi.org/10.1029/93WR02931>.

1110 Koster, R. D., Dirmeyer, P. A., Guo, Z., Bonan, G., Chan, E., Cox, P., ... Xue, Y., Yamada, T., et al., 2004. Regions
1111 of strong coupling between soil moisture and precipitation. *Science.* 305(5687), 1138–1140.
1112 <https://doi.org/10.1126/science.1100217>

1113 Köhli, M., Schrön, M., Zreda, M., Schmidt, U., Dietrich, P., Zacharias, S., 2015. Footprint characteristics revised
1114 for field-scale soil moisture monitoring with cosmic-ray neutrons. *Water Resour. Res.* 51(7), 5772–5790.
1115 <https://doi.org/10.1002/2015WR017169>

1116 Largeron, C., Krinner, G., Ciais, P., Brutel-Vuilmet, C., 2018. Implementing northern peatlands in a global land
1117 surface model: Description and evaluation. *Geosci. Model Dev.* 11, 3279–3297. <https://doi.org/10.5194/gmd-11-3279-2018>

1119 Li, X. R., Jia, X. H., Dang, G. R., 2006. Influence of desertification on vegetation pattern variation in the cold semi-
1120 arid grasslands of Qinghai-Tibet Plateau, North-west China. *J. Arid Environ.* 64(3), 505–522.
1121 <https://doi.org/10.1016/j.jaridenv.2005.06.011>

1122 Li, L., Yang, Z.-L., Matheny, A.M., Zheng, H., Swenson, S.C., Lawrence, D.M., Barlage, M., Yan, B., McDowell,
1123 N.G., Leung, L.R., 2021. Coupling plant hydraulics and soil hydraulics in the Noah-MP land surface model to
1124 improve drought simulations of surface energy and carbon fluxes. *J. Adv. Model. Earth Syst.* 13(2),
1125 e2020MS002214. <https://doi.org/10.1029/2020MS002214>

1126 Li, J., Miao, C., Zhang, G., Fang, Y.H., Shangguan, W., Niu, G.Y., 2022. Global evaluation of the Noah-MP land
1127 surface model and suggestions for selecting parameterization schemes. *J. Geophys. Res.: Atmos.* 127(5),
1128 e2021JD035753. <https://doi.org/10.1029/2021JD035753>.

1129 Liang, J., Yang, Z., Lin, P., 2019. Systematic Hydrological Evaluation of the Noah-MP Land Surface Model over
1130 China. *Adv. Atmos. Sci.* 36, 1171–1187. <https://doi.org/10.1007/s00376-019-9016-y>

1131 Liu, R., 2026. Soil Hydraulic Properties and Noah-MP Simulation Dataset for a Qinghai–Tibetan Plateau Wetland.
1132 <https://doi.org/10.6084/m9.figshare.32197428>

1133 McCarter, C. P. R., Rezanezhad, F., Quinton, W. L., Gharedaghloo, B., Lennartz, B., Price, J., Connon R, Cappenllen
1134 P.V., 2020. Pore-scale controls on hydrological and geochemical processes in peat: Implications on interacting
1135 processes. *Earth-Sci. Rev.* 207, 103227. <https://doi.org/10.1016/j.earscirev.2020.103227>

1136 Mitsch, W.J., Gosselink, J.G., 2015. *Wetlands*, fifth ed. John Wiley & Sons, Hoboken, NJ.

- Mualem, Y., 1976. A new model for predicting the hydraulic conductivity of unsaturated porous media. *Water Resour. Res.* 12(3), 513–522. <https://doi.org/10.1029/WR012i003p00513>
- Niu, G.Y., Yang, Z.L., 2006. Effects of frozen soil on snowmelt runoff and soil water storage at a continental scale. *J. Hydrometeorol.* 7 (5), 937–952. <https://doi.org/10.1175/JHM538.1>.
- Niu, G.Y., Yang, Z.L., Mitchell, K.E., Chen, F., Ek, M.B., Barlage, M., Kumar, A., Manning, K., Niyogi, D., Rosero, E., Tewari, M., Xia, Y., 2011. The community Noah land surface model with multiparameterization options (Noah-MP): 1. Model description and evaluation with local-scale measurements. *J. Geophys. Res.: Atmos.* 116, D12109. <https://doi.org/10.1029/2010JD015139>.
- Page, A.L., Miller, R.H., Keeney, D.R., 1982. *Methods of Soil Analysis, Part 2: Chemical and Microbiological Properties*, second ed. American Society of Agronomy, Madison, WI.
- Pan, T., Hou, S., Wu, S., Liu, Y., Liu, Y., Zou, X., Herzberger, A., Liu, J., 2017. Variation of soil hydraulic properties with alpine grassland degradation in the eastern Tibetan Plateau. *Hydrol. Earth Syst. Sci.* 21(4), 2249–2261. <https://doi.org/10.5194/hess-21-2249-2017>.
- Peters, A., Durner, W., 2008. Simplified evaporation method for determining soil hydraulic properties. *J. Hydrol.* 356(1-2), 147–162. <https://doi.org/10.1016/j.jhydrol.2008.04.016>
- Peters, A., Iden, S.C., Durner, W., 2015. Revisiting the simplified evaporation method: Identification of hydraulic functions considering vapor, film and corner flow. *J. Hydrol.* 527, 531–542. <https://doi.org/10.1016/j.jhydrol.2015.05.020>
- Rezanezhad, F., Quinton, W.L., Price, J.S., Elrick, D., Elliot, T.R., Heck, R.J., 2009. Examining the effect of pore size distribution and shape on flow through unsaturated peat using computed tomography. *Hydrol. Earth Syst. Sci.* 13, 1993–2002. <https://doi.org/10.5194/hess-13-1993-2009>
- Savitzky, A., Golay, M.J.E., 1964. Smoothing and Differentiation of Data by Simplified Least Squares Procedures. *Anal. Chem.* 36(8), 1627–1639. <https://doi.org/10.1021/ac60214a047>
- Schrön, M., Köhli, M., Scheffele, L., Iwema, J., Bogen, H.R., Lv, L., Martini, E., Baroni, G., Rosolem, R., Weimar, J., Mai, J., Zreda, M., Dietrich, P., Zacharias, S., 2017. Improving calibration and validation of cosmic-ray neutron sensors in the light of spatial sensitivity. *Hydrol. Earth Syst. Sci.* 21, 5009–5030. <https://doi.org/10.5194/hess-21-5009-2017>
- Seneviratne, S. I., Lüthi, D., Litschi, M., Schär, C., 2006. Land–atmosphere coupling and climate change in Europe. *Nature.* 443, 205–209. <https://doi.org/10.1038/nature05095>.
- Shao, Y., Irannejad, P., 1999. On the choice of soil hydraulic models in land-surface schemes. *Boundary-Layer Meteorol.* 90(1), 83–115. <https://doi.org/10.1023/A:1001786023580>
- Tuller, M., Or, D., 2001. Hydraulic conductivity of variably saturated porous media: Film and corner flow in angular pore space. *Water Resour. Res.* 37, 1257–1276. <https://doi.org/10.1029/2000WR900328>.
- van Genuchten, M.Th., 1980. A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 44(5), 892–898. <https://doi.org/10.2136/sssaj1980.03615995004400050002x>.
- Van Looy, K., Bouma, J., Herbst, M., Koestel, J., Minasny, B., Mishra, U., Montzka, C., Nemes, A., Pachepsky, Y.A., Padarian, J., Schaap, M.G., Tóth, B., Verhoef, A., Vanderborght, J., van der Ploeg, M.J., Weihermüller, L., Zacharias, S., Zhang, Y., Vereecken, H., 2017. Pedotransfer functions in Earth system science: Challenges and perspectives. *Rev. Geophys.* 55(4), 1199–1256. <https://doi.org/10.1002/2017RG000581>.
- Vereecken, H., Amelung, W., Bauke, S.L., Bogen, H., Brüggemann, N., Montzka, C., Vanderborght, J., Bechtold, M., Blöschl, G., Carminati, A., Javaux, M., Konings, A.G., Kusche, J., Neuweiler, I., Or, D., Steele-Dunne, S., Verhoef, A., Young, M., Zhang, Y., 2022. Soil hydrology in the Earth system. *Nat. Rev. Earth Environ.* 3(9), 573–587. <https://doi.org/10.1038/s43017-022-00324-6>.

- Vepraskas, M.J., Craft, C.B. (Eds.), 2016. *Wetland Soils: Genesis, Hydrology, Landscapes, and Classification*, second ed. CRC Press, Boca Raton. <https://doi.org/10.1201/b18996>
- Wang, X., Wang, Z., Liu, R., 2024. Hydraulic properties within the complete moisture range of hydric soil on the Tibetan Plateau. *Water Resour. Res.*, 60(7), e2023WR036018. <https://doi.org/10.1029/2023WR036018>
- Wang, X., Liu, R., Köhli, M., Marach, J., Wang, Z.-L., 2025. Monitoring soil water content and measurement depth of cosmic-ray neutron sensing in the Tibetan Plateau. *J. Hydrometeorol.* 26(2), 155–167. <https://doi.org/10.1175/JHM-D-23-0103.1>
- Wildenschild, D., Sheppard, A.P., 2013. X-ray imaging and analysis techniques for quantifying pore-scale structure and processes in subsurface porous medium systems. *Adv. Water Resour.* 51, 217–246. <https://doi.org/10.1016/j.advwatres.2012.07.018>
- Yang, Z.L., Dickinson, R.E., Robock, A., Vinnikov, K.Y., 1997. Validation of the snow submodel of the Biosphere–Atmosphere Transfer Scheme with Russian snow cover and meteorological observational data. *J. Geophys. Res.: Atmos.* 102(D14), 19549–19558. <https://doi.org/10.1029/97JD00904>
- Yang, Z.L., Niu, G.-Y., Mitchell, K.E., Chen, F., Ek, M.B., Barlage, M., Longuevergne, L., Manning, K., Niyogi, D., Tewari, M., Xia, Y., LeMone, M.A., Holtslag, A.A.M., 2011. The community Noah land surface model with multiparameterization options (Noah-MP): 2. Evaluation over global river basins. *J. Geophys. Res.: Atmos.* 116, D12110. <https://doi.org/10.1029/2010JD015140>.
- Yang, K., Zhang, J., Wu, H., Wang, J. (2018). Analysis of soil hydraulic and thermal properties for land surface modeling over the Tibetan Plateau. *Earth Syst. Sci. Data*, 10(2), 1031–1061. <https://doi.org/10.5194/essd-10-1031-2018>.
- Zeng, C., Zhang, F., Wang, Q.J., Chen, Y.Y., Joswiak, D.R., 2013. Impact of alpine meadow degradation on soil hydraulic properties over the Qinghai–Tibetan Plateau. *J. Hydrol.* 478, 148–156. <https://doi.org/10.1016/j.jhydrol.2012.11.058>.
- Zhang, T., Zhang, Y., Jia, G.J., Dong, Y., An, S.Q., Li, X., Guo, X., Sun, Y., Liu, X., He, F., Fang, J., 2019. Grazing effects on deep soil moisture and related ecohydrological processes revealed by eddy covariance and in-situ observations on the Tibetan Plateau. *Agric. For. Meteorol.* 269–270, 330–341. <https://doi.org/10.1016/j.agrformet.2019.02.022>.