

A High-Resolution Framework for Urban Pluvial Flood Risk Mapping

Anastasia Vogelbacher^{1,2*}, Malte von Szombathely^{3*}, Marc Lennartz⁴, Benjamin Poschlod^{3,5} and Jana Sillmann³

5

[1 Institute of Geo-Hydroinformatics, Hamburg University of Technology, 21073 Hamburg, Germany](#)

[2 United Nations University Institute for Water, Environment and Health \(UNU-INWEH\), United Nations University Hub on Engineering to Face Climate Change at the Hamburg University of Technology, 21073 Hamburg, Germany](#)

[3 Earth and Society Research Hub \(ESRAH\)-, Universität Hamburg, 20144 Hamburg, Germany](#)

10 [4 Section Hydrology, GFZ Helmholtz Centre for Geosciences, 14412 Potsdam, Germany](#)

[5 Institute for Global Water Security, Hamburg University of Technology, 21079 Hamburg, Germany](#)

Correspondence to: Malte von Szombathely (malte.szombathely@uni-hamburg.de), Anastasia Vogelbacher (anastasia.vogelbacher@tuhh.de)

15

Abstract. This study presents a high-resolution framework for assessing climate-related risk at the building scale by operationalizing the IPCC risk concept, defining risk as a function of vulnerability, exposure and hazard. The framework focuses on pluvial flood risk related to people's well-being and mobility. Hazard is driven by a 100-year rainfall event (36 mm/hr), modelled with a hydrodynamic flood simulation incorporating topography, drainage capacity, and land use. Exposure is differentiated by impact type, considering residents on ground floors for well-being and building proximity to flooded streets for mobility and accessibility. Social vulnerability is quantified using socioeconomic indicators such as age, income, and education. The framework is demonstrated using empirical data from Hamburg, Germany, identifying risk hotspots where high social vulnerability coincides with elevated flood exposure. To support practical implementation, we introduce a Python-based ArcGIS pluvial flood risk toolbox that enables automated, building-level risk mapping. The transparent and flexible design makes the framework transferable to other cities, supporting climate adaptation planning and risk-informed decision-making.

20

25

Non-Technical Summary

30 With more than half of the population living currently in urban settings and increased urbanization under
changing climate leads to the need of assessing risk to climate extremes, such as pluvial flooding at local
scale. In this study, this is addressed by following the Intergovernmental Panel on Climate Change (IPCC)
risk definition, conceptualizing risk as a function of hazard, exposure, and vulnerability. The resulting
risk is presented as risk to well-being, considering residents living on the building's ground floor and the
35 risk to mobility and accessibility, considering flooded streets in close vicinity to the building. The results
identify buildings in urban areas where residents face higher flood risk due to greater social vulnerability,
increased exposure, or elevated flood hazard. We present the development and application of a Python-
based ArcGIS toolbox for estimating pluvial flood risk at the building scale. It is designed specifically for
application in urban environments. This enables urban planners to focus on the areas that require the most
40 attention. The approach is transferable to other cities, offering a practical tool for flood risk management
and climate adaptation planning.

1 Introduction

More than half of the world's population (55%) currently resides in urban areas, a figure projected to
increase to 68% by 2050 (United Nations, 2019). Urbanization, coupled with climate change, intensifies
45 the risk of pluvial flooding, especially in strongly sealed cities where intense rainfall leads to small-scale,
rapid flooding events (Arnbjerg-Nielsen et al., 2013; Fereshtehpour & Najafi, 2025; Scalenghe & Marsan,
2009). Climate change already exacerbates short-duration rainfall extremes (Lang & Poschlod, 2024),
with further intensification expected under warming scenarios (Fowler et al., 2021).

While Hamburg, Germany, is well known for severe storm-surges in the past (De Guttry & Ratter, 2022),
50 recent pluvial rainfall events gained attention by city stakeholders and the media (Boettcher et al., 2025;
Osuide, 2022). The city of Hamburg focuses endeavours for sustainable rainwater management by
developing concepts (e.g. Rainwater Infrastructure Adaptation project, (RISA)) collaboratively with the
participation of several municipal stakeholders (BUKEA, 2026). Two major and local past rainfall events
in the city located in Lohbrügge (2018) and Barmbek (2024) motivated this study. Both extreme events
55 (Schmitt, 2016) caused severe flooding, infrastructure damage, major traffic disruptions and evacuations

of a few families due to sinkholes (DWD, 2021). Recent studies emphasize the importance of understanding these extreme events at high temporal and spatial resolutions, as they significantly influence urban flood risk assessments (Sillmann et al., 2024). While ~~many several~~ modelling approaches for pluvial flood hazard and vulnerability assessment exist, their effectiveness depends heavily on data availability and local conditions (Bulti & Abebe, 2020; Cea & Costabile, 2022; Nkwunonwo et al., 2020). High-resolution models are essential for credible risk assessments and effective flood management strategies (Fritsch et al., 2016; Rehman et al., 2019). ~~In this context, the development of practical, stakeholder-oriented tools that incorporate a holistic perspective is crucial for urban resilience efforts~~

Previous work on high-resolution flood risk management mainly focused on the hazard component, e.g. by integrating high-resolution flood modelling (Bertsch et al., 2022). However, only a few cases expanded the hazard-focused few by incorporating additional variables into the risk estimation, such as susceptibility and exposure at the basin scale (Afifi et al., 2019; Devi et al., 2025) or the building usage to estimate the damage potential (Bhola et al., 2020). Other studies linked citizen science to flood modelling (Assumpção et al., 2018). Notably, certain projects have used physically-based damage modelling approaches to quantify risk more precisely (e.g. Gentile et al., 2022), providing valuable insights for urban flood risk management. However, the integration of all three variables, hazard, exposure and (social) vulnerability remains largely unaddressed on this scale.

Building on these advances, the availability of high-resolution flood simulations requires water managers and adaptation planners to access targeted insights from these extensive datasets, beyond simple overlays of layers such as flood extents, population distributions, and social vulnerability metrics. Our approach addresses this need by quantifying the combined effects of social vulnerability, exposure, and hazard, thereby enabling the identification of risk hotspots to support adaptation planning. The proposed framework emphasizes on user-friendly, stakeholder-oriented tools and goes beyond existing approaches. It provides a generic method for assessing pluvial flood risk

~~The proposed framework implementsy~~ following the Intergovernmental Panel on Climate Change (IPCC) risk definition from the Fifth Assessment Report, which ~~conceptualizing~~ conceptualizes risk as a function of hazard, exposure, and vulnerability (Field et al., 2014). To tailor this framework for an urban context, we adapt the social vulnerability concept articulated by von Szombathely et al. (2023), specifically focusing on its application

to pluvial flood hazards on a building-resolving scale. This approach emphasizes the importance of understanding social dynamics in risk assessments, aligning with recent research efforts that aim to integrate hazard-specific vulnerability profiles within urban settings (Alves et al., 2021; Prall et al., 2024). Central to this effort is the creation of a stakeholder-informed Python-based ArcGIS toolbox designed to generate flood risk maps, supporting urban stakeholders in flood risk management. We introduce two relative pluvial flood risk indices: one for well-being and one for mobility and accessibility. The well-being index measures risks to human well-being, including injuries and, in extreme cases, fatalities. It also accounts for material damage and costly, time-consuming repairs. The mobility index assesses limits on entering or leaving buildings. It also reflects disruptions to critical infrastructure and access to care and medication during emergencies. Both indices are classified in relative classes depending on the buildings included in the study area. This allows for the identification of relative risk hotspots that absolute metrics might miss, especially in areas with overall moderate risk. This framework demonstrates a transferable approach through an example using building-specific data, where the dataset is synthetically generated but informed by data from a city quarter in Hamburg. It aims to support reproducible urban flood risk assessments, enabling stakeholders and risk managers to assess flood risk holistically at the building level. We follow the FAIR Principles (Findable, Accessible, Interoperable, Reusable), ensuring that both data and methods are transparently shared and can be used effectively by other cities (Wilkinson et al., 2016). With this approach, we aim to bridge the gap between technical flood hazard modelling and decision-oriented risk management, enabling more informed, transparent, and ~~inclusive~~ holistic urban flood risk planning.

2 Data and software environment

For this analysis, we use the ArcGIS Pro Software and the Python programming language to ensure both professional functionality and open-source adaptability. ArcGIS Pro is a license-based software and for this analysis, the advanced license is used. Since ESRI products are widely used among the involved stakeholders, the primary application presented here is based on the ArcGIS Pro environment. More specifically, we employ the Model Builder tool, which enables users to sequence geoprocessing tools and package them into reproducible workflows, also known as toolsets, which are organized within a toolbox. This approach allows others to easily replicate the analytical steps described in this study.

To ensure transparency and facilitate open-source data replication, all models created using the Model Builder were also exported as Python scripts, allowing users to run or modify them outside the ArcGIS environment.

2.1 Input data

115 In this case study, we make use of hydrodynamic model simulations of urban flood water levels, which are complemented by empirical socio-economic data from a single statistical unit (neighbourhood) in Hamburg. While the hydrodynamic simulations are available at high spatial resolution, socio-economic data are typically only provided as aggregated values on the neighbourhood scale. In Hamburg, statistical
120 units are sub-regions reflecting a grouping of neighbouring building blocks that are assumed to be broadly similar in terms of their building and socio-structural characteristics (Statistisches Amt für Hamburg und Schleswig-Holstein, 2024). For this case study, we synthesized a plausible building-level realization of socio-economic and exposure data, to capture spatial variability within a city quarter.

125 The dataset shown in Figure 1 includes indicators of social vulnerability and exposure. Social vulnerability is represented by the number of children and elderly single residents (Figures 1a–b) as a sensitivity component, as well as residents who left school within the past three years without obtaining a high school diploma (equivalent to the German Abitur) (Figure 1c) and social welfare recipients, representing the coping-capacity component. These indicators are described in more detail in Section 2.2.
130 In addition, Figures 1e–h present building-related data, including the number of residents per building and per ground floor (international first floor), building height, and building use. The area is primarily composed of residential buildings, with a small number of mixed-use buildings, where the ground floor is used for commercial purposes and the upper floors for housing.

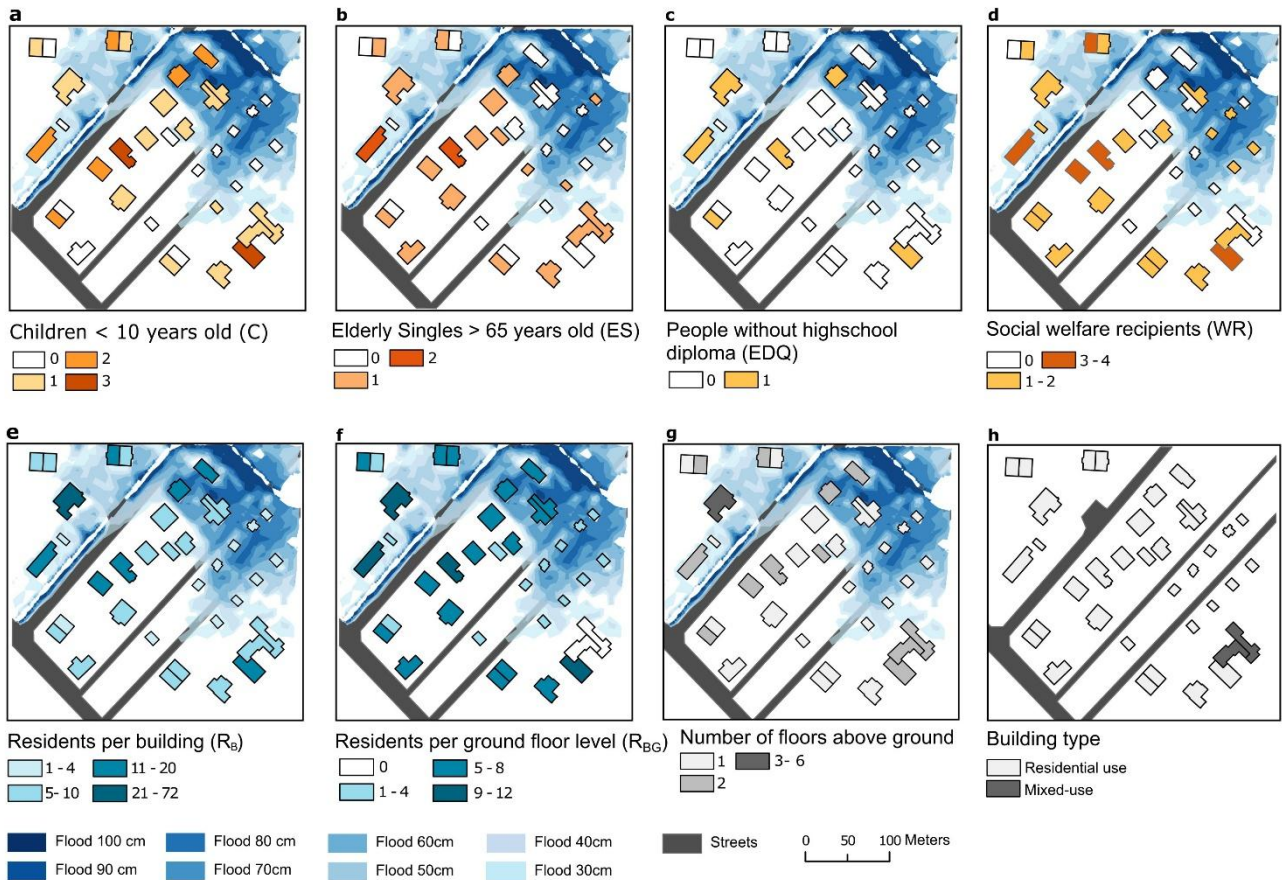


Figure 1: Underlying input data for the risk map framework. The first row (a to d) includes social vulnerability parameters, whereas the bottom row (e to h) shows exposure related variables. Hazard related variables are depicted as flooding depths between 30 and 100 cm and is omitted in panel h to fully show the street network.

This realization was developed using expert knowledge gathered during three stakeholder workshops involving local authorities (Table S1 summarizes the participating institutions). Population and social data were distributed to individual buildings reproducing the aggregated values for the whole statistical unit. While the here applied dataset is publicly available (Vogelbacher et al., 2025), high-resolution social data of this kind are rare.

To address this, we included a simple disaggregation tool within the toolbox, which is not used in this study. This tool distributes population linearly according to the living space of each building, while social characteristics are assigned equally across buildings within a statistical area. We acknowledge that this disaggregation scheme is a limitation potentially leading to an underestimation of local risk, where more

sophisticated methodologies offer improved disaggregation (Pajares et al., 2021; Sapena et al., 2022; Wardrop et al., 2018). The underlying indices and proxy data used in this analysis are described in the following.

150

2.2 Social vulnerability: Socio-economic data

As socio-economic data is often available at aggregated scales, the toolbox offers the functionality to disaggregate the data equally across a statistical unit (von Szombathely et al., 2023). As shown by von Szombathely et al. (2023), both sensitivity and coping capacity are key components of social vulnerability, and the age structure of an area plays an especially important role (Cutter et al. 2003; Fekete 2009). Authors in von Szombathely et al (2023) highlight the particular role of children and elderly singles, since they are particularly dependent on external help and less mobile. This became even clearer in past flooding events in Germany (Ahr Valley, June 2021), where mainly elderly and disabled people were affected by the flood event (Kosanic et al., 2022). Therefore, two age-based variables have been defined to address the sensitivity aspect of the social vulnerability index. A) the elderly singles variable defined as people older than 65 years living alone and B) children younger than 10 years, who generally need more assistance and may have difficulty understanding evolving situations based on their cognitive and reading skills von Szombathely et al. (2023). For our example, we created a realization at the building-level based on expert knowledge, distributing aggregated population numbers and social data from statistical units (neighbourhood) to the building level.

155

160

165

The second component in social vulnerability is coping capacity, as financial resources are crucial in disaster situations (Cutter et al. 2003). Based on data availability, eligibility for social welfare is used as a proxy for poverty and the likely need for external support (Holand et al., 2011). Additionally, the educational status is considered, since one ability to understand and improve a situation is closely related to ones coping capacity to an extreme event (described in more detail in the underlying works of von Szombathely et al., 2023; Cutter (2024) and Cutter et al.,2003). In Hamburg, this data is part of the official socio-spatial monitoring system (Freie und Hansestadt Hamburg, Behörde für Stadtentwicklung

170

und Wohnen 2021) designed to identify neighbourhoods with low social status and considers the number of residents who left school without a high school diploma (equivalent to German ‘Abitur’) within the last three years (FHH, Behörde für Stadtentwicklung und Wohnen, 2023, 2024; Statistisches Amt für Hamburg und Schleswig-Holstein, 2024). This information is the only available data source providing information on the high school level for the case study example.

2.3 Exposure: Residents and building data

We define two distinct exposure variables, one related to mobility & accessibility and one related to well-being which we describe in more detail in sections 3.1.2 and 3.2.2. Due to data protection regulations, information on the number of residents in each building is not publicly available for German cities, like Hamburg. Instead, the latest population data is reported at the statistical unit level (neighbourhood scale) based on the year 2023 (Statistisches Amt für Hamburg und Schleswig-Holstein, 2024). Hence, we distribute the number of residents to the buildings of the case study guided by the living space of the buildings. We additionally include the number of above-ground floors and their primary function (residential or mixed-use, sourced from the official land register (ALKIS) provided by the city of Hamburg (FHH, Statistikamt Nord, 2017; Landesbetrieb Geoinformation und Vermessung (LGV) Hamburg, 2020).

2.4 Hazard: Modelled flood level data and street data

Simulations of pluvial flooding are provided by Hamburg’s water supply and wastewater disposal company HAMBURG WASSER on behalf of and in cooperation with the Hamburg Ministry for Environment, Climate, Energy and Agriculture (Behörde für Umwelt, Klima, Energie und Agrarwirtschaft; BUKEA). Our case study example is based on the pluvial flood scenario triggered by a design rainfall of 36 mm/h reflecting a 100-year event (FHH, BUKEA, 2024), assuming a uniform probability of occurrence throughout the urban area with a resolution of 1 m². Thereby, the 36 mm of rainfall are distributed along the 60-minute period as Euler-II type design storm (Wartalska et al., 2020) as suggested by the German Association for Water, Wastewater and Waste (DWA, 2006).

200 The pluvial flood simulations are conducted using hydrodynamic model simulations that account for
surface runoff, soil infiltration capacity, surface interception, and the capacity of the public sewer
network. Therefore, the two-dimensional surface runoff model VISDOM (Blöschl et al., 2024; Buttinger-
Kreuzhuber et al., 2019, 2022a, 2022b; Waser et al., 2011) is bidirectionally coupled with the Storm
Water Management Model (SWMM; Rossman and Simon, 2022), which one-dimensionally represents
205 the sewer system. Model simulations were performed using a digital terrain model with a spatial
resolution of 1 m, explicitly incorporating retention basins and drainage ditches. Clogging effects of inlets
and drains are not represented in the simulations.

For the spatial analysis, any road network can be used. In this example we use road data obtained from
the official land register (ALKIS) provided by the city of Hamburg (FHH, Statistikamt Nord, 2017;
Landesbetrieb Geoinformation und Vermessung (LGV) Hamburg, 2020).

210 Table 1 provides an overview of the data used and their respective sources.

Table 1: Input data overview.

Raw variable		Data derived variables	Output variables	Analysis resolution	Original resolution	Underlying data source
Social Vulnerability	Socio-economic data	Number of children < 10 years old (C)	<u>SV_{PF}</u>	<u>Building level</u>	Statistical unit	FHH, Behörde für Stadtentwicklung und Wohnen, (2023) FHH, Statistikamt Nord, (2024)
		Elderly singles > 65 years old (ES)				
		People without high school diploma within the last 3 years (EDQ)				
		Receivers of social welfare (WR)				
Exposure	Residents data	Residents per building (R) and residents per ground floor level (RG)	<u>E_{MA}, E_{WB}</u>	<u>Building level</u>	Statistical unit	FHH, Statistikamt Nord, (2024)
	Building information	Nr. of floors above ground and building type	<u>E_{MA}, E_{WB}</u>	<u>Building level</u>	Building level	Landesbetrieb Geoinformation und Vermessung (LGV) Hamburg, (2020)
Hazard	Flood data	Water level based on pluvial flood scenario based on a rainfall of 36 mm/h reflecting a 100-year event	<u>H_{MA}, H_{WB}</u>	<u>1m²</u>	<u>1m²</u>	FHH, BUKEA, (2024)
	<u>Infrastructure</u>	<u>Street outlines</u>	<u>Intersected areas with flood layer</u>	<u>Intersected areas with flood layer</u>	<u>1m</u>	<u>FHH, Statistikamt Nord, (2017)</u>

3. Methodology

The applied input data and overall structure of the here presented methodology is presented in Figure 2.

215 The figure illustrates the methodological framework developed to assess pluvial flood risk (PFR) by integrating Social Vulnerability (SV), Exposure (E), and Hazard (H). Each component is processed separately based on its native data structure and subsequently harmonized to a common spatial resolution (building polygons) before the final risk calculation.

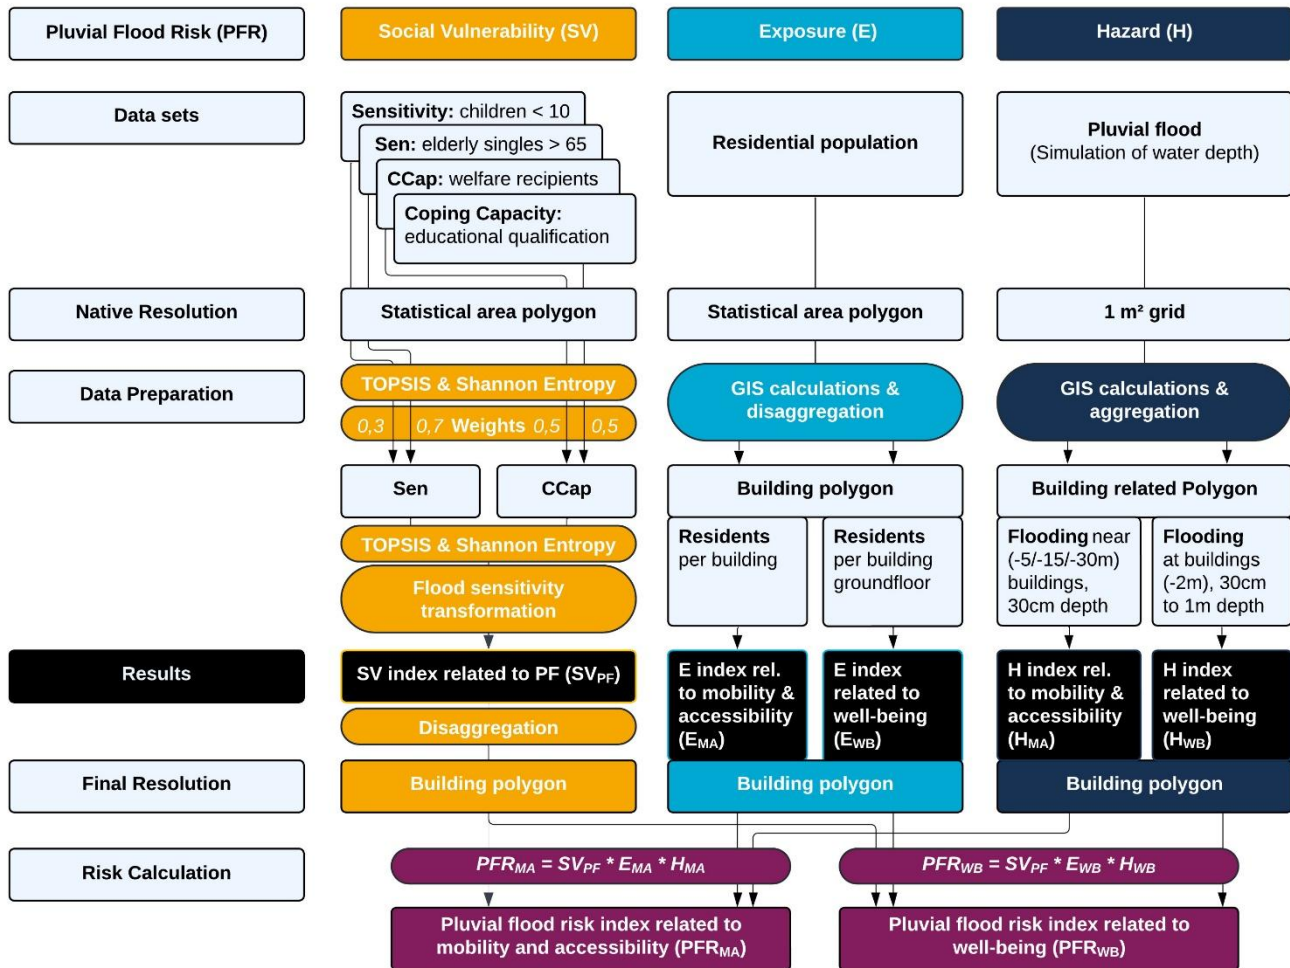


Figure 2: Overview of the applied methodology for calculating pluvial flood risk at the household level in an exemplary urban environment. Colours and labels indicate the individual components and processing steps of the risk calculation.

The structure of the framework also serves as the structure for this section. Section 3.1 describes the conceptual design and data preparation for each column. Section 3.2 then shows the exact calculation and implementation in the ArcGIS toolbox.

3.1 Underlying concepts and data pre-processing

3.1.1 Social vulnerability


230 The concept of SV is based on the selection of socio-economic variables that must be related to each other. Each increase of each variable must increase vulnerability and the assigned variables should be categorized in either Sensitivity or Coping Capacity for flood events. ~~It is important to ensure that horizontal social distinctions (such as age) contribute to sensitivity, while vertical distinctions (such as income) (Bourdieu, 1984) influence coping capacity.~~

235 For the calculation of social vulnerability (SV) we followed the procedure presented in von Szombathely et al., (2023), where SV is calculated considering the coping capacity and sensitivity, both represented with equal importance (0.5, 0.5). These weights are based on an analytical hierarchy process and local expert opinions. All weights in either the group of sensitivity or coping capacity have to add up to one. In the case study, sensitivity is defined by assigning a weight of 0.7 to children under 10 years old (C) and
240 0.3 to elderly singles over 65 years old (ES). For coping capacity, equal importance (0.5) are used between the number of residents who left school without a high school diploma within the previous three years (EDQ) as well as recipients of social welfare (WR).

Since we include several variables that contribute to a combined flood risk index, it is important to consider how these variables interact to create a comprehensive assessment of flood risk. While the
245 alternatives can be easily ranked based on a single attribute, combining all attributes into a single index requires special techniques. One method in flood risk analysis is the Technique for Order Performance by Similarity to an Ideal Solution (TOPSIS) (Hwang & Yoon, 1981) which has been applied in several flood risk analysis' (Ekmekcioğlu et al., 2021; Nguyen et al., 2020; Pathan et al., 2022; Rafiei-Sardooi et al., 2021; Yang et al., 2018) and was applied in this work in addition to the methodology presented von
250 Szombathely et al., (2023). This technique quantifies for each alternative (A1 - A8 in Figure 3) the relative distance to the positive ideal (A⁺ in Figure 3) and negative ideal (A⁻ in Figure 3) and ranks them accordingly.

The TOPSIS method can compare attributes with differing units and is able to incorporate specific weights for each attribute. The values assigned to each alternative can also be interpreted geometrically: for each
255 attribute, the maximum (A⁻) and minimum (A⁺) values define two ideal points within a multidimensional

space. The dimension is equal to the number of different attributes. Then each alternative occupies a place in space. Lastly, we can calculate the relative Euclidean distance to the negative and positive ideal (A^- , A^+ see Figure 3).

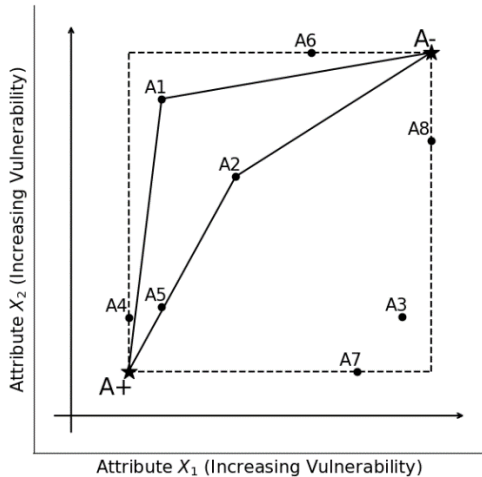

260 **Figure 3: Conceptual description of social vulnerability (adapted from Dyson et al., (2017)).** A^- and A^+ represent negative and positive ideals of the vector space (dashed lines) spanned by the smallest and largest attributes of the alternatives (A_1 to A_8). The solid lines depict the distance between two example points (A_1 and A_2) to either ideal point.

Heterogeneity may be a driving factor in the way attributes contribute to the final risk index. This is not considered in the TOPSIS approach but can be compensated by applying the Shannon Entropy method
 265 (Shannon, 1948). Other studies have already applied this concept in a flood risk context (Malekinezhad et al., 2021; Yang et al., 2018). In our analysis, both the TOPSIS and the Shannon Entropy methods are applied to the estimation of Sensitivity, Coping Capacity and the Social Vulnerability Index (SVI).

The distribution of the Social Vulnerability Index depends heavily on the variability of the initial socio-economic data, which is in turn dependent on the spatial resolution of the socio-economic data. Since we
 270 aim for an application of the IPCC risk framework to urban pluvial flood risk, it would be ideal to have socio-economic data at the building resolution. The coarser the resolution of the input variables used to calculate the SVI, the more the SVI follows a normal distribution. Given that our analysis is applying the risk framework at the household level, the social vulnerability data is skewed. When multiplying the social vulnerability with the exposure and hazard indices as foreseen by the IPCC risk framework, the
 275 skewed social vulnerability data would affect the final risk index less compared to exposure and hazard.

To mitigate this, we square social vulnerability values to approximate a more normal distribution of SVI values.

280 In addition, we address the implication of the IPCC risk framework, which defines risk as the product of hazard, exposure, and social vulnerability, and would therefore assign zero risk to observations with “no” social vulnerability. In the case of the proposed SVI depending on age, social welfare and the high school diploma, zero values of the SVI are possible on the building scale. To prevent that this leads to zero risk, a value of a quarter mean of the SV value is added to the SV value. This is an arbitrary choice and we acknowledge the possible variations of resulting risk. Therefore, we show the effect of varying transformation thresholds on the overall estimated risk within the sensitivity analysis (Section 4.1).

285 **3.1.2 Exposure**

In line with the IPCC framework, we define exposure as the presence of people in areas that may be adversely affected by pluvial flooding. In this study, exposure is assessed in relation to the residential population and their places of residence. Since different flood hazards have varying impacts, we differentiate between hazards to mobility restrictions & accessibility and hazards to well-being, leading
290 to two distinct exposure concepts:

1. **Exposure related to mobility & accessibility (E_{MA}):** Includes all residents of a given building, as flooding can affect their ability to enter or exit the premises.
2. **Exposure related to well-being (E_{WB}):** Considers only individuals residing on the ground floor, as they are directly affected by water entering the building.

295 For the case that population data is not present on building level but, we provide a sub-tool within the toolbox, which can allocate population data at the building level, assuming a uniform population distribution within each statistical unit. The total population is then distributed among residential buildings in proportion to their available living space. In the case of mixed-use buildings, we assume that the first floor (equivalent to ground floor) is dedicated to commercial use and does not contribute to the
300 residential living area. This method improves the spatial accuracy of our exposure assessment by ensuring a more realistic distribution of inhabitants.

3.1.3 Hazard

In this study, we consider urban pluvial flooding as the hazard. We define water level thresholds based on existing studies on pluvial flooding (Bhola et al., 2020; Calianno et al., 2013; Lazzarin et al., 2022) and building regulations (Bignami, 2019). Following the two distinct exposure concepts we define two pluvial flood hazards:

1. **Hazard related to well-being (H_{WB}):** Water levels between 30 cm and 1 m with 10 cm increments directly adjacent to buildings, to assess the potential for damage and danger to well-being.

2. **Hazard related to mobility and accessibility (H_{MA}):** 30 cm as a threshold for flooding near buildings, to evaluate how flooding impacts movement and access in affected areas.

We used water levels of equal to or higher than 30 cm as a lower threshold, as they obstruct evacuation and rescue, enhance the occurrence of street blocking and stranded vehicles, and significantly reduce safe movement in flooded areas (Calianno et al., 2013, Lazzarin et al., 2022). In the context of a design rainfall event with an intensity of 36 mm/h (corresponding to a 100-year return period; Schmitt, 2016) this threshold captures realistic near-building inundation depths that threaten well-being and accessibility, even at moderate flow velocities (0.5-2 m/s) typical of such events (Landesanstalt für Umwelt, Messungen und Naturschutz Baden-Württemberg (LUBW), 2016).

3.1.4 Risk


Building on the previously established data indices, flood risk at the building level is assessed using the IPCC Risk Assessment framework (Intergovernmental Panel On Climate Change (IPCC), 2021), which integrates hazard, exposure, and vulnerability to quantify risks associated with pluvial flooding. This approach enables a detailed evaluation of flood-related impacts on mobility & accessibility and well-being in Hamburg. Based on this conceptual decision to define two different approaches to hazard and exposure, we ultimately calculate two different risk indices:

1. **Pluvial flood risk to well-being (PFR_{WB})**

2. **Pluvial flood risk to mobility and accessibility (PFR_{MA})**

3.2 Toolbox architecture and model development

330 To adopt the theoretical concepts into reproducible workflows, we made use of the ArcGIS Pro (V.3.2.0) model builder. We created a Risk Map Toolbox (<https://doi.org/10.5281/zenodo.17986182> Vogelbacher et al., 2025), which contains all calculation steps needed to represent the here shown results. The tools are stored in three toolsets, following the presented structure of the IPCC including Vulnerability, Exposure and Hazard (Figure 4). For the final risk calculation, a script-based tool is added, as well as an
 335 optional tool which calculates the boundary classes used for the applied visualization.

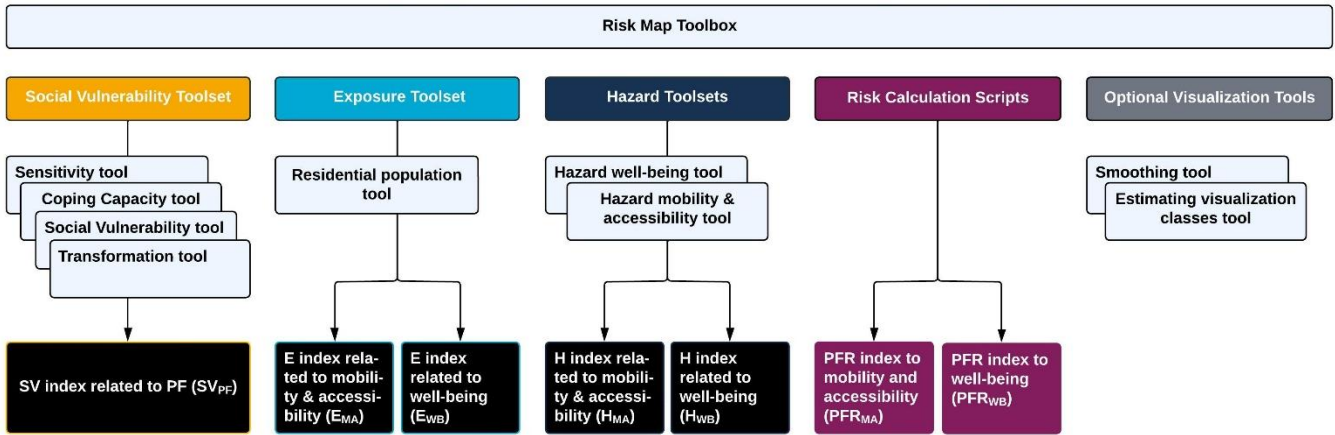

340 **Figure 4: Outline of the Risk Map Toolbox.** The coloured boxes represent the corresponding risk parameters (Social Vulnerability, Exposure, Hazard, and Risk Calculation), containing toolsets and scripts for the respective calculation steps. Black boxes represent the result(s) of each **toolset**, necessary for the risk calculation (dark purple boxes). For an overview of the appearance in ArcGIS and the actual user interfaces, please refer to Figure S14.

3.2.1 Social vulnerability toolset

The SV toolset calculates Sensitivity, Coping Capacity, and the SV index using TOPSIS, and its transformed version using the flood sensitivity transformation tool. Each vulnerability tool allows adjustment of the weights for Sensitivity and Coping Capacity. Within each group, the weights must sum
 345 to one and can be modified in the toolbox (Equ. 1 - 3).

$$SV_i = F_{TOPSIS}(CC_i, S_i, 0.5, 0.5) \quad , \text{ with} \quad (1)$$

$$CC_i = F_{TOPSIS}(C_i, ES_i, 0.3, 0.7) \quad , \text{ and} \quad (2)$$

$$S_i = F_{TOPSIS}(WR_i, EDQ_i, 0.5, 0.5) \quad (3)$$

350 where the TOPSIS procedure is represented as F_{TOPSIS} for the coping capacity (CC_i), and Sensitivity (S_i), for each alternative (building) i .

In more detail, to apply TOPSIS, all attributes are normalized (Eq. 4), and then multiplied with the specific weight. The normalization of each alternative can be expressed as:

$$z_{ij} = \frac{x_{ij}}{\sum_{i=1}^m x_{ij}}, j \in \{1, \dots, n\}, i \in \{1, \dots, m\} \quad (4)$$

355 where z_{ij} is the normalized attribute and x_{ij} reflects the unweighted value for the i -th alternative (buildings) and j -th attribute (relative share of C, ES, WR, EDQ).

The maximum and minimum values for each attribute define two ideal points in a multidimensional space (Eq. 5). We can calculate the relative Euclidean distance to this negative and positive ideal (A-, A+ see 360 Figure 3). Generally speaking for alternative A_i with n different attributes, let z_{ij} be the normalized attribute then:

$$F_{TOPSIS}(z_{i1}, \dots, z_{in}, w_1, \dots, w_n) = \frac{\sqrt{\sum_{j=1}^n w_j^2 (\min_i(z_{ij}) - z_j)^2}}{\sqrt{\sum_{j=1}^n w_j^2 (\min_i(z_{ij}) - z_j)^2 + \sum_{j=1}^n w_j^2 (\max_i(z_{ij}) - z_j)^2}} \quad (5)$$

with n attributes, where z_{ij} is the normalized attribute and j reflects the unweighted attribute for the i alternative.

365 Additionally, we apply the Shannon Entropy method. The idea of the Shannon Entropy method is to multiply the final risk index with an entropy-index between 1 and 2, where 1 indicates complete homogeneity and 2 indicates total inhomogeneity across different attributes. More specifically, for m alternatives with n attributes, where z_{ij} is the normalized attribute and j reflects the unweighted attribute for the i -th alternative, the entropy U_i is calculated following Eq. 6:

$$370 \quad U_i = 2 + \frac{1}{\ln(n)} \sum_{j=1}^n \left(\frac{z_{ij}}{\sum_{j=1}^n z_{ij}} \ln \left(\frac{z_{ij}}{\sum_{j=1}^n z_{ij}} \right) \right), i \in \{1, \dots, m\} \quad (6)$$

The effect of heterogeneity depends on the specific context and its application should be evaluated individually for each hazard scenario. Hence, our toolbox offers the user to choose if Shannon Entropy shall be applied (please see additional screenshots of the tool user interfaces provided in the supplementary material Figure S2 a to c.).

375 Finally, we perform two additional transformations, addressing the specific data distribution of SV (flood sensitivity transformation, see Figure 1): (a) To mitigate the skewed social vulnerability data, we square social vulnerability values to approximate a more normal distribution of SV values; (b) to prevent that zero SV values lead to zero risk, a value of a quarter mean of the SV value is added to the SV value (see Eq. 7). This threshold must be evaluated individually for different hazards or cities. Hence, our toolbox
380 offers the user to apply different thresholds if needed (no, half or one mean value)

$$SV_{PF} = \left(U_i \cdot SV + \frac{Mean(U_i \cdot SV)}{4} \right) \quad (7)$$

, with the Entropy U_i , and the previously calculated social vulnerability value (SV).

All four tools are coded in Python and were incorporated within the ArcGIS framework. An exemplary outline of the calculated values is depicted in Figure S3. We show the sensitivity to changes of this
385 threshold within the sensitivity analysis.

3.2.2 Exposure toolsets

The calculation of Exposure contains one tool (see Figure 4) including several sub-tools which are linked to one-another. The full workflow exported from the toolbox can be viewed in the supplementary Figure S4. First, both input data, the available data based on the statistical unit and the building information are
390 combined (See Figure S5 a to c). Then, the available living area per building is calculated based on the following equation (Figure S5 d and e) (Eq. 8).

$$A_B = (Fl - (B - 1)) \cdot A_P \quad (8)$$

Where A_B is the area of each building (in m²), Fl being the number of floors of the corresponding building
395 and B the building type, ($B = 1$ for residential, $B = 2$ for mixed use, containing no residents on the base floor level but in the upper levels), and A_P for the area (in m²) of each building.

Following the two previously mentioned exposure concepts of E_{MA} , including all residents of a given building and E_{WB} , considering only individuals residing on the ground floor level, the subsequent Eq. 9 and Eq. 10 are used to obtain E_{MA} and E_{WB} .

$$400 \quad E_{MA} = \frac{A_B}{A_{LSU}} * R_{SU} \quad (9)$$

with A_B being the area in m^2 of each house, A_{LSU} the total living area in m^2 within the statistical unit and R_{SU} , the overall number of residents living in the corresponding statistical unit (SU).

$$E_{WB} = \frac{-(B-2) \cdot EMA}{Fl} \quad (10)$$

405 With building type ($B = 1$ for residential, $B = 2$ for mixed use) and the number of floors in the corresponding house (Fl).

The corresponding tools are shown in Figure S5 e to i). An excerpt of the resulting attribute table after implementing the exposure calculation is depicted in Figure S6.

3.2.3 Hazard toolsets

410 The calculation of the hazard is two-fold, one toolset is developed for the calculation of the hazard to mobility & accessibility and one for the hazard to well-being.

The assessment of the hazard to well-being is carried out in two stages (see Figure S7). The first tool computes the areas of intersection between all flood-depth layers from 30 cm to 100 cm (with 10 cm increments) and the affected buildings (see Figure S7 a and c). To account for potential water intrusion near buildings, we applied a 2-meter buffer around all buildings, which was determined based on the
415 native 1-meter resolution of the flood simulation, expert knowledge, and stakeholder workshops in Hamburg, as well as following the approach of von Szombathely et al., (2025).

The second tool (as shown in Figure S7 b) calculates the hazard to well-being (H_{WB}) following a cumulative distribution function (CDF; Φ) of the log-normal distribution with $\mu = 0$ and $\sigma = 0.25$.

$$F_X(x) = \Phi \left(\frac{\ln(x) - \mu}{\sigma} \right) \quad (11)$$

420 We derive the hazard index with

$$H_{WB} = \sum_{i=30}^{100} [F_X(4 \cdot A_{2m,i})], \quad i \in \{30, 40, 50, 60, 70, 80, 90, 100\} \quad (12)$$

where $A_{2m,i}$ as the fraction of the flooded area within a 2 m buffer at the water level i (in centimeter).

The toolset of the well-being hazard considers all potential flood-layers included in the corresponding input folder. In the sensitivity analysis, we therefore discuss the sensitivity of the applied method using a
425 lower flooding threshold (20 cm). An example of the resulting output table is shown in Figure S8.


The assessment of the hazard to mobility and accessibility includes two tools. Using the first tool (see Figure S9 a and c), we determine the areas of intersection, expressed in square meters (labelled with A) and percentages (labelled with P), between the flood hazard layer and (a) a 5 m buffer around each building, representing the feasibility of accessing the building, and (b) 15 m and (c) 15-to-30 m buffers
430 around affected buildings, capturing potential intersections with the road network.

The second tool (Figure S9 b) includes the calculation of the actual hazard as described in von Szombathely et al., (2025), where the hazard index related to mobility and accessibility (H_{MA}) is calculated using the maximum value derived from the Eq. 13.

$$H_{MA} = \text{Max}[F_X(4 \cdot A_{5m,30cm}), F_X(4 \cdot R_{15m,30cm}), F_X(4 \cdot R_{30m,30cm})] \quad (13)$$

435 There, $A_{5m,30cm}$ refers to the fraction of area within a 5 m buffer, which is flooded above a 30 cm water level. $R_{15m,30cm}$ and $R_{30m,30cm}$ describe the fraction of road area within a 15 m buffer and 15-to-30m buffer, respectively, which are flooded above a 30 cm water level.

To ensure relevant insights into surrounding road conditions and to exclude greater hazard ratings due to small flooded road areas, only flooded road areas exceeding 4 m² are included. A schematic drawing
440 (Figure 5) depicts the applied buffers and intersections applied. Figure S10 shows an excerpt of the resulting H_{MA} values.

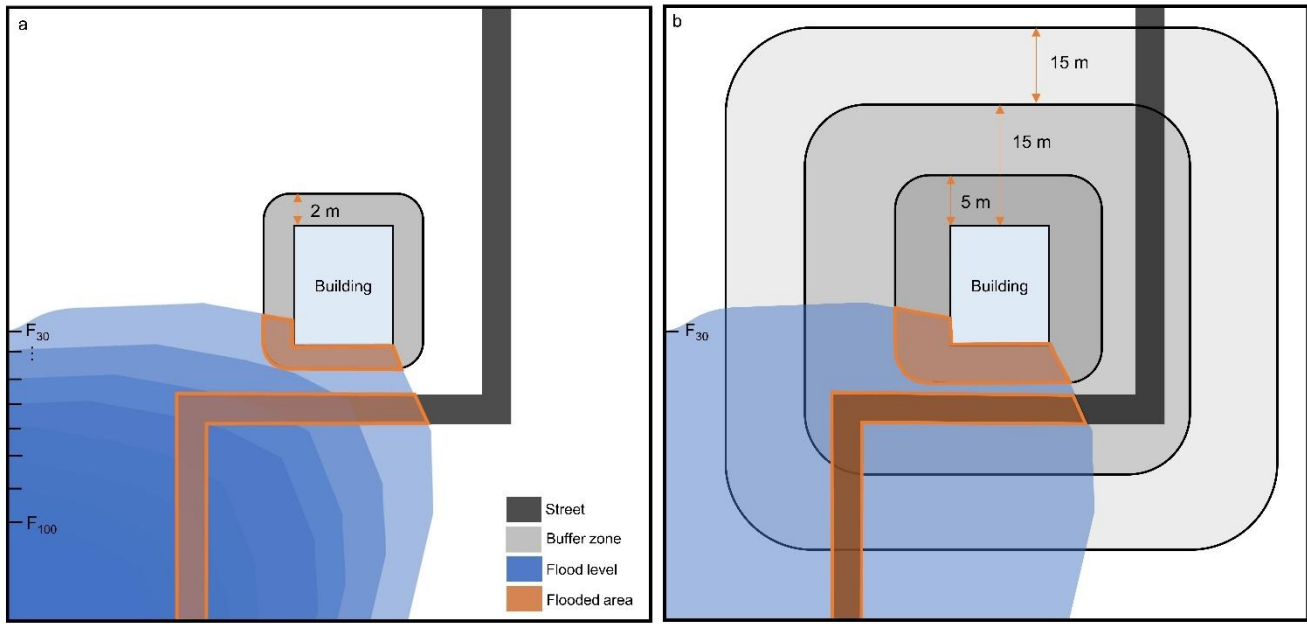

445 **Figure 5: Schematic of the hazard concept.** (a) shows the schematic for the hazard of well-being, including flood levels (F) between 30 cm to 100 cm and a 2 m buffer around a building to assess water at the building as a threat to well-being (b) depicts the framework for the hazard of mobility and accessibility using a 5 m, 15 m and 15-30 m buffer around a building at a 30 cm flood level, taking into account high water levels on streets and blocked access to a building. Orange color highlights the flooded buffer around the building and the flooded road area.

3.2.4 Risk tool

In a final calculation, the calculated sub-indices for social vulnerability, exposure and hazard are linked to obtain two specific risks during pluvial flooding events, one related to well-being (PFR_{WB}) and the other one related to mobility and accessibility (PFR_{MA}).

The PFR_{WB} is calculated as:

$$PFR_{WB} = (SV_{PF})^a \cdot (E_{WB})^b \cdot (H_{WB})^c \quad (14)$$

445 Where SV_{PF} reflects the social and economic characteristics that influence flood resilience, E_{WB} considers the number of ground-floor residents, as those are most vulnerable to direct flood impacts, and H_{WB} measures the likelihood and severity of floodwater intrusion at the ground floor level. Exponents a, b, and c reflects their corresponding (optional) weights.

$$PFR_{MA} = (SV_{PF})^a \cdot (E_{MA})^b \cdot (H_{MA})^c \quad (15)$$

With SV_{PF} reflecting the social and economic characteristics influencing flood resilience, E_{WB} considering
460 the number of ground-floor residents, as those are most vulnerable to direct flood impacts, and H_{WB}
measuring the likelihood and severity of floodwater intrusion at the ground floor level.

Within the toolbox, we provide further options by selecting the exponent for each sub-index (hazard,
exposure and social vulnerability), which allows for further specific weighting of the sub-indices in the
final risk assessment (see Figure S11). An excerpt of the resulting risk values and related sub-indices is
465 shown in the supplementary Figure S12. Additionally, we provide a tool to estimate the visualization
classes (no risk to very high risk) based on an iterative mean-based filtering process. In this context, the
absolute values themselves are not decisive, rather, the relative gradations between them determine the
risk structure. This approach ensures that the classification of risk classes reflects the data's internal
structure (see Figure S13).


470 **4 Results and discussion**

The resulting pluvial flood risk is provided by assessing the risk to well-being (Figure 6) and risk to
mobility and accessibility (Figure 7).

4.1. Risk to well-being

Using this example case study, we first present the pluvial flood risk to well-being as calculated by
475 integrating social vulnerability, exposure and hazard. The composition of social vulnerability reveals how
SV emerges from the interaction between sensitivity and coping capacity. Social vulnerability becomes
high or very high for buildings with elevated sensitivity, for example due to the presence of young
children or elderly residents living alone (indicated by darker red shades in Figure 6 a). However, SV can
be reduced where coping capacity is comparatively high (Figure 6 b), resulting in an overall medium level
480 of social vulnerability to pluvial flooding (Figure 6 c). For the estimation of pluvial flood risk to well-
being, exposure is limited to residents living on the ground floor, such as in mixed-use buildings with
offices or stores on the ground level and apartments above. This highlights a potential limitation of this
framework, where based on the building scale, case specific information is not captured, such as the
building's entry side, the likelihood of water intrusion into the basement, or the feasibility of

485 implementing protective measures. However, the presented toolbox allows users to adjust the weighting of individual parameters, for instance by applying a higher weight to the sub-index to better reflect specific conditions where necessary. Overall, the resulting risk map for well-being captures spatially differentiated patterns and helps identify areas where targeted adaptation measures may be required.

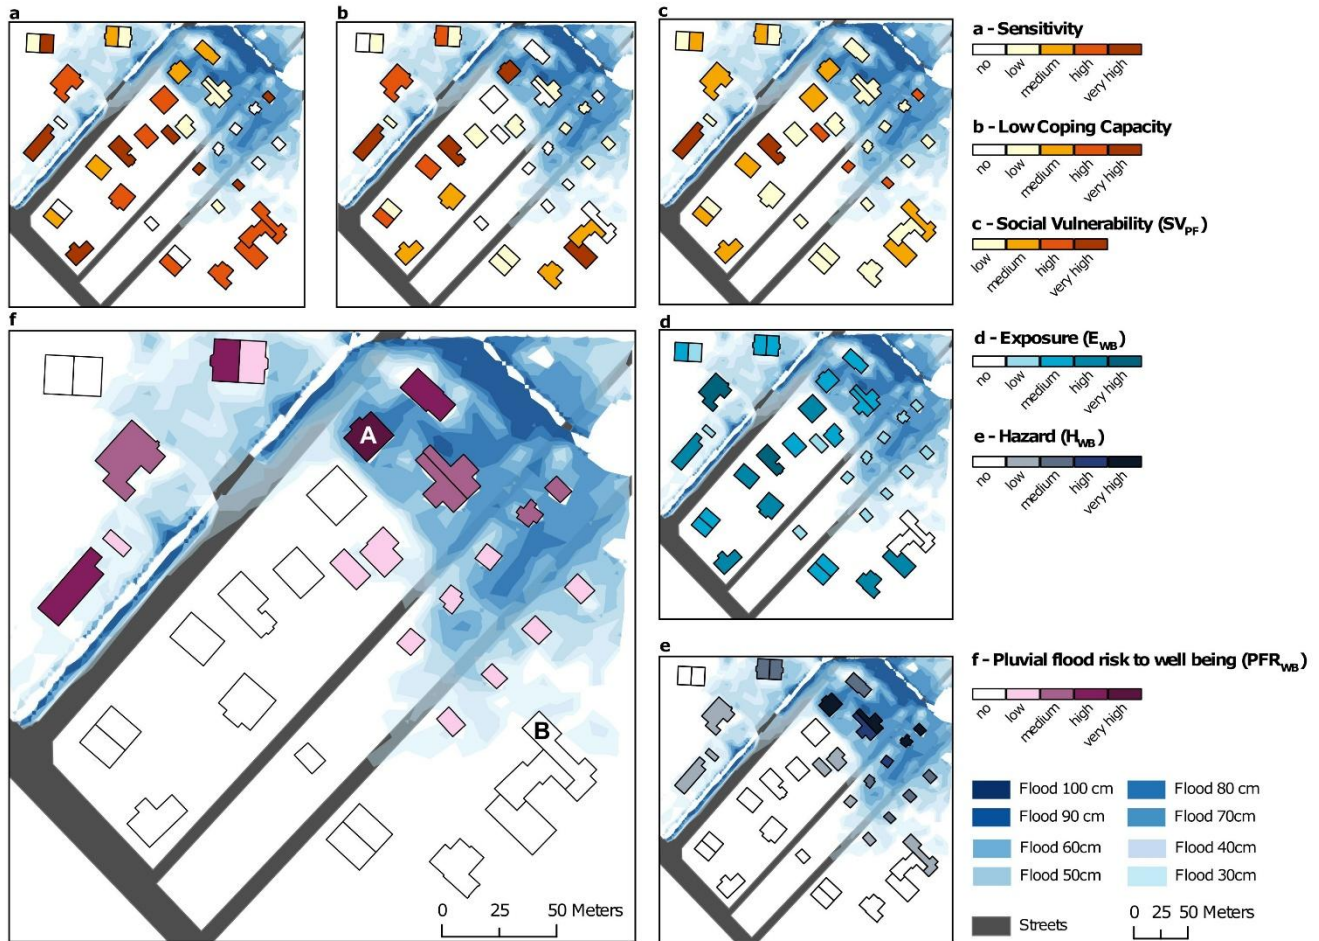

490 **Figure 6: Pluvial flood risk to well-being.** (a) shows sensitivity based on the presence of young children and elderly singles. (b) depicts the coping capacity and (c) the combination of both leading to the transformed social vulnerability index. (d) shows the exposure as the number of residents of the ground level per building, (e) depicts the hazard based on the 30 cm - 100 cm flood levels and (f) shows the final pluvial flood risk to well-being.


495 **4.2. Risk to mobility and accessibility**

Figure 7 presents the risk to mobility & accessibility with a focus on the street network under a flood depth of 30 cm. While social vulnerability remains identical to the assessment of risk to well-being (Figure 7 a to c), the exposure is defined differently and now considers all residents per building (Figure 7 d). The corresponding hazard (Figure 8 e) considers the flooded areas in close vicinity to the house (5 m) as well
500 as flooded street segments located within distances of 15 m and 15 - 30 m.

The application of the pluvial flood risk toolbox revealed higher risks for buildings in close vicinity to flooded areas and streets, especially, where high exposure and high hazard categories coincide. This is exemplified by the building assigned to the highest risk class (see Building A in Figure 7 f). Notably, buildings with higher exposure, in this example due to larger building size (leading to possibly larger
505 intersections with flooded areas) are assigned higher risk categories than smaller buildings with lower exposure, such as the single-family homes along the two streets (Example building B in Figure 7 f). This is also due to the linear aggregation of exposure data from city sub-level to building scale.

Some buildings (see e.g. Building B in Figure 7 f) were attributed a low risk to mobility and accessibility, even though for some houses the social vulnerability and hazard category were classified as high.
510 Besides the impact of the relatively low exposure, this captures a limitation of the framework when applied to a small example area with a high hazard level. It is related to the calculation of risk-classes, for which a mean-based classification was applied to capture the distribution in the (example) area. Due to the high level of hazard in the study area, a relatively high share of houses is assigned with risk to mobility. If considering this framework for a whole city, the risk categories will be shifted, and the class of the
515 example building B in this case would be assigned a higher risk class (see for example von Szombathely et al., (2025)). On the one hand, the relative risk assessment is a limitation, as the value itself cannot be interpreted (see also Russo et al. 2019). On the other hand, the relative nature of the framework allows to capture the heterogeneity of the input data and provides a base for relative prioritization of necessary adaptation measures. Using this case example, we examine the behavior of the risk calculation on building
520 level for typical urban building types, such as a city quarter in Hamburg. Semi-detached houses, consisting of two identical units sharing a common wall, show a distinct response within this framework. Within the toolbox we account for this by excluding the building area from the buffered area, resulting in

a higher risk category to the side facing a flooded street, whereas the opposite side receives a lower or no risk classification (see building C in Figure 8 f). Although the calculation follows the risk framework, it reveals methodological shortcomings arising from the use of building-based data to infer risk for residents. For example, for two semi-detached houses with the same number of residents and same social vulnerability and hazard, the resulting risk index would increase, if the semi-detached buildings would be counted as one single building. In such cases, a careful interpretation by stakeholders and city management on a case-by-case basis is required.

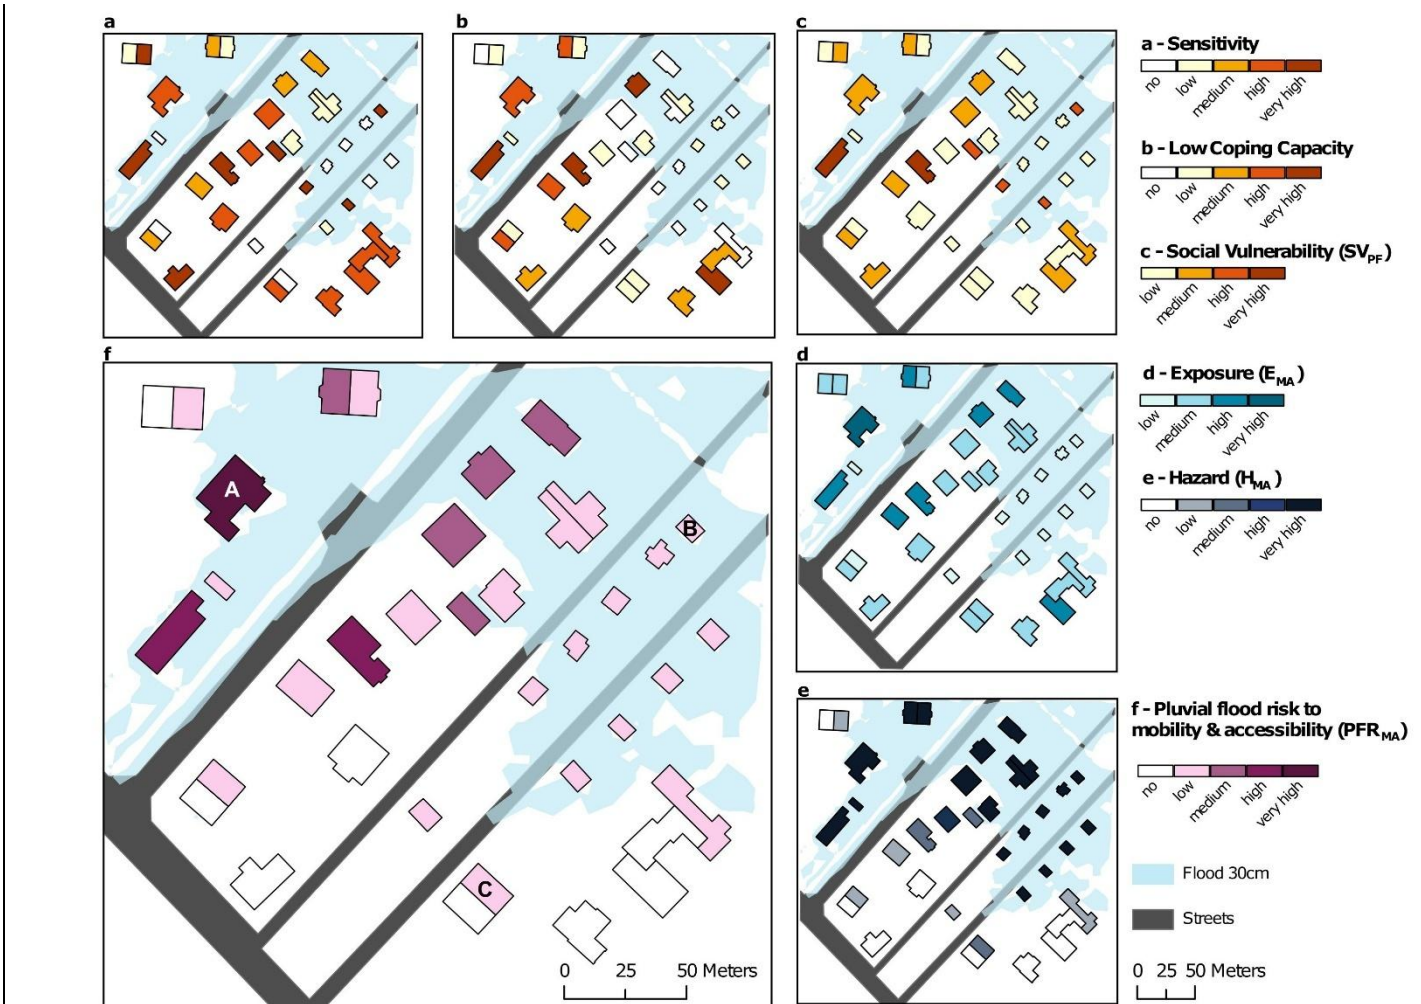

530

Figure 7: Pluvial flood risk to mobility & accessibility. (a) shows sensitivity based on the presence of young children and elderly singles. (b) depicts the coping capacity and (c) the product of both leading to the transformed social vulnerability index. (d) shows the exposure as the number of residents per building, (e) depicts the hazard based on the 30 cm flood level and (f) shows the final pluvial flood risk to mobility & accessibility.

Nevertheless, this approach provides a viable framework for calculating high-resolution risk, effectively capturing both risks to well-being as well as to mobility and accessibility. The automated calculation implemented in the provided toolbox enables the transfer of this approach to real-world case studies and facilitates its application across different urban settings.

540 **4.3 Sensitivity, validation, and transferability of the approach**

The toolbox provides a framework for calculating explicit flood risk indicators but requires several context-dependent assumptions regarding parameter values and transformations. These choices can be flexibly adjusted, influencing the resulting risk indices. As the index classification is meaningful only in a relative sense, we assess its sensitivity by comparing changes in average relative risk across groups of
545 buildings with similar risk characteristics.

For the calculation of the SV index the choice of lower threshold for the flood susceptibility transformation is adjustable. Adding a threshold to the SVI ensures that social vulnerability never reaches zero within the risk framework, which would otherwise eliminate risk entirely. Since vulnerability depends on multiple socioeconomic factors, individuals can only become more or less vulnerable but
550 never entirely invulnerable to pluvial flooding. We see that the at-risk buildings are much less sensitive to the choice of threshold added (see Figures 8 a & d), while the lowest risk class is particularly susceptible to changes across all scenarios, not just those affecting the SVI itself. This holds for both the PFR_{WB} as well as PFR_{MA} with the most at-risk group being about half as sensitive as the least at-risk group. In more detail, adjusting additional thresholds for the SVI, which would alter the vulnerability classification, has
555 a greater impact on mobility and accessibility risk than on well-being risk. This occurs because mobility depends more sensitively on discrete threshold exceedances that define accessible and inaccessible areas, respectively skewed distribution and increases the weight of cases with extremely high SVI values. Thereby the SVI achieves a higher impact on the total risk, which is comparable to the impact of the hazard and exposure. We emphasize that the transformation power can be set by the user according to the needs of the respective risk assessment. Again, both the PFR_{WB} and the PFR_{MA} show that at-risk buildings have a lower sensitivity to the exponent. For the least at-risk buildings, risk values halve for
560

each increase of the exponent. The inverted trend for the high-risk class in Figure 8 e is due to the very small number of buildings (n = 2) in this class, both with a very high social vulnerability, which explains the apparent reversal in trend in this particular case.

565 Finally, the range of flood depths in the hazard layer influences the overall risk distribution. We therefore illustrate how each risk class responds to varying hazard ranges (Figure 8c, f). For H_{WB} , we test the sensitivity of flood depths between 20 cm and 100 cm as well as between 40 cm and 100 cm (Figures 8 c & f). Reducing the hazard range lowers total risk simply by covering less area (as shown in Figure 5), though these changes affect well-being risk more substantially than mobility risk. Again, we can see that
570 the group with the lowest overall risk is more sensitive to changes. One exception here is the "very high" risk building category in PFR_{MA} , which is empty at an entry threshold of 40 cm and therefore drops to 0. Similar effects can be expected when adjusting the flood depth used to calculate the H_{MA} , with high-risk buildings having lower sensitivities in regards to their PFR_{MA} . However, individual buildings may have very high sensitivities regardless of their original risk value.

575 To sum up, patterns are consistent across different classes of PFR results, with larger deviations observed for "low" categories under alternative thresholds, transformations, and hazard ranges.

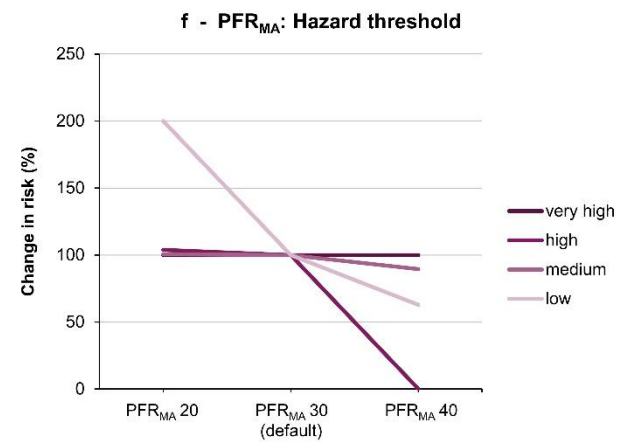
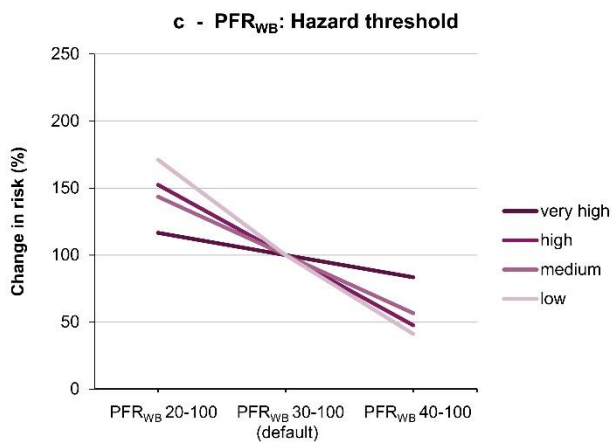
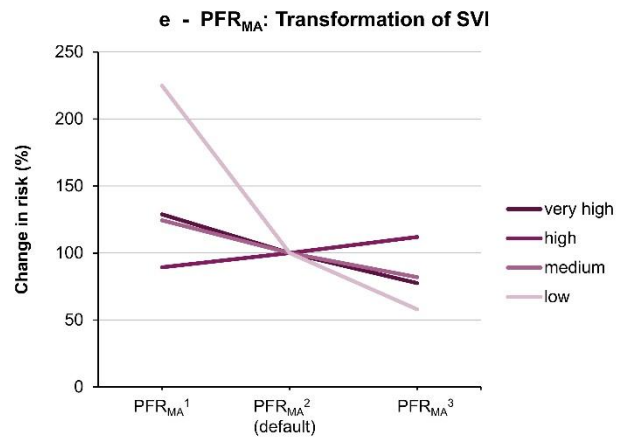
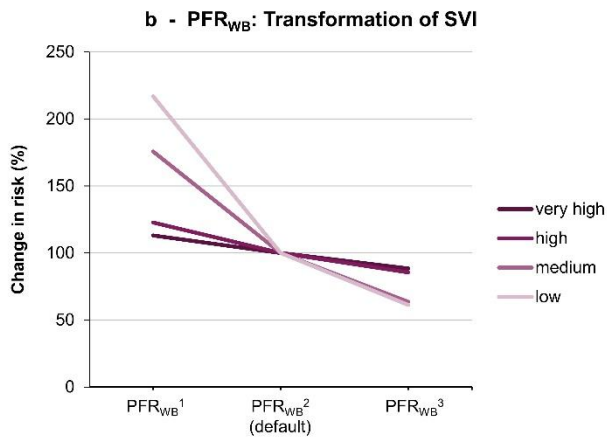
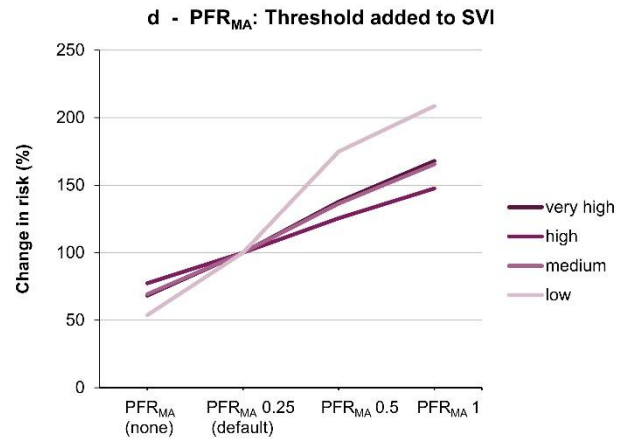
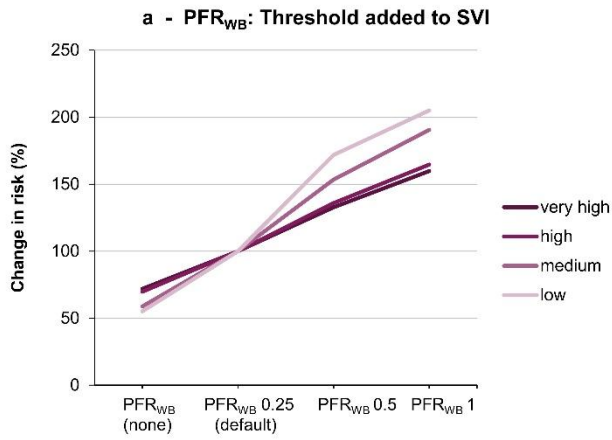


Figure 8: Sensitivity analysis of the Pluvial Flood Risk (PFR) results. Panels (a,d) show the effect of adding a threshold to the social vulnerability index (SVI) results; panels (b,e) show the effect of alternative SVI transformations; and panels (c,f) show the effect of varying the hazard range. Results are shown for four levels of the outcome variable (very high, high, medium, and low; corresponding to the figures in the results section). Default parameter settings are indicated on the x-axes.

585 4.3.1 Validation and contextualization of model results

To contextualize the results, we qualitatively compare the simulated rainfall scenario to two recent heavy rainfall events in Hamburg (years of 2018 and 2024). The event in Lohbrügge (10th of May 2018) was a local convective downpour with intensities above the 100-year return period. The event caused severe flooding, infrastructure damage, major traffic disruptions and evacuations due to sinkholes (DWD, 2021).
590 The Barmbek event (2th of June 2024) reached intensities of the 100-year return period used in this study and slightly above triggering over 800 operations of the local fire brigades. There, traffic disruptions, power outages, and flooded basements, stores and underground parking garages were reported (Gaertner et al., 2024; Scheiwe & Schwieger, 2024)

595 4.3.2 Transferability of the method

The development of the presented toolbox was developed in close cooperation with city stakeholders in Hamburg. Various agencies (see Table S3 for details) were actively involved in its development through three stakeholder workshops and are the main beneficiaries of the toolbox. The toolbox is therefore mainly designed for cities, where similar data is available. In Germany, high-resolution pluvial flood simulations
600 are or will soon be available across the country (Wimmer et al., 2023; Wimmer & Hovenbitzer, 2025). In addition, high-resolution urban flood maps are available from the EU project REACHOUT for the cities of Athens, Milano, Logrono, Gdynia (Staccione & Pal, 2024). Beyond Europe, there are high-resolution simulations available for New York (Department of Environmental Protection NYC, 2024), Los Angeles (Sanders et al., 2022), Miami (Sanders et al., 2025), and Houston (Schubert et al., 2022).

605 Recent advances enabling faster flood simulations (Van Den Bout et al., 2023) and flood simulations driven by artificial intelligence (Li et al., 2025) may further increase data availability and therefore transferability of our framework globally. For the availability of population data and social data, we acknowledge limitations due to data protection and privacy, which vary by country or commune, while

high-resolution data might be available at least internally within the local authorities. Recent developments of global building data, including the area and height of buildings on a meter resolution (Zhu et al., 2025) could support future adaptations of the toolbox.

5 Limitations and future improvements

While this study provides a comprehensive framework for the assessment of pluvial flood risk in urban areas at the building level, several limitations must be accounted for:

- The estimation of risk including social vulnerability and exposure requires a high data resolution and current data. For the applied methodology, socio-economic data at the building resolution are required. Alternatively, data with coarser resolution can be disaggregated to the building level with the help of the toolsets provided in the pluvial flood risk toolbox. Disaggregation was applied for the analysis of pluvial flood risks in the city of Hamburg (von Szombathely et al., 2025). By providing the toolbox along with its input data structure and code, we enable its transferability and adaptability to other regions, including those with coarser data, as demonstrated in this work.
- The ~~disaggregation~~ delineation of risk to pluvial floods ~~at~~ building-resolution requires several assumptions and case dependent adaptations which were highlighted in this study. By designing the toolbox to allow adjustments of hazard thresholds, the weighting of individual risk parameters, as well as the consideration of Shannon-Entropy, we aim to explicitly highlight those aspects where context-specific decisions are required and expert knowledge or collaborations with local stakeholders can be beneficial.
- Pluvial floods may affect socially vulnerable groups disproportionately larger or smaller than indicated by the SVI. We mitigate this by using an additional transformation, the flood sensitivity transformation. For our case example, we used the default values which were defined through a co-creation process with city authorities and informed by expert knowledge. However, we acknowledge that thresholds depend on local context and on the socio-economic data available and consequently they may have to be adapted to the individual study area.
- The representation of results on building scale may create an impression of false precision, as several important building-specific details cannot be adequately captured, such as the building's

entry side, the likelihood of water intrusion into the basement, or the feasibility of implementing protective measures.

- The hazard indices do not consider flow velocities. In principle, water level or inundation depth are the main outputs of urban flood models, and therefore generally available for urban pluvial flood assessments (Guo et al., 2021). However, flow velocities might be relevant for mobility (Pregolato et al., 2017)- and damage to well-being (Jonkman & Penning-Rowsell, 2008) and would improve future approaches of pluvial flood risk mapping.
- Although our risk implementation follows the IPCC risk framework, the model does not account for temporal changes or time dependent responses to the risk (introduced in AR6, IPCC; 2021). While the modelled hazard incorporates technical measures like ~~The here used modelled hazard includes technical adaptation measures, such as~~ sewer infrastructure and retention measures, the framework could be extended to include further responses. These responses could include resettlement (exposure), flood education or financial aid (social vulnerability), and could be incorporated within the framework by either modifying the data inputs (e.g., adjusted water levels, population, or social data) or updating core components (e.g., coping capacity effects). ~~This framework could extend to include further responses to risk and time domain by integrating~~ Future enhancements could integrate agent-based modelling (Peng et al., 2023) ~~or~~ or dynamic urban flood risk assessment (He et al., 2023). Including emergency response measures and long-term adaptation strategies would strengthen the model's applicability for decision-makers.

6 Conclusions and outlook

We have outlined a possible approach for adapting the IPCC risk framework to urban environments and for estimating pluvial flood risk at the building scale. Using a small synthetic case study based on empirical data from Hamburg, we demonstrated that shifting the spatial scale from sub-city units to individual buildings is generally feasible with the available data. However, working at this finer resolution requires several assumptions outlined in this study, such as differentiating risks based on exposure type, and applying generalizations where input data are not available at building scale, which is

often the case given current data resolutions. To our knowledge, this represents the first publicly available application of the IPCC framework at the building level in an urban context and showcases some challenges and opportunities with implementing this conceptual framework in a local context with empirical data. This finer level of granularity has the potential to significantly enhance the accuracy of urban risk assessments and support decision-making regarding disaster risk management and climate adaptation. The framework and toolbox, developed in close collaboration with city stakeholders through co-creation processes, enables such downscaling and provides a transferable structure that can be applied to other cities as well. Due to its four-part structure, the toolbox can be adapted to other hazards, such as heat, though several adjustments of the risk parameters would be required and lies beyond the scope of this analysis.

While we do not claim that this is the optimal implementation, the framework offers a transparent method to quantify risk, determined by the risk for mobility and accessibility and risk to well-being. Our results underline the need for high-resolution and openly accessible data to meaningfully integrate hazard and exposure, a combination not extensively documented in previous work. Given the increasing frequency and intensity of extreme events in the future (Sillmann et al., 2024) incorporating social vulnerability and hazard-dependent exposure into risk assessments is essential. The framework presented here offers municipal institutions a basis for identifying adaptation measures that go beyond a sole focus on the hazard and thus provide valuable guidance for urban flood risk management.

Supplement link

The link to the supplement will be included by Copernicus, if applicable.

685 **Data availability**

The toolbox presented in this outline, including the tools and input data needed to calculate the presented risk maps are provided in Zenodo-~~under~~: <https://doi.org/10.5281/zenodo.1986073347986182>

Author contributions

Anastasia Vogelbacher: Writing – original draft, Methodology, Formal analysis, Data curation.
690 Investigation, Visualization, Conceptualization. Malte von Szombathely: Writing – review & editing, Methodology, Formal analysis, Visualization, Conceptualization. Marc Lennartz: Writing – review & editing, Methodology, Data curation, Conceptualization. Benjamin Poschlod: Writing – review & editing, Methodology, Conceptualization. Jana Sillmann: Writing – review & editing, Conceptualization, Resources.

695 **Competing interests**

The authors have no conflicts of interest to declare.

Acknowledgements

The authors thank the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) under Germany's Excellence Strategy–EXC 2037 'CLICCS- Climate, Climatic Change, and Society'– Project
700 Number: 390683824. Resources provided by the Institute of Geo- Hydroinformatics at Hamburg University of Technology are greatly acknowledged.

References

- 705 Afifi, Z., Chu, H.-J., Kuo, Y.-L., Hsu, Y.-C., Wong, H.-K., Ali, M. Z., Afifi, Z., Chu, H.-J., Kuo, Y.-L., Hsu, Y.-C., Wong, H.-K., & Ali, M. Z. (2019). Residential Flood Loss Assessment and Risk Mapping from High-Resolution Simulation. *Water*, 11(4). <https://doi.org/10.3390/w11040751>
- Arnbjerg-Nielsen, K., Willems, P., Olsson, J., Beecham, S., Pathirana, A., Bülow Gregersen, I., Madsen, H., & Nguyen, V.-T.-V. (2013). Impacts of climate change on rainfall extremes and urban drainage systems: A review. *Water Science and Technology*, 68(1), 16–28. <https://doi.org/10.2166/wst.2013.251>
- 710 Assumpção, T. H., Popescu, I., Jonoski, A., & Solomatine, D. P. (2018). Citizen observations contributing to flood modelling: Opportunities and challenges. *Hydrology and Earth System Sciences*, 22(2), 1473–1489. <https://doi.org/10.5194/hess-22-1473-2018>
- Behörde für Umwelt, Klima, Energie und Agrarwirtschaft und Hamburg Wasser (BUKEA). (2026). *Hintergründe—RISA Hamburg*. RISA - Leben Mit Wasser / Hintergründe. <https://www.risa-hamburg.de/hintergruende>
- 715 Bertsch, R., Glenis, V., & Kilsby, C. (2022). Building level flood exposure analysis using a hydrodynamic model. *Environmental Modelling & Software*, 156, 105490. <https://doi.org/10.1016/j.envsoft.2022.105490>
- Bhola, P. K., Leandro, J., & Disse, M. (2020). Building hazard maps with differentiated risk perception for flood impact assessment. *Natural Hazards and Earth System Sciences*, 20(10), 2647–2663. <https://doi.org/10.5194/nhess-20-2647-2020>
- 720 Bignami, D. F. (with Rosso, R., & Sanfilippo, U.). (2019). *Flood Proofing in Urban Areas*. Springer International Publishing AG.
- Boettcher, M., Grawe, D., Fröhle, P., & Waldeier, I. (2025). *Development of a high-resolution model system for assessing an urban flood event in past and future climate* (Nos. ICUC12-573). Copernicus Meetings. ICUC12. <https://doi.org/10.5194/icuc12-573>
- 725 Bulti, D. T., & Abebe, B. G. (2020). A review of flood modeling methods for urban pluvial flood application. *Modeling Earth Systems and Environment*, 6(3), 1293–1302. <https://doi.org/10.1007/s40808-020-00803-z>
- Calianno, M., Ruin, I., & Gourley, J. J. (2013). Supplementing flash flood reports with impact classifications. *Journal of Hydrology*, 477, 1–16. <https://doi.org/10.1016/j.jhydrol.2012.09.036>
- Cea, L., & Costabile, P. (2022). Flood Risk in Urban Areas: Modelling, Management and Adaptation to Climate Change. A Review. *Hydrology*, 9(3), 50. <https://doi.org/10.3390/hydrology9030050>
- 730 Cutter, S. L. (2024). The origin and diffusion of the social vulnerability index (SoVI). *International Journal of Disaster Risk Reduction*, 109, 104576. <https://doi.org/10.1016/j.ijdr.2024.104576>
- Cutter, S.L., Boruff, B.J. and Shirley, W.L. (2003), Social Vulnerability to Environmental Hazards*. *Social Science Quarterly*, 84: 242-261. <https://doi.org/10.1111/1540-6237.8402002>
- 735 De Guttry, C., & Ratter, B. (2022). Expiry date of a disaster: Memory anchoring and the storm surge 1962 in Hamburg, Germany. *International Journal of Disaster Risk Reduction*, 70, 102719. <https://doi.org/10.1016/j.ijdr.2021.102719>
- Department of Environmental Protection NYC. (2024). *NYC Stormwater Flood Maps | NYC Open Data*. NYC Open Data. https://data.cityofnewyork.us/Environment/NYC-Stormwater-Flood-Maps/9i7c-xyvv/about_data
- 740 Devi, K., Reddy, C. C., Rahul, K., Khuntia, J. R., & Das, B. S. (2025). A holistic methodology for evaluating flood vulnerability, generating flood risk map and conducting detailed flood inundation assessment. *Scientific Reports*, 15(1), 28253. <https://doi.org/10.1038/s41598-025-13025-z>
- DWD. (2021). *Klimareport Hamburg*. Deutscher Wetterdienst. <https://www.hamburg.de/contentblob/15421026/822d441ea002e436cade3fc9630aa85a/data/d-kimareport-hamburg-dwd.pdf>

- 745 Dyson, B. (2017). Integration of Life Cycle Assessment Into Decision-Analytic Approaches for Sustainable Technologies. In *Encyclopedia of Sustainable Technologies* (pp. 81–89). Elsevier. <https://doi.org/10.1016/B978-0-12-409548-9.10037-5>
- Ekmekcioğlu, Ö., Koc, K., & Özger, M. (2021). Stakeholder perceptions in flood risk assessment: A hybrid fuzzy AHP-TOPSIS approach for Istanbul, Turkey. *International Journal of Disaster Risk Reduction*, *60*, 102327. <https://doi.org/10.1016/j.ijdr.2021.102327>
- 750 Fereshtehpour, M., & Najafi, M. R. (2025). Urban stormwater resilience: Global insights and strategies for climate adaptation. *Urban Climate*, *59*, 102290. <https://doi.org/10.1016/j.uclim.2025.102290>
- FHH, Behörde für Stadtentwicklung und Wohnen. (2023). *Sozialmonitoring Integrierte Stadtteilentwicklung – Karten- und Tabellenband 2023*. FHH, BSW. <https://www.hamburg.de/resource/blob/286264/30117a83fe60f77cbd7344274fa5beb4/d-sozialmonitoring-bericht-2023-data.pdf>
- 755 FHH, Behörde für Stadtentwicklung und Wohnen. (2024). *Sozialmonitoring Integrierte Stadtteilentwicklung – Bericht 2024* (p. 31). FHH, BSW. <https://www.hamburg.de/resource/blob/1008718/43ed5565389b54c7af103ba038b658b0/d-sozialmonitoring-bericht-2024-data.pdf>
- 760 FHH, BUKEA. (2024). *Technisches Informationsblatt Starkregengefahrenkarte Hamburg* (p. 15). <https://www.hamburg.de/resource/blob/173730/5270f2cb96a1e41b5e45b64f84aa853e/d-technischesinformationsblatt-srgk-data.pdf>
- FHH, Statistikamt Nord. (2017). *INSPIRE HH Verkehrsnetze ALKIS—MetaVer* (Geodatenatz, Vector Data <https://registry.gdi-de.Org/id/de.hh/189b6adf-A805-42b7-A9ac-202da761fde2>; Version 3.2). MetaVer. <https://metaver.de/trefferanzeige?cmd=doShowDocument&docuuid=1BD1BACC-6E6C-40E2-9B29-3B851CD6CFB5>
- 765 FHH, Statistikamt Nord. (2024). *Bevölkerung in Hamburg am 31.12.2023*. Statistisches Amt für Hamburg und Schleswig-Holstein. <https://www.statistik-nord.de/zahlen-fakten/hamburger-melderegister/bevoelkerungsstand#c6618>
- Field, C. B., Barros, V. R., & Intergovernmental Panel on Climate Change (Eds.). (2014). *Climate change 2014: Impacts, adaptation, and vulnerability: Working Group II contribution to the fifth assessment report of the Intergovernmental Panel on Climate Change*. Cambridge University Press.
- 770 Fowler, H. J., Lenderink, G., Prein, A. F., Westra, S., Allan, R. P., Ban, N., Barbero, R., Berg, P., Blenkinsop, S., Do, H. X., Guerreiro, S., Haerter, J. O., Kendon, E. J., Lewis, E., Schaer, C., Sharma, A., Villarini, G., Wasko, C., & Zhang, X. (2021). Anthropogenic intensification of short-duration rainfall extremes. *Nature Reviews Earth & Environment*, *2*(2), 107–122. <https://doi.org/10.1038/s43017-020-00128-6>
- 775 Fritsch, K., Assmann, A., & Tyrna, B. (2016). Long-term experiences with pluvial flood risk management. *E3S Web of Conferences*, *7*, 04017. <https://doi.org/10.1051/e3sconf/20160704017>
- Gaertner, R., De Vincenzi, I., & Lübbe, E. (2024, June 28). *Wie im Ahrtal: Regen in Hamburg erreicht Katastrophen-Ausmaß / MOPO* [Fast wie im Ahrtal: „Starkregen in Hamburg erreicht Katastrophen-Ausmaß“]. Morgenpost Verlag GmbH. <https://www.mopo.de/hamburg/hitze-und-gewitter-mit-starkregen-und-hagel-im-norden-erwartet/>
- 780 Gentile, R., Cremen, G., Galasso, C., Jenkins, L. T., Manandhar, V., Menteşe, E. Y., Guragain, R., & McCloskey, J. (2022). Scoring, selecting, and developing physical impact models for multi-hazard risk assessment. *International Journal of Disaster Risk Reduction*, *82*, 103365. <https://doi.org/10.1016/j.ijdr.2022.103365>
- He, H., Li, R., Pei, J., Bilodeau, J.-P., & Huang, G. (2023). Current overview of impact analysis and risk assessment of urban pluvial flood on road traffic. *Sustainable Cities and Society*, *99*, 104993. <https://doi.org/10.1016/j.scs.2023.104993>
- 785 Hwang, C.-L., & Yoon, K. (1981). *Multiple Attribute Decision Making* (Vol. 186). Springer. <https://doi.org/10.1007/978-3-642-48318-9>

- Intergovernmental Panel On Climate Change (IPCC). (2021). *Climate Change 2021 – The Physical Science Basis: Working Group I Contribution to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change* (1st ed.). Cambridge University Press. <https://doi.org/10.1017/9781009157896>
- 790 Jonkman, S. N., & Penning-Rowsell, E. (2008). Human Instability in Flood Flows¹. *JAWRA Journal of the American Water Resources Association*, 44(5), 1208–1218. <https://doi.org/10.1111/j.1752-1688.2008.00217.x>
- Kosanic, A., Petzold, J., Martín-López, B., & Razanajatovo, M. (2022). An inclusive future: Disabled populations in the context of climate and environmental change. *Current Opinion in Environmental Sustainability*, 55, 101159. <https://doi.org/10.1016/j.cosust.2022.101159>
- 795 Landesanstalt für Umwelt, Messungen und Naturschutz Baden-Württemberg (Ed.). (2016). *Leitfaden Kommunales Starkregenrisikomanagement in Baden-Württemberg* (Stand August 2016). LUBW Landesanstalt für Umwelt, Messungen und Naturschutz.
- Landesbetrieb Geoinformation und Vermessung (LGV) Hamburg. (2020). *INSPIRE HH Gebäude ALKIS—MetaVer* (Geodata, Vector data <https://registry.gdi-de.Org/id/de.hh/e33c193f-278f-4118-A581-Cc8e8420abc3>; Version 3.2). <https://metaver.de/trefferanzeige?docuuuid=0C4AD3A9-ECC4-4936-92FD-18E21DFA9234>
- 800 Lang, A., & Poschlod, B. (2024). Updating catastrophe models to today’s climate – An application of a large ensemble approach to extreme rainfall. *Climate Risk Management*, 44, 100594. <https://doi.org/10.1016/j.crm.2024.100594>
- Lazzarin, T., Viero, D. P., Molinari, D., Ballio, F., & Defina, A. (2022). Flood damage functions based on a single physics- and data-based impact parameter that jointly accounts for water depth and velocity. *Journal of Hydrology*, 607, 127485. <https://doi.org/10.1016/j.jhydrol.2022.127485>
- 805 Li, Z., Zhou, Z., Wang, H., Li, X., Shi, X., Xiao, J., Yang, Z., Sun, M., Li, X., & Jia, H. (2025). Artificial intelligence-incorporated prediction for urban flooding processes in the past 20 years: A critical review. *Environmental Modelling & Software*, 192, 106525. <https://doi.org/10.1016/j.envsoft.2025.106525>
- 810 Lukas Wimmer, M. H., Martin Lenk, Eva-Christina Katz (Frankfurt), Michael Engel (Koblenz). (2023). Hinweiskarten Starkregengefahren: Ein Projekt des Bundes und der Länder. *Hinweiskarten Starkregengefahren: Ein Projekt Des Bundes Und Der Länder*, 2023(11), 732–737. <https://doi.org/10.3243/kwe2023.11.001>
- Malekinezhad, H., Sepehri, M., Pham, Q. B., Hosseini, S. Z., Meshram, S. G., Vojtek, M., & Vojteková, J. (2021). Application of entropy weighting method for urban flood hazard mapping. *Acta Geophysica*, 69(3), 841–854. <https://doi.org/10.1007/s11600-021-00586-6>
- 815 Nguyen, H. X., Nguyen, A. T., Ngo, A. T., Phan, V. T., Nguyen, T. D., Do, V. T., Dao, D. C., Dang, D. T., Nguyen, A. T., Nguyen, T. K., & Hens, L. (2020). A Hybrid Approach Using GIS-Based Fuzzy AHP–TOPSIS Assessing Flood Hazards along the South-Central Coast of Vietnam. *Applied Sciences*, 10(20), Article 20. <https://doi.org/10.3390/app10207142>
- 820 Nkwunonwo, U. C., Whitworth, M., & Baily, B. (2020). A review of the current status of flood modelling for urban flood risk management in the developing countries. *Scientific African*, 7, e00269. <https://doi.org/10.1016/j.sciaf.2020.e00269>
- Osuide, E. E. (2022). Implementation of measures to mitigate the risk of pluvial flooding in urban areas. *Modeling Earth Systems and Environment*, 8(3), 2897–2910. <https://doi.org/10.1007/s40808-021-01308-z>
- Pajares, E., Muñoz Nieto, R., Meng, L., & Wulfhorst, G. (2021). Population Disaggregation on the Building Level Based on Outdated Census Data. *ISPRS International Journal of Geo-Information*, 10(10), 662. <https://doi.org/10.3390/ijgi10100662>
- 825 Pathan, A. I., Girish Agnihotri, P., Said, S., & Patel, D. (2022). AHP and TOPSIS based flood risk assessment- a case study of the Navsari City, Gujarat, India. *Environmental Monitoring and Assessment*, 194(7), 509. <https://doi.org/10.1007/s10661-022-10111-x>

- 830 Peng, Y., Rodriguez Lopez, J. M., Santos, A. P., Mobeen, M., & Scheffran, J. (2023). Simulating exposure-related human mobility behavior at the neighborhood-level under COVID-19 in Porto Alegre, Brazil. *Cities*, *134*, 104161. <https://doi.org/10.1016/j.cities.2022.104161>
- Rafiei-Sardooi, E., Azareh, A., Choubin, B., Mosavi, A. H., & Clague, J. J. (2021). Evaluating urban flood risk using hybrid method of TOPSIS and machine learning. *International Journal of Disaster Risk Reduction*, *66*, 102614. <https://doi.org/10.1016/j.ijdr.2021.102614>
- 835 Rehman, S., Sahana, M., Hong, H., Sajjad, H., & Ahmed, B. B. (2019). A systematic review on approaches and methods used for flood vulnerability assessment: Framework for future research. *Natural Hazards*, *96*(2), 975–998. <https://doi.org/10.1007/s11069-018-03567-z>
- Sanders, B. F., Schubert, J. E., Kahl, D. T., Mach, K. J., Brady, D., AghaKouchak, A., Forman, F., Matthew, R. A., Ulibarri, N., & Davis, S. J. (2022). Large and inequitable flood risks in Los Angeles, California. *Nature Sustainability*, *6*(1), 47–57. <https://doi.org/10.1038/s41893-022-00977-7>
- 840 Sanders, B. F., Schubert, J. E., Martin, E.-M. H., Wang, S., Sukop, M. C., & Mach, K. J. (2025). A fast flood inundation model with groundwater interactions and hydraulic structures. *Advances in Water Resources*, *204*, 105057. <https://doi.org/10.1016/j.advwatres.2025.105057>
- 845 Sapena, M., Kühnl, M., Wurm, M., Patino, J. E., Duque, J. C., & Taubenböck, H. (2022). Empiric recommendations for population disaggregation under different data scenarios. *PLOS ONE*, *17*(9), e0274504. <https://doi.org/10.1371/journal.pone.0274504>
- Scalenghe, R., & Marsan, F. A. (2009). The anthropogenic sealing of soils in urban areas. *Landscape and Urban Planning*, *90*(1–2), 1–10. <https://doi.org/10.1016/j.landurbplan.2008.10.011>
- 850 Scheiwe, H., & Schwieger, N. (2024, June 28). *Schwere Unwetter: Teile Hamburgs überflutet – Verletzte bei Blitzeinschlag in Dresdner Supermarkt* [Schwere Unwetter: Teile Hamburgs überflutet – Verletzte bei Blitzeinschlag in Dresdner Supermarkt]. Verlagsgesellschaft Madsack GmbH & Co. KG. <https://www.rnd.de/panorama/schwere-unwetter-teile-hamburgs-ueberflutet-verletzte-bei-blitzeinschlag-in-dresdner-supermarkt-NCKGDIXNLRKERH3QHOVTAJ2NDQ.html>
- 855 Schmitt, T. G. (2016). *Ortsbezogene Regenhöhen im Starkregenindexkonzept SRI12 zum Anwendungskontext Risikokommunikation in DWA-M 119*.
- Schubert, J. E., Luke, A., AghaKouchak, A., & Sanders, B. F. (2022). A Framework for Mechanistic Flood Inundation Forecasting at the Metropolitan Scale. *Water Resources Research*, *58*(10), e2021WR031279. <https://doi.org/10.1029/2021WR031279>
- 860 Shannon, C. E. (1948). A Mathematical Theory of Communication. *Bell System Technical Journal*, *27*(3), 379–423. <https://doi.org/10.1002/j.1538-7305.1948.tb01338.x>
- Sillmann, J., Raupach, T. H., Findell, K. L., Donat, M., Alves, L. M., Alexander, L., Borchert, L., De Amorim, P. B., Buontempo, C., Fischer, E. M., Franzke, C. L., Guan, B., Haasnoot, M., Hawkins, E., Jacob, D., Mahon, R., Maraun, D., Morrison, M. A., Posch, B., ... Županić, J. (2024). Climate extremes and risks: Links between climate science and decision-making. *Frontiers in Climate*, *6*, 1499765. <https://doi.org/10.3389/fclim.2024.1499765>
- 865 Staccione, A., & Pal, J. S. (2024). *Urban pluvial flood maps under different green cover scenarios* (Version Version 1) [Dataset]. Zenodo. <https://doi.org/10.5281/ZENODO.14035876>
- Statistisches Amt für Hamburg und Schleswig-Holstein. (2024). *Bevölkerung in Hamburg am 31.12.2023*. Statistisches Amt für Hamburg und Schleswig-Holstein. https://www.statistik-nord.de/fileadmin/Dokumente/Statistische_Berichte/bevoelkerung/A_I_S_1_j_H/A_I_S_1_j23.pdf
- 870 Van Den Bout, B., Jetten, V. G., Van Westen, C. J., & Lombardo, L. (2023). A breakthrough in fast flood simulation. *Environmental Modelling & Software*, *168*, 105787. <https://doi.org/10.1016/j.envsoft.2023.105787>

Vogelbacher, A., von Szombathely, M., Lennartz, M., Poschlod, B., & Sillmann, J. (2025). Urban Pluvial Flood Risk Toolbox (Version 2). Zenodo.[Dataset] <https://doi.org/10.5281/zenodo.19860733>

- 875 von Szombathely, M., Behrens, J., Hanf, F. S., Lennartz, M., Nayak, S., Oßenbrügge, J., Poschlod, B., Scheffran, J.,
Vogelbacher, A., & Sillman, J. (2025). *Urban Pluvial Flood Risk Mapping: A High-Resolution Assessment for the
City of Hamburg*. [Preprint] SSRN. <https://doi.org/10.2139/ssrn.5231006>
- 880 von Szombathely, M., Hanf, F. S., Bareis, J., Meier, L., Oßenbrügge, J., & Pohl, T. (2023). An Index-Based Approach to
Assess Social Vulnerability for Hamburg, Germany. *International Journal of Disaster Risk Science*, *14*(5), 782–794.
<https://doi.org/10.1007/s13753-023-00517-7>
- Wardrop, N. A., Jochem, W. C., Bird, T. J., Chamberlain, H. R., Clarke, D., Kerr, D., Bengtsson, L., Juran, S., Seaman, V., &
Tatem, A. J. (2018). Spatially disaggregated population estimates in the absence of national population and housing
census data. *Proceedings of the National Academy of Sciences*, *115*(14), 3529–3537.
<https://doi.org/10.1073/pnas.1715305115>
- 885 Wartalska, K., Kaźmierczak, B., Nowakowska, M., & Kotowski, A. (2020). Analysis of Hyetographs for Drainage System
Modeling. *Water*, *12*(1), 149. <https://doi.org/10.3390/w12010149>
- Wilkinson, M. D., Dumontier, M., Aalbersberg, Ij. J., Appleton, G., Axton, M., Baak, A., Blomberg, N., Boiten, J.-W., da
Silva Santos, L. B., Bourne, P. E., Bouwman, J., Brookes, A. J., Clark, T., Crosas, M., Dillo, I., Dumon, O., Edmunds,
S., Evelo, C. T., Finkers, R., ... Mons, B. (2016). The FAIR Guiding Principles for scientific data management and
890 stewardship. *Scientific Data*, *3*(1), 160018. <https://doi.org/10.1038/sdata.2016.18>
- Wimmer, L., & Hovenbitzer, M. (2025). Introducing a Nationwide High-Resolution Pluvial Flood Map: A New Tool for Risk
Assessment and Emergency Management in Germany. *Abstracts of the ICA*, *9*, 1–2. <https://doi.org/10.5194/ica-abs-9-43-2025>
- Yang, W., Xu, K., Lian, J., Ma, C., & Bin, L. (2018). Integrated flood vulnerability assessment approach based on TOPSIS
895 and Shannon entropy methods. *Ecological Indicators*, *89*, 269–280. <https://doi.org/10.1016/j.ecolind.2018.02.015>
- Zhu, X. X., Chen, S., Zhang, F., Shi, Y., & Wang, Y. (2025). GlobalBuildingAtlas: An open global and complete dataset of
building polygons, heights and LoD1 3D models. *Earth System Science Data*, *17*(12), 6647–6668.
<https://doi.org/10.5194/essd-17-6647-2025>