

Ice jam formation at river confluences: comprehensive field investigation and comparison to laboratory-derived predictive equations

Laurence Charbonneau¹, Tadros Ghobrial¹, Jennifer Nafziger², Catherine Blouin¹ & Gabriel Pelchat¹

¹Department of Civil & Water Engineering, Université Laval, Québec City, G1V 0A6, Canada

²Department of Civil and Environmental Engineering, University of Alberta, Edmonton, T6G 2R3, Canada

Correspondance to: Laurence Charbonneau (laurence.charbonneau.2@ulaval.ca)

Abstract. Ice jams can cause significant damages to riverine communities during breakup season, with annual government expenditures related to ice jam floods averaging 70 million \$CAD in Québec alone (Ouranos, 2023). Tributaries often play an important role, leading to complex spatial ice processes and occasional flooding. The behaviour of tributaries during breakup as well as their impact on the initiation of ice jams at confluences is very site-specific and depends on ice, morphological and hydrometeorological conditions. The objectives of this study are to characterize the interaction between tributary and main river ice during breakup, to quantify hydro-environmental factors controlling breakup sequences and jam formation at confluences, and to evaluate the applicability of laboratory-derived ice jam formation mechanisms to these real-world systems. These objectives were achieved through a comprehensive field monitoring program of four confluences in Québec, Canada (three on the Chaudière River and one on the Sainte-Anne River) over four consecutive winters (2021-2024). Field monitoring included continuous water temperature and depth, time-lapse photography, drone surveys and meteorological data. The results showed that distinct ice jam formation mechanisms were identified at each confluence. At Sainte-Anne and Bras-du-Nord confluence, a flow impact mechanism consistently produced ice jams when the flow from ice-free tributary restricted ice passage in the main river. At Chaudière and Du Loup confluence, the presence of a downstream ice control structure maintained a stationary ice cover at the confluence, forcing a jam to form on the tributary. Finally, at Chaudière and Famine confluence as well as at Chaudière and Bras Saint-Victor confluence, morphological controls including depositional bars, islands and bridge piers at the tributary mouth were found to be preventing ice evacuation at the confluence. These observations were then compared to those developed in the laboratory by Ettema & Muste (2001). Laboratory-derived equations could be used to predict jam formation at the confluence on the Sainte-Anne River, where the governing mechanism was well-defined and hydraulic parameters were adequately constrained, with bank shear stress values ranging from 1.15 to 16.32 N m⁻² consistent with values reported in the literature. At Chaudière and Famine confluence, the jam formation was also correctly predicted, though with a significant discrepancy in ice thickness estimates, suggesting the need for improved integration of discharge parameters. At other sites, the complexity of the field setting or data limitations limited the comparison with the laboratory framework to a qualitative assessment. It was shown that laboratory-derived equations could be used to predict jam formation at confluences when the governing breakup mechanism is well-defined and related parameters are adequately measured.

Commenté [LC1]: this is a key reason to study ice jams, it would be helpful if additional details were included in Introduction. For example, are the major historical incidents of flooding due to ice jams or any annual figures of damages in Quebec?

Commenté [LC2R1]: Thank you for this suggestion. The first sentence of the Abstract has been revised to incorporate quantitative context on the economic impact of ice jam floods in Quebec, stating that annual government expenditures related to ice jam floods average 70 million \$CAD in Quebec alone (Ouranos, 2023).

Commenté [LC3]: Replace "objective" with "objectives" and "is" to "are", as multiple objectives are stated.

Commenté [LC4R3]: Thank you for this correction. The text in Paragraph 10 has been revised accordingly. 'The objective of this study is therefore three-fold' has been replaced with 'The objectives of this study are therefore three-fold'.

Commenté [LC5]: This very interesting manuscript reports field observations of ice jam formation at 4 confluences over 4 years in Quebec, Canada. Field monitoring including water level, water temperature, and ice thickness measurements were conducted and combined with existing weather datasets. The study goal to compare to laboratory studies of Ettema et al. and validate equations describing formation of ice jams.

Commenté [LC6R5]: Thank you for this positive assessment. We would like to clarify that the study encompasses three equally weighted objectives: 1) to characterize the interaction between tributary and main river ice during breakup; 2) to quantify hydrometeorological factors controlling breakup sequences and jam formation at confluences; and 3) to evaluate the applicability of laboratory-derived equations of ice jam formation to field cases. The evaluation of the Ettema & Muste (2001) equations is therefore the third objective of a broader field investigation, rather than the sole goal of the manuscript.

Commenté [LC7]: This portion of the Abstract seems to generalise observations across sites, but the Results are very site-specific with different mechanisms for ice jam formation occurring at different sites. It could be helpful to set out in the Abstract that the mechanisms observed occurred at different confluences.

Commenté [LC8R7]: Thank you for this observation. The Abstract has been revised to explicitly attribute each observed mechanism to its respective confluence. The revised text now states that at STA-BDN, a flow impact mechanism consistently produced ice jams when the ice-free tributary flow restricted ice passage in the main river; at CH-DL, the presence of a downstream ice control structure maintained a stationary ice cover at the confluence, forcing a jam to form on the tributary; and at CH-FA and CH-BSV, morphological controls including depositional bars, islands and bridge piers at the tributary mouth prevented ice evacuation at the confluence.

a mis en forme : Exposit

Commenté [LC9]: This summary seems overly general as for much of the Results, comparison is not possible due to complexity of the field setting or the spatial scale of the jam formation mechanism.

Commenté [LC10R9]: Thank you for this comment. The concluding sentence of the Abstract has been revised to more accurately reflect the variable success of the model comparison across sites. The revised text now states that laboratory-derived equations could be used to predict jam formation at STA-BDN, ...

1. Introduction

Ice jam flooding is a frequent phenomenon in northern rivers, causing extensive property damage and ecosystem disruption (Beltaos & Prowse, 2001). In Québec alone, the average annual cost of flooding was approximately 70 million \$CAD between 1991 and 2013, with the 2019 spring breakup events including those on the Chaudière River which directly motivated this study, costing an estimated of 438 million \$CAD in government expenditures (Ouranos, 2023). Furthermore, ice jam floods are disproportionately costly relative to their frequency because they account for approximately one third of flood events but result in two thirds of total flood damages in regions where detailed records are available (Beltaos & Prowse, 2001). On the Chaudière River, 51 ice jams were documented over just two consecutive winter seasons (Ghobrial et al., 2023), illustrating the frequency and concentration of these events in the study area. Ice jams form when incoming ice discharge exceeds local ice transport capacity, typically at locations with geometric or hydraulic constraints such as river bends, slope reductions, bridges and confluences (Hicks, 2009; Beltaos, 2008). River confluences often play an important role during the breakup season, leading to complex spatial ice processes and frequent ice jam flooding (Rice et al., 2008). The behaviour of tributaries during breakup as well as their impact on the initiation of ice jams near the confluences is very site specific and depends on ice, morphological and hydrometeorological conditions. Smaller tributaries can breakup before main rivers due to their steeper gradients, narrower channels and warmer water temperatures, often resulting in tributary ice being jammed at its mouth (Michel, 1972; De Munck et al., 2017; De Munck et al., 2011). Many field observations of ice dynamics at confluences were conducted on branching confluences (i.e., river deltas). Bergeron & Roy (1988) studied the effects of ice jams at a delta on the morphology of the riverbed, while Martel (2019) looked at the structure of the flow at the vicinity of a confluence underneath the ice. Beltaos et al. (2012) studied the Mackenzie River Delta and found that the jams in the delta channels were initiated by the ice jam release waves from the upper reach and consisted of a surface accumulation of ice blocks and plates which created increased roughness. Nafziger et al. (2019) observed ice jam dynamics in the Hay River Delta and determined that the ice always began consolidating at the upstream end of the jam and stopped at the toe, prompting a rejection wave that caused an alternating pattern of ice movement between two adjacent channels of the delta. Field data have been used to develop numerical models aimed at improving our understanding of jamming processes and flow distribution at confluences using 1-D (e.g., Blackburn et al., 2015; Zhang et al., 2017) and 2-D (e.g., Brayall & Hicks, 2012) models. Field data has also been used to develop prediction models for the reoccurrences of ice jams at confluences (e.g., Massie et al. 2002; McDonald et al. 2002).

Few observations have been made on merging confluences (i.e., a tributary merging with a main river), despite documented field examples of ice jam formation at such junctions in North America (Rice et al., 2008). Prowse (1986) conducted a six-year field investigation of ice jams at the confluence of Liard and Mackenzie Rivers in Canada's Northwest Territories, identifying two dominant controls (stationary ice cover and presence of deltaic bars). Turcotte et al. (2014) provided a qualitative description of the impacts of upstream tributaries on the downstream channels' freeze-up and breakup processes on

Commenté [LC11]: As above, it would be helpful if a bit more context could be provided motivating the study of ice jams due to the impact of them on society and the environment.

Commenté [LC12R11]: Thank you for this suggestion. Some sentences have been added to the first paragraph of the Introduction to provide quantitative context on the economic impact of ice jam floods.

a mis en forme : Ne pas vérifier l'orthographe ou la grammaire

a mis en forme : Ne pas vérifier l'orthographe ou la grammaire

Commenté [LC13]: Data are plural (datum is singular). So, replace "has " with "have".

Commenté [LC14R13]: Thank you for this grammatical correction. The sentence has been revised to read 'Field data have been used to develop'.

the Montmorency River. They showed that dynamic ice processes both affect and are affected by the thermal and hydrological regimes of the steeper tributaries. The most comprehensive study on jamming processes at merging confluences was conducted by Ettema & Muste (2001) and Ettema et al. (1999) utilizing extensive laboratory experiments on a small-scale hydraulic model based on observed conditions at real-life confluences. The authors described a total of seven processes leading to ice jams at confluences, which can be grouped based on ice, hydraulic, and morphological conditions, as listed below.

- The first group is controlled by the ice conditions:
1. ~~and includes:~~ (1) ~~A~~ an ice run from the tributary meeting a stationary or slow-moving ice cover at the confluence;
 2. ~~(2) A~~ an ice run discharging into a channel where the water is still or sluggish;
 3. ~~L and (3)~~ large pieces of ice merging together from both channels and forming an arching jam at the confluence. ~~The second group is based on hydraulic conditions and includes:~~

- Hydraulic conditions:
4. ~~(4)~~ jamming where the elevated upstream lateral pressure from the tributary is greater than the driving force of the ice moving downstream in the main channel;
 5. ~~I; (5)~~ jamming due to flow impact when one of the channels (which is free of ice) has a strong enough flow to prevent ice runs in the other channel to evacuate freely. ~~The third group is based on morphological conditions and includes:~~
 6. ~~(6)~~

- Morphological conditions:
6. ~~I~~ jamming at confluence bar in the main channel where a bar has developed just downstream from the tributary, ice may be coming from one or both channels and, although formed in the main river, the jam may extend into the tributary;
 7. ~~I and (7)~~ ice grounding on confluence deltaic bars occurring in the case of a discordant-bed confluence where the bed levels of the two confluent channels differ significantly in level and slope.

Ettema & Muste (2001) identified the different factors leading to confluence jamming, including the relative location of the dividing streamline as well as the flow-separation zone between the two flows, the concentration of incoming ice in each channel and the backwater effect created by ice congestion in the confluence. Based on their extensive model testing, they proposed simplified force balance equations for predicting specific ice jam formation processes at confluences for jamming due to merging ice runs (process 3), jamming due to flow impact (process 3) and jamming due to confluence bars (process 6) only, as these were the only mechanisms for which sufficient data were available to derive predictive relationships, including jamming due to merging ice runs (process 3), jamming due to flow impact (process 5), and jamming due to confluence bars (process 6). Nevertheless, the validity of these simplified equations has never been evaluated with field data.

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Normal, Sans numérotation ni puces

a mis en forme : Police :Italique

a mis en forme : Normal, Sans numérotation ni puces

Commenté [LC15]: This paragraph provides key information describing the theoretical basis of the study, the lab-derived observations and models by Ettema et al. At present the information is somewhat difficult to follow. It would be helpful if the different jam formation mechanisms were organised using a table or list so the reader can easily follow along.

Commenté [LC16R15]: Thank you for this suggestion. The seven ice jam formation mechanisms identified by Ettema & Muste (2001) have been reorganized as a numbered list grouped by the three controlling factors: ice conditions (processes 1–3), hydraulic conditions (processes 4–5), and morphological conditions (processes 6–7).

a mis en forme : Normal, Sans numérotation ni puces

In summary, many past studies have focused on ice jams at branching junctions in deltas and, to the best of the authors knowledge, there has not been a comprehensive field study on the hydrometeorological, morphological and river ice conditions affecting breakup processes and jamming at merging confluences. In addition, there is insufficient field data and observations to evaluate the ice jam processes presented by Ettema & Muste (2001) or the applicability of their laboratory-derived equations for jam initiation at confluences. Consequently, the objectives of this study are three-fold: 1) to characterize the interaction between tributary and main river ice during breakup; 2) to quantify hydrometeorological factors controlling breakup sequences and jam formation at confluences; and 3) to evaluate the applicability of laboratory-derived equations of ice jam formation to field cases. To do so, four river confluences across two watersheds in Québec, Canada, were monitored over four consecutive winters (2021 to 2024). Field investigation included continuous measurement of hydraulic, meteorological and surface ice conditions at several locations along each confluence. This field data and results from hydraulic models were then used to validate the applicability of laboratory-developed ice jam prediction equations related to each confluence. The paper is structured as follows: field observations at each of the four confluences are first presented for a representative year specific to each site, addressing objectives 1 and 2, followed by a dedicated section bringing together the comparisons to the Ettema & Muste (2001) laboratory framework for all four confluences, addressing objective 3. This structure separates the field documentation from the model validation.

2. Study sites

The locations of studied confluences with their main tributary rivers are shown in Fig. 1. The study sites include the confluence of the Sainte-Anne River (STA) with the Bras-du-Nord River (BDN) (Fig. 1a), and three confluences along the Chaudière River (CH): with the Du Loup (DL), Famine (FA) and Bras Saint-Victor (BSV) Rivers (Fig. 1c). These locations were selected for their documented history of frequent ice jam flooding and represent diverse morphological and hydraulic conditions. Although spring breakup occurs between mid-March and mid-April, there are also mid-winter breakup events on the studied rivers which could sometimes lead to ice jam floodings (Turcotte et al., 2020). The morphological characteristics of each study site are summarized in Table 1.

STA originates from the Sainte-Anne Lake and flows south for 123 km to the north shore of the St. Lawrence River at the Town of Sainte-Anne-de-la-Pérade. While the total watershed drains 2706 km², this study focuses exclusively on the area upstream of the Chute-Panet Dam (the downstream boundary of the study reach at km 0), covering 1550 km². BDN is the largest tributary within the STA watershed: it drains 777 km², is 48 km long, and joins STA 3.3 km upstream of the Chute-Panet Dam. Figure 2 shows the STA-BDN confluence study area. There are two ice control structures located on the STA upstream of the confluence and were designed to mitigate ice-related flooding at the Town of Saint-Raymond between km 5 and 3. The first structure is at km 6 and consists of a weir with piers and the second structure is a staggered concrete blocks arrangement on the riverbed at km 10 (Pourshahbaz et al., 2023). An iron bridge with no piers is located downstream of the

Commenté [LC17]: The description of jam formation at the study sites is clear, but in places the manuscript reads more like a case study. To move beyond this, it would be helpful if the structure of the manuscript were clarified and in places the analysis were further developed to clearly identify insights from the data for model validation and put forward specific directions for future work.

Commenté [LC18R17]: Thank you for this comment. To address the concern regarding manuscript structure, a sentence has been added at the end of the Introduction explicitly describing the organization of the manuscript relative to the three objectives. The Results section now presents the breakup dynamics observed at each confluence across the four study years, addressing objectives 1 and 2. A dedicated new section (Section 7) following the Results brings together the comparisons to the Ettema & Muste (2001) laboratory framework for all four confluences, addressing objective 3. This restructuring separates the field documentation from the model validation, making it easier for the reader to follow the progression from field observations to equation testing. Regarding the development of specific directions for future work, a dedicated paragraph has been added to the Discussion, identifying four specific points to take forward from this study.

Commenté [LC19]: It is not clear to me why these specific sites were chosen. Were the authors expecting to see a range of jam formation processes among them?

Commenté [LC20]: Because the core goal appears to be to validate the Ettema lab studies, I suggest to make comparison to Ettema an organising factor of the manuscript. For example, were the confluences chosen to find specific processes? Did the authors observe the processes they expected to, or not observed some processes they anticipated?



Commenté [LC21R20]: Thank you for this suggestion. As clarified above, the validation of the Ettema & Muste (2001) equations is the third of three equally weighted objectives. Regarding site selection, a sentence explicitly state in Section 2 that the four confluences were selected based on two criteria: their documented history of frequent ice jam flooding causing damage to nearby urban communities, and their diverse morphological configurations. Their geographic proximity to Université Laval enabling sustained four-year multi-site monitoring was also a criterion not stated in the paper, because it was considered less relevant than the other two criteria. The sites were not selected with the intent of pre-assigning specific laboratory processes to specific sites, so the mechanism identified at each confluence emerged from the field observations themselves.

confluence at km 2.2, creating additional flow constrictions and may influence ice accumulation and jamming. Also, there are two islands at the mouth of BDN. Based on the bed level difference of 0.8 m near the confluence and a slope ratio of 0.60 between the tributary and the main river (Table 1), the STA-BDN can be classified as a discordant bed confluence (Charbonneau et al., 2024). While discordant bed confluences typically exhibit a steeper tributary (Chang, 1988), at this study site the slope at the mouth of the BDN decreased from 0.577 % to 0.170 % due to sediment accumulation (Fig. 1b). These apparent deltas point bars directly upstream of the confluence regulate the tributary discharge before it enters the confluence (Fig. 2a). The BDN's higher invert bed level relative to the STA, deflects flow towards the STA, as laboratory studies have confirmed that flow interaction at confluences is deflected towards the channel with lower bed elevation (Biron et al., 1996). Consequently, the STA discharge appears to be constrained towards its left bank.

CH originates from Mégantic Lake and flows north for 192 km to discharge into the St. Lawrence River, with a total watershed area of 6694 km². The Innergex Dam is located 4 km upstream of the mouth of CH, marking km 0. The river can be divided into three reaches with distinct bed slopes, namely the upper (km 185 to km 99, slope: 0.263 %), intermediate (km 99 to km 39, slope: 0.048 %) and lower (from km 39 to the mouth, slope: 0.210 %) reaches (Fig. 1d), with a mean annual discharge of 114 m³ s⁻¹. Spring freshet on the CH represents approximately 60 % of its annual flow volume and is partially responsible for its frequent ice-jam floods (Biron et al., 2020). Figure 2b shows the CH-DL confluence, which is located at km 103.4 of CH. At about 0.8 km downstream of the confluence, there is an ice control structure (the Sartigan Dam, km 102.6 of CH), which was designed to retain the ice from the upper reach of the CH to reduce the risk of ice jam flooding on the downstream reaches (Pourshahbaz et al., 2023). The CH-DL is the only CH confluence that exhibits a concordant bed configuration (Rhoads, 2020), with the invert bed level of the CH only 0.1 m lower than that of the DL (Table 1). Despite the tributary slope being twice as steep as that of the main river, these similar bed levels enable discharges and sediments to merge without significant sediment deposition at the junction. However, bridge piers and a sand bar create local restrictions near the mouth of DL. A concordant bed bathymetry typically includes a zone of sediment scour whose position aligns with that of the dividing streamline. This dividing streamline represents the hydraulic boundary separating the discharges from the two rivers, with the flow deflection zone forming in the main river upstream of the streamline and the flow separation zone developing downstream along the bank where the tributary joins (Ettema & Muste, 2001). The depth of this sediment scour zone was estimated at 2.7 m with the bathymetric survey of the confluence. This value is consistent with the prediction of 2.9 m from Best's (1988) relationship, using the confluence angle of 88° and average discharge ratios. At the downstream end of this scour region, transported sediments commonly become entrapped and accumulate in the flow separation zone, forming a large bar (Ettema & Muste, 2001). This sedimentary deposit is visible downstream of the confluence on the right bank of the CH (Fig. 2b). Figure 2c shows the CH-FA confluence, (km 97.5, CH). Bars and a highway bridge at the mouth reduce the effective width of FA, and additional bars are present in the CH downstream of the confluence. The FA and CH riverbeds are discordant, with the two rivers exhibiting significantly different slopes, with the FA having a slope 18 times steeper than the CH (Table 1). This slope difference, combined with the 1 m bed level difference where the tributary is positioned above the main river, creates



165 favorable conditions for the sediment-depositional patterns characteristic of discordant bed confluences. The notable
underwater drop at the confluence further enhances sediment deposition processes, resulting in accumulations deposited in a
fan-shaped pattern where the FA joins the CH (Fig. 2c). During periods of low discharges, ice grounding can occur on these
depositional features. Figure 2d shows the CH-BSV confluence, located at km 75.3 of the CH. Like CH-FA, this confluence
exhibits a discordant bed configuration with the two rivers displaying a slope ratio of 14 (Table 1). Bars of sediment form at
170 the confluence, where ice grounding can occur during low discharge periods.

175
180
185
190

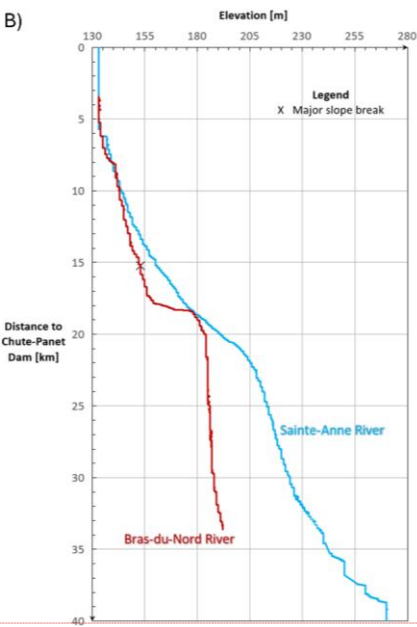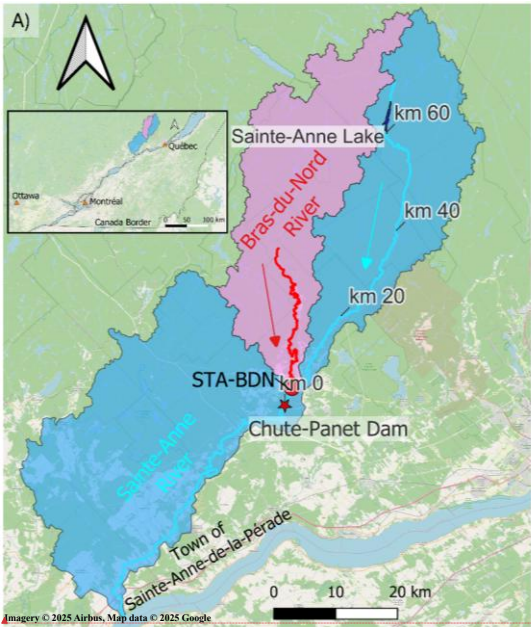

a mis en forme : Normal

a mis en forme : Police :5 pt

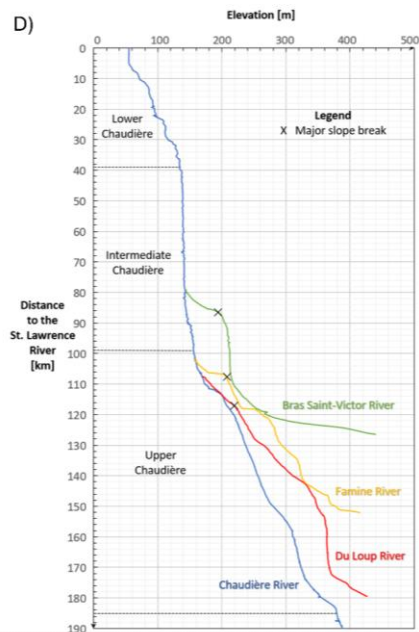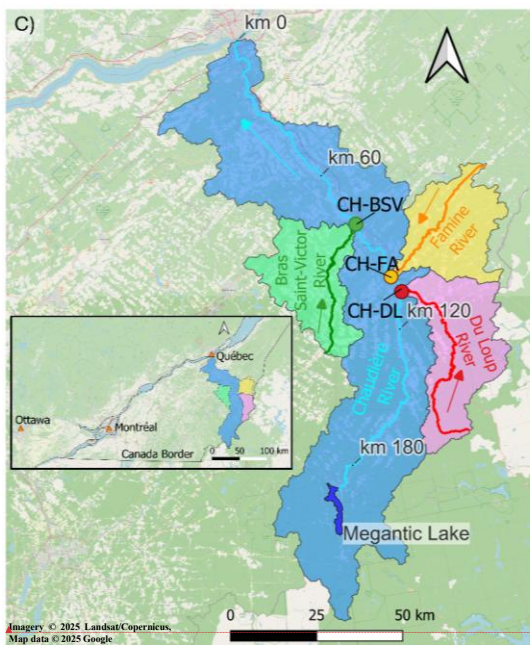

a mis en forme : Police :5 pt

a mis en forme : Interligne : simple



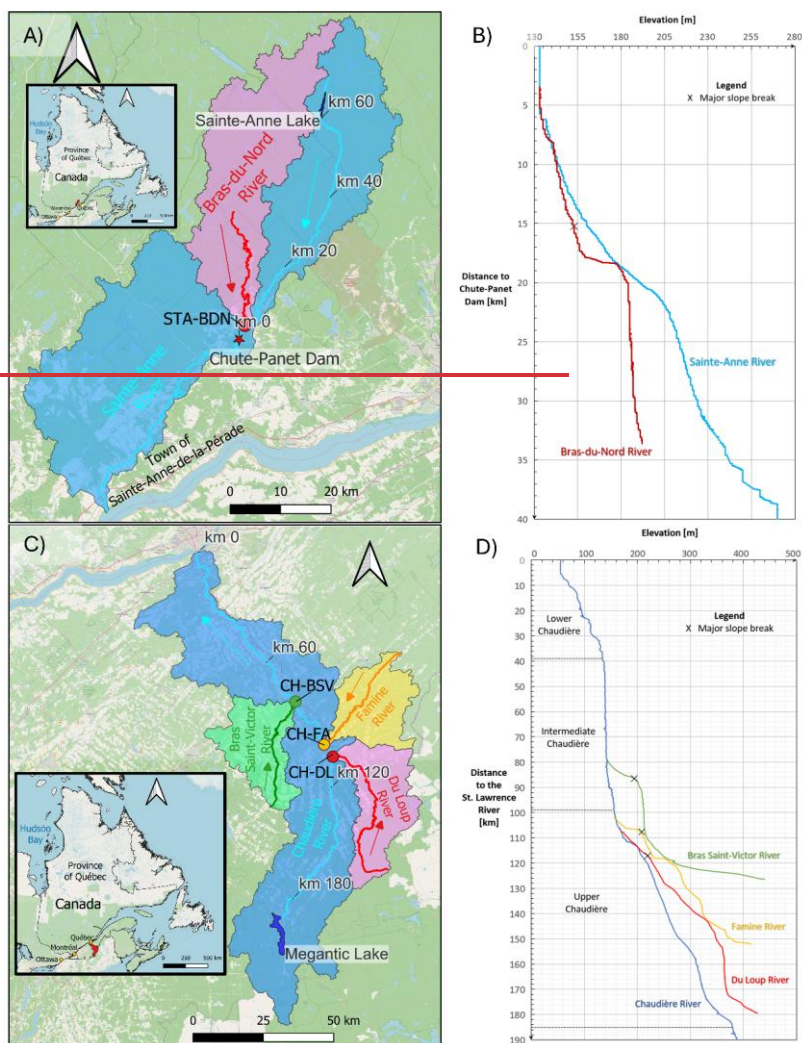


Figure 1: Maps showing study areas A) watersheds and river course for the Sainte-Anne River with location inset in Canada (Imagery © 2025 Airbus, Map data © 2025 Google), B) elevation profiles of the Sainte-Anne River, C) watersheds and river course for the Chaudière River with location inset in Canada (Imagery © 2025 Landsat/Copernicus, Map data © 2025 Google) and D) elevation profiles of the Chaudière River.


Commenté [LC22]: Ensure the readability of this figure (actually, all figures). Some fonts are very small.

Commenté [LC23R22]: Thank you for this observation. All figures have been reviewed. The panels of Figures 1 and 2 were sized to fit within a single page to keep each composite figure compact and self-contained, so as not to make this paper any longer. However, this came at the cost of readability as mentioned and as the dense spatial content of each panel, including maps, aerial imagery, elevation profiles, instrumentation locations, and legend symbols, required small font sizes to avoid overlapping labels. We appreciate the reviewer's comment and agree that readability is a priority. In response, the size of each panel of these two figures has been increased to improve the legibility of all labels, station IDs, river names, and legend text. As a result, Figures 1 and 2 now extend across two pages in the manuscript. We note that while the figures span two pages in the Word document for readability purposes, each figure will be submitted as a single image file, ensuring that it remains a self-contained composite figure with a single caption.

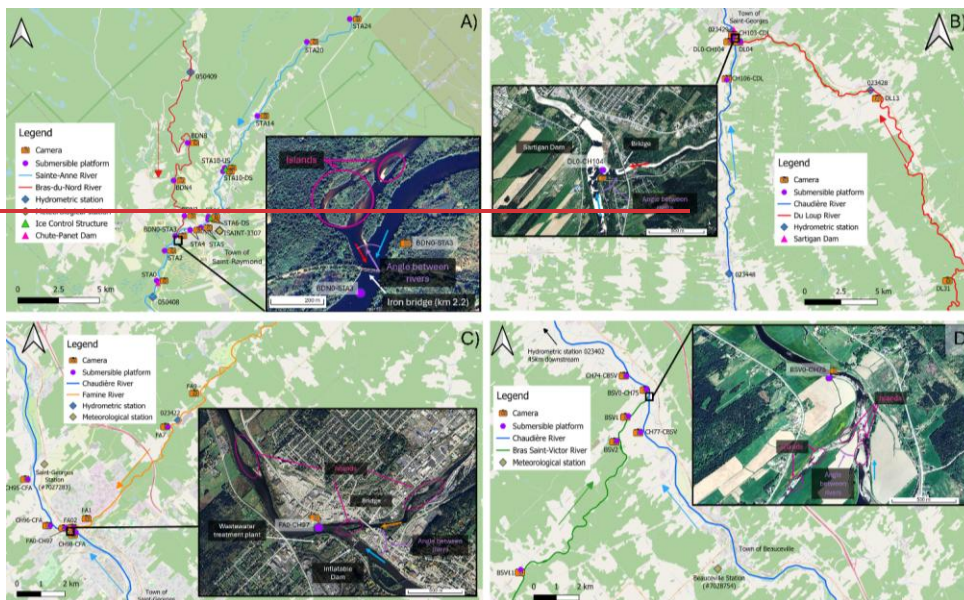

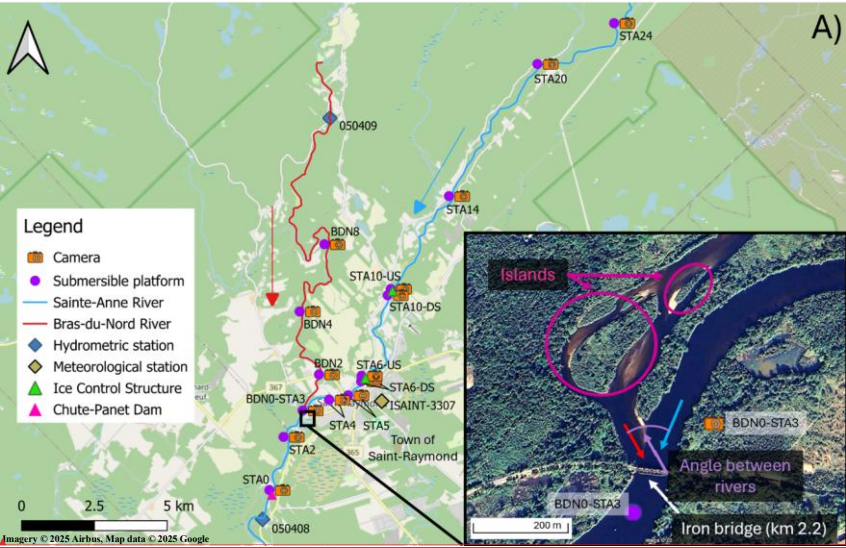

a mis en forme : Légende, Interligne : 1.5 ligne

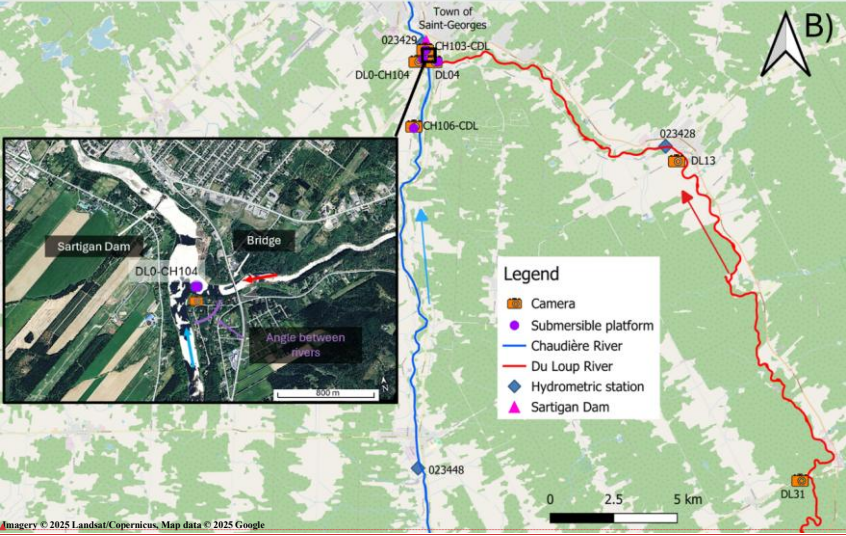

a mis en forme : Police :5 pt

a mis en forme : Police :5 pt

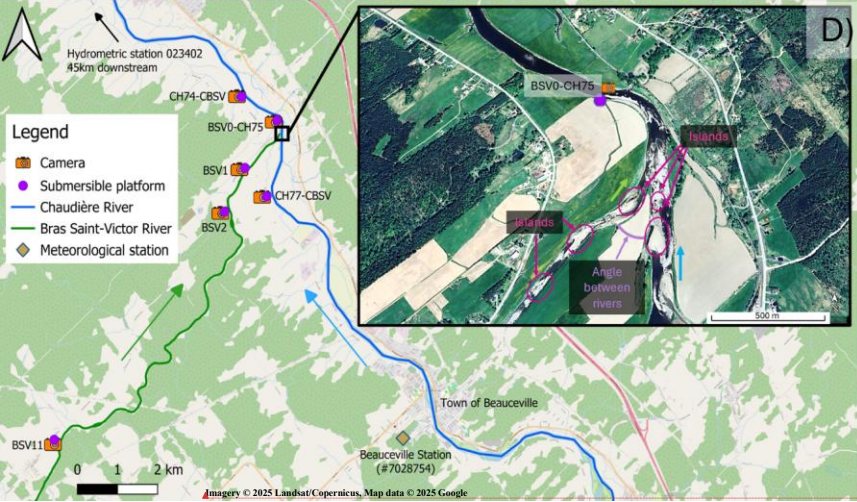
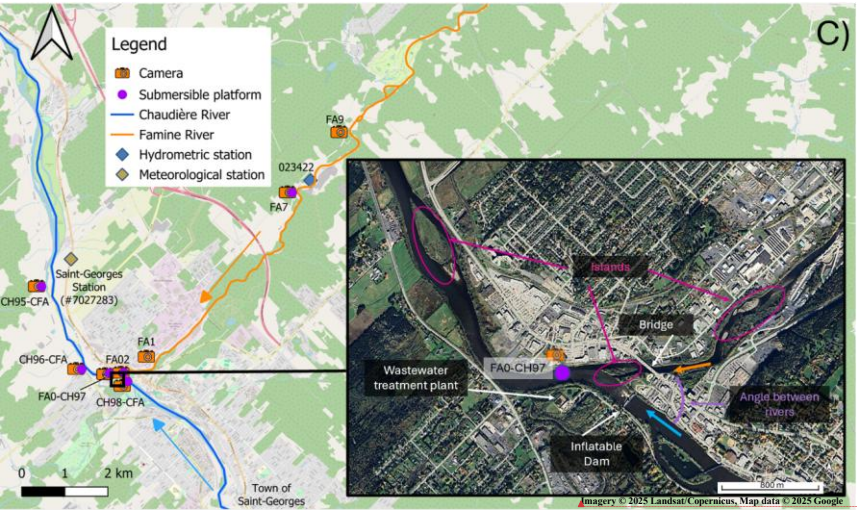


Figure 2: Study sites showing instrumentation locations at each measurement sites with their respective site ID for A) STA-BDN, B) CH-DL, C) CH-FA, and D) CH-BSV. The insert is an aerial zoomed in photo of the confluence to highlight the morphological features (A) Imagery © 2025 Airbus, Map data © 2025 Google; B), C) and D) Imagery © 2025 Landsat/Copernicus, Map data ©

a mis en forme : Police :5 pt

a mis en forme : Normal

a mis en forme : Police :5 pt

2025 Google). The sites ID in these figures indicates the river where the instrument was located followed by its stationing from the downstream boundary (Chute-Panet Dam for STA and Innergex Dam for CH).

a mis en forme : Légende

210 Table 1: Morphological characteristics for all study rivers.

Confluence	River	Watershed area		Slope		Effective width ³		Bed height near the confluence [m]	
		[km ²]		[%]		[m]			
		Value	Ratio ¹	Value ²	Ratio ¹	Value	Ratio ¹	Value	Difference ⁴
STA-BDN	STA	1 550	0.50	0.305	0.6	81	0.77	131.5	0.8
	BDN	777		0.170		62		132.3	
CH-DL	CH	3 066	0.29	0.263	2	133	0.70	168.7	0.1
	DL	893		0.516		93		168.8	
CH-FA	CH	3 020	0.19	0.048	18	113	0.43	158.0	1.1
	FA	714		0.847		48		159.1	
CH-BSV	CH	5 059	0.15	0.048	14	88	0.61	142.4	1.3
	BSV	735		0.687		54		143.7	

¹Tributary/main river

² Downstream reach of the tributary is considered from the mouth to a major slope break which corresponds to km 15.2 for BDN, km 9.7 for DL, km 6.1 for FA and km 7.4 for BSV (see Fig. 1)

³Averaged over a distance equivalent to about 5 times the width of the river at the confluence, upstream from the mouth in the tributary and downstream from the confluence in the main river (after Bonner (1996))

⁴ Tributary minus main river

3. Field measurements

3.1 Instrumentation and data sources

Field monitoring was conducted at the four confluences over four consecutive winters from 2021 to 2024. Table 2 summarizes the monitoring equipment deployed at each site for each year—, indicating whether water level, water temperature, and ice observations (Ice obs.) were collected at each location. Ice observations refer to ice state and surface concentration. The number of instrumented locations at each confluence ranged between 6 and 13 sites. In some cases, two cameras were installed at the same river stationing to capture both directions, and in two cases, instruments were also installed upstream and downstream of an ice control structure, thus at the same measuring site.

Table 2: Details of monitoring sites at each confluence for each year of the study period.

Confluence	Sites ID	Stationing (km)	2021			2022			2023			2024		
			Water level	Water temp.	Ice obs.	Water level	Water temp.	Ice obs.	Water level	Water temp.	Ice obs.	Water level	Water temp.	Ice obs.
STA-BDN	BDN0-STA3	3.3	✓	✓	✓				✓	✓	✓	✓	✓	✓
	BDN2	1.7	✓	✓	✓				✓	✓	✓	✓	✓	✓
	BDN4	4.3			✓									
	BDN8	8.1				✓	✓	✓						
	STA0	0.1			✓			✓						
	STA2	2.1							✓	✓	✓	✓	✓	✓
	STA4	4.4							✓	✓	✓	✓	✓	✓
	STA5	5.2						✓				U/D	U	U/D
	STA6	6.2						U/D	U/D	U/D	U/D	U/D	U	U/D
	STA10	10.3							U/D	U/D	U/D	U/D	U/D	U/D
CH-DL	STA14	14.2						✓						
	STA20	19.7	✓	✓	✓			✓						
	STA24	23.8	✓	✓	✓			✓						
	DL0-CH104	103.8				✓	✓	✓	✓	✓	✓	✓	✓	✓
	DL04	0.4	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
	DL13	12.5			✓									
	DL31	30.6			✓									
CH-EA	CH103-CDL	102.6	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓
	CH106-CDL	106.0			✓	✓	✓		✓	✓	✓	✓	✓	✓
	FA0-CH197	97.4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	FA02	0.2	U/D			✓	✓	✓	✓	✓	✓	✓	✓	✓
	FA1	0.7						✓						
	FA7	6.6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	FA9	9.0						✓						
CH-BSV	CH95-CFA	95.4	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓
	CH96-CFA	95.7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	CH98-CFA	97.9	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	BSV0-CH75	75.3			✓			✓	✓	✓	✓	✓	✓	✓
	BSV1	1.2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	BSV2	2.0				✓		✓						
	BSV11	10.6	✓	✓	✓	✓	✓		✓	✓	U/D			
CH74-CBSV	CH74-CBSV	74.2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	CH77-CBSV	77.4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Commenté [LC24]: ‘Ice’ is a vague descriptor—I assume this refers to ice thickness measurements. Could this be described in more detail, perhaps by defining a variable to use in the table header.

Commenté [LC25R24]: Thank you for this remark. The column header 'Ice' in Table 2 has been replaced with 'Ice obs.' to better reflect that these observations refer to ice state and surface concentration, rather than ice thickness measurements. The sentence introducing Table 2 in the text has also been revised to clarify that ice observations refer to ice state and surface concentration, as defined in Section 3.2.

Note: *U* refers to an upstream view or location and *D* to a downstream view at the same site.

230 Submersible platforms containing temperature (RBRsolo3T®, accuracy $\pm 0.002^{\circ}\text{C}$) and pressure (HOBO U20L-01®, accuracy $\pm 0.1\%$ FS) sensors were deployed at several locations including: 1) upstream of the confluence on the main river, 2) upstream of the confluence on the tributary, 3) within the confluence, and 4) downstream of the confluence on the main river, where conditions allowed. The sensors were housed within two PVC pipes, secured with fitted plastic rings and closed with bolts in holes that permitted water circulation while maintaining sensor stability. Each pipe was mounted to an 11 kg
235 metal plate and the platform was anchored to the riverbed using rebar spikes. To prevent displacement by ice movement, chains were welded to each plate and secured to the riverbed using additional metal stakes. The data recording intervals varied between instruments and from year to year but were 1-15 minutes for the temperature sensors and 4 minutes to 24 hours for the pressure sensors. Surface ice dynamics were documented through time-lapse cameras (Brinno BCC100®, photo interval: 20-120 min). Drone flights were conducted at each site 1 to 6 times per year, during periods of potential ice movements such
240 as a significant rise in air temperature, after precipitation events, and when river discharge was forecast to increase. Images from the European Space Agency's Sentinel-2 satellite (~5 days frequency when not cloudy), were acquired through the Sentinel-HUB® platform.

River discharge was obtained from multiple hydrometric stations operated by the *Centre d'expertise hydrique du Québec*
245 (CEHQ). The location of all hydrometric stations and their ID numbers are shown in Fig. 2. The CEHQ operates one hydrometric station on the STA River just downstream of Chute-Panet Dam (ID 050408, km 0.0, watershed area: 1546 km^2) and another on the BDN River (ID: 050409, km 16.6 from the mouth, watershed area: 646 km^2). Three relevant stations reporting discharge data on the CH River, namely St. Martin station (ID 023448, km 120.5, watershed area: 2009 km^2) upstream of the CH-DL confluence, St. Georges station (ID 023429, km 102.6, watershed area: 3085 km^2) downstream of the
250 Sartigan Dam, and Saint-Lambert-de-Lauzon (ID 023402, km 25.6, watershed area: 5820 km^2). In addition, the CEHQ has a hydrometric station on the DL River (ID 023428, km 10.8 from the mouth, watershed area: 806 km^2) and on the FA River (ID 023422, km 6.6 from the mouth, watershed area: 696 km^2). All discharge data were obtained at 15-minute intervals when available or as daily averages.

255 Meteorological data was collected from the closest meteorological station(s) to the sites. For STA-BDN, air temperature and atmospheric pressure were acquired from a municipal weather station (Station #ISAINT3307) in Saint-Raymond (Fig. 2a), while precipitation (daily rainfall and snowfall) and total snow on the ground were obtained from the *Ministère de l'Environnement de la Lutte contre les Changements Climatiques, de la Faune et des Parcs* (MELCCFP) of Québec weather station Sainte-Christine (#7017000) located in the municipality of Saint-Basile, approximately 15 km downstream of the
260 confluence. For CH confluences, air temperature and atmospheric pressure were acquired from the Beauceville weather station (ID 7028754, Fig. 2d) operated by Environment and Climate Change Canada (ECCC), and the precipitation (daily rainfall and snowfall) and total snow on the ground were obtained from the St-Georges weather station (ID 7027283, Fig. 2c) operated by the MELCCFP. Ice thicknesses for the STA-BDN confluence were acquired from ice surveys done by the town of Saint-

Raymond at various locations along the rivers, except for the year of 2024 when transects were done on each reach by the
265 Université Laval research team as detailed by Charbonneau et al. (2025). For CH-FA, ice thicknesses were measured by the
Université Laval research team in 2021, 2022, and 2023.

3.2 Data analysis

The typical ice breakup sequence for each confluence was analysed through the time series of measured meteorological and
hydrometric data to identify characteristic patterns and critical thresholds. Discharge at each confluence mouth was determined
270 by scaling the discharge from hydrometric stations' locations to the confluence location using the ratio of the watershed area
at the confluence (Table 1) to the watershed area of the corresponding hydrometric station. For the STA-BDN, the upstream
STA discharge was calculated by subtracting the scaled BDN discharge (ID 050409) from the downstream scaled STA
discharge (ID 050408). For the CH-BSV, BSV discharge was estimated by subtracting combined upstream scaled contributions
(CH: ID 023429 and FA: ID023422) from the downstream scaled measurement (CH: ID 023402). The discharge ratio (Qr)
275 was defined as the ratio of the tributary discharge to the main river discharge.

Cumulative degree-days of freezing (CDDF) and Cumulative degree-day of thawing (CDDT) were calculated to represent the
ice cover resistance at the end of the winter and the ice cover weakening by breakup time, respectively. CDDF calculations
were initiated when daily air temperatures remained below 0°C for three consecutive days starting on the first of October,
280 while subsequent positive temperatures were ignored (Bilello, 1980). CDDT calculations were initiated when daily air
temperatures exceeded -5°C for three consecutive days from the first of February, with only daily temperatures above -5°C
contributing to the cumulative sum (Turcotte et al., 2025). The cumulative degree-day ratio (CDDr) was defined as the ratio
of CDDT to CDDF, which reflects the degree of thermal weakening of the ice cover at the end of the winter season.

285 Time-lapse images, drone flights and satellite imagery were analysed to determine the ice type and estimate surface coverage
and ice “state” during the breakup period, based on four ice conditions: open-water (less than 50 % ice coverage), ice cover
(more than 50 % stationary ice coverage), ice run (moving ice covering at least 20 % of the surface) and ice jam (broken
stationary ice accumulation). All data were processed using MATLAB code created by the Université Laval research team
and synchronized to a 1-hour timestep using linear interpolation between available measurements.

290 4. Laboratory-derived equations for ice jam formations at confluences established by Ettema & Muste (2001)

Of the seven ice jam formation processes identified by Ettema & Muste (2001), predictive force balance equations were only
developed for three: jamming due to merging ice runs (process 3), jamming due to flow impact (process 5), and jamming due
to confluence bars (process 6). This section therefore focuses exclusively on these three processes because for the remaining
mechanisms, no predictive equations exist in the literature and the comparison with the laboratory framework is qualitative.

Commenté [LC26]: Use "All data were..."
Commenté [LC27R26]: Thank you. The sentence at Line 225 has been revised to read: 'All data were processed using MATLAB code created by the Université Laval research team and synchronized to a 1-hour timestep using linear interpolation between available measurements.'

Commenté [LC28]: The structure of this section would be easier to interpret if a table or list were used in the Introduction to clearly set out the previously observed processes and perhaps references for existing model equations for them. I realise this section comes before the Results, but it is a bit jarring to only see equations for some processes. Perhaps it would make sense to state that only processes 3,5,6 were observed and so Section 4 describes only these.

The morphological and hydraulic characteristics of each confluence were compared with established laboratory study cases by Ettema & Muste (2001) to identify analogous experimental conditions and ice jam formation thresholds. Field-measured parameters including confluence angle, channel width ratio and discharge ratio were matched with corresponding laboratory experiments to verify predictive ice jam location. In this section, a review of the simplified force balance equations presented by Ettema & Muste (2001) for jamming due to merging ice runs (process 3), jamming due to flow impact (process 5), and jamming due to confluence bars (process 6), is presented. The forces and parameters used for each process are illustrated in Fig. 3.

Commenté [LC29R28]: Thank you for this comment. Section 4 now opens with a sentence explicitly stating that Ettema & Muste (2001) only developed predictive force balance equations for three of the seven mechanisms: process 3 (merging ice runs), process 5 (flow impact), and process 6 (confluence bars). Section 4 therefore focuses exclusively on these three processes. For the remaining mechanisms, no predictive equations have been published in the literature and the comparison with the laboratory framework presented in the new Section 7 is qualitative.

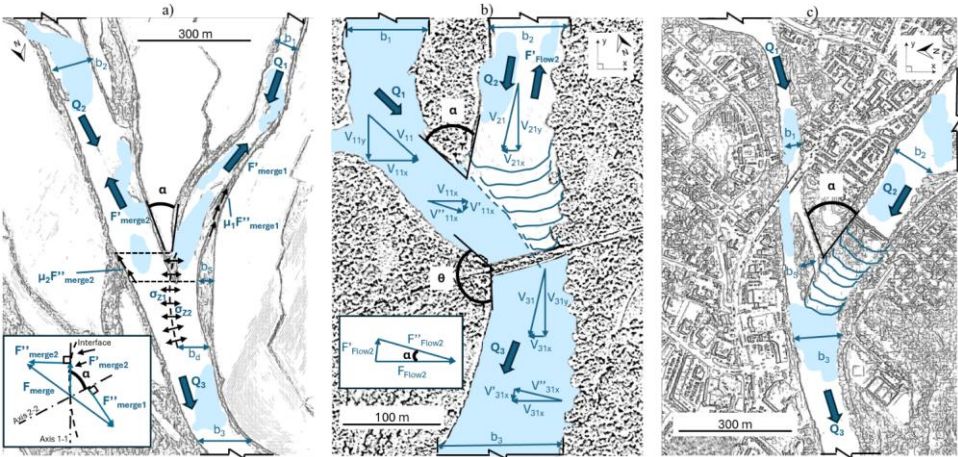


Figure 3: Visual representation of the forces applied showing a) a plan view of the ice jam due to merging ice runs at CH-BSV (process 3), b) a plan view of the flow impact mechanism at STA-BDN (process 5) and c) a plan view of the ice jam due to a confluence bar at CH-FA (process 6). The light blue in the background corresponds to ice free.

a mis en forme : Police : (Par défaut) +Corps (Times New Roman)

4.1 Merging ice runs (process 3)

Ice jam formation resulting from merging ice runs is expressed by the force-balance Eq. (1) and considers six forces (expressed in $N m^{-1}$, force normalized to the ice jam width): the flow drag force (F_{drag}), the ice accumulation weight (F_{weight}), the ice accumulation strength ($F_{strength}$), the bank shear resistance (F_{bank}), and the merging forces of the lateral pressure exerted by ice moving from the tributary multiplied by the contact area normal and parallel to the direction of flow in the main river axis (F'_{merge1}/b_2 and F''_{merge1}/b_2 , respectively, where b_2 is the width of the main channel). Ice jam formation occurs when the net force in Eq. (1) equals or falls below zero. Figure 3a shows a visual representation of the lateral pressure applied in Eq. (1).

$$F_{drag} + F_{weight} - F_{strength} - F_{bank} - \frac{F'_{merge1}}{b_2} - \frac{F''_{merge1}}{b_2} \leq 0 \quad (1)$$

Eq. (1) can be expanded into Eq. (2) as follows:

$$\begin{aligned} & \tau_{i2} \cos\left(\frac{\rho_i}{\rho} \frac{\delta\eta}{\delta x}\right)_2 + s_{i2} \rho L_f g \eta_2 \sin(S_w)_2 - \frac{\delta}{\delta x} (\eta_2 \sigma_{x2}) - \frac{\delta}{\delta y} (\eta_2 \tau_{xy2}) \\ & - \sigma_{z1} \eta_1 \left(\frac{b_d}{b_2}\right) - \mu_2 \sigma_{z1} \eta_1 \left(\frac{b_s + \frac{b_1}{\sin \alpha}}{b_2}\right) \leq 0 \end{aligned} \quad (2)$$

with the normal stress in the streamwise direction σ_x [N m⁻²] with e referring to the porosity of ice [-] that can be obtained by Eq. (3):

$$\sigma_{x2} = 0.5 * \rho_i * g * (1 - s_{i2}) * (1 - e) * \eta_2 \quad (3)$$

where the indices i, 1 and 2 refer to the ice, the tributary and the main river, respectively, τ_i [N m⁻²] is the shear stress on the underside of the cover, ρ [kg m⁻³] is the density of water, ρ_i [kg m⁻³] is the density of ice, η [m] is the thickness of the ice run, x refers to the distance across the channel, s_i [-] is the specific gravity of ice, L_f [m] is the jam length, g [m s⁻²] is the gravitational acceleration, S_w [m m⁻¹] is the slope of water surface, τ_{xy} [N m⁻²] is the shear stress at the bank, σ_z [N m⁻²] is the lateral pressure exerted by the ice moving from the corresponding channel, b_d [m] is the distance to the dividing streamline, b [m] is the width of the channel, μ [-] is the dynamic fluid viscosity of water, b_s [m] is the width of the flow separation bar and finally α [°] is the angle between the channels at the confluence measured from the dominant flow direction from each channel.

4.2 Flow impact (process 5)

This mechanism occurs when the ice-free flow from the tributary exerts enough force to push ice into the main river, where it accumulates and blocks the flow, leading to jam formation. This process is expressed by the force-balance Eq. (4) and considers six forces (expressed in N m⁻¹, force normalized to the ice jam width) with the same first forces from Eq. (1) which are: the flow drag force (F_{drag}), the ice accumulation weight (F_{weight}), the ice accumulation strength ($F_{strength}$) and the bank shear resistance (F_{bank}), with the hydrodynamic reaction forces acting along and normal to the main river axis (F'_{flow2}/b_2 and F''_{flow2}/b_2 , respectively, where b_2 is the width of the main channel), which stabilize the jam. Ice jam formation occurs when the net force summation in Eq. (4) equals or falls below zero.

$$F_{drag} + F_{weight} - F_{strength} - F_{bank} - \frac{F'_{flow2}}{b_2} - \frac{F''_{flow2}}{b_2} \leq 0 \quad (4)$$

Eq. (4) can be expanded into Eq. (5) as follows:

$$\begin{aligned} & \tau_{i2} \cos\left(\frac{\rho_i}{\rho} \frac{\delta\eta}{\delta x}\right)_2 + s_{i2} \rho L_f g \eta_2 \sin(S_w)_2 - \frac{\delta}{\delta x} (\eta_2 \sigma_{x2}) - \frac{\delta}{\delta y} (\eta_2 \tau_{xy2}) \\ & - \frac{\rho Q_1 (v'_{11x} - v'_{31x}) \eta_2}{b_2} - \frac{\mu_2 \rho Q_1 (v''_{11x} - v''_{31x}) (\eta_2 b \cot \alpha)}{b_2} \leq 0 \end{aligned} \quad (5)$$

where the index 3 refers to the reach downstream of the confluence, Q [m³ s⁻¹] is the flow, v_{11x} and v_{31x} [m s⁻¹] are the lateral velocity components of flow from channel 1 and 3 through the confluence control volume, v'_{11x} and v'_{31x} [m s⁻¹] are the component of v_{11x} and v_{31x} acting along the axis of channel 2, and finally v''_{11x} and v''_{31x} [m s⁻¹] are the component of v_{11x} and v_{31x} acting normal to the axis of channel 2. These forces are represented graphically on Fig. 3b.

4.3 Confluence bars (process 6)

The ice jam occurs when the accumulated ice thickness (η_c -[m]) equals or less than the critical equilibrium ice thickness (η_{eq} -[m]) proposed by Beltaos (1995) in straight channels as presented by Eq. (6). The width of the equivalent channel (b_c -[m]) is also equal to the width of the downstream channel (b_3 -[m]) minus the width of bars (b_s -[m]).

345
$$\eta_c = \frac{1}{b_c}(b_1\eta_1 + b_2\eta_2) \leq \eta_{eq} \tag{6}$$

To estimate the equilibrium jam thickness from the Beltaos (1995) relationship, it is necessary to calculate the non-dimensional discharge (ξ) of Eq. (7)

$$\xi = \frac{(q^2_{sw})^{1/3}}{S_w B}, \tag{7}$$

where q is the discharge per unit width of the ice jam channel [$\text{m}^2 \text{s}^{-1}$] and B is the accumulation width [m]. Visual presentation of the parameters is shown on Fig. 3c.

350

5. Hydraulic modeling

To validate the equations developed by Ettema & Muste (2001), it is essential to estimate the hydraulic parameters which were not measured in the field such as flow velocity and shear stresses during ice jam formation events. For this purpose, a steady state one-dimensional hydraulic network model was developed for the STA-BDN confluence using HEC-RAS 6.4.1 (US Army Corps of Engineers, 2025) to simulate flow and ice conditions across the study period. Three scenarios were simulated for each season (12 simulations in total): 1) an open water scenario to calibrate channel bed roughness coefficients, 2) an ice cover scenario to calibrate under-ice roughness parameters for stable ice cover conditions, and 3) an ice jam scenario which incorporated the calibrated bed and ice cover roughness coefficients to calibrate ice jam roughness to match the observed water levels. Ice jam length was estimated from field observations. The default HEC-RAS values for the ice jam strength parameters (i.e. $K_I = 0.33$, $\phi = 45^\circ$, $e = 0.4$) and critical toe velocity ($V_{max} = 1.524 \text{ m s}^{-1}$) were used in these simulations (after Beltaos & Tang, (2013)). Upstream boundary conditions were based on measured discharges on both rivers upstream of the confluence for each respective year, with downstream boundaries established to critical depth at the Chute-Panet Dam, which is a free overflow spillway structure. Table 3 summarizes discharge input data for each scenario at STA-BDN.

360
365
370

- a mis en forme : Police :Italique
- a mis en forme : Police :Italique, Indice
- a mis en forme : Police :Italique
- a mis en forme : Police :Italique
- a mis en forme : Police :Italique

375

velocity ($V_{\max} = 1.524 \text{ m s}^{-1}$) were used in these simulations (after Beltaos & Tang, (2013)). Upstream boundary conditions were based on measured discharges on both rivers upstream of the confluence for each respective year, with downstream boundaries established to critical depth at the Chute Panet Dam, which is a free overflow spillway structure. Table 3 summarizes discharge input data for each scenario at STA-BDN. Attempts to model CH-BSV were constrained by data limitations due to insufficient bathymetric data for the BSV tributary which prevented the development of a reliable hydraulic model for this confluence, limiting the analysis of the predictive equation. The processes observed in the CH-DL and CH-FA confluences did not require the development of a hydraulic model.

Table 3: Discharge data for all model simulations of the studied years of STA-BDN.

Year	Model scenario	Date	BDN [m ³ s ⁻¹]	STA [m ³ s ⁻¹]	Junction [m ³ s ⁻¹]
2021	Open water	April 13	65.3	76.8	142.1
	Ice cover	February 17	6.1	5.8	11.9
	Ice jam	April 7	36.1	50.0	86.1
2022	Open water	April 18	37.1	46.0	83.1
	Ice cover	February 1 st	5.7	5.8	11.5
	Ice jam	April 15	58.2	89.8	148.0
2023	Open water	April 22	51.9	50.9	102.8
	Ice cover	February 7	6.4	5.1	11.5
	Ice jam	April 17	107.4	110.8	218.2
2024	Open water	April 29	42.7	43.9	86.6
	Ice cover	February 20	6.4	6.0	12.4
	Ice jam	April 3	10.0	14.4	24.4

380

6. DResultsescription of breakup dynamics

The results are presented for STA-BDN first, as it is the only confluence studied on the Sainte-Anne River and the site for which the most complete quantitative comparison with the laboratory-derived equations was achievable. The three Chaudière River confluences are then presented in order from upstream to downstream along the river: CH-DL (km 103.4), CH-FA (km 97.5), and CH-BSV (km 75.3).

385

Commenté [LC30]: Ensure the readability of this lengthy paragraph (here and there, elsewhere too). I suggest breaking the paragraph in two parts.

Commenté [LC31R30]: Thank you for this suggestion. The paragraph at Line 290 has been divided into two parts. The first paragraph covers the model setup, simulation scenarios, boundary conditions, and default ice jam parameters. The second paragraph covers the model geometry, reach extent, cross-section counts, and the rationale for limiting hydraulic modeling to the STA-BDN confluence. We have also reviewed the remainder of the manuscript for similarly lengthy paragraphs and have broken where appropriate.

Commenté [LC32]: The site description in the Results is clear, but it is difficult to follow the model validation between sites. It may make sense to order the site descriptions according to complexity, allowing clear development of model validation, or to report the site-specific results in the Results and develop a targeted Discussion focused on model validation.

Commenté [LC33R32]: Thank you for this structural suggestion. The manuscript has been restructured accordingly. All site-specific breakup dynamics are now presented in the Results (Section 6), and a new dedicated Section 7 brings together all comparisons to the Ettema & Muste (2001) laboratory framework across the four confluences. The site ordering follows a geographic rationale: STA-BDN is presented first as it is the only confluence studied on the Sainte-Anne River and also the site for which the most complete comparison with the laboratory-derived equations was achievable, including full quantitative validation of Equation 5. The three Chaudière River confluences are then presented from upstream to downstream along the river: CH-DL (km 103.4), CH-FA (km 97.5), and CH-BSV (km 75.3). This geographic ordering is consistent with the hydrological context of the Chaudière watershed and reflects the natural downstream progression of breakup processes along the river.

a mis en forme : Anglais (Canada)

a mis en forme : Anglais (Canada)

a mis en forme : Anglais (Canada)

a mis en forme : Justifié, Interligne : 1.5 ligne

Commenté [LC34]: the rationale for the structure of the results is unclear. I can see that the Results is organised by site, but why were the sites ordered in the current manner? To clarify the overall comparison, I would suggest either ordering the respective sites by increasing complexity, so that the clearest comparisons to existing models appear first, or to report the site results first, and then develop a comparison to existing models in the Discussion.

Commenté [LC35R34]: Thank you for this comment. As described in the response to the general comment above, the site ordering follows a geographic rationale: STA-BDN is presented first as it is the only confluence studied on the Sainte-Anne River and the site for which the most complete comparison with the laboratory-derived equations was achievable. The three Chaudière River confluences are then presented from upstream to downstream along the river: CH-DL (km 103.4), CH-FA (km 97.5), and CH-BSV (km 75.3). A brief introductory sentence has been added at the beginning of the Results section explicitly stating this ordering and its rationale.

a mis en forme : Anglais (Canada)

a mis en forme : Normal

6.1 Bras-du-Nord and Sainte-Anne confluence

6.1.1 Description of breakup dynamics


The ice breakup dynamics at STA-BDN were analysed over four winters. In all four years, the ice cleared in the BDN tributary before the STA. The tributary's water and ice flow constricted the passage of ice on the STA resulting in the formation of ice jams in the main river. This can be categorized as a flow impact process based on Ettema & Muste (2001). The same processes and sequence were consistently observed despite the variations in breakup timing, meteorological drivers and discharge magnitudes (Supplement S1).

The results of the meteorological, hydraulic and ice conditions for the 2021 breakup are represented in Fig. 4 and discussed here as an example of the field data analysed during each breakup. A detailed summary of the other three breakups is available in Supplement S1. During the 2021 breakup period, the air temperatures started to rise steadily until reaching an average positive temperature on March 22nd and remained positive except from March 30 to April 4 when the air temperatures dropped below freezing, reaching -15°C on March 31st (Fig. 4a). Two rain events on March 24 and 26 totalling 40 mm (Fig. 4c) resulted in a peak discharge on March 27 of 93.1 m³ s⁻¹ in the STA and 51.1 m³ s⁻¹ in the BDN, for a Qr of 0.55 (Fig. 4i). On this day, the CDDT reached 109.5°C.D. while the CDDF reached 807.4°C.D., resulting in a CDDr of 0.14 (Fig. 4b).

The breakup occurred from upstream to downstream in both the STA and BDN rivers (Fig. 4e). Consequently, three ice jams formed (Fig. 4f). Firstly, an ice jam formed at the upstream site in the tributary (BDN4) on March 26 and released on March 30. A second ice jam formed upstream in the main river (STA20) on March 27 and stayed in place until April 8 (Fig. 4f). By this date, the CDDT had accumulated 174.6°C.D. and the CDDr was 0.21 (Fig. 4b). The formation of this ice jam is also clearly visible in the 0.5 m spike in the water level (Fig. 4h). The third ice jam formed downstream of the confluence at the Chute-Panet Dam (STA0) on March 28 and released on April 6. The water temperatures started rising at the most upstream sites on the STA (STA24 and STA20) from April 3 (Fig. 4g). The downstream site in the tributary (BDN2), located in the meander, was open on April 6, the same day the snow on the ground completely melted (Fig. 4d, e). A few ice runs on April 7 led to the formation of a fourth ice jam at the confluence (BDN0-STA3), while the main river remained ice covered. On April 7 the discharge increased again, likely in response to snowmelt within the watershed, and reached 32.2 m³ s⁻¹ in the STA and 25.1 m³ s⁻¹ in the BDN for a Qr of 0.78 (Fig. 4i). On April 8, the ice jam at the confluence was released. The confluence was the last site to become ice free.

Commenté [LC36]: In each site description, I appreciate the narrative of breakup procedures but I am not sure why a given year was chosen for the narrative. I realise that the details of the other years is provided in the supplemental material to conserve space, but a bit more developed analysis in the description would be helpful. Could a bit more detail be provided so that the reader can understand if this is a typical year, with a short summary what variations were observed on the other 3 years.

Commenté [LC37R36]: Thank you for this comment. The year chosen for each site narrative was selected as the most representative example of the dominant ice jam formation process observed at that confluence: 2021 for STA-BDN, 2022 for CH-DL, 2023 for CH-FA, and 2024 for CH-BSV. This selection also reflects the chronological order of site presentation. Regarding the variations across years, the first paragraph of each site's description of breakup dynamics already provides a summary of the typical breakup sequence and highlights the key variations observed across the other three years, and jam formation outcomes. Where a year deviated significantly from the typical pattern, such as the thermally dominated 2023 breakup at CH-DL which did not produce a significant ice jam, this anomaly is explicitly noted and explained. The detailed results for the other years are provided in the Supplementary Material.

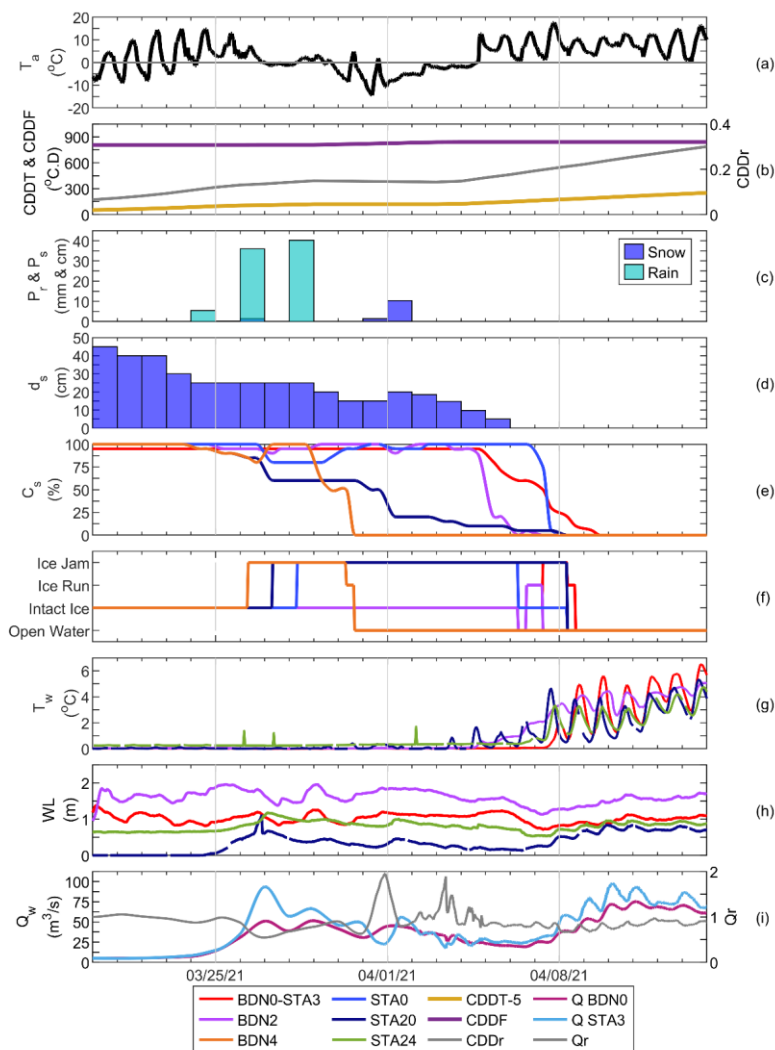

415 **Figure 4: Time series of hydrometeorological conditions during the 2021 breakup at STA-BDN (March 20 to April 14, 2021) showing**
a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states,
g) water temperature, h) water level above the pressure probe and i) discharge and Qr.

6.2 Du Loup and Chaudière confluence

a mis en forme : Anglais (Canada)

6.2.1 Description of breakup dynamics

The ice breakup dynamics at CH-DL were analysed over four winters. In general, breakups at CH-DL occurred from upstream to downstream. The breakup tended to begin in the CH, where ice accumulates upstream of the confluence due to the stationary ice cover maintained by the Sartigan Dam, forming an ice jam. Ice on the tributary responds similarly, causing ice jams later in the season. The dam's stationary ice cover was therefore the primary cause of the ice jam formation at this site. The same processes and sequence were consistently observed in 2021, 2022, and 2024 despite variations in breakup timing, meteorological drivers, and discharge magnitudes (Supplements S2). The 2023 breakup, however, presented a contrasting thermally dominated scenario where gradual melting prevented significant ice accumulation against the dam's stationary ice cover, resulting in a relatively jam free breakup sequence (Fig. S5).

The meteorological, hydraulic and ice conditions for the 2022 breakup are presented in Fig. 7Fig. 5 and discussed here as an example of the field data analysed during each breakup. The detailed summary of the other three breakups is available in Supplement S2. The breakup occurred in two stages. First, coinciding with complete snowmelt, a 25 mm rainfall event on March 18 and 19 rendered the site upstream of the confluence in the CH ice free (Fig. 7Fig. 5c, d). By this date, the CDDT had reached 76.0°C.D., while the CDDF reached 1107.0°C.D., resulting in a CDDr of 0.07 (Fig. 7Fig. 5b). Discharge in the CH was 81.2 m³ s⁻¹, increasing to 157.4 m³ s⁻¹ on March 20 (Fig. 7Fig. 5j). The water level at this site subsequently declined, dropping 3 m in two days following the opening of the Sartigan Dam gates on March 21st (Fig. 7Fig. 5h). The second stage of the breakup occurred in April at the site downstream of the confluence (CH103-CDL), which lost most of its ice cover on April 7 (Fig. 7Fig. 5e). The tributary had begun its breakup the previous day, on April 6. By this date, the CDDT had reached 164°C.D. °and the CDDr was 0.14 (Fig. 7Fig. 5b). Discharges began to rise gradually from this date, initially at 96.4 m³ s⁻¹ in the CH and 39.5 m³ s⁻¹ in the DL, yielding a Qr of 0.41 (Fig. 7Fig. 5i). Subsequently, given the increases in water temperatures at the confluence (DL0-CH104) from April 11, it was inferred that this site was in open water by that time (Fig. 7Fig. 5g).

It was inferred that an ice jam formed upstream of the confluence from March 28 to 30, given the sudden drop in water temperature at the site upstream of the confluence on the CH (CH106-CDL) from March 28 to 30, followed by a 1 m drop in water level. This ice jam likely formed after ice accumulated on the stationary ice cover directly upstream of the Sartigan Dam (Fig. 7Fig. 5g, h). An ice jam also formed at the mouth of the tributary (DL04) and at the confluence (DL0-CH104) shortly thereafter, as observed during a drone flight from March 31st to April 2nd. A second ice jam formed and released at this site on the night of April 4 to 5. Despite the dam, these ice runs releases formed ice jams downstream of the dam (CH103-CDL) from April 6 to 7 and again from April 8 to 11. The mouth of the tributary was the last site to become completely ice free on April 12. Following a sequence of rainfall from April 7 to 16, maximum seasonal discharges were reached on April 16, at 351.0 m³ s⁻¹ in the CH and 163.6 m³ s⁻¹ in the DL, yielding a Qr of 0.47 (Fig. 7Fig. 5c, i).

|

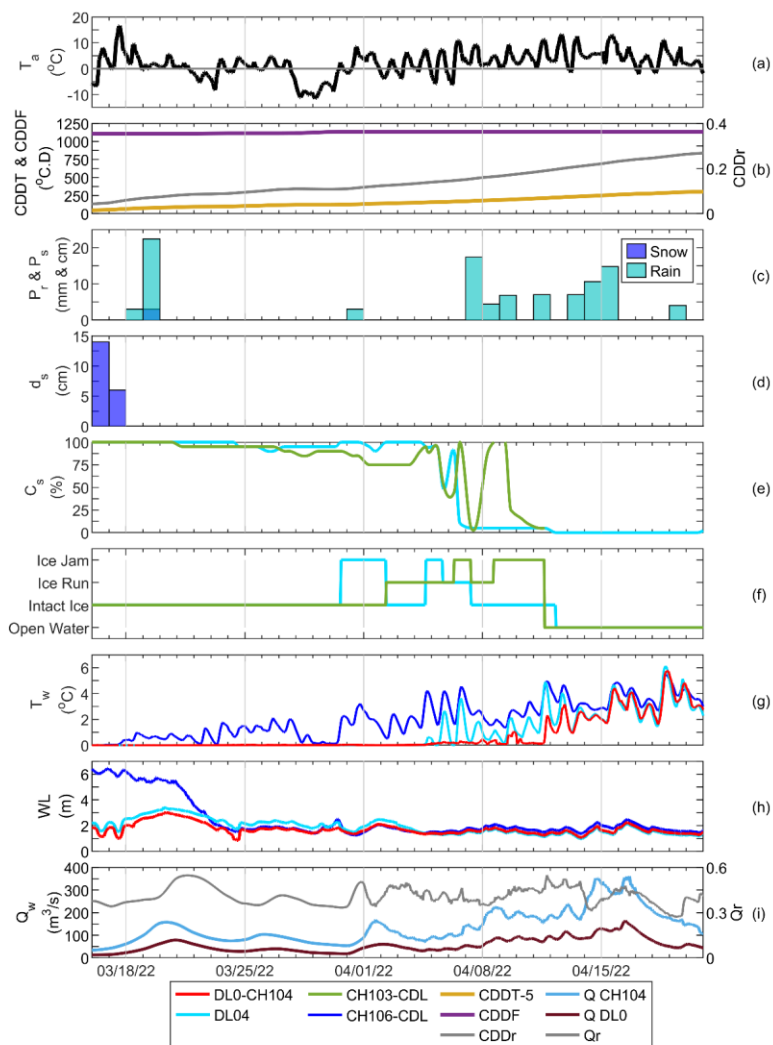


Figure 52: Time series of hydrometeorological conditions during the 2022 breakup at CH-DL (March 16 to April 21, 2022) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Q_r .

6.3 Famine and Chaudière confluence

6.3.1 Description of breakup dynamics

The ice breakup dynamics at CH-FA were analysed over four winters. Across all study years, ice jam formation at this confluence is consistently driven by three key morphological constraints: multiple islands within the confluence zone obstructing ice movement, highway-bridge 173 restricting ice passage and discharge in the tributary, and the inflatable dam structure in the main river influencing discharge and ice evacuation downstream. These controls create predictable jam formation locations, particularly at the tributary mouth (FA02) where bridge restrictions and accumulation banks consistently trap ice. The severity and duration of jams depend on discharge required to overcome these physical restrictions, while breakup timing varies (Supplement S3). The results of the meteorological, hydraulic and ice conditions for the 2023 breakup are represented in Fig. 9Fig. 6 and discussed here as an example of the field data analysed during each breakup. The detailed synopsis of the other three breakups is available in Supplement S3.

The 2023 breakup at CH-FA occurred from downstream to upstream, first in the CH, then in the tributary. The site downstream of the confluence lost its ice cover first due to warmer water from the treatment plant, while morphological controls at the tributary mouth induced ice jam formation requiring high discharge to clear. In 2023, despite the onset of breakup in March, air temperatures did not begin to remain consistently positive until April 9 (Fig. 9Fig. 6a). Following 5 mm of rainfall on March 23, discharge in the CH increased slightly to $75.0 \text{ m}^3 \text{ s}^{-1}$ on March 25 (Fig. 9Fig. 6c, i). By April 2nd, when most sites lost their ice cover, the CDDT had reached 129.6°C.D. , while the CDDF reached 753.7°C.D. , resulting in a CDDr of 0.17 (Fig. 9Fig. 6b). Discharge also began to increase from that day, starting at $105.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $17.9 \text{ m}^3 \text{ s}^{-1}$ in the FA, for a Qr of 0.17 (Fig. 9Fig. 6i).

An ice jam formed downstream of the confluence in the main river (CH96-CFA) during the night of March 24 and 25 following the rainfall event and was released the latter day. This blockage raised the water level by 1 m at this site (Fig. 9Fig. 6h). The water level at the site further downstream (CH95-CFA) also rose, suggesting the ice jam was spreading. The ice cover downstream of the confluence was released first, probably because it was affected by hot water discharges from the Saint-Georges wastewater treatment plant located approximately 1 km upstream (Fig. 9Fig. 6f). The effect of the water treatment plant is also visible in warmer water temperature peaks downstream of the confluence (CH95-CFA and CH96-CFA) throughout the breakup (Fig. 9Fig. 6g). The confluence itself (FA0-CH97) did not experience any ice jams but allowed ice runs to pass through on April 2nd and 3rd from the upstream CH site (CH98-CFA). These ice runs then spread to the downstream confluence site (CH96-CFA) from April 2nd to 4th. A second sequence of ice runs spread from the confluence (FA0-CH97) from April 4th to 5, continuing downstream (CH96-CFA) from April 5 to 6. The confluence became ice free first on April 6, followed by the upstream CH site (CH98-CFA) on the same day and the downstream site (CH96-CFA) on April 7. A short ice jam subsequently formed at the tributary mouth (FA02) on April 8. Ice runs coming from upstream of the tributary on April 10 formed a second jam at this site on April 11, which evacuated as ice runs into the confluence during the night of April 11.

490

and 12. The discharge required to clear this ice was $46.0 \text{ m}^3 \text{ s}^{-1}$ in the FA due to bank accumulations and the restriction from the highway-bridge 173 (Fig. 9Fig. 6i). Maximum seasonal discharge was reached on April 14, following complete snow melt, reaching $734.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $154.3 \text{ m}^3 \text{ s}^{-1}$ in the FA, for a Or of 0.21 (Fig. 9Fig. 6d, i).

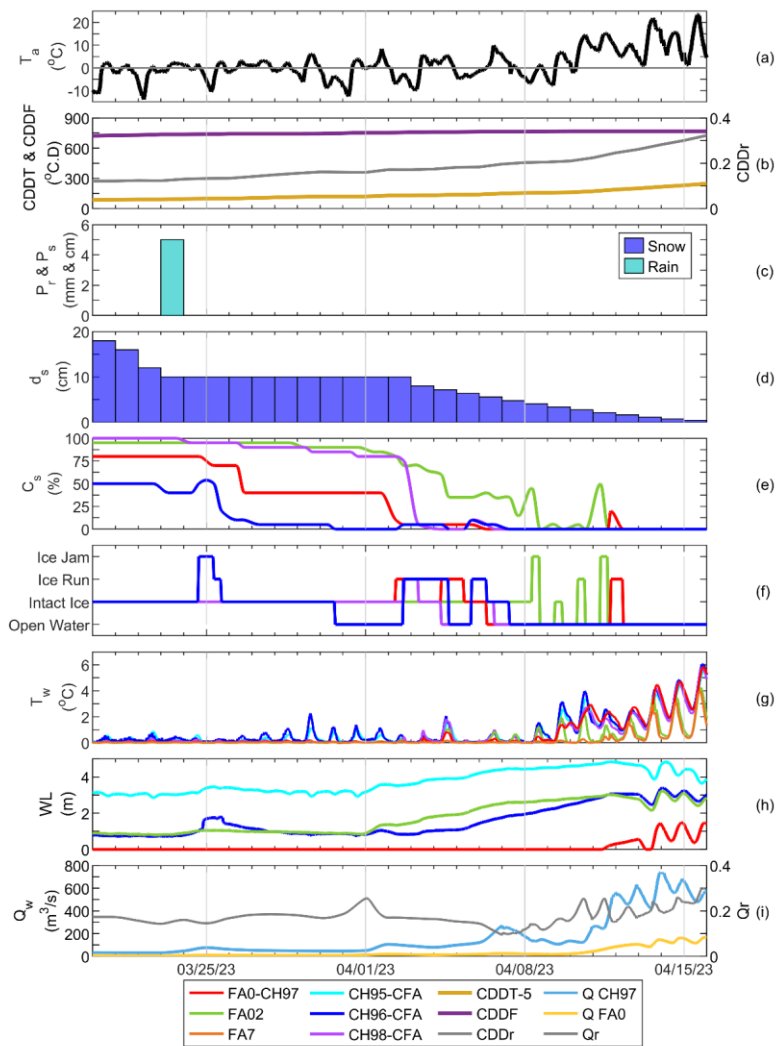


Figure 6: Time series of hydrometeorological conditions during the 2023 breakup at CH-FA (March 20 to April 16, 2023) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Qr.

6.4 Bras Saint-Victor and Chaudière confluence

6.4.1 Description of breakup dynamics

The ice breakup dynamics at CH-BSV were analysed over four winters. Breakup dynamics at CH-BSV were variable and controlled by the interplay between thermal and hydraulic processes. Two distinct breakup patterns were observed: hydraulically driven breakups (2021 and 2024) characterized by a rapid discharge increase and mechanical ice failure and thermally driven breakups (2022 and 2023) dominated by gradual melting. Ice jams at the confluence were triggered by cascading effects from upstream jam formation and release, creating sequential jams at the confluence as released ice becomes trapped at successive hydraulic restrictions. The sequence of breakup progression varies between years depending on dominant driving mechanisms (see the detailed summaries of breakups 2021 to 2023 in Supplement S4).

The results of the meteorological, hydraulic and ice conditions for the 2024 breakup are represented in Fig. 7 and discussed here as an example of the field data analysed during each breakup. During the 2024 breakup period, several freeze-thaw cycles were observed. The onset of breakup in the tributary on February 29 coincided with the coldest temperatures, reaching a minimum of -17°C (Fig. 7a). By March 7, when breakup reached the confluence, the CDDT reached 100.6°C.D. , while the CDDF reached 634.5°C.D. , resulting in a CDDr of 0.16 (Fig. 7b). Breakup at the confluence coincided with the season's maximum discharges, which increased rapidly starting February 29. Following rainfall totalling 18 mm on March 5 and 6, discharge reached $535.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $433.6 \text{ m}^3 \text{ s}^{-1}$ in the BSV on March 7, for a Qr of 0.81 with water levels rising approximately 3.5 m at all observation sites (Fig. 7c, h, i).

The 2024 breakup at CH-BSV was hydraulically driven with rapid discharge increases leading to mechanical ice failure. Ice release spread from the tributary to the confluence, then to the CH in a downstream to upstream pattern. The confluence geometry created hydraulic bottlenecks where converging discharges facilitated repeated jam formation from upstream ice releases. The 2024 breakup began with gradual ice cover melting in the tributary, with melting moving upstream starting February 29 (Fig. 7e). Following a $\sim 7 \text{ mm}$ rainfall on February 28, an ice jam formed at the tributary mouth (BSV1) on February 29, coincident with a $\sim 2 \text{ m}$ water level rise at all sites (Fig. 7c, h). This ice jam did not release until March 11 (Fig. 7f). Ice jams then formed simultaneously on the CH upstream of the confluence (CH77-CBSV) and at the confluence itself (BSV0-CH75) on March 5, before being released as ice runs from March 7 to 9, with the confluence (BSV0-CH75) becoming ice free a few hours before the upstream CH site (CH77-CBSV). A second ice jam formed at the confluence (BSV0-CH75) during the night of March 10 to 11 as upstream ice was released. Water temperatures at all sites began to rise on March 9, including at the downstream confluence site (CH74-CBSV), suggesting it was ice free by that date (Fig. 7g). These temperatures then dropped by approximately 3°C around March 23, coinciding with a 16 mm of snowfall and colder

air temperatures reaching -12.4°C (Fig. 7a, c, g). A second breakup sequence occurred at the confluence, again from downstream to upstream, and driven by further snowmelt (Fig. 7d). After ice runs were observed during the day on March 22 to 23, an ice jam formed overnight March 23 to 24, and then released. Ice runs at the upstream CH site (CH77-CBSV) from March 22nd to 24 contributed to ice jam formation at the confluence. With colder air and water temperatures, an ice cover temporarily reformed at the confluence (BSV0-CH75) until March 27 (Fig. 7a, f, g). The ice cover had also reformed at the tributary mouth (BSV1) on March 23rd, melting simultaneously with the confluence on March 27. By this date, all observation sites were ice free.

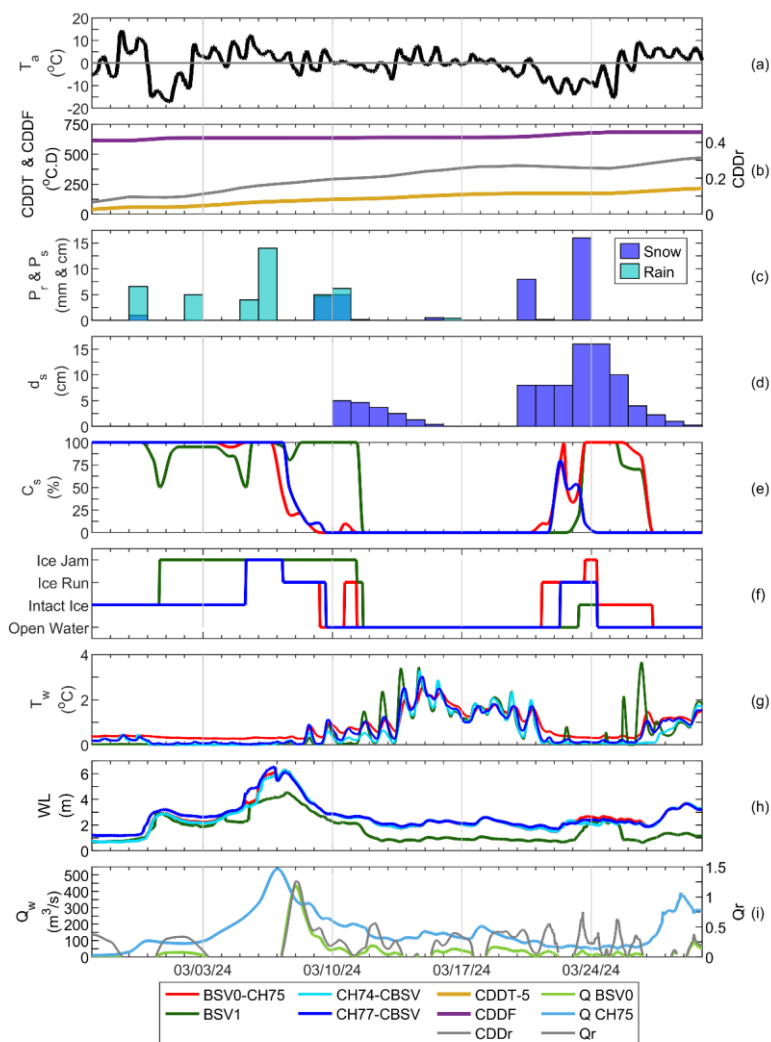


Figure 7: Time series of hydrometeorological conditions during the 2024 breakup at CH-BSV (February 26 to March 30, 2024) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Q_r .

7.6.4.2 Comparison to laboratory-derived formulations

7.1 Bras-du-Nord and Sainte-Anne confluence

With the confluence angle of STA-BDN estimated at 55° and the channel width ratio of 0.77, these field conditions can be compared with the laboratory case study of Ettema et al. (1999), which considered a 45° angle between rivers and a channel width ratio of 0.74. This laboratory experiment showed that Q_r of 0.6 consistently resulted in ice jam in the main river. Similarly, field observations showed ice jam formation at the confluence in the main river occurred in all four years, and the Q_r exceeded 0.6 in all years ($Q_r = 0.61, 0.71, 0.79$ and 0.69 for 2021, 2022, 2023, and 2024, respectively).

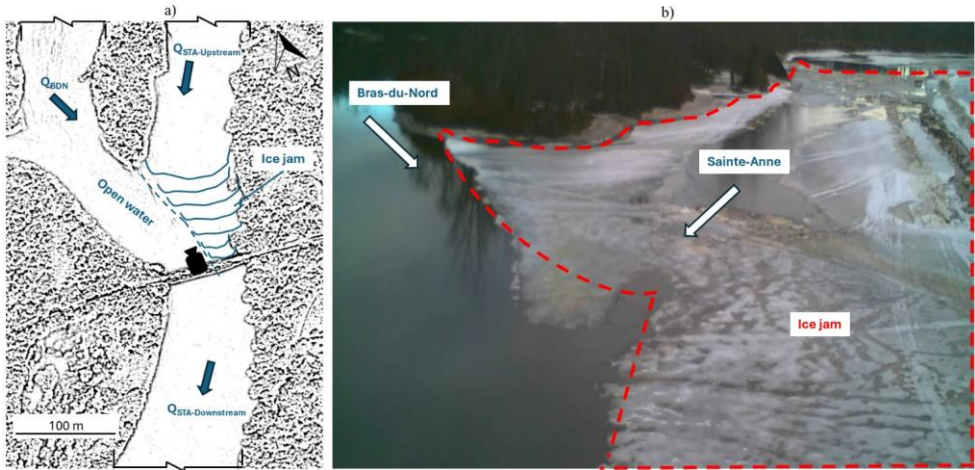


Figure 8: Jamming due to flow impact with a) a schematic representation and b) a picture taken at site BDN0-STA3 on April 7, 2021, looking upstream towards the flow as represented by the camera symbol in a), where the ice jam appeared at STA-BDN. The red dotted line in b) represents the ice jam caused by the effect of flow impact from the BDN on the ice in STA.

The scenario where an ice jam in the main river caused by flow impact from the tributary (pProcess 5) occurs at the STA-BDN confluence is illustrated in Fig. 5Fig. 8. Equation 5 for this mechanism was tested for the four years of the study period using information from field observations and hydraulic modeling. Table 4 shows the calibrated hydraulic parameters over the study period and Fig. 6Fig. 9 shows an example of the final calibration of the ice jam model for the year 2021. For 2021, the ice jam length was estimated of 2000 m with the toe located at the confluence (BDN0-STA3) and the head at STA5. It should be noted that the ice thickness and under-ice roughness in the three reaches were adjusted from the ice cover simulation to calibrate the

a mis en forme : Français (Canada)
a mis en forme : Français (Canada)
a mis en forme : Titre 2

560

565

ice jam simulation for all studied periods. Across all years, calibrated parameters showed considerable variability, consistent with the diverse hydraulic and ice conditions observed during different breakup events. [The three calibrated parameter types present specific measurement challenges in the field. The under-ice Manning roughness coefficient depends on the highly irregular and spatially variable texture of the ice underside, which forms under dynamic conditions and cannot be measured non-intrusively. The bed roughness can in principle be estimated from grain size distributions under open water conditions, but its simultaneous calibration with the under-ice roughness means that both parameters are adjusted to match a single observed water level time series. Because both parameters influence total hydraulic resistance in similar ways, they cannot be fully decoupled, a well-known equifinality problem in hydraulic modelling (Beven, 2006).] [The wide range of calibrated values in Table 4 reflects this combined uncertainty and should not be interpreted as true physical variability of the parameters.]

Table 4: Range of calibrated parameters of the HEC-RAS ice jam simulations of the study period at STA-BDN.

Parameter	Reach	2021	2022	2023	2024
Manning's bed roughness [-]	STA-US	0.035	0.035	0.015	0.035
	STA-DS	0.010	0.025	0.040	0.025
	BDN	0.045	0.045	0.065	0.045
Manning's under-ice roughness [-]	STA-US	0.024 – 0.030	0.024 – 0.050	0.024 – 0.050	0.040 - 0.090
	STA-DS	0.024	0.024	0.100 – 0.120	0.060 - 0.140
	BDN	0.024	- ¹	0.060	0.050
Average ice thickness [m]	STA-US	0.60 – 1.50	0.20 – 0.40	0.20 – 0.80	0.31
	STA-DS	0.10	0.05 – 0.10	0.95 – 1.23	0.67
	BDN	0.10 – 0.20	- ¹	0.80	0.71

¹No data because the reach was open

570

Commenté [LC38]: Here, it would be helpful if the authors could comment using their expertise from a field perspective as to why these parameters are difficult to obtain in the field, requiring calibration. As a 3-parameter calibration necessarily limits the usefulness of the model, perhaps a discussion of future experiments or field measurements could be helpful in terms of looking to future research directions in order to understand these terms better.

Commenté [LC39R38]: Thank you for this suggestion. A paragraph has been added before Table 4 in the Results section explaining the field measurement challenges associated with the three calibrated parameter types. The under-ice Manning roughness coefficient depends on the highly irregular and spatially variable texture of the ice underside, which forms under dynamic conditions and cannot be measured non-intrusively. The bed roughness can in principle be estimated from grain size distributions under open water conditions, but its simultaneous calibration with the under-ice roughness means that both parameters are adjusted to match a single observed water level time series. Because both parameters influence total hydraulic resistance in similar ways, they cannot be fully decoupled, a well-known equifinality problem in hydraulic modelling (Beven, 2006). The discussion of future work to address these limitations has been kept in the Discussion section, where a global sensitivity analysis to assess the relative effect of each parameter on model outputs was identified as priority directions for future research.

Commenté [LC40]: As in the Summary above, inclusion of error in the Results (ex. estimated uncertainty for parameters in Table 4, Table 5, Table 6) would be helpful in understanding the model validation.

Commenté [LC41R40]: Thank you for this comment. As described in the response to the general comment on uncertainty above, the sources of uncertainty are discussed in detail in the Discussion section, covering measurement uncertainty, hydraulic modeling uncertainty, and parameter uncertainty. The wide range of calibrated values in Table 4 is explicitly discussed as an indicator of this combined uncertainty, and a sentence has been added before the Table 4 directing the reader to the uncertainty discussion for the interpretation of the calibrated parameter ranges. Regarding Tables 5 and 6, the parameters in these tables are either directly measured in the field, calculated from field measurements, or deduced from the force balance equations. Their uncertainty is therefore inherently linked to the measurement and modeling uncertainties described in the Discussion. Sentences have been added following Tables 5 and 6 respectively directing the reader to the uncertainty discussion for the interpretation of these values.

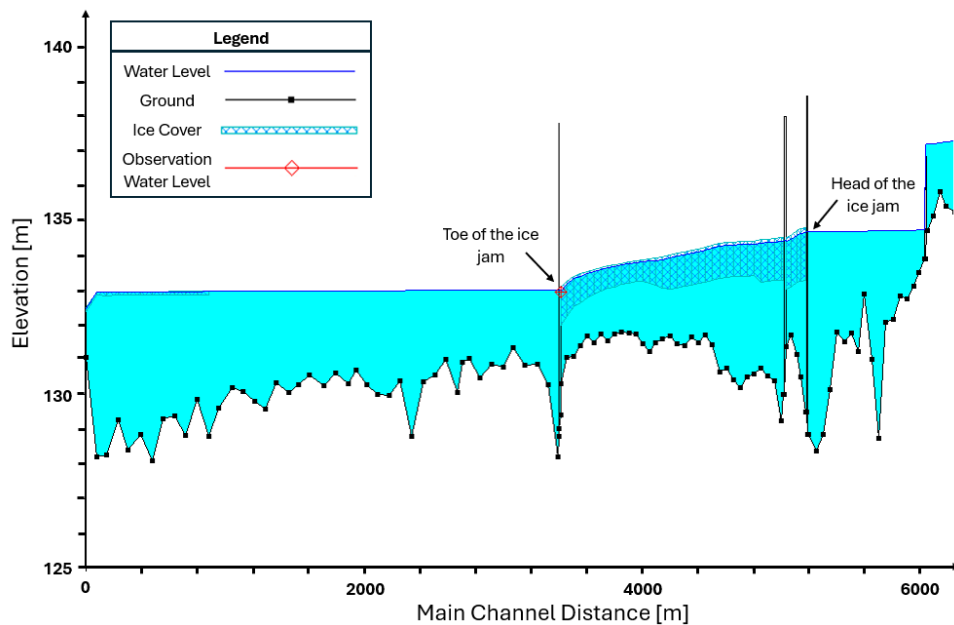


Figure 9: Profile of calibrated ice jam of April 7, 2021, on the STA River confluence.

Table 5 shows the values of parameters used in Eq. (5) for all years, specifying their respective sources, either hydraulic modelling, field measurements, calculated or deduced to satisfy ice jam formation criteria. Several constants were used for all years, including: ice density (ρ_i) = 917 kg m⁻³, the water density (ρ) = 1000 kg m⁻³, the gravitational acceleration (g) = 9.81 m s⁻², the dynamic fluid viscosity of water (μ) = 0.00157 and the porosity of ice accumulation (e) = 0.4 (after (Beltaos & Tang, 2013)). The morphological parameters were also kept the same for all years, including angle (α) of 55° between the two rivers and a width of the STA (b_2) of 80.6 m. The discharge from the tributary (Q_i) ranged from 10 to 107 m³ s⁻¹, while the length of the ice jam (L_f) and the normal stresses along the main river in the flow direction (σ_{x2}), ranged from 2000 to 3100 m and from 45 to 206 N m⁻², respectively. According to Eq. (5), an ice jam at the confluence is formed when the shear stress at the bank in the STA upstream the confluence (τ_{xy2}) reaches a specific threshold. The bank shear stress was deduced so that the sum of the forces is equal to zero for each observed ice jam event and ranged from 1.15 to 16.32 N m⁻² (Table 5). These values are consistent with the values between 0.52 and 23.87 N m⁻² reported for a similar river study conducted on the Nelson River in Manitoba by Zare et al. (2015). The minimum value of 1.15 N m⁻² (observed in 2024) may represent the bank shear

a mis en forme : Légende

a mis en forme : Police :Italique

stress required for ice jam formation at this location. [The uncertainty in the deduced bank shear stress is inherently linked to the combined measurement and modeling uncertainties mentioned in the discussion.](#)

Table 5: Values of the parameters used in the ice jam balance equation for all years of the study period at STA-BDN.

Parameter	Source	2021	2022	2023	2024
τ_i [N m ⁻²]	HEC-RAS Modelling	5.03	6.81	4.71	0.56
$\frac{\delta\eta}{\delta x}$ [m]	HEC-RAS Modelling	0.92	0.83	0.81	0.20
η_2 [m]	HEC-RAS Modelling	0.92	0.83	0.81	0.20
S_w [m m ⁻¹]	HEC-RAS Modelling	0.00067	0.00062	0.00037	0.00011
v_{11} [m s ⁻¹]	HEC-RAS Modelling	0.52	0.43	0.63	0.22
v_{31} [m s ⁻¹]	HEC-RAS Modelling	0.54	0.48	0.83	0.18
Q_1 [m ³ s ⁻¹]	Field measurement	36.09	58.21	107.43	9.98
L_f [m]	Field measurement	2000	2000	3100	2500
σ_{x2} [N m ⁻²]	Calculated	206.08	185.92	181.4	44.8
τ_{xy2} [N m ⁻²]	Deduced	9.36	16.32	1.99	1.15

6.2 Du Loup and Chaudière confluence

6.2.1 Description of breakup dynamics

The ice breakup dynamics at CH-DL were analysed over four winters. In general, breakups at CH-DL occurred from upstream to downstream. The breakup tended to begin in the CH, where ice accumulates upstream of the confluence due to the stationary ice cover maintained by the Sartigan Dam, forming an ice jam. Ice on the tributary responds similarly, causing ice jams later in the season. The dam's stationary ice cover was therefore the primary cause of the ice jam formation at this site. The same processes and sequence were consistently observed in 2021, 2022, and 2024 despite variations in breakup timing, meteorological drivers, and discharge magnitudes (Supplements S2). The 2023 breakup, however, presented a contrasting thermally dominated scenario where gradual melting prevented significant ice accumulation against the dam's stationary ice cover, resulting in a relatively jam free breakup sequence (Fig. S5).

The meteorological, hydraulic and ice conditions for the 2022 breakup are presented in Fig. 7 and discussed here as an example of the field data analysed during each breakup. The detailed summary of the other three breakups is available in Supplement S2. The breakup occurred in two stages. First, coinciding with complete snowmelt, a 25 mm rainfall event on March 18 and 19 rendered the site upstream of the confluence in the CH ice free (Fig. 7e, d). By this date, the CDDT had reached 76.0°C.D., while the CDDF reached 1107.0°C.D., resulting in a CDDr of 0.07 (Fig. 7b). Discharge in the CH was 81.2 m³s⁻¹, increasing to 157.4 m³s⁻¹ on March 20 (Fig. 7i). The water level at this site subsequently declined, dropping 3 m in two days following the opening of the Sartigan Dam gates on March 21* (Fig. 7h). The second stage of the breakup occurred in April at the site downstream of the confluence (CH103-CDL), which lost most of its ice cover on April 7 (Fig. 7e). The tributary had begun its breakup the previous day, on April 6. By this date, the CDDT had reached 164°C.D., and the CDDr was 0.14 (Fig. 7b). Discharges began to rise gradually from this date, initially at


a mis en forme : Titre 2

96.4 m³·s⁻¹ in the CH and 39.5 m³·s⁻¹ in the DL, yielding a Qr of 0.41 (Fig. 7i). Subsequently, given the increases in water temperatures at the confluence (DL0-CH104) from April 11, it was inferred that this site was in open water by that time (Fig. 7g).

It was inferred that an ice jam formed upstream of the confluence from March 28 to 30, given the sudden drop in water temperature at the site upstream of the confluence on the CH (CH106-CDL) from March 28 to 30, followed by a 1-m drop in water level. This ice jam likely formed after ice accumulated on the stationary ice cover directly upstream of the Sartigan Dam (Fig. 7g, h). An ice jam also formed at the mouth of the tributary (DL04) and at the confluence (DL0-CH104) shortly thereafter, as observed during a drone flight from March 31st to April 2nd. A second ice jam formed and released at this site on the night of April 4 to 5. Despite the dam, these ice runs releases formed ice jams downstream of the dam (CH103-CDL) from April 6 to 7 and again from April 8 to 11. The mouth of the tributary was the last site to become completely ice free on April 12. Following a sequence of rainfall from April 7 to 16, maximum seasonal

discharges were reached on April 16, at $351.0 \text{ m}^3 \text{ s}^{-1}$ in the CH and $163.6 \text{ m}^3 \text{ s}^{-1}$ in the DL, yielding a Qr of 0.47 (Fig. 7e, i).

625

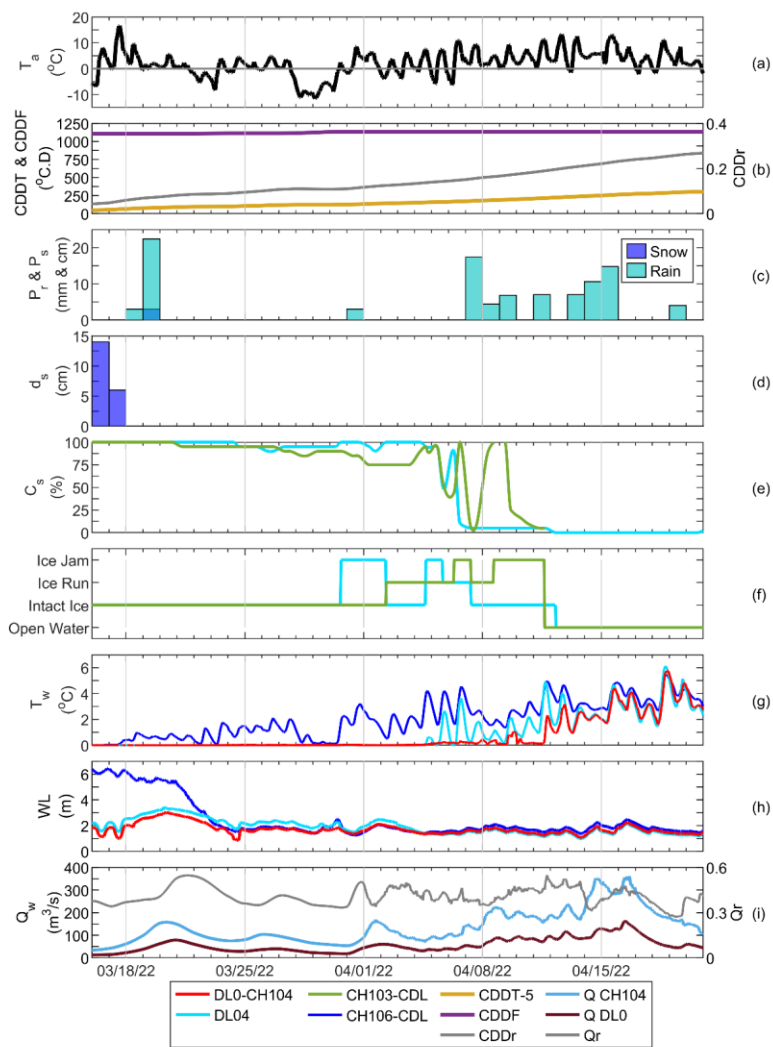

a mis en forme : Titre 2, Pas de paragraphes solidaires

Figure 7: Time series of hydrometeorological conditions during the 2022 breakup at CH-DL (March 16 to April 21, 2022) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Q_r .

a mis en forme : Titre 2

7.2.6.2.2-Du Loup and Chaudière confluence Comparison to laboratory-observed processes

a mis en forme : Français (Canada)

At the CH-DL confluence, the Sartigan Dam creates a stationary ice cover barrier. Moving ice from both rivers collides directly with the dam’s stationary ice cover before reaching the sedimentation bar in the flow separation zone downstream in the confluence. This consistent pattern aligns with one of the ice jam formation mechanisms defined by Ettema & Muste (2001): an ice run blocked by stationary or slow-moving ice in the outflow channel (pProcess 1) (Fig-8Fig. 10). This mechanism represents one of the simplest yet most common jamming scenarios in river ice dynamics (Andres, 1998)(Andres, 1998; Tuthill & Mamone, 1997). Due to its straightforward nature, no specific predictive equations have been developed, as it is governed by basic principles of ice transport and obstruction.

Nevertheless, it was possible to compare the location of ice jam formation at this confluence with one of the laboratory cases based on morphological parameters. For the 90° concordant bed laboratory confluence with discharge ratio Q_r of 2/3 and width ratio of 0.67, the ice jam consistently formed in the tributary channel. However, field observations at this confluence demonstrate that ice jams form almost simultaneously in both the main river upstream of the confluence and at the tributary mouth. Additionally, the discharge ratios recorded during ice jam formation at this site (Q_r of 0.64, 0.33, and 0.47 for 2021, 2022, and 2024 respectively, with an average of 0.48 ± 0.16) encompass a much broader range of variability than the controlled laboratory conditions yet consistently produce the same jamming mechanism regardless of this hydraulic variability.

The hydraulic processes at CH-DL are dominated by the interaction between typical concordant confluence dynamics and artificial flow control imposed by the Sartigan Dam. This hydraulic control mechanism creates predictable patterns of ice jam formation, with variations driven mainly by meteorological conditions affecting the melting rate of the stationary ice cover rather than underlying hydraulic processes. The only year that did not form an ice jam upstream of the stationary ice cover was 2023 which experienced a thermally dominated breakup occurring later in the season. This breakup occurred in early April with a CDDr of approximately 0.22, indicating significantly higher thermal energy available for ice cover melting compared to the 2021, 2022, and 2024 breakups, which occurred in late March with lower CDDr values of 0.14, 0.11 and 0.16, respectively.

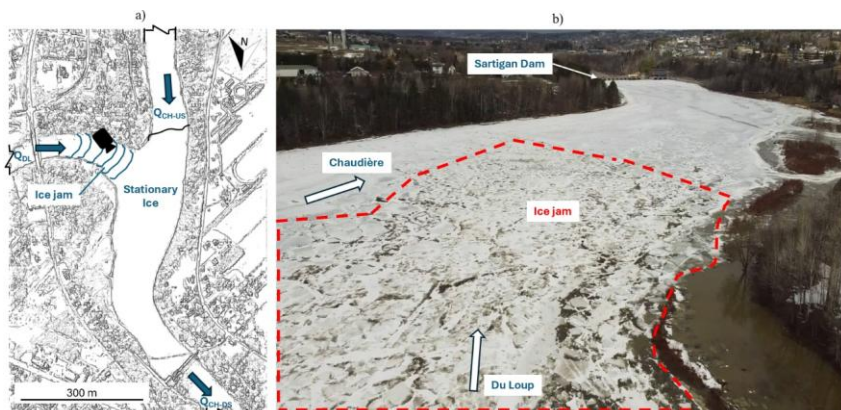


Figure Figure 108: Jamming due to stationary ice with a) a visual representation and b) a drone picture taken at site DL0-CH104 on March 31, 2022, looking downstream in the flow direction as represented by the camera symbol in a) where the ice jam appeared at CH-DL.

6.3 Famine and Chaudière confluence

6.3.1 Description of breakup dynamics

The ice breakup dynamics at CH-FA were analysed over four winters. Across all study years, ice jam formation at this confluence is consistently driven by three key morphological constraints: multiple islands within the confluence zone obstructing ice movement, highway-bridge 173 restricting ice passage and discharge in the tributary, and the inflatable dam structure in the main river influencing discharge and ice evacuation downstream. These controls create predictable jam formation locations, particularly at the tributary mouth (FA02) where bridge restrictions and accumulation banks consistently trap ice. The severity and duration of jams depend on discharge required to overcome these physical restrictions, while breakup timing varies (Supplement S3). The results of the meteorological, hydraulic and ice conditions for the 2023 breakup are represented in Fig. 9 and discussed here as an example of the field data analysed during each breakup. The detailed synopsis of the other three breakups is available in Supplement S3.


The 2023 breakup at CH-FA occurred from downstream to upstream, first in the CH, then in the tributary. The site downstream of the confluence lost its ice cover first due to warmer water from the treatment plant, while morphological controls at the tributary mouth induced ice jam formation requiring high discharge to clear. In 2023, despite the onset of breakup in March, air temperatures did not begin to remain consistently until April 9 (Fig. 9a). Following 5 mm of rainfall on March 23, discharge in the CH increased slightly to $75.0 \text{ m}^3 \text{ s}^{-1}$ on March 25 (Fig. 9a, i). By April 2nd, when most sites lost their ice cover, the CDDT had reached 129.6°C.D. , while the CDDF reached 753.7°C.D. , resulting in a CDDr of 0.17 (Fig. 9b). Discharge also began to increase from that day, starting at $105.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $17.9 \text{ m}^3 \text{ s}^{-1}$ in the FA, for a Qr of 0.17 (Fig. 9i).

An ice jam formed downstream of the confluence in the main river (CH96-CFA) during the night of March 24 and 25 following the rainfall event and was released the latter day. This blockage raised the water level by 1 m at this site (Fig. 9h). The water level at the site further downstream (CH95-CFA) also rose, suggesting the ice jam was spreading. The

a mis en forme : Titre 2

ice cover downstream of the confluence was released first, probably because it was affected by hot water discharges from the Saint-Georges wastewater treatment plant located approximately 1 km upstream (Fig. 9f). The effect of the water treatment plant is also visible in warmer water temperature peaks downstream of the confluence (CH95-CFA and CH96-CFA) throughout the breakup (Fig. 9g). The confluence itself (FA0-CH97) did not experience any ice jams but allowed ice runs to pass through on April 2nd and 3rd from the upstream CH site (CH98-CFA). These ice runs then spread to the downstream confluence site (CH96-CFA) from April 2nd to 4th. A second sequence of ice runs spread from the confluence (FA0-CH97) from April 4th to 5, continuing downstream (CH96-CFA) from April 5 to 6. The confluence became ice free first on April 6, followed by the upstream CH site (CH98-CFA) on the same day and the downstream site (CH96-CFA) on April 7. A short ice jam subsequently formed at the tributary mouth (FA02) on April 8. Ice runs coming from upstream of the tributary on April 10 formed a second jam at this site on April 11, which evacuated as ice runs into the confluence during the night of April 11 and 12. The discharge required to clear this ice was 46.0 m³·s⁻¹ in the FA due to bank accumulations and the restriction from the highway bridge 173 (Fig. 9i). Maximum seasonal

695 discharge was reached on April 14, following complete snow melt, reaching $734.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $154.3 \text{ m}^3 \text{ s}^{-1}$ in the FA, for a Qr of 0.21 (Fig. 9d, i).

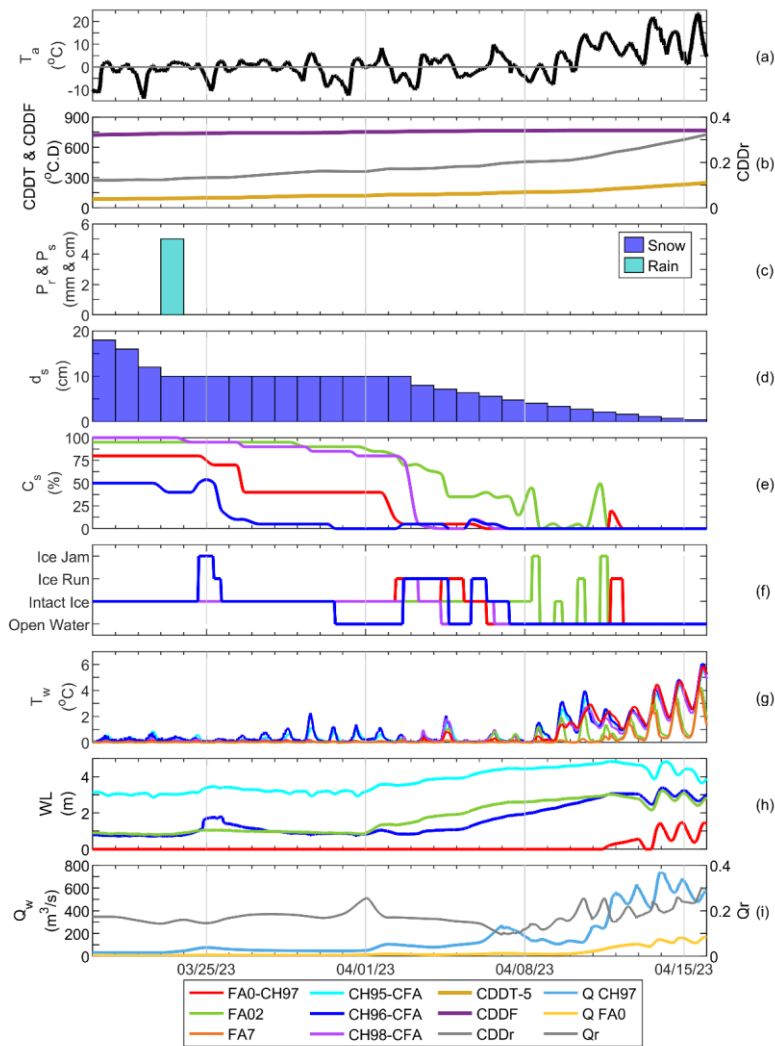

a mis en forme : Titre 2, Pas de paragraphes solidaires

Figure 9: Time series of hydrometeorological conditions during the 2023 breakup at CH-FA (March 20 to April 16, 2023) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Q_r .

7.3.6.3.2 Famine and Chaudière confluence Comparison to laboratory-derived formulations

With the confluence angle of the CH-FA estimated at 40° and a channel width ratio of 0.43, these field conditions can be compared with laboratory cases from Ettema et al. (1999). Field observations reveal that ice jams formed at discharge ratios of 0.21, 0.17, 0.15, and 0.20 for 2021, 2022, 2023, and 2024, respectively. These ratios are lower than those investigated in laboratory studies for a similar confluence angle of 45° and the closest width ratio tested of 0.67, where the comparable case examined discharge ratios around 0.67. This difference can be attributed to factors not considered in laboratory experiments: the discordant bed with significant slope variations, and the presence of islands upstream of the confluence. These morphological features cause ice jams requiring high tributary discharges to dislodge, explaining why ice jam formation occurs at lower discharge ratios than predicted by laboratory studies.

This ice jam formation mechanism at CH-FA is similar to both the confluence bar mechanism (process 6) and the jamming on depositional fans (process 7) identified by Ettema & Muste (2001) as shown in Fig. 10 Fig. 11. This type of morphological control is consistent with field observations at the Liard River confluence in the north of Canada, where similar deltaic deposits and islands were found to cause ice grounding and arching at the tributary mouth (Prowse, 1986). This process is enhanced by the flow constrictions from the highway-bridge at CH-FA. While the processes observed are similar to both processes, and equations are only provided for process 6, therefore Eq. 6 and Eq. 7 (process 6) were tested at this confluence. These equations were tested for the first three years for which ice thickness was measured in the field. Table 6 shows the parameters values used for the tested years.

For all years tested, calculated ice thicknesses (η_c) are a lot lower than equilibrium ice thicknesses (η_{eq}) predicted with Beltaos' (1995) relationship (Table 6). This large discrepancy can be explained by the nature of the morphological jamming mechanism, which occurs specifically under low flow conditions where ice grounds on the elevated bed and depositional accumulations. The calculated ice thickness does not incorporate discharge parameters, while the equilibrium ice thickness relationship includes flow conditions in its formulation, suggesting that integrating discharge into the predictive equation could improve accuracy and reduce this significant discrepancy. The uncertainty in the calculated and equilibrium ice thicknesses is discussed in the context of overall model validation uncertainty in the discussion.

a mis en forme : Titre 2

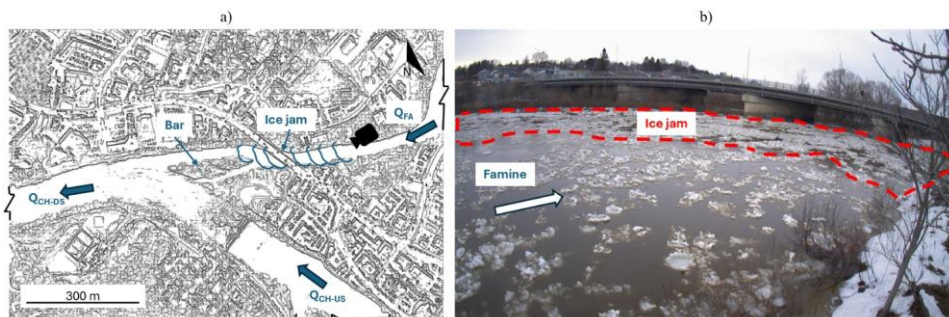


Figure 119: Jamming on depositional fan with a) a visual representation and b) a picture taken at site FA02 on April 11, 2023, looking downstream in the flow direction of FA as represented by the camera symbol in a), where the ice jam appeared at the mouth of the FA.

735 **Table 6: Values of the parameters used in the ice jam balance equation for three years (2021, 2022 and 2023) at CH-FA.**

Parameter	2021	2022	2023
b_c [m]	48	48	48
b_1 [m]	48	48	48
η_1 [m]	0.34	0.59	0.32
b_2 [m]	113	113	113
η_2 [m]	0.40	0.47	0.31
η_c [m]	1.28	1.70	1.05
g [m ² s ⁻¹]	1.10	3.57	1.68
S_w [m m ⁻¹]	0.0072	0.0072	0.0072
B [m]	22	38	24
ξ [-]	16.6	20.4	19.8
η_{eq} [m]	24	27	26

Commenté [LC42]: I use "variables" rather than "parameters" to describe dimensional quantities. "Parameters" (to my mind) are dimensionless ratios determined from dimensional analysis.

Commenté [LC43R42]: Thank you for this terminological clarification. We acknowledge the reviewer's distinction and agree that it is technically precise. However, because the manuscript frequently presents both dimensional quantities and dimensionless ratios together, as it's the case in Table 6, which contains both variables (e.g., b_c , b_1 , b_2 , η_1 , η_2 , q , S_w , B) and dimensionless parameters (e.g., ξ), we have chosen to retain the term "parameter" throughout the manuscript as a unifying term covering both categories. This is consistent with common usage in the river ice engineering literature, where "parameter" is broadly understood to encompass both types of quantities. We believe this choice avoids unnecessary complexity in the text and tables without causing ambiguity, and we respectfully maintain this convention in the revised manuscript.

a mis en forme : Police :Italique

a mis en forme : Police :Italique

6.4 Bras Saint-Victor and Chaudière confluence

6.4.1 Description of breakup dynamics

740 The ice breakup dynamics at CH-BSV were analysed over four winters. Breakup dynamics at CH-BSV were variable and controlled by the interplay between thermal and hydraulic processes. Two distinct breakup patterns were observed: hydraulically driven breakups (2021 and 2024) characterized by a rapid discharge increase and mechanical ice failure and thermally driven breakups (2022 and 2023) dominated by gradual melting. Ice jams at the confluence were triggered by cascading effects from upstream jam formation and release, creating sequential jams at the confluence as released ice becomes trapped at successive hydraulic restrictions. The sequence of breakup progression varies between years depending on dominant driving mechanisms (see the detailed summaries of breakups 2021 to 2023 in Supplement S4).


a mis en forme : Titre 2

750 The results of the meteorological, hydraulic and ice conditions for the 2024 breakup are represented in Fig. 11 and discussed here as an example of the field data analysed during each breakup. During the 2024 breakup period, several freeze-thaw cycles were observed. The onset of breakup in the tributary on February 29 coincided with the coldest temperatures, reaching a minimum of -17°C (Fig. 11a). By March 7, when breakup reached the confluence, the CDDT reached 100.6°C.D. , while the CDDF reached 634.5°C.D. , resulting in a CDDr of 0.16 (Fig. 11b). Breakup at the confluence coincided with the season's maximum discharges, which increased rapidly starting February 29. Following

rainfall totalling 18 mm on March 5 and 6, discharge reached $535.4 \text{ m}^3 \text{ s}^{-1}$ in the CH and $433.6 \text{ m}^3 \text{ s}^{-1}$ in the BSV on March 7, for a Qr of 0.81 with water levels rising approximately 3.5 m at all observation sites (Fig. 11e, h, i).

The 2024 breakup at CH-BSV was hydraulically driven with rapid discharge increases leading to mechanical ice failure. Ice release spread from the tributary to the confluence, then to the CH in a downstream-to-upstream pattern. The confluence geometry created hydraulic bottlenecks where converging discharges facilitated repeated jam formation from upstream ice releases. The 2024 breakup began with gradual ice cover melting in the tributary, with melting moving upstream starting February 29 (Fig. 11e). Following a 7 mm rainfall on February 28, an ice jam formed at the tributary mouth (BSV1) on February 29, coincident with a ~2 m water level rise at all sites (Fig. 11e, h). This ice jam did not release until March 11 (Fig. 11f). Ice jams then formed simultaneously on the CH upstream of the confluence (CH77-CBSV) and at the confluence itself (BSV0-CH75) on March 5, before being released as ice runs from March 7 to 9, with the confluence (BSV0-CH75) becoming ice free a few hours before the upstream CH site (CH77-CBSV). A second ice jam formed at the confluence (BSV0-CH75) during the night of March 10 to 11 as upstream ice was released. Water temperatures at all sites began to rise on March 9, including at the downstream confluence site (CH74-CBSV), suggesting it was ice free by that date (Fig. 11g). These temperatures then dropped by approximately 3°C around March 23, coinciding with a 16 mm of snowfall and colder air temperatures reaching -12.4°C (Fig. 11a, e, g). A second breakup sequence occurred at the confluence, again from downstream to upstream, and driven by further snowmelt (Fig. 11d). After ice runs were observed during the day on March 22 to 23, an ice jam formed overnight March 23 to 24, and then released. Ice runs at the upstream CH site (CH77-CBSV) from March 22nd to 24 contributed to ice jam formation at the confluence. With colder air and water temperatures, an ice cover temporarily reformed at the confluence (BSV0-CH75) until March 27 (Fig. 11a, f, g). The ice cover had also reformed at the tributary mouth

(BSV1) on March 23rd, melting simultaneously with the confluence on March 27. By this date, all observation sites were ice-free.

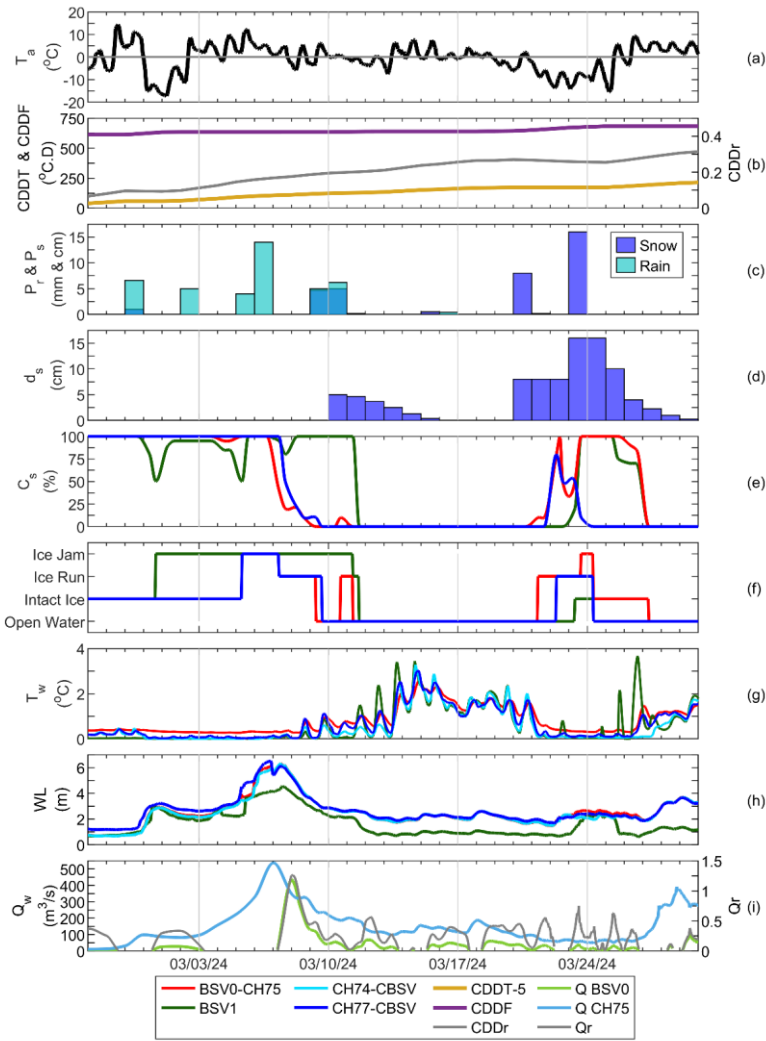

a mis en forme : Titre 2, Pas de paragraphes solidaires

Figure 11: Time series of hydrometeorological conditions during the 2024 breakup at CH-BSV (February 26 to March 30, 2024) showing a) air temperature, b) CDDT, CDDF and CDDr, c) daily precipitation, d) snow on ground, e) surface ice concentration, f) ice states, g) water temperature, h) water level above the pressure probe and i) discharge and Q_r .

a mis en forme : Titre 2

7.4.6.4.2 Bras Saint-Victor and Chaudière confluence Comparison to laboratory-observed processes

With a confluence angle of $\sim 58^\circ$ and the channel width ratio of 0.63, the field conditions at CH-BSV present limited comparability with laboratory cases documented by Ettema et al. (1999). At CH-BSV, ice jams formed at discharge ratios of 0.12, 0.73, 0.54 and 0.38 for 2021, 2022, 2023, and 2024, respectively, with an average of 0.44 ± 0.26 . Most of these ratios fall outside the range investigated in laboratory studies for similar confluence angles, where comparable cases typically examined discharge ratios around 0.67 for a 45° angle and width ratio of 0.67. Larger confluence angles can alter flow deflection patterns and increase turbulence at the junction, potentially creating more favourable conditions for ice accumulation at lower discharge ratios and jamming than would be predicted from experiments conducted at smaller angles (Penna et al., 2018). Additionally, at CH-BSV, the ice jamming process is complicated by upstream ice jams that subsequently migrate downstream and become trapped at the confluence, creating extensive composite ice jams. This cascading mechanism, where multiple upstream jams merge to form a large-scale ice obstruction, represents a complex natural process not replicated in controlled laboratory conditions. The presence of morphological features upstream further creates local flow constrictions that promote this sequential ice accumulation pattern. Therefore, breakup processes at this confluence likely involves a combination of mechanisms identified by Ettema & Muste (2001). These includes jamming due to arching ice pieces (process 3) and jamming due to bars (process 6). For process 3, ice runs become mechanically interlocked and form stable arches spanning the river width as shown in Fig. 12. Process 6 is also possibly occurring due to the morphological characteristics of the confluence. A predictive equation was specifically developed for the jamming due to merging ice runs mechanism (Eq. 2). Nevertheless, testing this equation was not feasible due to insufficient bathymetric data needed for hydraulic modeling, the complexity of ice processes occurring at the confluence, and the availability of its ice related measurements.

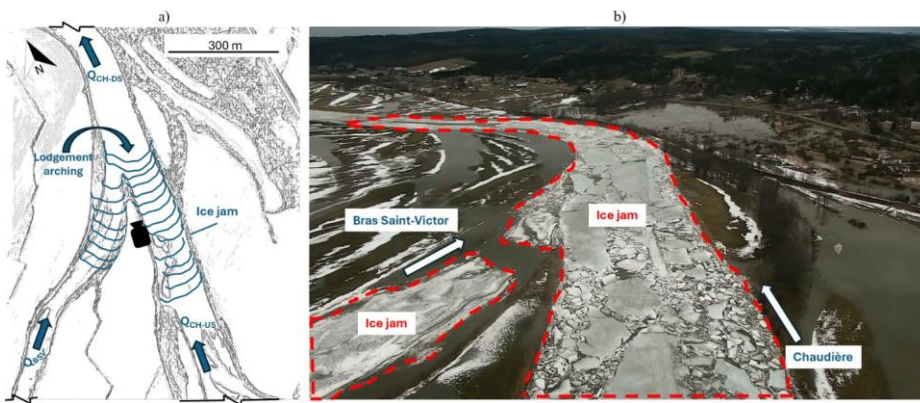


Figure 12: Jamming of arching ice pieces with a) a visual representation and b) a drone picture taken at site BSV0-CH75 on March 6, 2024, looking downstream in the flow direction as represented by the camera symbol in a), where the ice jam occurred at CH-BSV.

87. Discussion

The analysis of ice jam formation at river confluences in a real-life context presents several sources of uncertainty that must be acknowledged when interpreting results and applying predictive frameworks. Data collection represents a challenge in this field study, arising from the inherent difficulties of monitoring dynamic ice processes in winter conditions (Beltaos & Prowse, 2010)(Beltaos & Prowse, 2001). The temporal resolution of monitoring equipment varied across instruments and years, creating potential gaps in capturing ice jam formation and corresponding parameters. Furthermore, the spatial distribution of monitoring equipment, while strategically placed to capture confluence dynamics, may not have fully represented the heterogeneous ice conditions across the entire study reach. Also, the reliance on visual observations from time-lapse cameras and drone flights, though valuable for understanding ice dynamics, introduces subjective interpretation of ice states and surface concentrations that could vary between observers or be influenced by lighting and weather conditions during image capture.

Hydraulic modeling uncertainties constitute another source of error in this analysis. The successful development of models for only STA-BDN, while CH-BSV's model was constrained by data limitations, highlights the importance of adequate bathymetric and ice condition data for reliable model calibration. The calibration process itself introduces uncertainty, as the adjustment of roughness coefficients and ice thickness values to match observed conditions may not represent the actual physical processes (PappenbergerWerner et al., 2005). Also, the discharge measurements may not have represented the exact flow conditions at the confluence at the same temporal resolution due to travel time and routing effects between measurement points. In summary, the wide ranges of calibrated parameters presented in Table 4, suggest that these values may be

compensating for unmodeled physical processes or measurement errors rather than reflecting true physical properties, which is common when modeling river ice hydraulics (Beven, 2006). Future work will focus on a global sensitivity analysis to assess the relative effect of each parameter on the model outputs, which would allow a more rigorous quantification of the contribution of each uncertainty source to the overall model validation uncertainty.

The empirical formulations developed by Ettema & Muste (2001) were derived under controlled laboratory conditions with simplified geometries that rarely match the complexity of natural river systems. The extrapolation of these equations to field conditions requires several assumptions regarding parameter values that are difficult to measure or estimate accurately in natural settings. Nevertheless, this study represents, to the authors' knowledge, the first attempt to correlate laboratory-derived equations developed by Ettema & Muste (2001) with real-world ice jam formation conditions at natural river confluences. The application of these equations to field observations provides insights into the transferability of controlled experimental results to complex natural systems. The validation of the flow impact mechanism equation at STA-BDN demonstrates that laboratory-derived force balance approaches can yield meaningful predictions when appropriate morphological and hydraulic analogues exist between experimental and field conditions.

The physics-based laboratory equations require extensive field campaigns and data analysis work. These resources might not be always available for ice jam flood forecasting agencies. Nevertheless, the data collected in this study, provides an opportunity to investigate empirical methods to predict ice jam formation at confluences. Turcotte et al. (2020) presented an empirical relation between the CDDT and the discharge leading to ice jam floods in rivers. The premise is that the discharge could represent the driving forces while the CDDT could represent the ice resistance. This model was adapted to the confluence setup by replacing the discharge value by the discharge ratio Q_r divided by the watershed's ratio (i.e., the watershed of the tributary divided by the watershed of the main river) (Table 1). This ratio could be explained as a non-dimensional unit discharge at the confluence which is plotted against the CDDT as shown in Fig. 13.

As shown in Fig. 13, the ice jams at the STA-BDN require the greater values of CDDT, i.e., greater thermal weakening of the ice cover, before any ice jam formation occurs. This can be explained by the fact that this confluence is the most northern site with colder air temperatures and consequently thicker ice covers. Similarly, the ice cover on the CH-DL is supported by the downstream Sartigan Dam, and therefore, would require a certain level of heat input before breakup start and ice jams form.

The CH-BSV appears to require the stronger hydraulic driving forces to form a jam at the confluence. Nevertheless, the processes at this confluence are very complex which is apparent from the wide range of conditions for ice jam formation during the study period. The CH-FA presents a typical case where a trend line can be plotted that highlight the decrease of CDDT with the increase of discharge. This means that an ice jam can form at a high CDDT but low discharge, or high discharge and lower CDDT. Note, that at this confluence, there are much more observed ice jams because several ice jams formed and released during each breakup.

Commenté [LC44]: Finally, it would be helpful if the uncertainty in the measurements and calibrated parameters was developed in more detail to clearly assess the model validation. The Discussion were focused on a clear assessment of points to take forward based on this work, as at present this is a very broad range of possibilities.

Commenté [LC45R44]: Thank you for these comments. Regarding uncertainty, the sources of uncertainty are already discussed in detail in the Discussion section. Measurement uncertainty is addressed in the first paragraph, covering the temporal resolution of monitoring equipment, the spatial distribution of instruments, and the subjective interpretation of ice states from time-lapse cameras and drone flights. Hydraulic modeling uncertainty is addressed in the second paragraph, covering the calibration of roughness coefficients and ice thickness values, discharge routing effects between measurement points, and the data limitations that prevented hydraulic model development at CH-BSV. The third paragraph explicitly acknowledges the assumptions required to extrapolate the laboratory-derived equations to field conditions, and the wide range of calibrated parameters in Table 4 is discussed as likely compensating for unmodelled physical processes rather than reflecting true physical variability (Beven, 2006). To further strengthen this section, the following sentence has been added at the end of the second paragraph: "Future work will focus on a global sensitivity analysis to assess the relative effect of each parameter on the model outputs, which would allow a more rigorous quantification of the contribution of each uncertainty source to the overall model validation uncertainty."

Regarding specific points to take forward, the Discussion already identifies several targeted directions. The third paragraph highlights that the validation of the flow impact equation at STA-BDN demonstrates the transferability of laboratory-derived force balance approaches to natural confluences when appropriate morphological and hydraulic analogues exist, pointing to further application of this framework at similar sites as a priority direction. The fourth and fifth paragraphs present the preliminary empirical relationship between the normalized discharge ratio and CDDT, with site-specific trends described for each confluence, and identify the development of data-driven models trained on the dataset collected in this study as a concrete direction. The final paragraph focuses future work on two specific priorities: the development of river ice hydraulic models capable of simulating ice dynamics at confluences, and the development of data-driven prediction models. The global sensitivity analysis mentioned above constitutes a third specific and actionable direction, complementing these existing priorities.

In summary, this preliminary analysis confirms that empirical models are site-specific but could potentially be used to predict ice jam formation at confluences. Nevertheless, future work should focus on developing river ice hydraulic models capable of simulating ice dynamics at confluences, as such models have not yet been developed. While physically based hydraulic models would provide comprehensive insights into the underlying processes, simpler empirical or data-driven models requiring fewer parameters offer practical advantages for operational flood management by reducing data acquisition complexity and computational burden during critical decision-making periods. Fortunately, the amount of data collected during this study provides an opportunity to develop such data-driven models to predict ice jam formation at confluences. This will be the focus of future research.

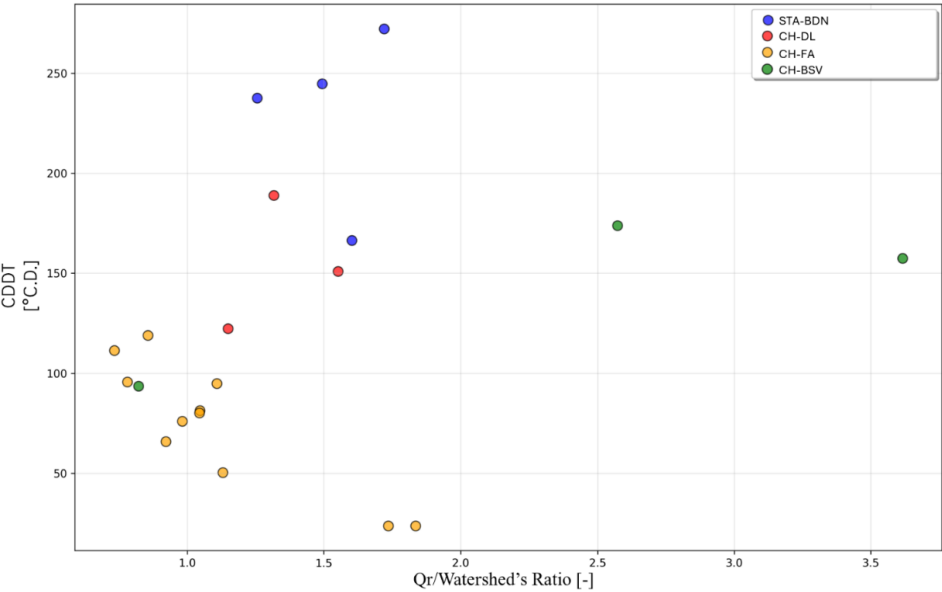


Figure 13: Relationship between discharge ratio (Qr) divided by the Watershed's Ratio (from Table 1) and cumulative degree-days of thawing (CDDT) on the ice jam day at the confluence site over the study period for all four confluences studied.

8. Conclusions

This four-year field study of ice jam formation at river confluences in Québec, Canada, represents the first validation of laboratory-derived predictive equations under natural conditions. Through continuous monitoring of four distinct confluences

Commenté [LC46]: Use "Conclusions" rather than "Conclusion", as you have several conclusions to state.

Commenté [LC47R46]: Thank you for this remark. The section heading has been revised from '8. Conclusion' to '8. Conclusions' in the revised manuscript.

that are the Bras-du-Nord and Sainte-Anne confluence (STA-BDN), the Du Loup and Chaudière confluence (CH-DL), the
Famine and Chaudière confluence (CH-FA) and the Bras Saint-Victor and Chaudière confluence (CH-BSV) from 2021 to
2024, this research analyse interactions between tributary and main river ice dynamics during breakup events, while
875 demonstrating both the potential and limitations of applying controlled laboratory findings to real-world river systems.

The study identified and characterized four distinct ice jam formation mechanisms for each confluence corresponding to
processes previously documented in laboratory studies by Ettema & Muste (2001). At STA-BDN, the flow impact mechanism
consistently produced ice jams at the confluence each year of the study period while the tributary was ice free. The laboratory-
880 derived equation developed for this mechanism could also be validated by considering bank shear stress values ranging from
1.15 to 16.32 N m⁻² depending on the year, which is consistent with the literature. CH-DL demonstrated jamming due to
stationary ice cover created by the Sartigan Dam, overriding natural morphological controls. CH-FA exhibited jamming on
depositional fans, where morphological controls at the tributary mouth created predictable jam formation locations. The
laboratory-derived equation for this mechanism could also correctly predict jam formation, though the large discrepancy
885 between calculated and equilibrium ice thicknesses suggests the need for improved integration of discharge parameters into
the equation. Finally, CH-BSV showed complex jamming patterns involving arching ice pieces and merging ice runs,
complicated by cascading effects from upstream jam formations and morphological controls. This mechanism was not defined
directly by the laboratory studies of Ettema & Muste (2001) and corresponds more to a combination of two or three
mechanisms. These findings demonstrate that while laboratory-derived relationships can provide valuable insights into natural
890 ice jam processes, their application requires careful consideration of site-specific conditions and parameter uncertainties.
Indeed, the weak correlations observed between most parameter combinations with all four confluences for all the study period
for predicting ice jam formation underscore the site-specific criteria with the importance of morphological controls that cannot
be easily quantified or generalized across different confluence types. The study's limitations highlight considerations for future
research and operational applications. Data collection challenges in winter conditions, hydraulic modeling uncertainties and
895 the inherent complexity of extrapolating laboratory results to natural systems instead of the opposite, all contribute to prediction
uncertainties. From a practical standpoint, this research provides operational guidance for ice jam flood management. The
identification of discharge ratio and cumulative degree-day of thawing as the most critical monitoring parameters offers a
streamlined approach to real-time jam prediction that balances accuracy with data accessibility. The site-specific nature of jam
formation mechanisms reinforces the need for confluence-specific monitoring and prediction strategies rather than universal
900 approaches.

The broader implications of this work extend beyond ice jam prediction to the fundamental understanding of river ice processes
in a changing climate. As winter temperatures continue to rise and precipitation patterns shift, the relative importance of
thermal versus hydraulic breakup mechanisms may change, potentially altering the effectiveness of current predictive
905 approaches (Turcotte et al., 2020). The documented sensitivity of jam formation to discharge ratios and thermal conditions

suggests that climate change could impact ice jam frequency and severity at northern river confluences. Future research should prioritize the expansion of monitoring networks to include additional confluence types and climatic conditions, enabling the development of more robust predictive relationships. The integration of remote sensing technologies, including satellite imagery as detailed by Trudel et al. (2025) with the satellite SWOT, could address data collection limitations while providing higher spatial and temporal resolution of ice conditions. The development of machine learning approaches trained on the extensive datasets generated by this study could potentially identify complex parameter relationships that traditional statistical analyses have failed to reveal. However, such approaches must be carefully validated to ensure physical plausibility and avoid overfitting to site-specific conditions (Berti et al., 2025).

In summary, this study demonstrates that laboratory-derived understanding of ice jam formation processes can provide insights into natural river systems, but their application requires consideration of site-specific conditions and inherent uncertainties. The identification of critical monitoring parameters and confluence-specific thresholds advances operational ice jam prediction capabilities, while highlighting the interplay between morphological, hydraulic and thermal processes that govern ice dynamics at river confluences.

109. Appendices

Appendix A : List of Symbols

Table A1: List of symbols used.

Symbol	Unit	Description
Forces (N m ⁻¹ , force per unit ice jam width)		
F_{bank}	N m ⁻¹	Bank shear resistance
F_{drag}	N m ⁻¹	Flow drag force on the ice accumulation
F_{flow2}	N m ⁻¹	Resultant hydrodynamic force exerted by the ice-free tributary flow on the ice in the main river
F'_{flow2}	N m ⁻¹	Component of F_{flow2} acting along the main river axis (channel 2)
F'_{flow2} / b_2	N m ⁻¹	F'_{flow2} normalised by the main channel width
F''_{flow2}	N m ⁻¹	Component of F_{flow2} acting normal to the main river axis
F''_{flow2} / b_2	N m ⁻¹	F''_{flow2} normalised by the main channel width
F_{merge}	N m ⁻¹	Resultant lateral merging force exerted by tributary ice on the confluence
F'_{merge1}	N m ⁻¹	Component of the merging force from channel 1 acting along the main river axis
F'_{merge1} / b_2	N m ⁻¹	F'_{merge1} normalised by the main channel width
F''_{merge1}	N m ⁻¹	Component of the merging force from channel 1 acting normal to the main river axis
F''_{merge1} / b_2	N m ⁻¹	F''_{merge1} normalised by the main channel width
F'_{merge2}	N m ⁻¹	Component of the merging force from channel 2 acting along the main river axis
F''_{merge2}	N m ⁻¹	Component of the merging force from channel 2 acting normal to the main river axis
$F_{strength}$	N m ⁻¹	Internal strength of the ice accumulation
F_{weight}	N m ⁻¹	Weight component of the ice accumulation
$\mu_1 F''_{merge1}$	N m ⁻¹	Friction component of F''_{merge1} (μ_1 = friction coefficient for channel 1)
$\mu_2 F''_{merge2}$	N m ⁻¹	Friction component of F''_{merge2} (μ_2 = friction coefficient for channel 2)
Geometric parameters		
b_1	m	Width of the tributary channel
b_2	m	Width of the main river channel
b_3	m	Width of the downstream channel
b_e	m	Width of the equivalent confluence channel ($b_3 - b_s$)
b_d	m	Distance from the bank to the dividing streamline
b_s	m	Width of the flow-separation bar
L_i	m	Length of the ice jam
α	°	Confluence angle (measured from the dominant flow direction in each channel)
Hydraulic parameters		
g	m s ⁻²	Gravitational acceleration

Commenté [LC48]: Be consistent with use of italics (e.g., in the Description you use text whereas under Symbol it [say F] is italicized).

Commenté [LC49R48]: Thank you for noting this inconsistency. Table A1 has been revised to ensure that all mathematical symbol ...

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

a mis en forme : Police :Italique

Appendix B : List of Abbreviations

Table B1: List of abbreviations used.

Abbreviation	Definition
BDN	Bras-du-Nord River
BSV	Bras Saint-Victor River
CH	Chaudière River
CH-BSV	Confluence of the Chaudière and Bras Saint-Victor Rivers
CH-DL	Confluence of the Chaudière and Du Loup Rivers
CH-FA	Confluence of the Chaudière and Famine Rivers
DL	Du Loup River
FA	Famine River
STA	Sainte-Anne River
STA-BDN	Confluence of the Sainte-Anne and Bras-du-Nord Rivers
CDDF	Cumulative Degree-Days of Freezing
CDDT	Cumulative Degree-Days of Thawing
CDDr	Cumulative Degree-Day ratio (CDDT / CDDF)
Qr	Discharge ratio (tributary / main river)
CEHQ	Centre d'expertise hydrique du Québec
CRIFE	Committee on River Ice Processes and the Environment
ECCC	Environment and Climate Change Canada
FRQNT	Fonds de recherche du Québec – Nature et Technologies
IAHR	International Association for Hydro-Environment Engineering and Research
MELCCFP	Ministère de l'Environnement, de la Lutte contre les Changements Climatiques, de la Faune et des Parcs du Québec
MSP	Ministère de la Sécurité Publique du Québec
HEC-RAS	Hydrologic Engineering Center – River Analysis System (US Army Corps of Engineers)
1-D / 2-D	One-dimensional / two-dimensional
ICS	Ice Control Structure

10- Code availability

930 The code to analyze and display the data could be available upon request.

~~11.~~ **Data availability**

All raw data used in this study could be available upon request.

~~12.~~ **Video supplement**

Field photos and videos could be available upon request.

935 ~~13.~~ **Supplement link**

Results for additional field season are available in supplementary materials.

~~14.~~ **Author contribution**

L.C.: Conceptualization, Data curation, Formal analysis, Investigation, Methodology, Software, Visualization, Writing – original draft.

940 T.G.: Conceptualization, Funding acquisition, Methodology, Project administration, Resources, Supervision, Validation, Writing – review & editing.

J.N.: Supervision, Validation, Writing – review & editing.

C.B.: Data curation.

G.P.: Data curation.

945 ~~15.~~ **Competing interest**

The authors declare that they have no conflict of interest.

~~16.~~ **Acknowledgments**

This research project was supported by Québec’s Ministère de la Sécurité Publique (MSP) under the FLUTEIS project (number CPS 18-19-26). We would also like to acknowledge the funding provided by a scholarship from the Fonds de recherche du
950 Québec – Nature et Technologies (FRQNT) to the first author (<https://doi.org/10.69777/336101>). Finally, we would like to thank Amandine Pierre, Éric Boucher, Christian Juneau, Clara Fruit and Ehab Zidan (Université Laval) as well as the Town of Saint-Raymond for their contribution to the field work, as well as Sean Boyd (Université Laval) for his contribution of MATLAB.

References

955 Andres, D.: Analysis of ice jams and associated flood levels and ice forces, Alberta Transportation and Utilities – Trillium Engineering and Hydrographics Inc., Edmonton, Canada, 1998.

Beltaos, S.: River Ice Jams, Water Resources Publications, LLC, Highlands, United States of America, 1995.

Beltaos, S.: River ice breakup, Water Resources Publications, LLC, 2008.

Beltaos, S. and Prowse, T. D.: Climate impacts on extreme ice-jam events in Canadian rivers, Hydrol. Sci. J., 46, 157–181, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2001\)127:8\(650\)](https://doi.org/10.1061/(ASCE)0733-9429(2001)127:8(650)), 2001.

960 ~~Beltaos, S. and Prowse, T. D.: Mathematical modeling of river ice processes, Cold Reg. Sci. Technol., 62, 3–17, 2010.~~

Beltaos, S. and Tang, P.: Applying HEC-RAS to simulate river ice jams: snags and practical hints, CGU HS Committee on River Ice Processes and the Environment, Edmonton, Canada, 16 pp., 2013.

Beltaos, S., Carter, T., and Rowsell, R.: Measurements and analysis of ice breakup and jamming characteristics in the Mackenzie Delta, Canada, Cold Reg. Sci. Technol., 82, 110–123, <https://doi.org/10.1016/j.coldregions.2012.05.013>, 2012.

965 Bergeron, N. and Roy, A.: Les effets d'un embâcle sur la morphologie du lit d'une confluence de cours d'eau, Géographie physique et Quaternaire, 42, 191–196, <https://doi.org/10.7202/032725ar>, 1988.

Berti, Z., Nafziger, J., and Kovachis, N.: Challenges of Forecasting Extreme Ice-Jam Flood Events Using Machine Learning Models: A Case Study at Fort McMurray, 23rd Workshop on the Hydraulics of Ice Covered Rivers, St. John's, Canada, CRIPE, 12 pp., 2025.

970 Best, J. L.: Sediment transport and bed morphology at river channel confluences, Sedimentology, 35, 481–498, <https://doi.org/10.1111/j.1365-3091.1988.tb00999.x>, 1988.

Beven, K.: A manifesto for the equifinality thesis, J. Hydrol., 320, 18–36, <https://doi.org/10.1016/j.jhydrol.2005.07.007>, 2006.

Bilello, M. A.: Maximum Thickness and Subsequent Decay of Lake, River and Fast Sea Ice in Canada and Alaska, Special Report 80-6, 160 pp., 1980.

975 Biron, P., Best, J. L., and Roy, A. G.: Effect of bed discordance on flow dynamics at open channel confluences, J. Hydraul. Eng., 122, 676–682, [https://doi.org/10.1061/\(ASCE\)0733-9429\(1996\)122:12\(676\)](https://doi.org/10.1061/(ASCE)0733-9429(1996)122:12(676)), 1996.

Biron, P., Boucher, E., Taha, W., Martel, J., and Fournier, A.: Comité expert visant à identifier des solutions porteuses pour la réduction de la vulnérabilité des risques liés à l'inondation par embâcles de glace sur la rivière Chaudière. Rapport Final, Ministère de l'Environnement, de la Lutte contre les changements climatiques, de la Faune et des Parcs, Québec, 2020.

980

a mis en forme : Lien hypertexte, Français (Canada)
Code de champ modifié

Blackburn, J., She, Y., Hicks, F., and Nafziger, J.: Ice effects on flow distributions in the Mackenzie Delta, 18th Workshop on the Hydraulics of Ice Covered Rivers, Québec City, Canada, CRIPE, 2015.

Bonner, V. R.: Bridge hydraulic analysis with HEC-RAS, US Army Corps of Engineers, Hydrologic Engineering Center, 1996.

985 Brayall, M. and Hicks, F. E.: Applicability of 2-D modeling for forecasting ice jam flood levels in the Hay River Delta, Canada, Can. J. Civil Eng., 39, 701–712, <https://doi.org/10.1139/I2012-056>, 2012.

Centre d'expertise hydrique du Québec (CEHQ): Direction de l'expertise hydrique, Banque de données hydriques (BDH), Ministère de l'Environnement et de la Lutte contre les changements climatiques, available at: <https://www.cehq.gouv.qc.ca/atlas-hydroclimatique/stations-hydrometriques/index.htm> (last access: 2025).

990 Chang, H. H.: Fluvial processes in river engineering, Wiley, New York, 1988.

Charbonneau, L., Blouin, C., and Ghobrial, T.: Field study of breakup dynamics at a river confluence: A case study on the Sainte-Anne River, Québec, 27th IAHR International Symposium on Ice, Gdańsk, Poland, IAHR, 12 pp., 2024.

Charbonneau, L., Ghobrial, T., and Nafziger, J.: Predicting ice jam formation at a confluence using hydraulic modelling and empirical relations: A case study on the Sainte-Anne River, Québec, 23rd Workshop on the Hydraulics of Ice Covered Rivers, St. John's, Canada, CRIPE, 16 pp., 2025.

995

De Munck, S., Gauthier, Y., Bernier, M., Chokmani, K., and Légaré, S.: River predisposition to ice jams: a simplified geospatial model, Nat. Hazards Earth Syst. Sci., 17, 1033–1045, <https://doi.org/10.5194/nhess-17-1033-2017>, 2017.

De Munck, S., Gauthier, Y., Bernier, M., Poulin, J., and Chokmani, K.: Preliminary development of a geospatial model to estimate a river channel's predisposition to ice jams, CGU HS Committee on River Ice Processes and the Environment, Winnipeg, Canada, CRIPE, 2011.

1000

Environment and Climate Change Canada: Historical Data – Daily Data Report, available at: https://climate.weather.gc.ca/climate_data/daily_data_e.html (last access: 2025).

Ettema, R. and Muste, M.: Laboratory observations of ice jams in channel confluences, J. Cold Reg. Eng., 15, 34–58, [https://doi.org/10.1061/\(ASCE\)0887-381X\(2001\)15:1\(34\)](https://doi.org/10.1061/(ASCE)0887-381X(2001)15:1(34)), 2001.

1005 Ettema, R., Muste, M., and Kruger, A.: Ice jams in river confluences, CRREL Report 99-6, US Army Corps of Engineers, Cold Regions Research & Engineering Laboratory, 70 pp., 1999.

Google: Google Earth, available at: <https://earth.google.com> (last access: 2025).

Google: Google Maps, available at: <https://www.google.com/maps> (last access: 2025).

Code de champ modifié

1010 Hicks, F.: An overview of river ice problems: CRIPE07 guest editorial, Cold Reg. Sci. Technol., 55, 175–185, <https://doi.org/10.1016/j.coldregions.2008.09.006>, 2009.

ISAINT3307 Weather Underground: Personal Weather Station monthly data – ISAINT3307, available at: <https://www.wunderground.com/dashboard/pws/ISAINT3307> (last access: 2025).

Martel, N.: Analyse de la structure de l'écoulement à une confluence de cours d'eau en présence d'un couvert de glace, Mémoire, Université du Québec à Rimouski, Rimouski, Québec, Canada, 2019.

1015 Massie, D. D., White, K. D., and Daly, S. F.: Application of neural networks to predict ice jam occurrence, Cold Reg. Sci. Technol., 35, 115–122, [https://doi.org/10.1016/S0165-232X\(02\)00056-3](https://doi.org/10.1016/S0165-232X(02)00056-3), 2002.

McDonald, R., White, K. D., Daly, S. F., and Massie, D. D.: Implementation of an ice jam predictor with user interface, in: Proceedings of the 16th IAHR International Symposium on Ice, Dunedin, New Zealand, 220–227, 2002.

1020 [Michel, B.: Properties and processes of river and lake ice, in: Proceedings of the IAHS Symposium on the Role of Snow and Ice in Hydrology, Banff, Alberta, 454–481, 1972.](#)

Ministère de l'Environnement et de la Lutte contre les changements climatiques, de la Faune et des Parcs du Québec: Daily climate summary, available at: <https://www.environnement.gouv.qc.ca/climat/donnees/sommaire.asp> (last access: 2025).

Nafziger, J., She, Y., and Hicks, F.: Dynamic river ice processes in a river delta network, Cold Reg. Sci. Technol., 165, 275–287, <https://doi.org/10.1016/j.coldregions.2018.09.005>, 2019.

1025 [Ouranos: High water and flooding — Impacts, Ouranos Consortium on Regional Climatology and Adaptation to Climate Change, available at: https://www.ouranos.ca/en/climate-phenomena/high-water-and-flooding-impacts \(last access: 2025\).](#)

[Pappenberger, F., Beven, K., Horritt, M. and Blazkova, S.: Uncertainty in the calibration of effective roughness parameters in HEC-RAS using inundation and downstream level observations, J. Hydrol., 302, 46–69, 2005.](#)

1030 Penna, N., De Marchis, M., Canelas, O. B., Napoli, E., Cardoso, A. H., and Gaudio, R.: Effect of the junction angle on turbulent flow at a hydraulic confluence, Water, 10, 469, <https://doi.org/10.3390/w10040469>, 2018.

Pourshahbaz, H., Ghobrial, T., and Shakibaeinia, A.: Field monitoring of river ice processes in the vicinity of ice control structures in the province of Quebec, Canada, Can. J. Civil Eng., 50, <https://doi.org/10.1139/cjce-2023-0087><https://doi.org/10.1139/cjee-2022-0456>, 2023.

1035 [Prowse, T. D.: Ice jam characteristics, Liard–Mackenzie Rivers confluence, Can. J. Civ. Eng., 13, 653–665, https://doi.org/10.1139/186-100, 1986.](#)

a mis en forme : Normal, Espace Après : 12 pt

a mis en forme : Vérifier l'orthographe et la grammaire

a mis en forme : Français (Canada)

a mis en forme : Normal, Espace Après : 12 pt

a mis en forme : Anglais (Canada)

a mis en forme : Vérifier l'orthographe et la grammaire

Code de champ modifié

Rhoads, B. L.: The dynamics of river confluences, in: River Dynamics – Geomorphology to Support Management, Cambridge University Press, Cambridge, 269–293, <https://doi.org/10.1017/9781108164108><https://doi.org/10.1017/9781108164108>, 2020.

Rice, S. P., Roy, A. G., and Rhoads, B. L. (Eds.): River Confluences, Tributaries and the Fluvial Network, John Wiley & Sons, Chichester, UK, <https://doi.org/10.1002/9780470760383>, 2008.

Sentinel-HUB: EO Browser, Sinergise v1.21.1, Planet Labs Company, available at: <https://browser.dataspace.copernicus.eu/?zoom=5&lat=50.16282&lng=20.78613&demSource3D=%22MAPZEN%22&cloudCoverage=30&dateMode=SINGLE> <https://apps.sentinel-hub.com/eo-browser/> (last access: 2025).

Trudel, M., Siles, G., Foucher, S., Biancamaria, S., Ghribi, T., and Mandeville, A.: Potential of the new satellite SWOT (Surface Water Ocean Topography) for monitoring lake and river ice, 23rd Workshop on the Hydraulics of Ice Covered Rivers, St. John's, Canada, CRIPE, 12 pp., 2025.

Turcotte, B., Morse, B., and Anctil, F.: Cryologic continuum of a steep watershed, Hydrol. Process., 28, 809–822, <https://doi.org/10.1002/hyp.9629>, 2014.

Turcotte, B., Morse, B., and Pelchat, G.: Impact of climate change on the frequency of dynamic breakup events and on the risks of ice-jam floods in Québec, Canada, Water, 12, 2891, <https://doi.org/10.3390/w12102891>, 2020.

Turcotte, B., Pelchat, G., and Ghobrial, T.: Correction of the degree-day approach to take solar radiation into account in breakup forecast models, 23rd Workshop on the Hydraulics of Ice Covered Rivers, St. John's, Canada, CRIPE, 7 pp., 2025.

Tuthill, A. and Mamone, A. C.: Selection of confluence sites with ice problems for structural solutions, CRREL Special Report 97-4, US Army Cold Regions Research and Engineering Laboratory, Hanover, NH, 1997.

US Army Corps of Engineers: HEC-RAS River Analysis System – HEC-RAS Release Notes 6.4.1, Hydrologic Engineering Center, available at: <https://www.hec.usace.army.mil/confluence/rasdocs/rasrn/6.4.1> (last access: 2025).

Werner, M., Hunter, N., and Bates, P.: Uncertainty in the calibration of effective roughness parameters in HEC-RAS using inundation and downstream level observations, J. Hydrol., 302, 46–79, 2005.

Zare, S. G., Moore, S. A., Rennie, C. D., Seidou, O., Ahmari, H., and Malenchak, J.: Boundary shear stress in an ice-covered river during breakup, J. Hydraul. Eng., 141, 04015017, [https://doi.org/10.1061/\(ASCE\)HY.1943-7900.0001081](https://doi.org/10.1061/(ASCE)HY.1943-7900.0001081), 2015.

a mis en forme : Normal, Espace Après : 12 pt

Commenté [LC50]: The authors should cite the 2008 book "River Confluences, Tributaries and the Fluvial Network", authored by Rice, Roy, and Rhoads, published by Wiley. Chapter 6 of this book concerns ice jams, giving several U.S. examples.

Commenté [LC51R50]: Thank you for this recommendation. The book by Rice, Roy, and Rhoads (2008) has been added to the reference list and cited in the Introduction where the role of confluences in river ice dynamics is first discussed. Chapter 6 of this volume provides useful U.S. case studies that complement the Quebec context of the present study. Some references integrated in the book have also been added to the manuscript such as Michel (1972), Prowse (1986) and Tuthill & Mamone (1997).

a mis en forme : Vérifier l'orthographe et la grammaire

a mis en forme : Vérifier l'orthographe et la grammaire

a mis en forme : Normal, Espace Après : 12 pt

a mis en forme : Normal, Espace Après : 12 pt

a mis en forme : Vérifier l'orthographe et la grammaire

a mis en forme : Anglais (Canada)

Code de champ modifié

Zhang, F., Mosaffa, M., Chu, T., and Lindenschmidt, K.-E.: Using remote sensing data to parameterize ice jam modeling for a northern inland delta, Remote Sens., 9, 306, <https://doi.org/10.3390/w9050306>, 2017.

a mis en forme : Bibliographie, Espace Après : 8 pt