

Enhancing Urban Air Quality Mapping through Novel Measurement and Modelling approaches, and Citizen Science: Actionable Insights from the RI-URBANS Project

Dimitrios Bousiotis¹, Francis D. Pope¹, Jelle Hofman², Martine Van Poppel², Jules Kerckhoffs³, Roy M. Harrison^{1*}

¹ School of Geography, Earth, and Environmental Sciences, University of Birmingham, Edgbaston, Birmingham, United Kingdom.

² Air Quality & Industrial Emissions Team, Flemish Institute for Technological Research (VITO), Boeretang 200, 2400 Mol, Belgium

³ Institute for Risk Assessment Sciences, Utrecht University, Utrecht, The Netherlands

* Department of Environmental Sciences/Centre of Excellence in Environmental Studies, King Abdulaziz University, Jeddah, Saudi Arabia

Correspondence to: Francis D. Pope (f.pope@bham.ac.uk)

Abstract

Air Quality is among the most pressing environmental issues impacting upon urban populations. Traditional air quality networks can assess time trends and assess compliance to air quality regulations, but lack the spatial and temporal resolution to understand individual exposure to air pollution. The RI-URBANS project is a European initiative aiming to develop new strategies and enhance the existing tools to address the air quality challenges and societal needs in European cities. This paper presents an overview of the pilots of the RI-URBANS project associated with air quality mapping and pollution hotspot identification using modelling, novel measurement methodologies and mapping techniques. Special focus is given on the discussion of the novel measurement methodologies introduced with the use of low-cost sensors, mobile measurements and citizen participation in the data collection process. The findings highlight the significance of participatory science, technological advancements in air quality measurement, adoption of novel measurement and modelling strategies and the potential for policy integration. The project's outcomes suggest that integrating stationary sensor networks, mobile monitoring platforms, and citizen engagement can significantly enhance urban air quality management alongside traditional monitoring and modelling approaches. However, harmonisation of data collected using these different methods is essential to ensure comparable outcomes across projects, which was one of the primary aims of RI-URBANS. The project also highlights several practices that improve both data collection and citizen participation. In particular, it emphasises the importance of careful campaign design and clear, direct communication with citizen scientists throughout both the monitoring process and the dissemination of project outcomes. This study highlights the

Deleted: the

Deleted: sources

Deleted: and assess

Deleted: ing

Deleted: ing

Deleted: , with pilot projects undertaken in the core pilot cities in Europe and other projects from cities outside the pilot's core

Deleted: The project's outcomes suggest that integrating stationary sensor networks, mobile monitoring platforms, and citizen engagement can significantly enhance urban air quality management, alongside traditional monitoring and modelling methodologies. However, harmonisation of the data obtained from different approaches is required for comparable outcomes between different projects, a practice which was one of the main aims of the RI-URBANS project. Furthermore, several practices which improve the data collection process and citizen participation are discussed. For the latter, the importance of careful design and direct communication with the citizen scientists on the process and the outcomes of the campaigns of the project is underlined.

62 important work undertaken by the participating cities and the novel approaches used
63 to disentangle the complicated air pollution patterns and improve the air quality for
64 everyone, while making this crucial information easily obtainable.

Deleted:

65 1. Introduction

66 Air pollution is one of the most pressing environmental challenges affecting urban
67 populations worldwide (Manisalidis et al., 2020). Poor air quality (AQ) is linked to
68 serious health problems, including respiratory diseases, cardiovascular conditions,
69 neurological disorders, cancers and premature mortality (EEA, 2024). It has been
70 also associated with negatively affecting the cognitive functions of humans (Faherty
71 et al., 2025), thereby likely reducing their productivity and educational outcomes.

72 To combat urban air pollution, targeted monitoring and data collection are essential.
73 High-resolution AQ data allows for improved air pollution mapping, helping
74 researchers and policymakers to understand AQ dynamics, implement targeted
75 interventions, evaluate policy effectiveness, and empower communities to act.
76 However, Air Quality Monitoring Networks (AQMN), due to their high installation and
77 operation cost, are generally sparsely distributed, failing to provide fine-scale
78 localised AQ data (Idrees and Zheng, 2021). This can be an even greater problem in
79 urban areas where pollution levels can vary significantly over short distances due to
80 factors such as traffic congestion, industrial activity, topography, population spread,
81 the presence of green spaces or hyperlocal sources of air pollution (Sartelet et al.,
82 2025).

83 Given these limitations, alternative AQ mapping techniques such as novel monitoring
84 and modelling methodologies and citizen science initiatives are increasingly used to
85 complement the current AQMN and atmospheric modelling (San José et al., 2008),
86 the latter being a commonly used alternative when measured AQ data is not
87 available. Novel monitoring methodologies can greatly expand the spatial coverage
88 of the monitored areas, either using technological advancements related with remote
89 sensing or an increase of the number of monitors, using measurement equipment of
90 a lower price, referred to as mid- or low-cost sensors (henceforth LCS) for air
91 pollution monitoring (Kumar et al., 2015; Motlagh et al., 2020). LCS have attracted
92 great interest in the last decade as they can provide an affordable alternative to
93 regulatory monitoring, significantly increasing the monitoring capabilities and
94 allowing for spatially denser air quality mapping (Shabbir et al., 2025). LCS come
95 with specific limitations though, associated with the lack of accuracy and uniformity
96 of their measurements resulting from the more simplified measuring methodologies
97 (Karagulian et al., 2020; Giordano et al., 2021). They also need calibration, typically
98 with colocation with regulatory monitors which take into account local atmospheric
99 and meteorological conditions, including temperature and relative humidity (Hofman
100 et al., 2022; Nalakurthi et al., 2024). However, the portable size, ease of use and low

Deleted: ing

103 energy demands of LCS make them ideal for deploying in large scale static sensor
104 measurement networks or in mobile set-ups,

105 LCS can be used in various scenarios greatly increasing the geographical coverage
106 and spatial density of AQ data. On one hand, LCS networks, comprising of great
107 numbers of sensors strategically deployed over large areas can provide detailed
108 information on air pollution's spatial variation in fine detail (Kosmopoulos et al., 2022;
109 Men et al., 2021), allowing for on demand measurements on points of interest
110 without the need for the significant financial burden that comes from AQ monitoring
111 networks (Hofman et al., 2022; Bousiotis et al., 2023). On the other hand, mobile
112 measurement campaigns are not new and have been tested in many studies
113 regarding AQ mapping, traffic emissions or the range of the effect of pollution
114 sources (Deshmukh et al., 2020). Mobile air quality monitoring involves the use of
115 portable LCS and/or regulatory grade instruments mounted on moving platforms
116 (e.g. vehicles, cyclists, pedestrians). As the cost of traditional mobile campaigns is
117 rather high though, the emergence of the low-cost sensors introduced new
118 opportunities for mobile data collection (Singh et al., 2021; Bagkis et al., 2025).
119 There are two types of mobile monitoring strategies, the opportunistic and the
120 targeted. Van den Bossche et al. (2016) defined opportunistic mobile monitoring as
121 data collection making use of existing carriers to move measurement devices
122 around, contrary to the targeted mobile monitoring which is focused on specific
123 pathways and periods.

124 The participation of citizens in the data collection process is another approach, which
125 has been facilitated by the emergence of the LCS (Oyola et al., 2022). As regulatory
126 instruments come with a great cost and are difficult to operate and maintain, LCS are
127 an affordable solution making data collection more accessible to greater audiences,
128 while medium cost portable devices, which offer better quality data, can be used on
129 campaigns which require simultaneous data collections with fewer participants (Van
130 Poppel et al., 2024). Citizen science offers great value in the data collection process,
131 as it exponentially increases the collection points and amount of data, while
132 increasing awareness and encourages behavioural changes among the public
133 (Relvas, et al., 2025; Ward, et al., 2022). There are specific concerns though with the
134 inclusion of citizens on the quality of the data collected (Fritz, et al., 2022), though
135 these can be overcome with clear instruction and closely follow-up of data, together
136 with a good cooperation of the citizens with specialised personnel.

137 Modelling of air pollution is also not new in the AQ mapping field. The use of models
138 where measurements are not available is a practice which assisted in the
139 understanding of the air pollution patterns and is harmonised in Europe through
140 FAIRMODE (EPA, 2025; Kushta et al., 2019). The exponential increase of both the
141 computing power and the available AQ data achieved with the use of the LCS, has
142 opened new opportunities on the potential of AQ mapping and understanding.

The present study highlights the outcomes of RI-URBANS ([Research Infrastructures Services Reinforcing Air Quality Monitoring Capacities in European Urban & Industrial Areas](#)), a project designed and funded by the European Commission (<https://riurbans.eu/>), to address the limitations of the existing AQMN by incorporating multiple traditional and novel approaches listed above. Among other objectives the project aimed to improve urban AQ mapping by incorporating tested modelling methodologies, novel measuring techniques and data analysis methods and citizen participation to increase data coverage, understanding and public awareness. Apart from the approaches tested, the study discusses the lessons learned from the mobile campaigns undertaken, the added value gained from citizen involvement, and the considerations for their wider and successful application.

2. Methodology

2.1 The RI-URBANS project

RI-URBANS is an EU-funded project aimed at reshaping how urban air quality is measured. It focuses on monitoring emerging hazardous pollutants, including ultrafine particles and black carbon, to better protect public health. The project has developed over 20 innovative measurement protocols, modelling tools, and emission inventories to track previously overlooked, non-regulated pollutants. These methods have been tested in several European pilot cities to demonstrate how complementary data can be integrated into routine monitoring networks. RI-URBANS maps urban exposure and investigates how specific atmospheric nanoparticles affect human morbidity and mortality, directly supporting EU efforts to implement stricter air quality standards. The initiative builds on existing research infrastructures, including ACTRIS, and aligns with World Health Organization guidelines.

While the RI-URBANS project addressed multiple themes (e.g. measurements, modelling and emission inventories of emerging pollutants, source apportionment, health effect assessment; see <https://riurbans.eu/project/#service-tools>), the present paper focuses on the urban mapping and pollution hotspot identification, discussing the pilots undertaken in RI-URBANS from several European research groups (Fig. 1). In general, there were two main approaches to the AQ mapping and pollution hotspot identification pilots. Firstly, the use of previously tested and novel modelling methodologies was deployed on pre-existing data, for detailed AQ mapping of areas. In several cases, two monitoring and modelling approaches were combined. Secondly, novel measurement approaches were tested, which in some cases involved citizen scientists from the local community. The data collected from these studies were interpreted using AQ mapping and various statistical analyses.

Deleted: RI-URBANS is an EU-funded project aimed at reshaping how urban air quality is measured. It focuses on monitoring emerging, hazardous pollutants like ultrafine particles and black carbon to better protect public health. The project developed over 20 innovative measurement protocols, modeling tools, and emission inventories also aiming at tracking non-regulated pollutants that were previously overlooked. These methods have been actively tested in several European pilot cities to demonstrate how complementary data can be integrated into regular monitoring networks. RI-URBANS maps urban exposure and studies how specific atmospheric nanoparticles affect human morbidity and mortality, directly supporting EU efforts to implement stricter air quality standards. The initiative builds on existing research infrastructures like ACTRIS and aligns with World Health Organization guidelines.

Deleted: themes

Moved down [3]: Firstly, novel measurement approaches were tested, which in some cases involved citizen scientists from the local community. The data from these studies were interpreted using AQ mapping and various statistical analyses.

Deleted: Secondly

Deleted: pre-existing

Deleted: Firstly

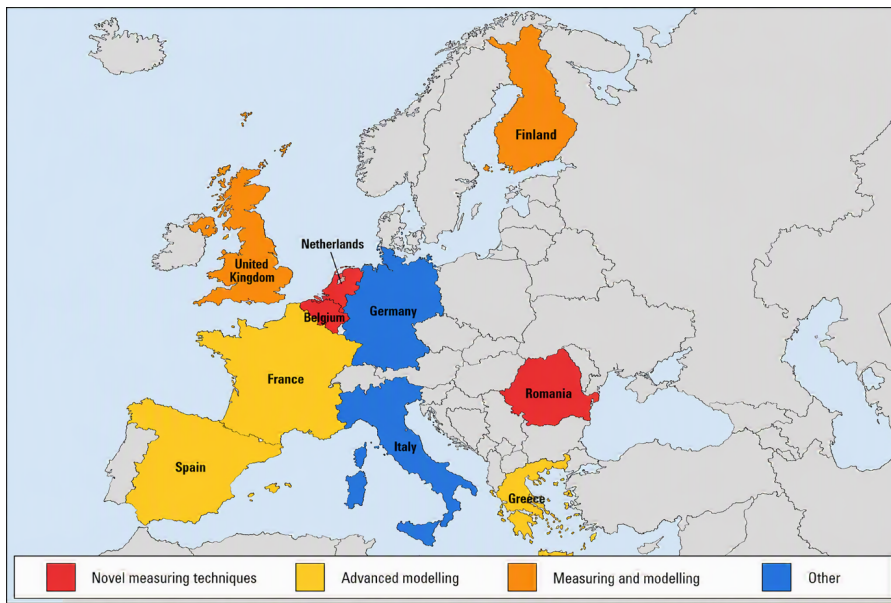


Figure 1: Map of the countries which contributed to the air pollution mapping and hotspot identification pilots (core and partners). *Map created by the authors using Microsoft's Copilot (2026)*

2.2. Advanced modelling

Different data analysis approaches were used depending on the envisaged research question and/or use case, either data-only or modelling approaches. While the data-only approaches generate AQ maps purely relying on the collected monitoring data, the model approach relies on modelling techniques to extrapolate air quality outside of the spatiotemporal monitoring window. Thus, the modelling techniques can also incorporate data from external sources (remote sensing, traffic intensity, emission factors, etc.) to estimate pollution levels over locations without measurement data, the identification of air pollution sources and the dispersion of their emissions.

Modelling can provide AQ mapping with or without the use of field measurements using information from emission inventories. Dispersion models using emission inventories or Land-Use Regression (LUR) models using emission inventories were developed and were also extensively tested in many studies as part of the RI-URBANS project to predict pollution concentrations across the area studied from the underlying statistical relationships. Data from emission inventories, while offering an



Deleted:

Moved down [1]: Robust QA/QC was achieved by means of campaign specific AQMN co-location campaigns, data cleaning, calibration, curation and normalisation procedures, for the different pilots participating in RI-URBANS, and assisted in the consistency and accuracy of the data collected. In most cases the data collected were openly available in data banks, such as the ARGOS platform (RI-URBANS, 2025b), further promoting transparency and increasing awareness.

The involvement of citizen scientists in the monitoring process was used in several pilot cities in the RI-URBANS project. Citizen science projects face several challenges, which along with the actions taken to

Moved down [2]: The involvement of citizen scientists in the monitoring process was used in several pilot cities in the RI-URBANS project. Citizen science projects face several challenges, which along with the actions taken to overcome them are discussed in this study along with the lessons learnt from these campaigns, which can be

Moved (insertion) [1]

Moved (insertion) [2]

Deleted: 2.2 Novel data collection techniques and citizen science involvement

Novel measurement techniques involved the setup of stationary networks, mobile measurement approaches or remote sensing to complement the existing regulatory AQMN. The sensors used can measure ... [1]

Deleted: 3

Deleted: Data Analysis: data-only & a

Deleted: s

Deleted: data-only approach relies on a dense monitoring coverage in the period of interest and adequate data processing (rescaling based on nearby AQMN), while

alternative when field data are not available, can lead to great discrepancies in areas where localised emission factors or activity data are not available, reducing the reliability of estimated concentrations (Holicki 2011). Regardless, advanced modelling techniques, particularly LUR, source apportionment methodologies, AI-based algorithms and machine learning approaches, which allowing meaningful interpretation of heterogenous datasets (Hofman et al., 2022; Yuan et al., 2022) were also tested by the RI-URBANS pilots. Table 1 lists the models used and the pollutants assessed from each pilot country.

The pilots in France mainly used the CHIMERE model, an open-source multi-scale chemistry transport model, which can forecast pollutant concentrations and make long-term simulations for emission control scenarios (LMD, 2025). The pilots in the UK focused on the ADMS (Atmospheric Dispersion Modelling System) model, an advanced dispersion model used to model the air quality impact of existing and proposed industrial installations. Specifically, the ADMS-Urban model can model the dispersion of particulate matter and chemical substances in the urban environment (CERC, 2026). The Environment – High Resolution Limited Area Model (Enviro-HIRLAM), used by the Finnish group, is developed as a fully online integrated numerical weather prediction and atmospheric chemical transport model for research and forecasting of joint meteorological, chemical and biological weather (Baklanov et al., 2017). The pilot cities in Greece used several models. The CAMS (Copernicus Atmosphere Monitoring Service) atmospheric model, an operational global forecasting system that tracks and predicts atmospheric composition, including air quality, greenhouse gases, and aerosols (ECMWF, 2026). Another model used was the Particulate Matter Comprehensive Air Quality Model with Extensions (PMCAMx), which is a state-of-the-art three-dimensional chemical transport model developed to simulate the atmospheric processing, mass concentration, and chemical composition of particulate matter over regional and urban scales (Gaydos et al., 2007). Finally, the group from Patras in Greece developed the SmartAQ system, which incorporates input from models including the PMCAMx, WRF (for meteorological data), MEGAN3 (for biogenic emissions), and outputs concentration forecasts for several gaseous pollutants and PM. The SmartAQ model (1x1 km²) provides advanced treatment of OA volatility chemistry, and uses an updated emission inventory, including biomass burning emissions and can forecast not only pollutant concentrations but also the source contributions for them (Siouti et al., 2022).

These models can handle large, complex datasets and uncover patterns that may not be evident through traditional statistical techniques, providing high-resolution mapping, exposure assessment, and policy evaluation. Moreover, emission factors from inventories can be optimized based on data assimilation techniques (Nguyen and Soulhac, 2021).

Table 1: Models used from the RI-URBANS pilots

Pilot country	Pollutants assessed	Model	Reference
France	NO ₂ , BC, PM, O ₃	CHIMERE, MUNICH	Park et al., (2025); Di Antonio, et al., (2025a); Vida et al., (2025)
France	Fungal spores, OA	CHIMERE	Vida et al., (2024)

Deleted: The pilots in France mainly used the CHIMERE, an open-source multi-scale chemistry transport model, which can forecast pollutant concentrations and make long-term simulations for emission control scenarios (LMD, 2025). The pilots in the UK focused on the ADMS (Atmospheric Dispersion Modelling System) model, an advanced dispersion model used to model the air quality impact of existing and proposed industrial installations. Specifically, the ADMS-Urban model can model the dispersion of particulate matter and chemical substances in the urban environment (CERC, 2026). The Environment – High Resolution Limited Area Model (Enviro-HIRLAM), used by the Finnish group, is developed as a fully online integrated numerical weather prediction and atmospheric chemical transport model for research and forecasting of joint meteorological, chemical and biological weather (Baklanov et al., 2017). The pilot cities in Greece used several models. The CAMS (Copernicus Atmosphere Monitoring Service) atmospheric model, an operational global forecasting system that tracks and predicts atmospheric composition, including air quality, greenhouse gases, and aerosols (ECMWF, 2026). Another model used was the Particulate Matter Comprehensive Air Quality Model with Extensions (PMCAMx), which is a state-of-the-art three-dimensional chemical transport model developed to simulate the atmospheric processing, mass concentration, and chemical composition of particulate matter over regional and urban scales (Gaydos et al., 2007). Finally, the group from Patras in Greece developed the SmartAQ system, which incorporates input from models including the PMCAMx, WRF (for meteorological data), MEGAN3 (for biogenic emissions), and outputs concentration forecasts for several gaseous pollutants and PM. The SmartAQ model (1x1 km²) provides advanced treatment of OA volatility chemistry, and uses an updated emission inventory, including biomass burning emissions and can forecast not only pollutant concentrations but also the source contributions for them (Siouti et al., 2022).

Formatted Table

France	BC, BrC	CHIMERE	Tuccella et al., (2025)
UK	PM, NO ₂ , BC, UFP	ADMS	Zhong et al., (2023); Zhong et al., (2024);
UK	PM, NO ₂ , BC	ADMS	Zhong et al., (2025)
Greece	NO ₂ , PM _{2.5}	CAMS/WRF/Episode- City Chem	Myriokefalitakis et al., (2024)
Greece	PM _{2.5} , UFP, OA	PMCAMx	Siouti et al., (2023); Patoulias et al., (2025); Siouti et al., (2025)
Greece	PM _{2.5} , OA, NOx	SmartAQ	Siouti et al., (2022)
Finland	BC	Enviro-HIRLAM	Savenets et al., (2022)
Spain	BC, PNC, NO ₂	Machine learning	Fung et al., (2024)

2.3 Novel data collection techniques and citizen science involvement

Novel measurement techniques involved the setup of stationary networks, mobile measurement approaches or remote sensing to complement the existing regulatory AQMN. Apart from novel setups of research grade instruments (e.g. on vans) low-cost sensors (LCS) were also extensively tested. These LCS can measure a variety of pollutants, including PM_{2.5}, PM₁₀, NO₂, CO, O₃, and in some cases black carbon (BC), ultrafine particles (UFP) and organic aerosols (OA). Table 2 lists the campaigns using novel data collection techniques from the RI-URBANS core and partner countries. The Alphasense OPC-N3 was the primary sensor used by the UK group for PM measurements. This is an optical particle counter sensor measuring PM in the range 0.35 to 40 µm, providing PNSD in 24 size bins and using that information to estimate PM₁, PM_{2.5} and PM₁₀ concentrations. For UFP measurements the Testo DISCmini, a hand-held ultrafine particle counter measuring the number and average diameter of nanoparticles in the diameter range from 10 to 700 nm, was used. For BC measurements, several sensors were tested, for example the single wavelength microAeth AE51 and Observair and the more advanced MA200, MA350 capable of measuring in multiple wavelengths providing additional information about the carbon content of the samples (Elomaa et al., 2024). Finally, the Kunak Air Mobile, a modular mobile IoT sensor system measuring PM, NO₂ and O₃, was deployed by some of the campaigns.

Remote sensing approaches were also tested for air pollution mapping and hotspot identification in several RI-URBANS sub-projects, in particular the use of satellite and LIDAR data. These approaches are expected to play an increasingly important role in future AQ monitoring, providing data collection with greater spatial coverage.

The combination of all these novel approaches, in combination with the data obtained from the existing AQMN, can deliver valuable insights and help guide urban AQ policies. The combination of different methodologies as well as the use of LCS require robust QA/QC, which within RI-URBANS was achieved through campaign specific AQMN co-location campaigns, data cleaning, calibration, curation and normalisation procedures, assisting in the consistency and accuracy of the data collected. In most cases the data collected were openly available in data banks, such

as the ARGOS platform (RI-URBANS, 2025b), further promoting transparency and increasing awareness.

Finally, the involvement of citizen scientists in the monitoring process was used in several pilot cities in the RI-URBANS project. Citizen science projects face several challenges. These, together with the measures adopted to overcome them and the lessons learned from the campaigns, are discussed in this study to inform future citizen science applications.

Table 2: List of the measuring campaigns from the cities of the RI-URBANS project.

Pilot country	Pollutants assessed	Collection method	Citizen involvement	Reference
UK	PM	Static and on foot	Yes	Baruah et al., (2024)
UK	PNC, LDSA, BC	On foot, cycling	No	Damayanti et al., (2026)
UK	PM, LDSA, BC	On foot	Yes	Bousiotis et al., (2024)
UK	PM	Indoor static	Yes	Rathbone et al., (2025)
Netherlands	BC, NO ₂ , UFP	Car-based	No	Yuan et al., (2024); Fry et al., (2025)
Netherlands	BC	On foot	Yes	Kerchoffs et al., (2022)
Romania	UFP, PM, BC, NO ₂	Car-based	No	Talianu et al., (2025)
Romania	BC	Car-based	No	Van Poppel et al., (2023); Nicolae et al., (2025)
Finland	BC	Static	No	Elomaa et al. (2024)
Finland	UFP, PM _{2.5} , BC	Cycling	Yes	Kleemola et al. (2024)
Finland	UFP, PNC, PM	Van	No	Järvi et al., (2023); Teinilä et al., (2025)
Finland	Vertical LDSA	Drone	No	Järvi et al., (2023)
Belgium	BC	Cycling	Yes	Van Poppel et al., (2024)
Belgium	PM, NO ₂ , O ₃	Postal service vehicles	Yes	Hofman et al., (2023)

Deleted: Novel measurement techniques involved the setup of stationary networks, mobile measurement approaches or remote sensing to complement the existing regulatory AQMN. Apart from novel setups of research grade instruments (e.g. on vans) low-cost sensors (LCS) were also extensively tested. These LCS can measure a variety of pollutants, including PM_{2.5}, PM₁₀, NO₂, CO, O₃, and in some cases black carbon (BC), ultrafine particles (UFP) and organic aerosols (OA). Table 2 lists the campaigns using novel data collection techniques from the RI-URBANS core and partner countries. The Alphasense OPC-N3 was the sensor extensively used for PM concentrations from the group in the UK. This is an optical particle counter sensor measuring PM in the range 0.35 to 40 µm, providing PNSD in 24 size bins and using that information to estimate PM₁, PM_{2.5} and PM₁₀ concentrations. For UFP measurements the Testo DISCmini, a hand-held ultrafine particle counter measuring the number and average diameter of nanoparticles in the diameter range from 10 to 700 nm, was used. For BC measurements, several sensors were tested like the single wavelength microAeth AE51 and Observair and the more advanced MA200, MA350 capable of measuring in multiple wavelengths providing additional information about the carbon content of the samples (Elomaa et al., 2024). Finally, the Kunak Air Mobile, a modular mobile IoT sensor system measuring PM, NO₂ and O₃, was deployed by some of the campaigns. ¶ Remote sensing was also tested for air pollution mapping and hotspot identification in some RI-URBANS sub-projects. Methodologies including satellite or LIDAR sensors' AQ data, though still in an infant state for routine monitoring, are expected to play an important role in the future of AQ monitoring, providing data collection with greater spatial coverage, no limitations on deployment areas and increased spatial density. ¶ The combination of all these novel approaches with the data obtained from the existing AQMN can deliver valuable insights and help guide urban AQ policies. The combination of different methodologies as well as the use of LCS require robust QA/QC, which was achieved by means of campaign specific AQMN co-location campaigns, data cleaning, calibration, curation and normalisation procedures, assisting in the consistency and accuracy of the data collected. In most cases the data collected were openly available in data banks, such as the ARGOS platform (RI-URBANS, 2025b), further promoting transparency and increasing awareness. ¶ Finally, the involvement of citizen scientists in the monitoring process was used in several pilot cities in the RI-URBANS project. Citizen science projects face several challenges, which along with the actions taken to overcome them are discussed in this study along with the lessons learnt from these campaigns, which can be used for future citizen science applications. ¶

3. Results

3.1 Advanced Modelling

Several models and approaches were tested by different groups within RI-URBANS. For the **Paris** pilot, techniques based on deterministic modelling provided high resolution outdoor exposure city maps. The CHIMERE model (Menut et al., 2024) was used and coupled with the MUNICH street scale model (Sartelet et al., 2020).

This model was used to successfully estimate the human exposure to NO₂, BC and PM₁ and PM_{2.5} (Park et al., 2025), the variability of O₃ and PM with different meteorological conditions (Di Antonio, et al., 2025a), as well as the oxidative potential of atmospheric particles (Vida et al., 2025), a metric which can be used for AQ risk assessment. The results from these studies were also evaluated against observations from the local AQMN. Maison et al., (2024) using the CHIMERE model found a mixed effect of the urban trees upon the AQ on the streets of Paris, finding a substantial increase in the organic particle concentrations while an opposing effect on gas and particle concentrations was found from the dry deposition on the leaves. Furthermore, Vida et al., (2024) modelled the fungal spore concentrations, which can make a significant portion of the total PM₁₀ in the atmosphere, but are not considered in many air quality models. While the model was successful in estimating the concentrations and seasonal changes in the northern and eastern parts of France, it was not so successful for the southern parts of France, mainly due to the limited dataset availability there. The CHIMERE model was also used for modelling the effect of large-scale events, such as the wildfires in Canada in 2023, for which the dispersion of the BC and Brown Carbon (BrC) emissions were estimated, with the effect reaching up to Eastern Europe, a result which was confirmed when the model estimations were compared against satellite observations (Tuccella et al., 2025).

Deleted: CHIMERE is an open-source multi-scale chemistry transport model, which can forecast pollutant concentrations and make long-term simulations for emission control scenarios.

Another commonly used model for the dispersion of the pollutants is the ADMS, which was tested thoroughly in several case studies by the **Birmingham** pilot. The ADMS was used to estimate the dispersion of road and regional emissions for PM, BC and NO₂. For the PM, it was found that while road transport is a major source, the rural background plays a decisive role for ultrafine particle concentrations in the urban environment (Zhong et al., 2023). On a street-scale simulation over Birmingham, UK, it was found that reduction of traffic, while resulting in significant NO₂ concentration reduction, had a limited effect on PM_{2.5} (Zhong et al., 2024). Furthermore, the ADMS-Urban model was capable of modelling BC concentrations in different scenarios, though adjustments to emission factors were suggested for improved estimation of the traffic contributions when compared to observations from the AQ monitoring network (Zhong et al., 2025).

Deleted: Specifically, the ADMS-Urban model can model the dispersion of particulate matter and chemical substances in the urban environment.

For the **Athens** pilot, the concentration variability and outdoor population exposure to NO₂ and PM_{2.5} was assessed using the multi-scale numerical atmospheric model system CAMS/WRF/ EPISODE-CityChem (Myriokefalitakis et al., 2024). The simulated concentrations, within 100 m cells, showed that for both pollutants the mean concentrations compare well with observations satisfying the model performance criteria and goal of Boylan and Russell (2006) in most cases. Another group from the Greek pilot in **Patras** used two models for the prediction and mapping of the air quality. The PMCAMx was the base for the estimation of the concentrations of the gases and aerosols. Using this model the effect of biomass burning on PM_{2.5} (Siouti et al., 2023) as well as that of the different mechanisms of nucleation on the UFP (Patoulas et al., 2025) were estimated throughout Europe. Furthermore, using

Deleted: , a chemical transport model (Gaydos et al., 2007), ...

632 the Particulate Source Apportionment Technology (PSAT) algorithm (Wagstrom et
633 al., 2008), biomass burning was found to be the most significant contributor to the
634 PM_{2.5} during the winter months (up to 70%). In both cases the results were evaluated
635 against field measurements, which for the first study derived from measurements
636 from the city's LCS network. The PMCAMx model was also successfully tested to
637 predict the PM_{2.5} concentrations and its sources, as well as exposure in a 1x1 km²
638 resolution grid in Athens (Siouti et al., 2025). The performance of the model was
639 good for both PM_{2.5} and organic aerosol (OA) estimation according to the criteria set
640 by Morris et al., (2005). The group from Patras also developed and tested the
641 SmartAQ system for one month for each season in 2021-22 in the city of Patras for
642 PM_{2.5} and NOx. The system performed excellently for PM_{2.5} during the summer and
643 winter times, while its performance was good during autumn for the city centre and
644 average for the suburbs, due to overestimation of long-range transport. Similar was
645 the performance for NOx, with an underestimation of the concentrations during the
646 daytime against the observed values.

Deleted: was tested

647 Other models were also tested in specific cases. For example, the Enviro-HIRLAM
648 modelling framework was used to estimate the contribution of forest fires on the BC
649 concentrations over Ukraine (Savenets et al., 2022). The model estimated a
650 contribution of 10-20% of BC to the total aerosol mass near the wildfires in the
651 lowest 2 km layer, while BC emissions from the wildfires were found in the
652 accumulation and coarse modes in distances up to 2000 km.

Deleted: (Baklanov et al., 2017)

653 Finally, several machine learning methodologies were tested by Fung et al., (2024)
654 for the mapping of BC concentrations. For this work, the machine learning models
655 were trained in Barcelona and then tested with datasets from urban and traffic sites
656 across Europe. It was found that BC concentrations correlate well with PNC of the
657 accumulation mode and NO₂, which was consistent in other European sites. Overall,
658 the tested ML model gave an acceptable performance, highlighting the transfer
659 possibility of these models across space and time.

660


661 **3.2 Mobile and citizen science studies**

662 The pilot cities tested novel methods for data collection for air quality mapping. For
663 the **Birmingham** pilot, monitoring included citizen-involved approaches using LCS
664 for static and mobile measurements, including walking and cycling in Selly Oak, a
665 populous neighbourhood next to the University of Birmingham. The main sensor
666 used in all these studies was the Alphansense OPC-N3. The air quality assessment
667 at neighbourhood scale included monitoring at 6 static measuring points (including at
668 the Birmingham Air Quality Supersite, as a background site) which also allowed
669 evaluation of long-term LCS performance vs. research grade instruments for air
670 pollution monitoring. The street level air quality assessment and pollution source
671 apportionment included stationary monitoring and both walking and cycling sessions
672 with the involvement of citizen scientists. For this additional equipment was used,

Deleted: , an optical particle counter (OPC) sensor measuring PM in the range 0.35 to 40 µm, providing PNSD in 24 size bins and using that information to estimate PM₁, PM_{2.5} and PM₁₀ concentrations

679 including a Aethlabs microAeth AE51 for BC measurements and a Testo Discmini for
680 PNC and Lung Deposited Surface Area (LDSA), fitted into a backpack for easy
681 transport. This allowed the air quality mapping and identification of PM hotspots
682 (Damayanti et al., 2026) and the estimation of the effect of both regional and local
683 sources at high spatial resolution (100 x 100 m) (Bousiotis et al., 2024), thereby
684 providing valuable information on hyperlocal sources of pollution (Fig. 2).
685 Furthermore, PM_{2.5} concentrations, using a combination of collected data (mobile
686 and static), with additional traffic, topography and demographic data were processed
687 to create a machine learning model to fill data gaps and predict PM concentrations
688 when measured data is not available (Baruah et al., 2024).


689 Finally, in one of the few indoor air quality studies among the pilots, with the
690 involvement of students at the University, LCS were installed in three student
691 houses, within the same Selly Oak region as the mobile measurements, to assess
692 the differences in PM sources and concentrations within indoor environments
693 (Rathbone et al., 2025).

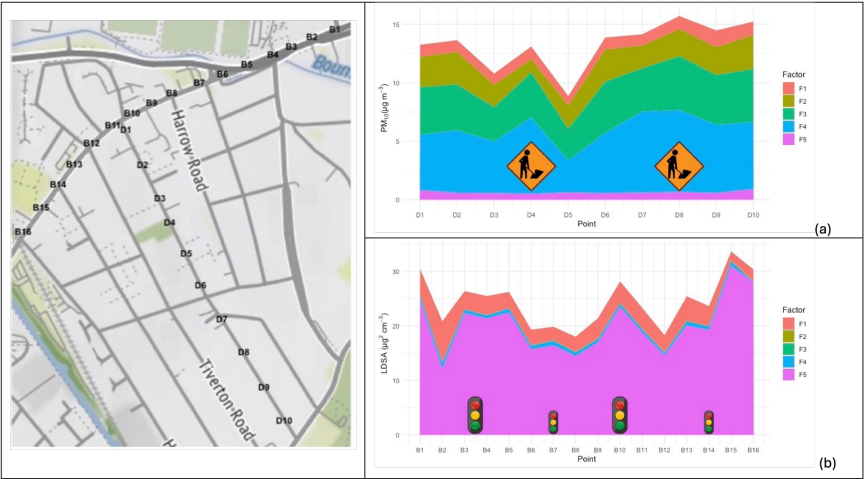

694
695 *Figure 2: (a) Variation of the sources of PM₁₀ for a transect across Dawlish Road, a relatively small*
696 *residential road in Selly Oak, Birmingham. The location of construction sites is highlighted. (c)*
697 *Variation of the sources of the LDSA for a transect across Bristol Road, a road with significant traffic*
698 *activity. The location of major (on a junction) and minor (no junction) traffic light points are marked. In*
699 *both cases, F1 represents the Urban Background source, F3 the Marine source, F5 the traffic source*
700 *and F2, F4 local sources (Bousiotis et al., 2024).*
701

702 In the **Rotterdam** pilot, citizen-based mobile monitoring and car-based
703 measurements were performed. The citizen science mobile monitoring was
704 performed following methods developed by van den Bossche (2015). In total, 38
705 participants collected data whilst commuting (to/from work) with portable instruments
706 for BC. The data was used to map exposure and derive representative long-term

707 average AQ maps during commuting hours in winter and summer. Like the
 708 Birmingham pilot, the microAeth AE51 was used for data collection, after confirming
 709 the comparability against the reference (AE33) by means of an initial co-location.
 710 The variability reported by the mobile sensors was similar to that of the reference
 711 monitor, and representative spatial maps of BC exposure were derived. Moreover, a
 712 sensitivity (subsampling) analysis revealed that up to 15 and 29 sampling repeats
 713 were needed to obtain within-season and multi-season representative AQ results,
 714 after post-processing the mobile data by means of winsorizing and background
 715 normalization (Fig. 3).

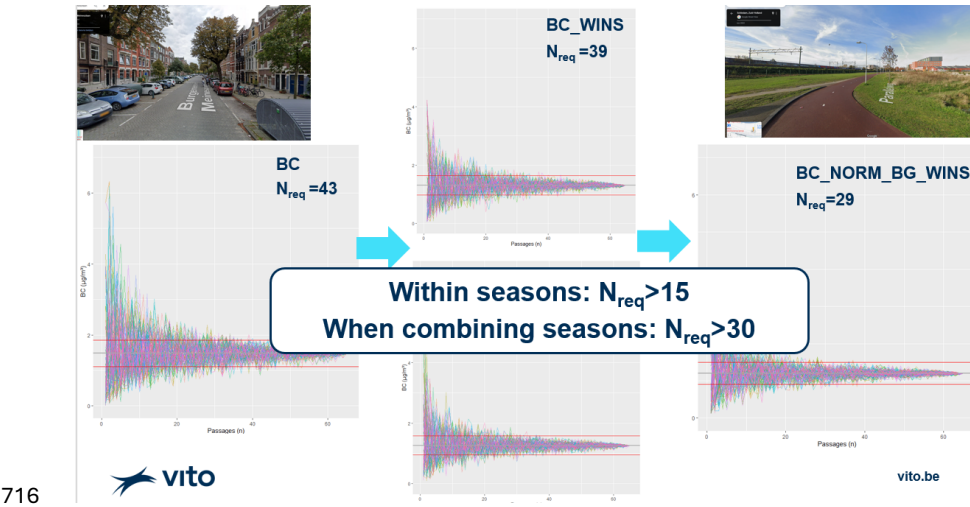

717 *Figure 3: Subsampling analysis to derive the number of required repeats (N_{req}) in*
 718 *order to be within 25% of the long-term mean. The number of required repeats was*
 719 *derived from the raw BC data (BC), winsorized BC data (BC_wins), background*
 720 *normalized BC data (BC_norm_bg) and fully post-processed (winsorizing +*
 721 *background normalization), for each of the considered seasons (winter/summer) or*
 722 *considering multiple seasons. The choice of the number of repeats should depend*
 723 *on the considered pollutant (variability expected) and reevaluated during the*
 724 *campaign.*

726 Car-based mobile monitoring was also implemented in Rotterdam, measuring the
 727 ambient concentrations of NO₂ (CAPS, Aerodyne Research Inc., USA), BC (Magee
 728 Scientific AE33) and UFP (TSi EPC 3783). The collected measurements were used
 729 to develop a mixed-effect model following methods described in Kerckhoffs et al
 730 (2022). Predictions represent long-term average air pollution concentration maps,
 731 and where possible, to investigate the impact of industrial sources (mainly port
 732 activities) on the total concentration values. The pilot was successful in producing
 733 maps of the individual pollutants, but less successful in the interpretation based upon

734 monitoring data directly. The ratios between the pollutants offered new insights into
735 the source contribution of the pollutants. UFP was often elevated near airports,
736 whereas BC and NO₂ were more confined to road traffic sources. This dataset was
737 also used to elucidate the effect of street trees on the pollutants measured (Fry et al.,
738 2025). Concentration of NO₂ and BC were higher during the summertime (when
739 trees had more leaves) in areas with many trees due to pollutant trapping (Vos et al.,
740 2013), while PM_{2.5} was lower, highlighting that this pollutant is usually transported
741 from other areas into street canyons. Finally, this data was combined with data from
742 mobile campaigns from Copenhagen and were used to develop LUR models for
743 Amsterdam, for which mobile data was also available for evaluation (Yuan et al.,
744 2024). Testing of the models highlighted the ability for successful hyperlocal air
745 pollution mapping for a city even without any pollution measurements, with Pearson
746 correlations reaching up to 0.92 for NO₂ and 0.90 for UFP.

747 For the **Bucharest** pilot, mobile measurements campaigns without citizens'
748 involvement were carried out for UFP, particulate matter fractions (PM₁, PM_{2.5}, and
749 PM₁₀), BC and NO₂ using LCS on specified routes (including heavy traffic roads,
750 inside the city, residential, industrial, commercial, sub-urban areas), along with the
751 ESCAPE LUR model, the PyLUR tool and QGIS. Maps based on car measurements
752 showed that the UFP sources seem to be widely distributed during summer, while
753 winter is characterized by more homogeneous sources (Talianu et al., 2025).
754 Significantly elevated concentrations were found mainly in the industrial area and
755 urban agglomerations, but also on some important traffic routes. Overall, the model
756 performed well, although NO₂ values were overestimated, while PM₁₀ levels were
757 slightly underestimated. Similar was the variance found for BC, using mobile data
758 collected by a car in the city of Cluj-Napoca during periods within and out of the
759 COVID-19 lockdown periods (Van Poppel et al., 2023). The BC concentrations on
760 roads with high traffic intensities were found to be up to four times greater compared
761 to those with reduced traffic. Furthermore, about halved BC concentrations were
762 found during the lockdown periods highlighting the effect of limiting the traffic activity
763 during these periods. Additionally, using mobile measurements and the LUR model
764 developed from the Rotterdam pilot for pollutant concentration prediction, the effect
765 of power plants on the nearby residential areas in the city of Bucharest was
766 assessed (Nicolae et al., 2025). It was found that despite the initial estimations, the
767 power plant in the western side of the city was not the main source of pollutants for
768 the nearby residential area. Such studies provide crucial information on the
769 assessment of the environmental impact of industrial activities, which in many cases
770 can be misinterpreted, thus leading to erroneous actions which may increase the
771 environmental action cost without providing the anticipated impact.

772 **Helsinki** measurements includes the Kumpula campus campaign measurements of
773 BC (Elomaa et al. 2024) and a mobile bike-based measurement campaign
774 (Kleemola et al. 2024). In the urban area, on the Kumpula campus the
775 measurements were conducted at the SMEAR-III station as an urban background

776 environment (Järvi et al., 2009) and at the Mäkeläncatu supersite as the urban street
 777 canyon (Barreira et al., 2021). A network of four types of small-scale filter-based BC
 778 sensors (AE51, MA200, MA350, Observair) was deployed with the objective to
 779 evaluate these sensors for monitoring ambient BC concentrations and to study
 780 variations in high resolution data. Sporadic and transient high values were observed
 781 both with sensors and with the reference instruments indicating spatially and
 782 temporally varying BC sources in the area. For this campaign the sensor data
 783 correlated relatively well against the reference (Pearson correlation 0.78-0.84).
 784 Mobile bike-based UFP, PM_{2.5}, BC measurements were also performed in Helsinki,
 785 where instrumentation was constructed on a bike and connected to cloud-services
 786 for data access. Sampling was done on a route that connected areas with high
 787 variability in aerosol number concentration and two AQ supersites, namely SMEAR-
 788 III and the Mäkeläncatu supersite. However, results showed that the correlation was
 789 modest. As expected, the highest concentrations were observed near traffic and
 790 considerably lower concentrations were observed in the park areas. Apart from bike
 791 campaigns, mobile measurements were also collected using the ATMo-Lab (Aerosol
 792 and Trace Gas Mobile Laboratory), a van carrying instruments targeted on the
 793 assessment of traffic derived UFP. Measurements collected using the van were
 794 combined with measurements from the Traffic and UB AQ stations in Helsinki for a
 795 source apportionment study to identify organic factors connected to different
 796 particulate sources (Teinilä et al., 2025). It was found that local traffic emissions
 797 increased the PNC, especially for particle sizes <10 nm, while long range transport
 798 increased the PM mass concentration and particle size. A different van, the “Sniffer”,
 799 was used to identify pollution hotspots in the city centre of Helsinki (Järvi et al.,
 800 2023). In this campaign, with the use of the mobile data along with data from the
 801 local monitoring station, both the horizontal and vertical pollutant variation was
 802 studied. For the vertical measurements a drone collecting LDSA data (Naneos
 803 Partector) was used. Using this data the mechanisms causing pollution hotspots in
 804 street canyons were explored, pointing to different drivers for the warm and cold
 805 periods of the year, highlighting the role of thermal processes within the street
 806 canyon as an important factor during the winter.

807 Finally, analysis of mobile measurements was also implemented in **Belgium** as part
 808 of the RI-URBANS, though the datasets were collected in other studies. Two
 809 approaches were tested, involving citizens in the collection of BC data using bicycle
 810 rides in a targeted approach, and the use of postal service vehicles for PM, NO₂ and
 811 O₃ data in an opportunistic approach. For the first project, the measurements were
 812 collected by citizen volunteers in Mechelen, Belgium who participated in a local
 813 citizen observatory, as part of the GroundTruth2.0 project (Van Poppel et al., 2024).
 814 For this campaign the citizen scientists, under the guidance from members of the
 815 research partner VITO and the city council, collected BC data using the AE51 in
 816 repeated rides on four predefined routes within the city in periods from all seasons.
 817 As repeated measurements are needed for adequate assessment of the BC
 818 concentrations, for each route and campaign 25 repetitions were done. Strong
 819 seasonality of the BC concentrations was observed, with the highest concentrations


820 found in the late autumn campaign and the lowest in the summer campaign, while
821 the diurnal variability was more complex and was found to depend on the proximity
822 to sources, dilution and dispersal dynamics. The mobile measurements were also
823 used to evaluate modelled results from the ATMO-Street model (using multiple data
824 sources including the AQ network). The mobile measurements presented a fair
825 correlation with the modelled data. Higher correlations were found in the
826 measurements collected in the suburban areas, where the cyclists were not exposed
827 to traffic emissions. The model underestimated the peak concentrations observed in
828 areas with heavier traffic. For the second study, the Kunak Air Mobile was used
829 (Hofman et al., 2023). Twenty of these systems were installed on postal vehicles
830 operating in Antwerp. A total of 945 km of road was covered by the vehicles in the 7-
831 month campaign, providing about 8 million datapoints scattered throughout the city.
832 NO₂ measurements properly reflected the observed exposure range as measured by
833 the AQMN in the city and pollution hotspots were mapped throughout the city (Fig.
834 4). This opportunistic data collection method was proven to be a valid approach for
835 pollution exposure assessments and a valuable source of air quality data for cities
836 with a limited monitoring network. The same mobile mapping approach was also
837 used in a project in Cluj-Napoca, Romania, with the the participation of citizens,
838 where the impact of traffic on BC concentrations during the COVID-19 lockdown was
839 assessed highlighting that background corrections are needed for better assessment
840 of the traffic impact (Van Poppel et al., 2023).
841

Deleted: , a mobile IoT sensor system measuring PM,
NO₂ and O₃, ...



844

(a)

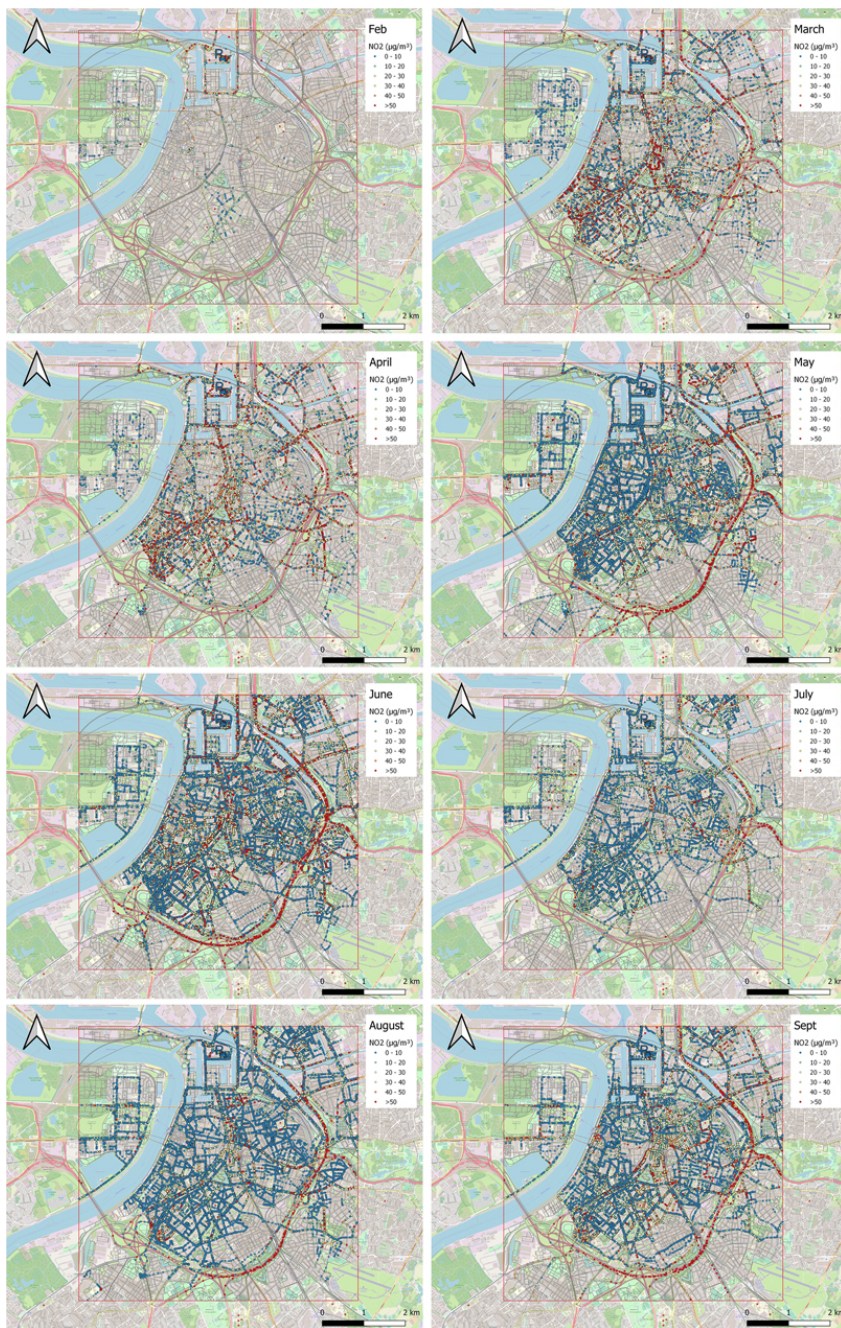

845

(b)

Figure 4: (a) Kunak® Air Mobile sensor systems co-located at the R817 AQMS; three in fixed shields, 17 in mobile enclosure (upper), details of the Kunak® Air Mobile sensor system (lower left), and rooftop deployment on a postal van in Antwerp (lower right). (b) maps of monthly collected mobile NO₂ measurements (µg m⁻³) in the city of Antwerp between February and September 2021. (Hofman et al., 2023)

3.3 Other approaches

A number of alternative approaches were also tested in the RI-URBANS project from both the pilot and partner cities. An interesting approach for air mapping data was used by a group from **Barcelona**. In this study, sand and soil was collected from 23 playgrounds and parks around Barcelona (González-Romero et al., 2025). The mineral content and trace element content of the samples were determined offline at the laboratory using two types of spectrometry. The sand samples from several parks exhibited significant enrichment factors for elements associated with road emissions (brake or tyre wear), while others exhibited elevated content of Pb and Sb which are most likely associated with industrial and port activities. Using this methodology improves the understanding of the urban PM dynamics while pollution hotspots can be identified. However, caution is necessary in data interpretation due to the long residence time of many trace elements in soil and associated legacy effects.

Air quality mapping with the use of the Aerosol Optical Depth (AOD) to monitor the aerosol load and distribution in the atmosphere is a tested approach which was also used by some pilot groups. The group for the **Paris** pilot studied the variation in Paris and its surrounding area Using the variations of the different wavelengths between the urban and sub-urban environments (Di Antonio et al., 2025b). In this study, the organic aerosols contributed up to 50% of the aerosol mass with variations observed between urban and forested areas. Similarly, the AOD was used from the pilot in **Athens** for the estimation of the impact of the wildfires in Athens, Greece in August 2021 on local AQ (Kaskaoutis et al., 2024). The biomass burning tracers used in this study, like nss-K⁺ (from PM_{2.5} filter samples) presented high correlations with BC, OC and EC, as well as with specific scattering and absorption coefficients, highlighting the ability of this approach to provide AQ data without the need for traditional monitoring instruments. Using the same methodology, a group of institutions in Italy formed a network of automated lidar ceilometers in 2015, the ALICENET. The ALICENET, comprising of 22 stations throughout Italy (in urban, industrial, coastal and mountainous sites), allows the monitoring of vertical aerosol profiles over a wide range of environmental and atmospheric conditions (Bellini et al., 2024). Apart from routine monitoring the network monitors all kinds of events, such as Saharan dust events, short and long range transport of biomass burning emissions, and the emissions from the volcanic activity in the South of the country. The data provided by the ALICENET network were tested as part of the RI-URBANS project against the ERA5 dataset and CAMS model with good agreement on variables such as the Boundary Layer Height and PM₁₀ (Bellini et al., 2025), providing an alternative and

cost-effective way for fine spatiotemporal air quality data collection. In a similar manner but using satellite lidar data instead, the pilot group from Helsinki collaborated with the University of Jordan in one of the first tests of simultaneous use of ground based and satellite observations for air quality mapping in the city of Amman, Jordan (Panahifar et al., 2023). Analysing the data from the space-borne Cloud-Aerosol Lidar with Orthogonal Polarisation (CALIOP) three main groups of aerosols were found over Amman, the coarse mode dust, the fine mode dust (polluted dust) and non-dust aerosols (pollution). The vertical aerosol profile over Amman was mapped and using the trajectory analysis, the sources of the incoming pollutants were distinguished (Fig. 5).


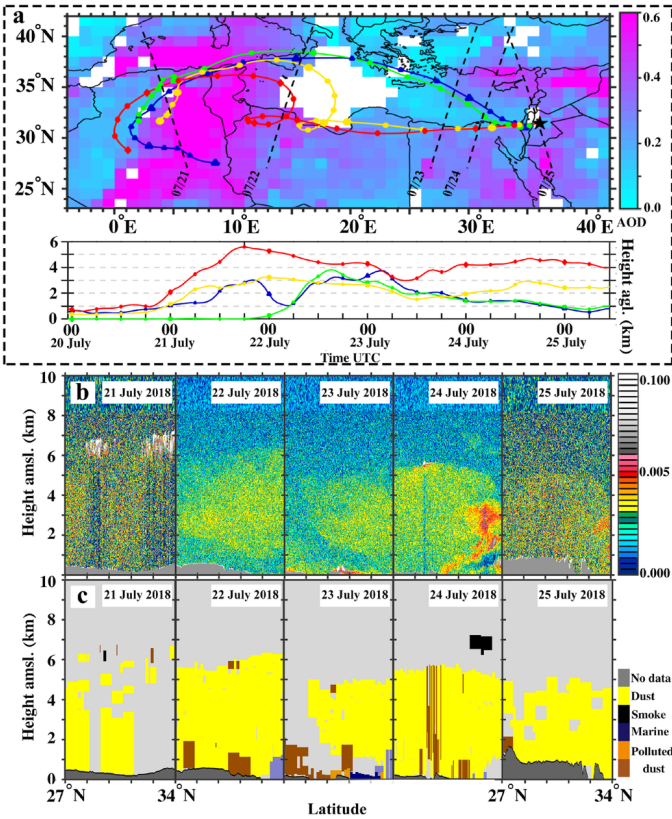


Figure 5: (a) Backward trajectories during the past 132 h by the HYSPLIT model on 25 July 2018 calculated at different heights, overlaid by MODIS Deep Blue AOD (on 21 July 2018) and corresponding CALIPSO ground track during transport path. (b) The attenuated backscatter coefficient in arbitrary units (AU). (c) The CALIPSO aerosol subtype classification. The horizontal axis for all panels of (b) and (c). This axis shows latitude from 27° N to 34° N. (Panahifar et al., 2023)

911 Finally, a novel approach on air quality mapping using street images was tested as
912 part of the RI-URBANS. For this, 2800 high resolution street images were captured
913 in 4 locations in Germany (Augsburg, Neubiberg, Warnemünde) and the Czech
914 Republic (Zelezna Ruda). Using three ML methodologies on the luminance of the
915 red, blue and green colours found in each pixel of the images the PM concentrations
916 was assessed. To assist the model construction, sampling campaigns were
917 conducted in the study areas. These sampling campaigns included walks around the
918 study areas in sunny and cloudy days, for the collection of PM₁, PM_{2.5}, PM₁₀, BC,
919 BrC, PNC and LDSA data. The models tested demonstrated adequate performance
920 and satisfactory generalisation capabilities in both temporal and spatial dimensions,
921 indicating that with proper calibration this approach can be used in different areas
922 and seasons (Liu et al., 2024) (Fig. 6).

923

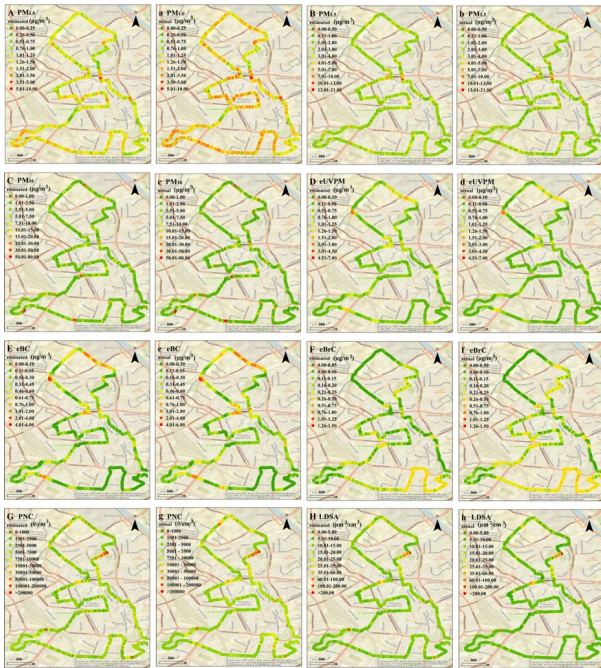

924

925

926 *Figure 6. Spatial distribution estimates of eight air PM metrics using the LSTM-HSV*
927 *model (A–H, capital letters) compared with actual monitoring (a–h, lowercase) in the*
928 *downtown of Augsburg (Liu et al., 2024)*

929

930

931 4. Discussion


932 **4.1 Combining modelling and novel measurement techniques to complement**
933 **the information from existing AQMN. The RI-URBANS promise.**

The preceding sections outlined the multi-faceted strategy adopted by the RI-URBANS project to advance urban AQ monitoring and pollution hotspot identification. The need for spatially dense datasets and on demand campaigns led to the considerations of more flexible monitoring methodologies. The LCS can provide on demand air quality measurements for a wide range of atmospheric variables with an affordable cost and great flexibility. Stationary sensor networks offer cost-effective means of expanding long-term monitoring coverage, especially in underrepresented or vulnerable communities (Shabbir et al., 2025), while mobile measurements can substantially expand the spatial coverage. Standardized QA/QC protocols across municipalities would enhance trust and enable cross-comparative analyses (Bousiotis et al., 2025). The integration of stationary and mobile allows for real-time assessment of pollution hotspots and population exposure across diverse urban environments. These platforms are especially valuable for identifying local sources of pollution, validating traffic-related emission controls, and assessing the effectiveness of urban interventions. For example, Hofman et al., (2022) showed the significant air quality impacts of temporary traffic restrictions in a school street using a stationary sensor network.

The pilot studies focused on modelling, and mobile monitoring with reference grade monitors or portable LCS which have been shown to compare well with reference grade monitors. Dispersion modelling was useful and agreed well with measurement data from the often-few regulatory monitoring stations. The mobile approaches also worked well to develop maps across the city, useful for studies which could benefit from finer resolution, for example epidemiological studies. Figure 7 illustrates the difference between mobile and stationary monitoring approaches and associated considerations in terms of monitoring set-up and device requirements. For the identification of specific hotspots, more focus on data-only approaches is needed, as was the case on the approach adopted in Rotterdam. Monitoring data are useful to identify locations where current models under- or overestimate concentrations. Furthermore, citizen involvement increases the awareness and enriched interpretation as citizens were able to provide feedback on observed spikes and hotspot locations in their commuting environment. Identification of hotspot locations, and assessment of personal exposure during commuting are additional merits of mobile monitoring.

In general, modelling is easier to implement since it requires a fewer number of repeat measurements, and can provide sufficient air pollution mapping, if prior expertise already exists and input data on emissions are available. However, contrary to data-only approaches, models only provide AQ predictions and the robustness of these model predictions relies on underlying model assumptions. Challenges may be raised by the requirements of regulatory modelling, limiting the flexibility of model choice. This applies less to unregulated pollutants such as UFP. Novel measurement techniques though, can assist in expanding current AQ mapping capabilities. LCS monitoring, stationary or mobile, is promising to refine spatial

978 resolution, assist in hotspot identification and evaluate models' output. As one of the
979 main targets of the RI-URBANS project was to expand the adoption of both mobile
980 measurements and citizen involvement, the lessons learnt from these applications
981 will be discussed on the next sections.
982

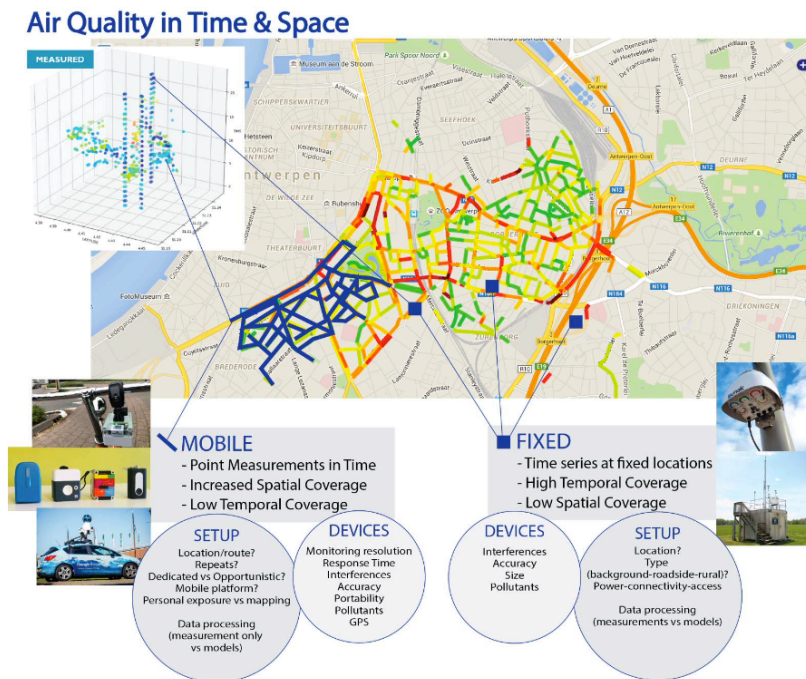

983
984 *Figure 7: Main differences between mobile and stationary air quality measurements in terms of*
985 *associated monitoring setup and device requirements (RI-URBANS, 2022)*

986
987
988 **4.2 Mobile measurements and citizen involvement**

989
990 **4.2.1 Design of mobile and citizen campaigns**

991 It is important to choose the monitoring strategy that best targets a specific research
992 question or use case. Slight changes in the data collection protocol can significantly
993 alter the results. At the same time, the required efforts and number of volunteers
994 need to be considered. Involving citizens has obvious merits but can entail significant
995 workload amongst the project support team, for example in recruiting,
996 communication, engagement and feedback to the citizen scientists.

997 Several opportunistic mobile campaigns were attempted in RI-URBANS using
998 common daily routines of people or service fleet vehicles. While the data collection

999 process is automated, the travelled route is uncontrollable from the point of view of
 1000 the researcher, as it is not designed and performed with data collection from a
 1001 specified route in mind. This approach was utilized on cyclists in the RI-URBANS
 1002 pilot in Rotterdam, cyclists in the province of Utrecht, the Netherlands (Wesseling et
 1003 al., 2021), on trams and buses in Zurich (Mueller et al., 2016) and Birmingham
 1004 (Damayanti et al., 2026), postal vans in Antwerp (Hofman et al., 2023) and in the
 1005 HOPE project in Helsinki (Rebeiro-Hargrave et al. 2022). These studies provide
 1006 information on the local AQ but also about urban mobility.

1007 The opportunistic approach contrasts with targeted mobile monitoring, which is a
 1008 coordinated approach in which the mobile measurements are deliberately planned in
 1009 terms of sampling route and monitoring period. The carriers, which are not expected
 1010 to make any changes in their usual habits, can be citizens, a certain professional
 1011 group (e.g. city wardens, home nurses, taxi drivers), or vehicles equipped with AQ
 1012 instruments (Kerckhoffs et al., 2022).

1013 Choosing between a targeted and an opportunistic approach is not a simple binary
 1014 decision. In practice, data can be collected opportunistically while still maintaining
 1015 some control over the number of repetitions and the trajectories followed. For
 1016 example, a campaign could be organized within a company, institute, government
 1017 entity, or university that invites employees to measure their exposure during their
 1018 daily commute. This approach was adopted in the Rotterdam pilot, in which
 1019 employees collected data during daily commuting from and to work. In such case,
 1020 the routes can be selected (by selecting employees with most relevant commuting
 1021 routes) and participants can be asked to measure the same route multiple times and
 1022 aligning this monitoring protocol among the participants.

1023 Careful consideration of the required spatial and temporal monitoring coverage is
 1024 essential, as measurements are only representative of the locations and time periods
 1025 in which they are collected. Temporal variability often exceeds spatial variability;
 1026 therefore, sufficient temporal repetitions should be ensured at each relevant spatial
 1027 location. Variations across times of day, weekdays, and seasons can strongly
 1028 influence pollutant concentrations and should be taken into account when designing
 1029 the monitoring campaign and when processing the collected mobile measurements
 1030 (e.g., through background normalization) to obtain data that are representative for
 1031 exposure assessments.

1032 The choice of targeted versus opportunistic monitoring holds some consequences
 1033 for the processing and interpretation of the data as well. The advantage of a targeted
 1034 approach is that all sections along the route can be optimized in terms of monitoring
 1035 repeats and are measured 'quasi-simultaneously' during the same days, seasons,
 1036 etc. which makes it easier to directly compare different datapoints in space and
 1037 perform background scaling to e.g. yearly average values. A drawback is the
 1038 workload; when citizens are involved, they must drive/walk the route in addition to
 1039 their normal activities. Furthermore, compensation might be required for such

1040 additional work. It should be noted that data collection during commuting can reduce
1041 the workload but also reduces the synchronization of the measurements. Thus, the
1042 opportunistic approach can result in spatial and temporal sampling bias. Certain
1043 urban microenvironments might be underrepresented or absent in the data.
1044 Furthermore, temporal bias can appear in the case of data collection by commuters,
1045 as the measurements are mainly limited to rush hours, and no data will be available
1046 during working nor non-working (night-time) hours.

1047 Finally, the sampling can also be biased by the weather conditions, e.g. when the
1048 data collection stops when it rains. However, this is not only true for opportunistic
1049 approaches (e.g. when the commuter takes the car instead of the bicycle on rainy
1050 days) but is also true when the monitoring equipment is not fully protected from rain.

1051
1052

1053 **4.2.2. Mobile measurements – strategies and lessons**

1054
1055 Kerckhoffs et al. (2025) extensively discussed the design choices and strategies of
1056 true mobile monitoring studies. For example, mobile monitoring data can be used for
1057 direct mapping or as input for models). It is important to consider the type of mobile
1058 platform (walking person, bicycle, car, tram, etc.), the measurement timing (e.g.
1059 hours of the day), and monitoring locations/route. It is also crucial to know in
1060 advance which data processing technique will be used to optimize the data
1061 collection. Not only whether a model is used, but also the type of model used can
1062 have impact on the data collection requirements. Furthermore, the data from mobile
1063 campaigns can also be used for model evaluation and improvement. When direct
1064 mapping is used, it is important to optimize monitoring repeats to obtain a
1065 representative spatial and temporal coverage. This is also true but to a lesser extent
1066 when models are developed, as spatiotemporal dependencies are learned from the
1067 available dataset. Additionally, the sampled concentrations of specific pollutants on a
1068 vehicle or bicycle on the road will likely exceed those of a pedestrian on the sidewalk
1069 and may not compare well with model outputs which estimate exposure of residents
1070 at their homes. Concentrations may also differ substantially between sides of a street
1071 canyon if influenced by a wind-driven vortex.

1072 Mehanna et al. (2022) defined three parameters for completeness of datasets:
1073 sensor completeness, temporal completeness, and spatial completeness. Sensor
1074 completeness is defined as a quality factor that captures the extent to which the
1075 measurements of a given sensor are complete over a certain sampling period.
1076 Similarly, Hofman et al. (2023) considered area coverage (% of covered street
1077 segments) and segment coverage (#measurements/segment) in the Antwerp
1078 campaign. To assure the completeness of data collected from a mobile campaign
1079 several aspects should be considered when designing and implementing the
1080 monitoring strategy.

1081 Monitoring devices need special attention when used for mobile data collection or by
1082 citizens who do not have specialised knowledge on AQ and measurements.
1083 Additionally, a high temporal monitoring resolution and fast response time is needed
1084 when collecting mobile AQ data. For example, when driving at a low speed of 15
1085 km/h, a single measurement point will take 42 m at a time resolution of 10 seconds.
1086 At a walking pace (5 km/h), this spatial resolution becomes 14 m. Another important
1087 issue associated with the sensors' measurement resolution and response time is the
1088 fast-changing environment, especially in urban setups. The sensors chosen should
1089 effectively adapt and collect reliable measurements in changing environments,
1090 including moving from indoors to outdoors. Additionally, a precise geolocation sensor
1091 is also very important when collecting mobile measurements. Such information is
1092 vital for mobile campaigns, and the price of GPS sensors is quite low nowadays,
1093 while retaining their high precision. Finally, the sensors need to be portable but
1094 sturdy. Especially in bicycle or walking campaigns, the size and weight of the
1095 sensors can be a limiting factor for their time and distance covered. Also, as mobile
1096 sensors are subjects to vibrations, turbulence or even drops, they should be sturdy
1097 enough to withstand certain abuse, while having sufficient sampling flow to collect
1098 data under variable and changing wind conditions.

1099 The pilot studies underscored the importance of repeated measurements for data
1100 reliability. For example, the model tested from the Bucharest pilot was trained with
1101 mobile on-road data, and it was found that it constantly overestimated NO₂
1102 exposures, pointing the need for multiple campaigns on multiple periods. Thus, in
1103 Rotterdam, at least 15 and 30 repeated bicycle runs per route were needed to derive
1104 representative within-season and cross-seasonal pollution estimates when
1105 implementing data-only approach. Similarly, a study on cycling data collected with a
1106 targeted approach in Warsaw showed comparable results with 12 and 17 required
1107 repeats for the winter and summer season respectively. Without sufficient
1108 repetitions, there is a risk of over/underestimating pollution levels due to temporal
1109 anomalies. The latter was also pointed by the Birmingham pilot, in which specific
1110 activities (eg. construction works) were captured only on specific days and hours in
1111 the day, a factor which should be considered on the data analyses. As mobile
1112 measurements are representative for the time and space they have been collected, it
1113 should be considered that (i) the monitoring strategy will determine the applicability
1114 of the results and (ii) repeated sampling and temporal corrections are needed to
1115 obtain location-representative results and (iii) model extrapolation might be needed
1116 to predict air quality at other time and space instances (Kerckhoffs et al., 2025).

1117 Furthermore, real time data increases the value and usability of the data. In this
1118 manner, the Helsinki pilot data were connected to operational air quality modelling
1119 (e.g. ENFUSER, Johansson et al. 2022) which allowed novel insights into the spatial
1120 variability of emerging air pollutants. Similarly, the Birmingham pilot used a cloud
1121 service for instant monitoring and reporting (the data was reported every 10
1122 seconds). This has multiple benefits for the campaigns, as apart from the ability to

1123 instantly see the effect of anticipated sources, it allows for identifying sensor
1124 downtimes or lack of internet or GPS connection. Sensor downtime is one of the
1125 most common reasons for data loss from LCS, thus any means to reduce that should
1126 be considered.

1127
1128 The Helsinki pilot group also pointed the need for minimum exposure of the
1129 participants' while collecting data. Since most of the campaigns are done within
1130 urban environments, the participants are often subject to high concentrations of
1131 pollutants, a factor which may reduce their will to participate.

1132

1133 **4.2.3 Citizen Engagement Strategies and lessons learned**

1134 Effective citizen engagement is essential for the success and sustainability of citizen
1135 science initiatives in AQ monitoring. These strategies aim to recruit, educate, and
1136 retain participants, ensuring meaningful contributions and long-term involvement in
1137 environmental monitoring. A well-designed engagement approach empowers
1138 individuals to take ownership of the data they collect and recognize their role in
1139 shaping healthier communities. Citizen science has proven to be a powerful
1140 mechanism for data collection, public awareness, and civic engagement. By
1141 empowering individuals with tools and knowledge, RI-URBANS has facilitated local
1142 advocacy and enriched datasets with otherwise inaccessible micro-scale information.
1143 However, challenges remain in sustaining long-term participation, ensuring data
1144 validity, and addressing inclusivity so that all communities can benefit from and
1145 contribute to such efforts.

1146 One of the most common methods of engagement involves training workshops and
1147 community events that introduce participants to the goals of the project, the
1148 functionality of air quality sensors, and the broader significance of air quality. These
1149 sessions help demystify scientific tools and build confidence in handling equipment
1150 and interpreting data. Overall, great interest was expressed by non-researchers in
1151 participating in AQ campaigns. Citizens were interested in the AQ of their areas and
1152 homes and were keen to participate in the initiatives presented. The Rotterdam pilots
1153 though pointed the need to explain the results and the difference in individual
1154 measurements when data were not collected simultaneously, to increase awareness
1155 and understanding.

1156 In Birmingham, community engagement was central to success. Students and staff
1157 at the University contributed to the placement of stationary LCS and participated in
1158 indoor AQ monitoring, providing valuable insights into personal exposure and the
1159 influence of local sources. The student invitation process sometimes included
1160 rewards for the participation, increasing the response and participation rates, though
1161 this resulted in the reward being the primary interest for some participants. Apart
1162 from students and staff, citizens and local companies were also invited to participate

1163 in the data collection process. The Birmingham pilot also obtained useful
1164 experiences from the interaction with citizens for LCS monitoring in or near their
1165 home. Building trust between citizens and researchers is probably the most
1166 important issue. Respecting anonymity is a requirement for citizens, schools and
1167 other organizations. Providing relevant feedback is also important as citizens often
1168 participate because they are interested in the topic. The Birmingham indoor AQ
1169 further showed that people were interested in the AQ of the spaces they spend most
1170 of their time in, and the factors that affect their quality of life.

1171
1172 For the Belgium project in Mechelen (mobile BC mapping with citizens) less data
1173 was collected during summer season because the lack of volunteers (Van Poppel et
1174 al., 2024). This pointed the need for a good preparation, clear explanation of the
1175 expectations and outputs to the participants and meaningful reasons for people to
1176 participate (either by giving “rewards” or increase awareness on the benefits of these
1177 campaigns). Furthermore, all pilots pointed the difficulty in finding participants for
1178 weekend and evening monitoring. Thus, projects may also partner with local schools,
1179 NGOs, and municipal governments to broaden outreach and encourage participation
1180 from diverse groups. For example, in one of the Rotterdam campaigns, employees of
1181 DCMR and the municipality of Rotterdam were deployed for the data collection.
1182 These were more knowledgeable in terms of AQ than the average citizen, hence it
1183 was easier for the local coordinator to organise and supervise the campaign. The
1184 Birmingham pilot also included schools as data collection points, which provided an
1185 excellent opportunity for an introduction of the air pollution concepts to children.

1186
1187 Providing recognition, such as certificates, public displays of contribution, or
1188 inclusion in project reports, can further motivate continued involvement and create a
1189 sense of community ownership over the initiative. Mobile applications and interactive
1190 dashboards play a crucial role in sustaining engagement. These platforms allow
1191 citizens to upload sensor data, access pollution maps, and receive personalized air
1192 quality updates in real time. Some apps also offer gamification features, encouraging
1193 users to collect data in new locations or participate in group challenges. For one of
1194 the Birmingham campaigns the participants had access to the air quality data as
1195 collected increasing both their interest and understanding on what affects the air they
1196 breathe.

1197
1198 There were also some interesting inputs from the deployment and the maintenance
1199 of the sensors from the RI-URBANS initiatives. Some instruments needed extra
1200 steps in providing sensible data. For example, filter changing or regular maintenance
1201 was sometimes needed. Citizens were happy to cooperate in this, though reluctant
1202 to carry on the work themselves. As maintenance though had to take place regularly,
1203 mild complains about the repeated nuisance were expressed, without though
1204 affecting their will to participate and willingness to do so in future campaigns.
1205 Specifically for one of the Birmingham pilots, the need for electricity to run the

sensors was the main setback for citizens' involvement. In many cases, while people were happy to cooperate the lack of specific infrastructure to operate the sensors (e.g. access to power sockets, safe location) led to their exclusion from the campaigns. This was the most significant difficulty in finding people to work with for outdoor campaigns. For this, specific solutions were considered (e.g. car batteries), though this partially jeopardised the safety of the equipment, as in some cases the sensors were left in relatively easily accessible locations.

Furthermore, in the COMPAIR project (wecompair.eu) the use of sensors and citizen science approaches has been explored and lessons learned are summarised in course material (see <https://www.wecompair.eu/post/new-online-course-for-citizen-science-practitioners>). Specific requirements were defined for the equipment used when collecting data by citizens: preferred automatic data uploading, as autonomous measurements as possible (power on/off, required communication/intervention handling), good portability (weight, size, easy to carry/attach, casing/backpack, etc), low noise, long battery time, easy charging, capacity to anonymize data.

Ultimately, the goal of these strategies is to ensure that citizen participation is not only productive but also empowering and repetitive. By fostering transparency and providing meaningful feedback, citizen engagement becomes a cornerstone of sustainable urban air quality monitoring. While citizen science may seem like an easy approach to extend the amount of data collected, dedicated communication and engagement strategies are required to ensure proper data collection, reliability and usefulness of the collected data, and ultimate impact of the research outcomes.

5. Conclusions and future directions

The RI-URBANS project has demonstrated that urban air quality mapping can be significantly enhanced through the integration of traditional methodologies, innovative technologies and citizen participation. By combining modelling, mobile monitoring, stationary sensor networks, and citizen science, hybrid approaches offer a more detailed, adaptive, and inclusive system for assessing pollution levels across urban environments. Improved AQ monitoring technologies provide the necessary tools to understand pollution sources, model future trends, and design mitigation strategies that create healthier, more sustainable cities.

On the one hand, the pilot studies which used modelling approaches highlighted the diverse information obtained even without the need for field measurements, though they rely heavily on expert work, proprietary data, model assumptions and methods which are not affordable and may carry great uncertainties for areas without local information. On the other hand, insights from several pilot studies underscore the value of diversified monitoring approaches, including both static and mobile measurements using either regulatory grade instruments or low-cost sensors, to generate AQ maps from data-only or hybrid modelling techniques. Furthermore,

1245 citizen science proved especially effective in increasing public engagement and
1246 spatial coverage, particularly in Birmingham and Rotterdam

1247 A proper monitoring and data processing strategy, calibration and QA/QC emerged
1248 as critical pillars of data integrity. Data harmonization techniques—including
1249 collocation, additive rescaling, and machine learning algorithms—enabled more
1250 accurate and comparable datasets. Our findings suggest that hybrid monitoring
1251 strategies not only improve exposure mapping and policy responsiveness but also
1252 contribute significantly to public engagement and scientific innovation. From a policy
1253 perspective, high-resolution exposure mapping supports localized interventions,
1254 hotspot identification, and health risk assessments.

1255 However, several challenges remain, such as the development of standardized
1256 calibration protocols across Europe, long-term citizen engagement, and the
1257 integration of multi-source data into policy mechanisms. Addressing these areas
1258 through coordinated research and shared best practices will be vital for replicating
1259 RI-URBANS's success at scale. For this purpose, RI-URBANS developed a
1260 dedicated service tool for mobile mapping and citizen science (RI-URBANS, 2024).

1261 Looking ahead, future research should prioritize:

- 1262 • Development of harmonized calibration and QA/QC standards for sensor
1263 networks.
- 1264 • Exploration of long-term health impacts using more spatially granular hybrid
1265 monitoring datasets.
- 1266 • Studies quantifying behavioural change and policy responsiveness stemming
1267 from citizen-led data.
- 1268 • Expansion of real-time, AI-driven forecasting tools for public and policy use.
- 1269 • Inclusive governance models that embed citizen science into urban decision-
1270 making frameworks.

1271 In summary, RI-URBANS illustrates that with the right blend of participatory science,
1272 emerging technologies, and cross-sector collaboration, cities can move toward more
1273 responsive, equitable, and effective air quality management. RI-URBANS lays a
1274 robust foundation for the future of urban air quality monitoring which future projects
1275 should build upon. Continued investment in interdisciplinary research, policy
1276 integration, and public engagement will be critical for scaling these innovations and
1277 delivering cleaner, healthier cities.

1278

1279 **CRedit authorship contribution statement**

1280 **DB:** Methodology, investigation, writing – original draft, **FDP:** Conceptualisation,
1281 project administration, funding acquisition, supervision, **JH:** Investigation, writing –

1282 review & editing, **MVP**: investigation, funding acquisition, writing – review & editing,
1283 **JK**: Investigation, writing – review & editing, **RMH**: Conceptualisation, funding
1284 acquisition, supervision.

1285

1286 **Declaration of competing interest**

1287 FDP is a member of the editorial board of Atmospheric Measurement Techniques.
1288 The other authors declare that they have no known competing financial interests or
1289 personal relationships that could have appeared to influence the work reported in
1290 this paper.

1291

1292 **Acknowledgements**

1293 The study was funded by the European Commission as part of the RI-URBANS
1294 project (grant no. 1010362450) and the Natural Environment Research Council
1295 (NERC grand no. NE/T001879/1).

1296 **Data availability**

1297 This review paper generates no primary data. All data can be acquired via the
1298 referenced papers.

1299

1300 **6. References**

1301 Bagkis, E., Hassani, A., Schneider, P., DeSouza, P., Shetty, S., Kassandros, T.,
1302 Salamalikis, V., Castell, N., Karatzas, K., Ahlawat, A., Khan, J., 2025. Evolving trends
1303 in application of low-cost air quality sensor networks: challenges and future directions.
1304 npj Climate and Atmospheric Science 8, 335, [https://doi.org/10.1038/s41612-025-](https://doi.org/10.1038/s41612-025-01216-4)
1305 [01216-4](https://doi.org/10.1038/s41612-025-01216-4).

1306 Baklanov, A., Smith Korsholm, U., Nuterman, R., Mahura, A., Nielsen, K.P., Sass,
1307 B.H., Rasmussen, A., Zakey, A., Kaas, E., Kurgaanskiy, A., Sørensen, B., González-
1308 Aparicio, I., 2017. Enviro-HIRLAM online integrated meteorology-chemistry
1309 modelling system: strategy, methodology, developments and applications (v7.2).
1310 Geoscientific Model Development, 10 (8), 2971 – 2999, [https://doi.org/gmd-10-2971-](https://doi.org/gmd-10-2971-2017)
1311 [2017](https://doi.org/gmd-10-2971-2017).

1312 Barreira, L. M. F., Helin, A., Aurela, M., Teinilä, K., Friman, M., Kangas, L., Niemi, J.
1313 V., Portin, H., Kousa, A., Pirjola, L., Rönkkö, T., Saarikoski, S., and Timonen, H.,
1314 2021. In-depth characterization of submicron particulate matter inter-annual
1315 variations at a street canyon site in Northern Europe, Atmos. Chem. Phys. 21, 6297–
1316 6314.

1317 Baruah, A., Bousiotis, D., Damayanti, S., Bigi, A., Ghermandi, G., Ghaffarpasand, O.,
 1318 Harrison, R.M., Pope, F.D., 2024. A novel spatiotemporal prediction approach to fill
 1319 air pollution data gaps using mobile sensors, machine learning and citizen science
 1320 techniques. *npj Climate and Atmospheric science*, 7 (310),
 1321 <https://doi.org/10.1038/s41612-024-00859-z>.

1322 Bellini, A., Diémoz, H., Gobbi, G.P., Di Liberto, L., Bracci, A., Barnaba, F., 2025.
 1323 Aerosols in the mixed layer and mid-troposphere from long-term data of the Italian
 1324 Automated Lidar-Ceilometer Network (ALICENET) and comparison with the ERA5
 1325 and CAMS models. *Remote Sensing*, 17(3), 372,
 1326 <https://doi.org/10.3390/rs17030372>.

1327 Bellini, A., Diémoz, H., Di Liberto, L., Gobbi, G.P., Bracci, A., Pasqualini, F., Barnaba,
 1328 F., 2024. ALICENET – an Italian network of automated lidar ceilometers for four-
 1329 dimensional aerosol monitoring: infrastructure, data processing, and applications.
 1330 *Atmospheric Measurement Techniques*, 17, 6119 – 6144,
 1331 <https://doi.org/10.5194/amt-17-6119-2024>.

1332 Bousiotis, D., Ademi Shaqiri, L., Sanghera, D.S., Tinker, D., Pope, F.D., 2025. Low-
 1333 Cost Source Apportionment (LoCoSA) of air pollution – literature review of the state
 1334 of the art. *The Science of The Total Environment*, 998, 180257,
 1335 <https://doi.org/10.1016/j.scitotenv.2025.180257>.

1336 Bousiotis, D., Damayanti, S., Baruah, A., Bigi, A., Beddows, D.C.S., Harrison, R.M.,
 1337 Pope, F.D., 2024. Pinpointing sources of pollution using citizen science and
 1338 hyperlocal low-cost mobile source apportionment. *Environment International*, 193,
 1339 109069, <https://doi.org/10.1016/j.envint.2024.109069>.

1340 Bousiotis, D., Allison, G., Beddows, D.C.S., Harrison, R.M., Pope, F.D., 2023.
 1341 Towards comprehensive air quality management using low-cost sensors for pollution
 1342 source apportionment. *npj Climate and Atmospheric Science*, 6 (122),
 1343 <https://doi.org/10.1038/s41612-023-00424-0>.

1344 Boylan, J.W., Russel, A.G., 2006. PM and light extinction model performance
 1345 metrics, goals, and criteria for three-dimensional air quality models. *Atmospheric*
 1346 *Environment*, 40 (26), 4946 – 4959, <https://doi.org/j.atmosenv.2005.09.087>.

1347 [Cambridge Environmental Research Consultants \(CERC\), 2026. ADMS 6, World](https://www.cerc.co.uk/environmental-software/ADMS-model.html)
 1348 [leading software for modelling industrial air pollution.](https://www.cerc.co.uk/environmental-software/ADMS-model.html)
 1349 <https://www.cerc.co.uk/environmental-software/ADMS-model.html> (last access:
 1350 [8/7/2026](https://www.cerc.co.uk/environmental-software/ADMS-model.html))

1351 Damayanti, S., Bousiotis, D., Baruah, A., Pope, F.D., Harrison, R.M., 2026. Analysing
 1352 multiple metrics of ultrafine particles from personal exposure campaigns with source
 1353 quantification. *Atmospheric Environment*, ATMENV-D-26-00407 (in review).

1354 Deshmukh, P., Kimbrough, S., Krabbe, S., Logan, R., Isakov, V., Baldauf, R., 2020.
 1355 Identifying air pollution source impacts in urban communities using mobile

1356 monitoring. Science of The Total Environment, 715:136979,
 1357 <https://doi.org/10.1016/j.scitotenv.2020.136979>.

1358 de Souza, P.N., 2022. Key concerns and drivers of low-cost air quality sensors use.
 1359 Sustainability, 14(1), 584, <https://doi.org/10.3390/su14010584>.

1360 Di Antonio, L., Beekmann, M., Siour, G., Michoud, V., Cantrell, C., Bauville, A.,
 1361 Bergé, A., Cazaunau, M., Chevallier, S., Cirtog, M., de Brito, J.F., Formenti, P.,
 1362 Gaimoz, C., Garret, O., Gratien, A., Gros, V., Haeffelin, M., Hawkins, L.N., Kotthaus,
 1363 S., Noyalet, G., Pereira, D.L., Petit, J-E., Pronovost, E.D., Riffault, V., Yu, C., Foret,
 1364 G., Doussin, J-F., Di Biagio, C., 2025a. Modelling of atmospheric variability in gas
 1365 and aerosols during the ACROSS campaign 2022 of the greater Paris area:
 1366 evaluation of the meteorology, dynamics and chemistry. Atmospheric Chemistry and
 1367 Physics, 25 (9), 4803 – 4831, <https://doi.org/10.5194/acp-25-4803-2025>.

1368 Di Antonio, L., Di Biagio, C., Formenti, P., Gratien, A., Michoud, V., Cantrell, C.,
 1369 Bauville, A., Bergé, A., Cazaunau, M., Chevallier, S., Cirtog, M., Coll, P., D'Anna, B.,
 1370 de Brito, J.F., De Haan, D.O., Dignum, J.R., Deshmukh, S., Favez, O., Flaud, P-M.,
 1371 Gaimoz, C., Hawkins, L.N., Kammer, J., Language, B., Maisonneuve, F., Močnik, G.,
 1372 Perraudin, E., Petit, J-E., Acharja, P., Poulain, L., Pouyes, P., Pronovost, E.D.,
 1373 Riffault, V., Roundtree, H.I., Shahin, M., Siour, G., Villenave, E., Zapf, P., Foret, G.,
 1374 Doussin, J-F., Beekman, M., 2025b. Aerosol spectral optical properties in the Paris
 1375 urban area and its peri-urban and forested surroundings during summer 2022 from
 1376 ACROSS surface observations. Atmospheric Chemistry and Physics, 25 (5), 3161 –
 1377 3189, <https://doi.org/10.5194/acp-25-3161-2025>.

1378 Di Antonio, L., Di Biagio, C., Foret, G., Formenti, P., Siour, G., Doussin, J-F.,
 1379 Beekmann, M., 2023. Aerosol optical depth climatology from the high-resolution
 1380 MAIAC product over Europe: differences between major European cities and their
 1381 surrounding environments. Atmospheric Chemistry and Physics, 23 (19), 12455 –
 1382 12475, <https://doi.org/10.5194/acp-23-12455-2023>.

1383 [European Centre for Medium-Range eather Forecasts \(ECMRF\), 2026. CAMS:
 1384 Global atmospheric composition forecast data documentation.
 1385 https://confluence.ecmwf.int/spaces/CKB/pages/212454117/CAMS+Global+atmosph
 1386 eric+composition+forecast+data+documentation \(last access: 8/7/2026\)](https://confluence.ecmwf.int/spaces/CKB/pages/212454117/CAMS+Global+atmosph+eric+composition+forecast+data+documentation)

1387 [European Environment Agency \(EEA\), 2024. Harm to human health from air
 1388 pollution in Europe: burden of disease status, 2024. EEA briefing no. 21/2024, ISBN:
 1389 978-92-9480-695-6, https://doi.org/10.2800/3950756.](https://doi.org/10.2800/3950756)

1390 [United States Environmental Protection Agency \(EPA\), 2025. Air quality modelling.
 1391 https://www.epa.gov/air-research/air-quality-modeling. \(last access 16/2/2026\)](https://www.epa.gov/air-research/air-quality-modeling)

1392 [Elomaa, T., Luoma, K., Harni, S., Virkkula, A., Timonen, H., and Petäjä, T., 2025. The
 1393 applicability and challenges of black carbon sensors in monitoring networks, Aerosol
 1394 Research, 3, 293 – 314, https://doi.org/10.5194/ar-3-293-2025.](https://doi.org/10.5194/ar-3-293-2025)

1395
 1396
 1397
 1398
 1399

- Deleted: 4
- Deleted: A
- Deleted: of small-scale
- Deleted: to explore high resolution spatial variability of ambient black carbon
- Deleted: . Discuss
- Deleted: .
- Deleted: 2024
- Deleted: 1
- Field Code Changed

1409 Faherty, T., Raymond, J. E., McFiggans, G., Pope, F.D., 2025. Acute particulate
 1410 matter exposure diminishes executive cognitive functioning after four hours
 1411 regardless of inhalation pathway. *Nature Communications*, 16 (1),
 1412 <https://doi.org/10.1038/s41467-025-56508-3>.

1413 Fritz, S., See, L., Grey, F., 2022. The grand challenges facing environmental citizen
 1414 science. *Frontiers in Environmental Science*, 10:1019628,
 1415 <https://doi.org/10.3389/fenvs.2022.1019628>.

1416 Fry, J.L., Ooms, P., Krol, M., Kerckhoffs, J., Vermeulen, R., Wesseling, J., van den
 1417 Elshout, S., 2025. Effect of street trees on local air pollutant concentrations (NO₂, BC,
 1418 UFP, PM_{2.5}) in Rotterdam, the Netherlands. *Environmental Science: Atmospheres*, 5,
 1419 394, <https://doi.org/10.1039/d4ea00157e>.

1420 Gaydos, T.M., Pinder, R., Koo, B., Fahey, K.M., Yarwood, G., Pandis, S.N., 2007.
 1421 Development and application of a three-dimensional aerosol chemical transport
 1422 model, PMCAMx. *Atmospheric Environment*, 41 (12), 2594 – 2611,
 1423 <https://doi.org/10.1016/j.atmosenv.2006.11.034>.

1424 Giordano, M.R., Malings, C., Pandis, S.N., Presto, A.A., McNeill, V.F., Westervelt,
 1425 D.M., Beekmann, M., Subramanian, R., 2021. From low-cost sensors to high-quality
 1426 data: A summary of challenges and best practices for effectively calibrating low-cost
 1427 particulate matter mass sensors. *J Aerosol Sci* 158, 105833.
 1428 <https://doi.org/10.1016/j.jaerosci.2021.105833>.

1429 González-Romero, A., Escorcia Rico, P., Alastuey, A., Mreno, N., Querol, X.,
 1430 Córdoba Sola, P., 2025. Spatial variability of metal pollution in sands and sandy soils
 1431 of playgrounds and parks in the arcelona metropolitan area: assessing the impact of
 1432 urban and industrial activities. *Air Quality, Atmosphere & Health*,
 1433 <https://doi.org/10.1007/s11869-025-01726-3>.

1434 Hofman, J., Peters, J., Stroobants, C., Elst, E., Baeyens, B., Van Laer, J., Spruyt, M.,
 1435 Van Essche, W., Delbare, E., Roels, B., Cochez, A., Gillijns, E., Van Poppel, M.,
 1436 2022. Air quality sensor networks for evidence-based policy making: Best practices
 1437 for actionable insights. *Atmosphere*, 13(6), 944,
 1438 <https://doi.org/10.3390/atmos13060944>.

1439 Hofman, J., Do, T.H., Qin, X., Bonet, E.R., Philips, W., Deligiannis, N., La Manna,
 1440 V.P., 2022. Spatiotemporal air quality inference of low-cost sensor data: Evidence
 1441 from multiple sensor testbeds. *Environmental Modelling & Software*, 149, 105306,
 1442 <https://doi.org/10.1016/j.envsoft.2022.105306>.

1443 Hofman, J., Panzica La Manna, V., Ibarrola-Ulzurrun, E., Peters, J., Escribano
 1444 Hierro, M., Van Poppel, M., 2023. Opportunistic mobile air quality mapping using
 1445 sensors on postal vehicles: from point clouds to actionable insights. *Frontiers in*
 1446 *Environmental Health*, 2:1232867, <https://doi.org/10.3389/fenvh.2023.1232867>.

1447 Hofman, J., Lazarov, B., Stroobants, C., Elst, E., Smets, I. Van Poppel, M., 2024.
 1448 Portable sensors for dynamic exposure assessment in urban environments: State of
 1449 the science. *Sensors*, 24(17), 5653, <https://doi.org/10.3390/s24175653>.

1450 Holicki, P., 2011. Uncertainty in Integrated Modelling of Air Quality, *Advanced Air*
 1451 *Pollution*. IntechOpen. ISBN: 978-953-307-511-2, <https://doi.org/10.5772/710>.

1452 Idrees, Z., Zheng, L., 2020. Low cost air pollution monitoring systems: A review of
 1453 protocols and enabling technologies. *J Ind Inf Integr* 17, 100123.
 1454 <https://doi.org/10.1016/j.jii.2019.100123>.

1455 Järvi, L., Kurppa, M., Kuuluvainen, H., Rönkkö, T., Karttunen, S., Balling, A.,
 1456 Timonen, H., Niemi, J.V., Pirjola, L., 2023. Determinants of spatial variability of air
 1457 pollutant concentrations in a street canyon network measured using a mobile
 1458 laboratory and a drone. *Science of The Total Environment*, 856(1), 158974,
 1459 <https://doi.org/10.1016/j.scitotenv.2022.158974>.

1460 Järvi, L., Hannuniemi, H., Hussein, T., Junninen, H., Aalto, P., Hillamo, R., Mäkelä, T.,
 1461 Keronen, P., Siivola, E., Vesala, T., and Kulmala, M., 2009. The urban measurement
 1462 station SMEAR III: Continuous monitoring of air pollution and surface-atmosphere
 1463 interactions in Helsinki, Finland, *Boreal Environ. Res.* 14, 86-109.

1464 Johansson, L., Karppinen, A., Kurppa, M., Kousa, A., Niemi, J.V., Kukkonen, J.,
 1465 2022. An operational urban air quality model ENFUSER, based on dispersion
 1466 modelling and data assimilation. *Environmental Modelling & Software*, 105460,
 1467 <https://doi.org/10.1016/j.envsoft.2022.105460>.

1470 Kang, Y., Aye, L., Ngo, T.D., Zhou, J., 2022. Performance evaluation of low-cost air
 1471 quality sensors: A review. *Science of The Total Environment*, 818, 151769,
 1472 <https://doi.org/10.1016/j.scitotenv.2021.151769>.

1473 Karagulian, F., Borowiak, A., Barbieri, M., Kotsev, A., Van Den Broecke, J., Vonk, J.,
 1474 Signorini, J., Gerboles, M., 2020. Calibration of AirSenseEUR boxes during a field
 1475 study in the Netherlands. Technical Report JRC116324, European Commission: Ispra,
 1476 Italy

1477 Kaskaoutis, D.G., Petrinoli, K., Grivas, G., Kalkavouras, P., Tsagkaraki, M.,
 1478 Tavernarakis, K., Papoutsidaki, K., Stavroulas, I., Paraskevopoulou, D., Bougiatioti,
 1479 A., Liakakou, E., Rashki, A., Sotiropoulou, R.E.P., Tagaris, E., Gerasopoulos, E.,
 1480 Mihalopoulos, N., 2024. Impact of peri-urban forest fires on air quality and aerosol
 1481 optical and chemical properties: The case of the August 2021 wildfires in Athens,
 1482 Greece. *Science of The Total Environment*, 907, 168028,
 1483 <https://doi.org/10.1016/j.scitotenv.2023.168028>.

1484 Kerckhoffs, J., Khan, J., Hoek, G., Yuan, Z., Ellermann, T., Hertel, O., Ketzel, M.,
 1485 Jensen, S.S., Maliefste, K., Vermeulen, R., 2022. Mixed-effects modelling framework
 1486 for Amsterdam and Copenhagen for outdoor NO₂ concentrations using
 1487 measurements sampled with Google Street View cars. *Environmental Science &*
 1488 *Technology*, 56, 11, 7174 – 7184, <https://doi.org/10.1021/acs.est.1c05806>.

1493
1494 Kerckhoffs, J., Hofman, J., Khan, J., Adams, M.D., Blanco, M.N., deSouza, P.,
1495 Durant, J.L., Faridi, S., Fruin, S., Hankey, S., Hassanvand, M.S., Hatzopoulou, M.,
1496 Hoek, G., de Hoogh, K., Hudda, N., Kushwaha, M., Marshall, J.D., Minet, L., Patton,
1497 A.P., Petäjä, T., Peters, J., Presto, A.A., Shairsingh, K., Sheppard, L., Simon, M.C.,
1498 Vakacherla, S., Van Ryswyk, K., Van Poppel, M., Vermeulen, R.C.H., Wegener, R.,
1499 Yuan, Z., Amini, H., 2025. Mobile monitoring of air pollution – a position paper on use
1500 cases, good practices, challenges, and opportunities. *Environment International*,
1501 202, 109582, <https://doi.org/10.1016/j.envint.2025.109582>.
1502
1503 Kleemola, E., Marsela, A., Haataja, J., Wu, Y., Rohal, D., Koskinen, P., Harni, S., Li,
1504 D., Timonen, H., Petäjä, T. and Kangasluoma, J., 2024. Integrated platform for
1505 mobile air quality measurements in urban environments, *Proceedings of European*
1506 *Aerosol Conference 2024*, Tampere, Finland.
1507
1508 Kosmopoulos, G., Salamalikis, V., Matrali, A., Pandis, S.N., Kazantzidis, A., 2022.
1509 Insights about the Sources of PM_{2.5} in an Urban Area from Measurements of a Low-
1510 Cost Sensor Network. *Atmosphere* (Basel) 13.
1511 <https://doi.org/10.3390/atmos13030440>.
1512
1513 Kumar, P., Morawska, L., Martani, C., Biskos, G., Neophytou, M., Di Sabatino, S., Bell.,
1514 M., Norford, L., Britter, R., 2015. The rise of low-cost sensing for managing air pollution
1515 in cities. *Environment International*, 75, 199 – 205,
1516 <https://doi.org/10.1016/j.envint.2014.11.019>.
1517
1518 Kushta, J., Georgiou, G.K., Proestos, Y., Christoudias, T., Thunis, P., Savvides, C.,
1519 Papadopoulos, C., Lelieveld, J., 2019. Evaluation of EU air quality standards through
1520 modelling and the FAIRMODE benchmarking methodology. *Air Quality, Atmosphere*
1521 *& Health*, 12, 73 – 86, <https://doi.org/10.1007/s11869-018-0631-z>.
1522
1523 Liu, X., Zhang, X., Wang, R., Liu, Y., Hadiatullah, H., Xu, Y., Wang, T., Bendi, J.,
1524 Adam, T., Schnelle-Kreis, J., Querol, X., 2024. High-precision microscale particulate
1525 matter prediction in diverse environments using a long short-term memory neural
1526 network and street view imagery. *Environment Science & Technology*, 58 (8),
1527 <https://doi.org/10.1021/acs.est.3c06511>.
1528
1529 [Laboratoire de Météorologie Dynamique \(LMD\), 2025. Chimere, Chemistry transport
1530 model v2023r3. Documentation. http://www.lmd.polytechnique.fr/chimere/ \(last
1531 access: 8/7/2026\)](http://www.lmd.polytechnique.fr/chimere/)
1532
1533 Lun Fung, P., Savadkoobi, M., Zaidan, M.A., Niemi, J.V., Timonen, H., Pandolfi, M.,
1534 Alastuey, A., Querol, X., Hussein, T., Petäjä, T., 2024. Constructing transferable and
1535 interpretable machine learning models for black carbon concentrations. *Environment*
1536 *International*, 184, 108449, <https://doi.org/10.1016/j.envint.2024.108449>.
1537
1538 Maison, A., Lugon, L., Park, S-J., Boissard, C., Fauchoux, A., Gros, V., Kalacian, C.,
1539 Kim, Y., Leymarie, J., Petit, J-E., Roustan, Y., Sanchez, O., Squarcioni, A., Valari, M.,
1540 Viatte, C., Vigneron, J., Tuzet, A., Sartelet, K., 2024. Contrasting effects of urban

1535 trees on air quality: From the aerodynamic effects in streets to impacts of biogenic
 1536 emissions in cities. *Science of The Total Environment*, 946, 174116,
 1537 <https://doi.org/10.1016/j.scitotenv.2024.174116>.

1538 Manisalidis, I., Stavropoulou, E., Stavropoulos, A., Bezirtzoglou, E., 2020.
 1539 Environmental and health impacts of air pollution: A review. *Frontiers in Public*
 1540 *Health*, 8:14, <https://doi.org/10.3389/fpubh.2020.00014>.

1541 Mannucci, P.M., Franchini, M., 2017. Health effects of ambient air pollution in
 1542 developing countries. *Int J Environ Res Public Health* 14, 1–8.
 1543 <https://doi.org/10.3390/ijerph14091048>.

1544 Men, Y., Li, J., Liu, X., Li, Y., Jiang, K., Luo, Z., Xiong, R., Cheng, H., Tao, S., Shen,
 1545 G., 2021. Contributions of internal emissions to peaks and incremental indoor PM_{2.5}
 1546 in rural coal use households. *Environmental Pollution* 288, 117753,
 1547 <https://doi.org/10.1016/j.envpol.2021.117753>.

1548 Mehanna, S., Kedad, Z., Chachoua, M., 2022. Completeness assessment and
 1549 improvement in mobile crowd-sensing environments. *SN Computer Science*, 3(3),
 1550 <https://doi.org/10.1007/s42979-022-01104-1>.

1551 Menut, L., Cholakian, A., Pennel, R., Siour, G., Mailler, S., Valari, M., Lugon, L.,
 1552 Meurdesoif, Y., 2024. The CHIMERE chemistry-transport model v2023r1. *Geosci.*
 1553 *Model Dev.*, 17, 5431 – 5457, <https://doi.org/10.5194/gmd-17-5431-2024>.

1554 Morris, R.E., McNally, D.E., Tesche, T.W., Tonnesen, G., Boylan, Brewer, P., 2005.
 1555 Preliminary evaluation of the community multiscale air quality model for 2002 over
 1556 the southeastern United States. *Journal of Air Waste Management Association*, 55,
 1557 1694 – 1708, <https://doi.org/10.1080/10473289.2005.10464765>.

1558 Motlagh, N., H., Lagerspetz, E., Nurmi, P., Li, X., Varjonen, S., Mineraud, J., 2020.
 1559 Toward massive scale air quality monitoring. *Institute of Electrical and Electronics*
 1560 *Engineers Communications Magazine*, 58 (2),
 1561 <https://doi.org/10.1109/mcom.001.1900515>.

1562 Mueller, M.D., Hasenfratz, D., Saukh, O., Fierz, M., Hueglin, C., 2016. Atmospheric
 1563 Environment, 126, 171 – 181, <https://doi.org/10.1016/j.atmosenv.2015.11.033>.

1564 Myriokefalitakis, S., Karl, M., Weiss, K.A., Karagiannis, D., Athanasopoulou, E.,
 1565 Kakouri, A., Bougatioti, A., Liakakou, E., Stavroulas, I., Papangelis, G., Grivas, G.,
 1566 Paraskevopoulou, D., Speyer, O., Mihalopoulos, N., Gerasopoulos, E., 2024.
 1567 Analysis of secondary inorganic aerosols over the greater Athens area using the
 1568 EPISODE-CityChem source dispersion and photochemistry model. *Atmospheric*
 1569 *Chemistry and Physics*, 24 (13), 7815 – 7835, <https://doi.org/acp-24-7815-2024>.

1570 Nalakurthi, N.V.S.R., Abimbola, I., Ahmed, T., Anton, I., Riaz, K., Ibrahim, Q.,
 1571 Banerjee, A., Tiwari, A., Gharbia, S., 2024. Challenges and opportunities in

1572 calibrating low-cost environmental sensors. *Sensors*, 24(11):3650,
1573 <https://doi.org/10.3390/s24113650>.

1574 Nguyen, C.V., Soulhac, L., 2021. Data assimilation methods for urban air quality at
1575 the local scale. *Atmospheric Environment*, 253, 118366,
1576 <https://doi.org/10.1016/j.atmosenv.2021.118366>.

1577 Nicolae, D., Talianu, C., Vasilescu, J., Dandocsi, A.M., Belegante, L., Nemuc, A.,
1578 Toanca, F., Ilie, A., Dandocsi, A.V., Nicolae, S.M., Ciocan, G., Vulturescu, V., Tudose,
1579 O.G., 2025. How does the location of power plants impact air quality in the urban
1580 area of Bucharest. *Atmosphere*, 16(6), 636, <https://doi.org/10.3390/atmos16060636>.

1581 Oyola, OP., Carbone, S., Timonen, H., Torkmahalleh, M., Lindén, J., 2022. Editorial:
1582 Rise of low-cost sensors and citizen science in air quality studies. *Frontiers in*
1583 *Environmental Science*, 10, <https://doi.org/10.3389/fenvs.2022.868543>.

1584 Panahifar, H., Bayat, F., Hussein, T., 2023. Simultaneous use of ground based and
1585 satellite observation to evaluate atmospheric air pollution over Amman, Jordan.
1586 *Atmosphere*, 14(2), 274, <https://doi.org/10.3390/atmos14020274>.

1587 Park, S-J., Lugon, L., Jacquot, O., Kim, Y., Baudic, A., D'Anna, B., Di Antonio, L., Di
1588 Biagio, C., Dugay, F., Favez, O., Gherzi, V., Gratien, A., Kammer, J., Petit, J-E.,
1589 Sanchez, O., Valari, M., Vigneron, J., Sartelet, K., 2025. Population exposure to
1590 outdoor NO₂, black carbon, and ultrafine and fine particles over Paris with multi-scale
1591 modelling down to the street scale. *Atmospheric Chemistry and Physics*, 25 (6), 3363
1592 – 3387, <https://doi.org/10.5194/acp-25-3363-2025>.

1593 Patoulas, D., Florou, K., Pandis, S.N., 2025. Sensitivity of predicted ultrafine
1594 particles size distributions in Europe to different nucleation rate parametrizations
1595 using PMCAMx-UF v2.2. *Geoscientific Model Development*, 18 (4), 1103 – 1118,
1596 <https://doi.org/10.5194/gmd-18-1103-2025>.

1597 Rathbone, C.J., Bousiotis, D., Rose, O.G., Pope, F.D., 2025. Using low-cost sensors
1598 to assess common air pollution sources across multiple residences. *Scientific*
1599 *Reports*, 15:1803, <https://doi.org/10.1038/s41598-025-85985-1>.

1600

1601 Rebeiro-Hargrave, A., Fung, P.L., Varjonen, S., Huertas, A., Sillanpää, S., Luoma, K.,
1602 Hussein, T., Petäjä, T., Timonen, H., Limo, J., Nousiainen, V. and Tarkoma, S., 2021.
1603 City wide participatory sensing of air quality, *Front. Environ. Sci.*
1604 <https://doi.org/10.3389/fenvs.2021.773778>.

1605

1606 Relvas, H., Lopes, D., Armengol, J., M., 2025. Empowering communities:
1607 Advancements in air quality monitoring and citizen engagement. *Urban Climate*,
1608 102344, <https://doi.org/10.1016/j.uclim.2025.102344>.

1609 RI-URBANS, 2025. Expanding the implementation. Applying our approach in all
1610 environments. <https://riurbans.eu/work-package-5/> (last access 21/10/2025),

1611 RI-URBANS, 2024. Guidance documents on measurements & modelling of novel air
 1612 quality pollutants: Urban mapping & citizen science. [https://riurbans.eu/wp-](https://riurbans.eu/wp-content/uploads/2024/11/ENV_GUIDANCE-DOCUMENT_ST13_urban-mapping_citizen_Definitive.pdf)
 1613 [content/uploads/2024/11/ENV_GUIDANCE-DOCUMENT_ST13_urban-](https://riurbans.eu/wp-content/uploads/2024/11/ENV_GUIDANCE-DOCUMENT_ST13_urban-mapping_citizen_Definitive.pdf)
 1614 [mapping_citizen_Definitive.pdf](https://riurbans.eu/wp-content/uploads/2024/11/ENV_GUIDANCE-DOCUMENT_ST13_urban-mapping_citizen_Definitive.pdf) (last access 16/2/2026).
 1615 RI-URBANS, 2022. WP2 Deliverable D13 (D2.5), Description of methodology for
 1616 mobile monitoring and citizen involvement. Horizon 2020 RI-URBANS project.
 1617 Available at: [https://riurbans.eu/wp-content/uploads/2022/10/RI-](https://riurbans.eu/wp-content/uploads/2022/10/RI-URBANS_D13_D2.5.pdf)
 1618 [URBANS_D13_D2.5.pdf](https://riurbans.eu/wp-content/uploads/2022/10/RI-URBANS_D13_D2.5.pdf) (last access 8/2/2026).
 1619 San José, R., Baklanov, A., Sokhi, R.S., Karatzas, K., Perez, J.L., 2008. Air quality
 1620 modelling. Encyclopedia of Ecology, 111-123, [https://doi.org/10.1016/B978-](https://doi.org/10.1016/B978-0080045405-4.00201-9)
 1621 [0080045405-4.00201-9](https://doi.org/10.1016/B978-0080045405-4.00201-9).
 1622 Sartelet, K., Kerckoffs, J., Athanasopoulou, E., Lugon, L., Vasilescu, J., Zhong, J.,
 1623 Hoek, G., Jolly, C., Park, S.-J., Talianu, C., van den Elshout, S., Dugay, F.,
 1624 Gerasopoulos, E., Ilie, A., Kim, Y., Nicolae, D., Harrison, R.M., Petäjä, T., 2025. Air
 1625 pollution mapping and variability over five European cities. Environment
 1626 International, 199, 109474, <https://doi.org/10.1016/j.envint.2025.109474>.
 1627 Sartelet, K., Couvidat, F., Wang, Z., Flageul, C., Kim, Y., 2020. SSH-aerosol v1. 1: A
 1628 modular box model to simulate the evolution of primary and secondary aerosols.
 1629 Atmosphere, 11 (5), 525, <https://doi.org/10.3390/atmos11050525>.
 1630 Savenets, M., Pysarenko, L., Krakovska, S., Mahura, A., Petäjä, T., 2022. Enviro-
 1631 HIRLAM model estimates of elevated black carbon pollution over Ukraine resulted
 1632 from forest fires. Atmospheric Chemistry and Physics, 22 (24), 15777 – 15791,
 1633 <https://doi.org/10.5194/acp-22-15777-2022>.
 1634 Shabbir, M., Saeed, T., Saleem, A., Bhawe, P., Bergin, M., Khokhar, M.F., 2025. A
 1635 paradigm shift: Low-cost sensors for effective air quality monitoring and
 1636 management in developing countries. Environment International, 109521,
 1637 <https://doi.org/10.1016/j.envint.2025.109521>.
 1638 Singh, A.J., D. Ng'ang'a, M. Gatari, A.W. Kidane, Z.A. Alemu, N. Derrick, M.J.
 1639 Webster, S. Bartington, G.N. Thomas, W.R. Avis and F.D. Pope., 2021. Air quality
 1640 assessment in three East African cities using calibrated low-cost sensors with a
 1641 focus on road-based hotspots. *Environmental Research Communications* **3** 075007
 1642 <https://doi.org/10.1088/2515-7620/ac0e0a>
 1643 Siouti, E., Skyllakou, K., Patoulas, D., Athanasopoulou, E., Mihalopoulos, N.,
 1644 Kuenen, J., Pandis, S.N., 2025. High resolution source-resolved PM_{2.5} spatial
 1645 distribution and human exposure in a large urban area. Atmospheric Environment,
 1646 355, 121277, <https://doi.org/10.1016/j.atmosenv.2025.121277>.
 1647 Siouti, E., Skyllakou, K., Kioutsoukis, I., Patoulas, D., Apostolopoulos, I.D.,
 1648 Fouskas, G., Pandis, S.N., 2024. Prediction of the concentration and source

1649 contributions of PM_{2.5} and gas-phase pollutants in an urban area with the SmartAQ
 1650 Forecasting System. *Atmosphere*, 15 (1), 8, <https://doi.org/10.3390/atmos15010008>.
 1651 Siouti, E., Kilafis, K., Kioutsioukis, I. Pandis, S.N., 2023. Simulation of the influence
 1652 of residential biomass burning on air quality in an urban area. *Atmospheric*
 1653 *Environment*, 309, 119897, <https://doi.org/10.1016/j.atmosenv.2023.119897>.
 1654 Siouti, E., Skyllakou, K., Kioutsioukis, I., Patoulas, D., Fouskas, G., Pandis, S.N.,
 1655 2022. Development and application of the SmartAQ high-resolution air quality and
 1656 source apportionment forecasting system for European urban areas. *Atmosphere*, 13
 1657 (10), 1693, <https://doi.org/10.3390/atmos12101693>.
 1658 Talianu, C., Vasilescu, J., Nicolae, D., Ilie, A., Dandocsi, A., Nemuc, A., Belegante,
 1659 L., 2025. High-resolution air quality maps for Bucharest using a mixed-effects
 1660 modelling framework. *Atmospheric Chemistry and Physics*, 25, 4639 – 4654,
 1661 <https://doi.org/10.5194/acp-25-4639-2025>.
 1662 Teinilä, K., Saarikoski, S., Lintusaari, H., Lepistö, T., Marjanen, P., Aurela, M., Hellén,
 1663 H., Tykkä, T., Lampimäki, M., Lampilahti, J., Barreira, L., Mäkelä, T., Kangas, L.,
 1664 Hatakka, J., Harni, S., Kuula, J., Niemi, J.V., Portin, H., Yli-Ojanperä, J., Niemelä, V.,
 1665 Jäppi, M., Lehtipalo, K., Vanhanen, J., Pirjola, L., Manninen, H.E., Petäjä, T.,
 1666 Rönkkö, T., Timonen, H., 2025. Measurements report: Wintertime aerosol
 1667 characterization at an urban traffic site in Helsinki, Finland. *Atmospheric Chemistry*
 1668 *and Physics*, 25, 4907 – 4928, <https://doi.org/10.5194/acp-25-4907-2025>.
 1669 Tuccella, P., Di Antonio, L., Di Muzio, A., Colaiuda, V., Lidori, R., Menut, L., Pitari, G.,
 1670 Raparelli, E., 2025. Modelling the black and brown carbon absorption and their
 1671 radiative impact: The June 2023 intense Canadian Boreal wildfires case study. *JGR*
 1672 *Atmospheres*, 130 (7), <https://doi.org/10.1029/2024JDO42674>.
 1673 Van Den Bossche, J., Peters, J., Verwaren, J., Botteldooren, D., Theunis, J. & De
 1674 Baets, B., 2015. Mobile monitoring for mapping spatial variation in urban air quality:
 1675 Development and validation of a methodology based on an extensive dataset.
 1676 *Atmos. Environ.*, 105, 148-161. <https://doi.org/10.1016/j.atmosenv.2015.01.017>
 1677
 1678 Van Den Bossche, J., Theunis, J., Elen, B., Peters, J., Botteldooren, D., De Boets,
 1679 B., 2016. Opportunistic mobile air pollution monitoring: A case study with city
 1680 wardens in Antwerp. *Atmospheric Environment*, 141, 408 – 421,
 1681 <https://doi.org/10.1016/j.atmosenv.2016.06.063>.
 1682 Van Poppel, M., Peters, J., Vranckx, S., Van Laer, J., Hofman, J., Vandeninden, B.,
 1683 Vanpoucke, C., Lefebvre, W., 2024. Exploring the spatial variability of air pollution
 1684 using mobile BC measurements in a citizen science project: A case study in
 1685 Mechelen. *Atmosphere*, 15(7), 757, <https://doi.org/10.3390/atmos15070757>.
 1686 Van Poppel, M., Peters, J., Levei, E.A., Mărmureanu, L., Moldovan, A., Hoaghia, M-
 1687 A., Varaticeanu, C., Van Laer, J., 2023. Mobile measurements of black carbon:
 1688 Comparison of normal traffic with reduced traffic conditions during COVID-19 lock-

1689 down. Atmospheric Environment, 297, 119594,
 1690 <https://doi.org/10.1016/j.atmosnv.2023.119594>.

1691 Vida, M., Foret, G., Siour, G., Jaffrezo, J-L., Favez, O., Cholakian, A., Cozic, J.,
 1692 Dupont, H., Gille, G., Oppo, S., Zhang, S., Francony, F., Pallares, C., Conil, S., Uzu,
 1693 G., Beekmann, M., 2025. Modelling oxidative potential of atmospheric particle: A 2-
 1694 year study over France. Science of The Total Environment, 967,
 1695 <https://doi.org/10.1016/j.scitotenv.2025.178813>.

1696 Vida, M., Foret, G., Siour, G., Couvidat, F., Favez, O., Uzu, G., Cholakian, A., Conil,
 1697 S., Beekmann, M., Jaffrezo, J-L., 2024. Modelling of atmospheric concentrations of
 1698 fungal spores: a 2-year simulation over France using CHIMERE. Atmospheric
 1699 Chemistry and Physics, 24 (18), 10601 – 10615, [https://doi.org/10.5194/acp-24-](https://doi.org/10.5194/acp-24-10601-2024)
 1700 [10601-2024](https://doi.org/10.5194/acp-24-10601-2024).

1701 Vos, P. E.J., Maiheu, B., Vankerkom, J. Janssen, S. 2013. Improving local air quality
 1702 in cities: to tree or not to tree? Environmental Pollution, 183, 113-22,
 1703 <https://doi.org/10.1016/j.envpol.2012.10.021>.

1704 Wagstrom, K.M., Pandis, S.N., Yarwood, G., Wilson, G.M., Morris, R.E., 2008.
 1705 Development and application of a computationally efficient particulate matter
 1706 apportionment algorithm in a three-dimensional chemical transport model.
 1707 Atmospheric Environment, 42, 5650 – 5659,
 1708 <https://doi.org/10.1016/j.atmosnv.2008.03.012>.

1709 Ward, F., Lowther-Payne, H.J., Halliday, E.C., Dooley, K., Joseph, N., Livesey, R.,
 1710 Moran, P., Kirby, S., Cloke, J., 2022. Engaging communities in addressing air quality:
 1711 a scoping review. Environmental Health 21, 89, [https://doi.org/10.1186/s12940-022-](https://doi.org/10.1186/s12940-022-00896-2)
 1712 [00896-2](https://doi.org/10.1186/s12940-022-00896-2).

1713 Wesseling, J., Hendricx, W., de Ruiter, H., van Ratingen, S., Drukker, D., Huitema,
 1714 M., Schouwenaar, C., Janssen, G., van Aken, S., Smeenk, J.W., Hof, A., Tielemans,
 1715 E., 2021. Assessment of PM_{2.5} exposure during cycle trips in The Netherlands using
 1716 low-cost sensors. Environmental Research and Public Health, 18(11), 6007,
 1717 <https://doi.org/10.3390/ijerph18116007>.

1718 Yuan, Z., Kerckhoffs, J., Hoek, G., Vermeulen, R., 2022. A knowledge transfer
 1719 approach to map long-term concentrations of hyperlocal air pollution from short-term
 1720 mobile measurements. Environmental Science & Technology, 56, 19, 13820 –
 1721 13828, <https://doi.org/10.1021/acs.est.2c05036>.

1722 Yuan, Z., Kerckhoffs, J., Li, H., Khan, J., Hoek, G., Vermeulen, R., 2024. Hypelocal
 1723 air pollution mapping: A scalable transfer learning LUR approach for mobile
 1724 monitoring. Environmental Science & Technology, 58, 14372 – 14383,
 1725 <https://doi.org/10.1021/acs.est.4c06144>.

1726 Zhong, J., Li, Y., Bloss, W.J., Harrison, R.M., 2025. Street-scale black carbon
 1727 modelling over the West Midlands, United Kingdom: Sensitivity test of traffic

1728 emission factor adjustments. Environment International, 196, 109265,
1729 <https://doi.org/10.1016/j.envint.2025.109265>.

1730 Zhong, J., Stocker, J., Cai, X., Harrison, R.M., Bloss, W.J., 2024. Street-scale air
1731 quality modelling over the West Midlands, United Kingdom: Effect of idealised traffic
1732 reduction scenarios. Urban Climate, 55, 101961,
1733 <https://doi.org/10.1016/j.uclim.2024.101961>.

1734 Zhong, J., Harrison, R.M., Bloss, W.J., Visschedjik, A., van der Gon, H.D., 2023.
1735 Modelling the dispersion of particle number concentrations in the West Midlands, UK
1736 using the ADMS-Urban model. Environment International, 181, 108273,
1737 <https://doi.org/10.1016/j.envint.2023.108273>.

1738

