

1 **Reducing False Alarms in Urban Flood Detection: An Enhanced** 2 **NDWI (ENDWI) with Hybrid Max Fusion on Sentinel-2 Data**

3 Abdulrhman M. Almoadi¹.

4 ¹Institute of Earth and Space Science, King Abdulaziz City for Science and Technology (KACST), Riyadh, Saudi Arabia.

5 *Correspondence to:* Abdulrhman M. Almoadi (aalmaadi@kacst.gov.sa)

6

7 **Abstract:** Accurately distinguishing flooded from non-flooded pixels in complex urban environments
8 remains challenging due to spectral confusion in optical data. This study aims to reduce false alarms in urban
9 flood detection by proposing the Enhanced Normalized Difference Water Index (ENDWI), a novel
10 enhancement of NDWI formulated as NDWI divided by the green band, to suppress urban noise and evaluate
11 its performance against seven established water indices. In addition, owing to the extremely narrow dynamic
12 range of raw ENDWI values, a novel Zero-Preserving Split Normalization (Z-Split) technique is introduced
13 to prepare ENDWI for reliable Otsu thresholding and applied exclusively to this index within this study. Z-
14 Split expands the ENDWI histogram while strictly preserving the zero value. The approach was applied to a
15 flash flood event in Al-Lith Governorate, a coastal urban area along the Red Sea in Saudi Arabia, selected as
16 the case study because of its recurrent vulnerability to intense rainfall and rapid-onset flooding. Sentinel-2
17 imagery acquired two days after the event served as the core methodology for this study. Validation was
18 performed using WorldView-4 high-resolution imagery obtained within two days of the event, based on
19 1,262 ground-truth points (559 flooded and 703 non-flooded) generated within polygons to ensure
20 consistency with the Sentinel-2 spatial resolution. Analysis of the raw indices revealed that the Automated
21 Water Extraction Index for shadows (AWEIsh_raw) achieved the highest area under the receiver operating
22 characteristic (ROC) curve (AUC= 0.908), followed by the Normalized Difference Water Index

(NDWI_raw) (0.671) and ENDWI_raw (0.636), positioning ENDWI among the top three performers out of eight evaluated indices. Following Otsu thresholding, ENDWI_otsu achieved the highest precision (79.41%), and the lowest false alarm rate (10.95%) among all individual indices. A novel hybrid maximum fusion of ENDWI_raw and AWEIsh_raw further enhanced results, attaining an overall accuracy of 82.65%, precision of 94.50%, F1-score of 76.73%, and Kappa coefficient of 0.637 after thresholding, with only 21 false positives (false alarm rate= 2.99%). Overall, ENDWI exhibited robust and consistent performance across individual applications, post-thresholding, and hybrid fusion with AWEIsh, establishing it as a reliable and effective tool for accurate urban flood mapping.

31

Keywords: ENDWI; AWEIsh; NDWI; Spectral indices; Urban flood detection; Z-Split normalization.

33

34 **1. INTRODUCTION**

Flooding is defined by the National Oceanic and Atmospheric Administration (NOAA) as the overflow of water onto land that is normally dry (NOAA, 2025). It impacts more people than any other natural hazard and typically occurs due to heavy or prolonged rainfall that overwhelms the soil's absorption capacity as well as the capacities of rivers, streams, and coastal areas. Floods can result from thunderstorms, tropical cyclones, monsoons, snowmelt, or dam failures (NOAA, 2025). The most common types include flash floods, coastal floods, and river floods. Flash floods in urban environments are hazardous, especially at night (Floods | Ready.gov, 2025). Urban flooding is a significant natural hazard triggered by short-term heavy rainstorms or prolonged periods of continuous precipitation that exceed drainage capacity (Wang et al., 2022). It resulted in the loss of 6.8 million human lives globally in the 20th century, and a recent study indicated that floods affected 2.3 billion people between 1995 and 2015 (Singha et al., 2020). Between 1980 and 2009, floods resulted in 539,811 deaths (range: 510,941 to 568,680), 361,974 injuries, and affected over 2.8 billion people, marking floods as the deadliest natural disaster (Doocy et al., 2013). The effects of urban flooding extend

beyond immediate disaster impacts, disrupting daily life, damaging infrastructure, harming economies, and causing loss of life (Flooding | US EPA, 2025). Economically, between 1970 and 2020, urban floods caused an average of US\$25.5 billion in damages, encompassing both insured and uninsured losses (Kundzewicz et al., 2014). With climate change driving more extreme weather and cities continuing to grow rapidly, the frequency and severity of urban flooding are expected to increase, creating even greater risks for communities in the future (Hirabayashi et al., 2013). These situations, involving human and economic losses, are likely to escalate, prompting organizations and governments to develop rapid and effective urban management plans. Such plans should aim to reduce risks in flood-prone areas, address and respond to rapidly emerging hotspots in near real-time, and assess damage.

Remote sensing instruments can determine the extent of flooded areas in both open and complex environments by utilizing their spectral wavelength ranges. Historically, the first Landsat-1 images were used during the 1973 floods on the Mississippi River, USA, demonstrating the potential of satellites for large-scale flood mapping (J-P. Schumann, 2024). Since then, multispectral data have been widely employed for flood observation, damage assessment, and mapping (Albertini et al., 2022). Various methods for water segmentation and flooded area mapping using multispectral satellite images have been documented in the literature. McFeeters (1996) proposed the Normalized Difference Water Index (NDWI), a widely applicable index that uses green and near-infrared (NIR) bands to distinguish between land and water bodies (McFeeters, 1996). In a study by Özelkan (2020), NDWI was applied using Landsat-8 OLI data in the Athisar Dam Lake area of Çanakkale, Turkey, to analyze the efficiency of three NDWI models in detecting water bodies and to compare their accuracies at 15m and 30m resolutions. The study found that NDWI was the most accurate in distinguishing water bodies, with data at 15m resolution yielding better results than those at 30m resolution (Özelkan, 2020). Ten years after McFeeters (1996) proposed NDWI, the Modified Normalized Difference Water Index (MNDWI) was developed by Xu (2006) to improve the extraction of flooded areas in complex environments. Albertini et al. (2022) tested MNDWI in various global flood-prone areas (e.g., urban, agricultural, and coastal) using Landsat and Sentinel-2 sensors with spatial resolutions of approximately 10–

30 m for medium- and high-resolution imagery. Their findings highlight MNDWI's superior performance over NDWI for flood mapping, achieving high overall accuracies (OA up to 97%) by better recognizing mixed pixels, turbid water, and algae/vegetation. MNDWI excelled in agricultural (crops), forested, and artificial/urban surface contexts, with median OA values higher than NDWI across categories and reduced errors in shadows or built-up areas (Albertini et al., 2022). Similarly, the Automated Water Extraction Index (AWEI), developed by Feyisa et al. (2014), offers two variants: Automated Water Extraction Index without shadow consideration (AWEInsh), and with shadow consideration (AWEIsh). Nonetheless, subsequent studies primarily employed threshold techniques to separate water from non-water pixels when using these indices (Jiang et al., 2020; Tan et al., 2023)

Synthetic Aperture Radar (SAR) is widely used for flood mapping because it can operate under all weather conditions and at any time of day. However, urban areas present significant challenges, including complex building-induced scattering (such as double- or triple-bounce effects), geometric distortions, and similar backscatter signatures between water and dry surfaces (Amitrano et al., 2024). Conversely, multispectral optical datasets are particularly effective under cloud-free conditions, provided this criterion is met.

Over the past five years, deep learning approaches have been employed to precisely extract boundaries between flooded and non-flooded areas. For example, the study by (Bersabe and Jun, 2025) utilized spatial data layers from geographical information systems (GIS) datasets representing various flood conditioning factors, such as topography, land use/land cover, soil type, drainage, and hydrological and urban infrastructure data. These data were analyzed on a 30m grid using machine learning models, including Logistic Regression, Random Forest, and Support Vector Machines (SVMs), to predict urban pluvial flood susceptibility in Seoul, South Korea. The results emphasized the crucial role of drainage factors in urban flood susceptibility, advancing the understanding of pluvial flood dynamics. These findings support comprehensive flood risk mapping to guide planning, insurance, and evacuation strategies. In another example, (Stateczny et al., 2023) applied a novel deep hybrid model for flood prediction (DHMFP) with a combined Harris Hawks Shuffled Shepherd Optimization (CHHSSO)-based training algorithm, using

97 satellite images with spatial resolutions ranging from 10 to 30 m in Kerala, India—an urban region affected
98 by drainage issues during the 2018 floods. The results showed sensitivity of 93.48%, specificity of 98.29%,
99 accuracy of 94.98%, false negative rate of 0.02%, and false positive rate of 0.02%. The proposed DHMFP–
100 CHHSSO outperformed baseline models in sensitivity (0.932), specificity (0.977), accuracy (0.952), false
101 negative rate (0.0858), and false positive rate (0.036). Although the promising results of using deep learning
102 in urban flood studies are evident, challenges remain, including high computational requirements, the need
103 for labeled training datasets to address urban complexities, and the time-intensive nature of processing
104 phases.

105 In summary, multispectral remote sensing data offers a practical and effective solution for applications
106 such as rapid disaster response, damage assessment, and long-term urban planning and management. The
107 proposed enhancement builds upon the widely used NDWI by incorporating a calibration step that divides
108 by the green band, thereby improving the differentiation of water from urban features. This modification is
109 particularly advantageous because most satellite sensors and low-flying unmanned aerial vehicles (UAVs)
110 platforms operating beneath cloud cover routinely acquire red, green, blue, and NIR bands, while short-wave
111 infrared (SWIR) bands—required by several existing indices—are less commonly available and more costly.
112 Therefore, this approach remains accessible and practical for end-users.

113 To address these limitations, the present study introduces the Enhanced Normalized Difference Water
114 Index (ENDWI), systematically evaluates its performance against seven established water indices using
115 Sentinel-2 imagery from a flash flood event, and validates the results with high-resolution reference data
116 derived from WorldView-4. Additionally, a novel hybrid fusion method is proposed to further reduce false
117 positives. The remainder of this paper is organized as follows: Section 2 describes the study area and data;
118 Section 3 presents the methodology; Section 4 reports the results; Section 5 discusses the findings and their
119 implications; and Section 6 concludes the paper and outlines directions for future research.

2. STUDY AREA AND SATELLITE DATA USED

Al-Lith Governorate, situated along the Red Sea coast in western Saudi Arabia Fig. 1(a, b), was selected as the case study area to evaluate the proposed ENDWI and hybrid max fusion approach. This region features a typical arid landscape, with steep wadis draining from the eastern highlands toward lowland urban settlements, creating a setting particularly vulnerable to flash flooding during rare but intense rainfall events (Elsebaie et al., 2023). The urban fabric of Al-Lith comprises a mix of residential buildings, paved roads, open spaces, scattered agricultural patches, and bare soil areas, land covers that often complicate optical flood detection due to spectral similarities among water, shadows, and built-up surfaces.

On 23 November 2018, heavy rainfall in the upstream catchment of Wadi Al-Lith triggered the partial breach of an earthen retaining dam (Ministry of Interior - General Directorate of Civil Defense, 2018), releasing a surge of floodwater that reached the downstream urban areas of Al-Lith Governorate within approximately four hours, marking the initial peak of the flash flood event. The flooding continued to escalate over the following hours, submerging roadways, vacant lots, and low-lying areas, with the crest extending into the early morning of 24 November and causing widespread water pooling and soil saturation. On 25 November, additional heavy precipitation prolonged the inundation, sustaining water levels above 1.7 m in several urban sectors. Satellite imagery acquired four to five days later effectively captured these sequential flood impacts, including stagnant water accumulations in urban depressions, sediment-clogged drainage channels, and saturated soils, highlighting the event's progressive effects on infrastructure and the built environment Fig. 1(b, c).

To analyze the flood conditions, we employed complementary multispectral imagery from two satellite sources (Table 1). The high-resolution WorldView-4 data, with multispectral bands pan-sharpened to approximately 0.31 m and acquired on 27 November 2018, provided detailed insights into localized inundation patterns and structural damage. This was supplemented by Sentinel-2 imagery at 10m resolution in the visible and NIR bands, captured on 28 November 2018, which offered broader contextual coverage

under clear atmospheric conditions. Both were obtained four to five days after the initial dam breach on 23 November, with the main flood peak extending into the early hours of 24 November, as detailed in the Local Civil Defense report (Ministry of Interior - General Directorate of Civil Defense, 2018). These datasets also recorded the continued effects of subsequent rainfall and ongoing submersion on 25 November (Table 1), during which elevated water levels remained prominent in Al-Lith's urban areas (Fig. 2) (Elkarim, 2020). By retaining visible signatures of residual surface water and moistened terrain, these images provided an ideal resource for evaluating the performance of the proposed new spectral water index, along with eight spectral water indices used in this study, including the proposed ENDWI and the following seven: (NDWI, MNDWI, AWEIsh, AWEInsh, WI, LSWI, and SWI). Detailed descriptions and equations for all indices are provided in the Methodology section.

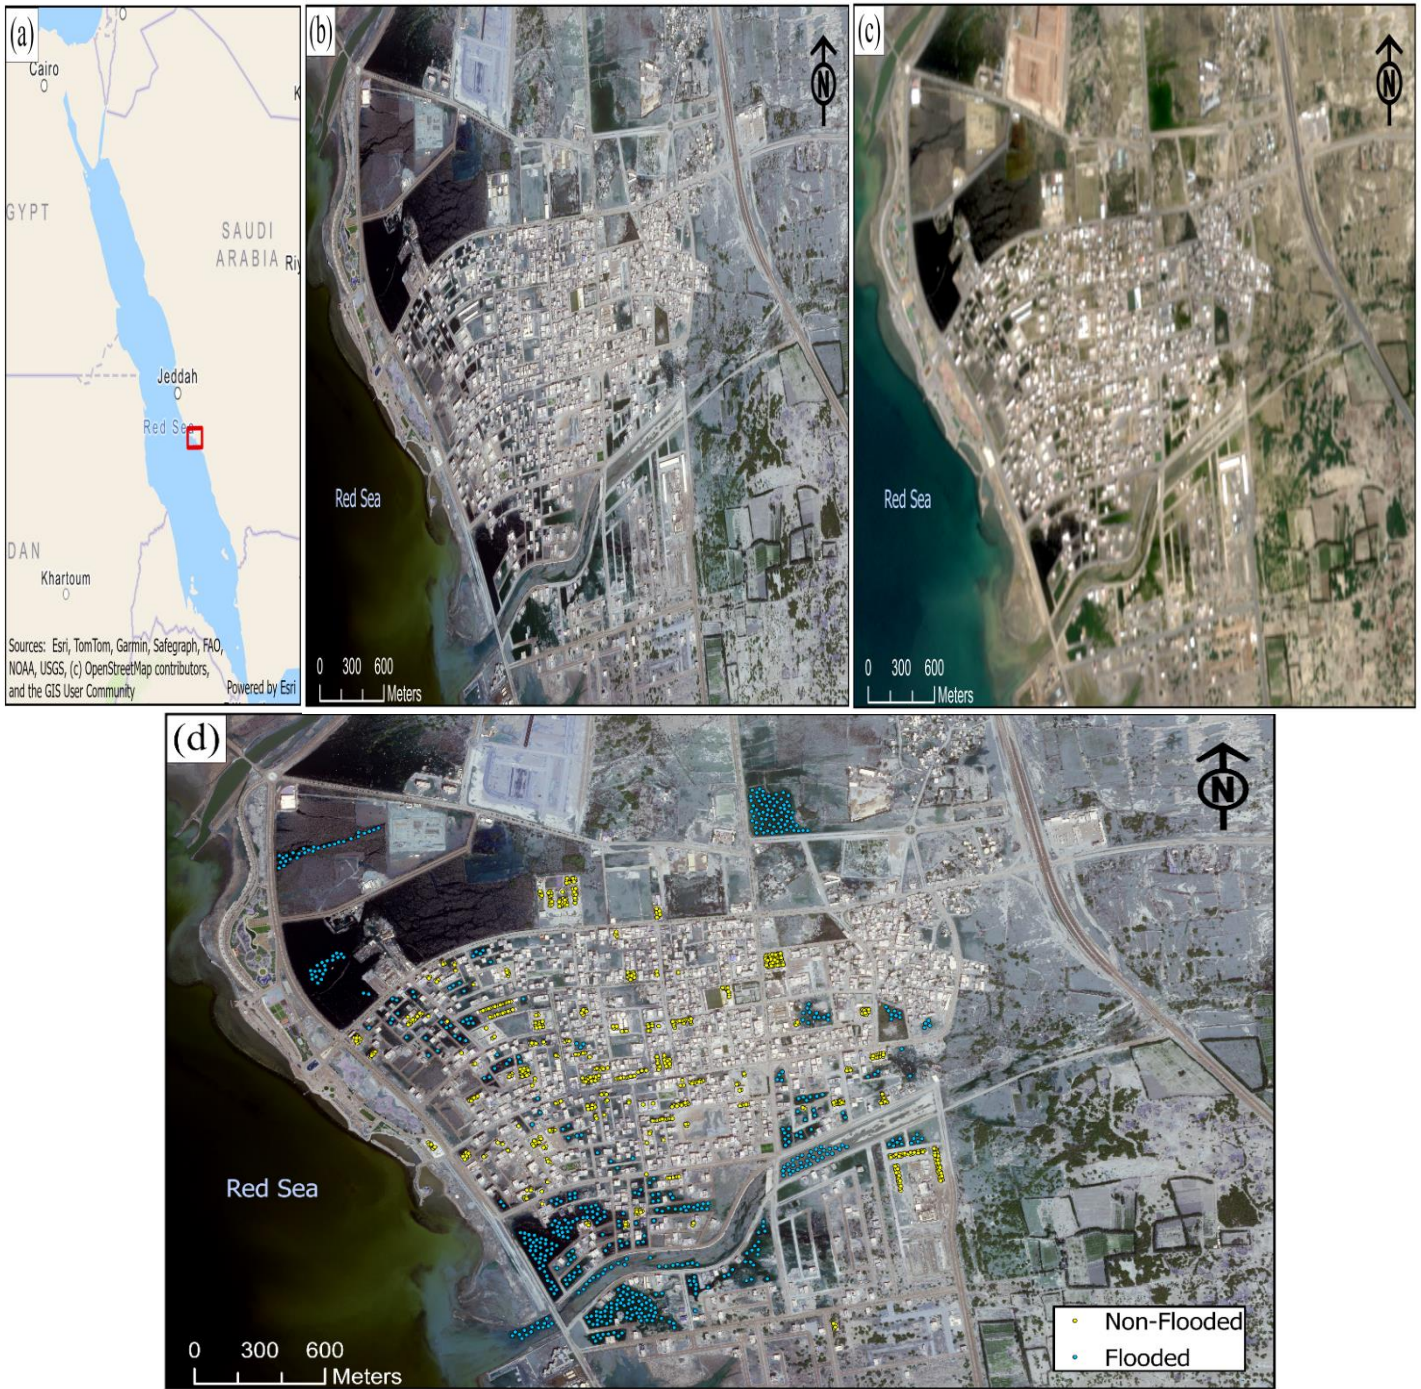


Fig. 1. Overview of the study area along the Red Sea coast, Saudi Arabia. (a) Location map with the study area marked by a red box. (b) High-resolution WorldView-4 image (0.31 m) of the study area, acquired on 27 November 2018. (c) Sentinel-2 image (10 m) acquired on 28 November 2018. (d) Distribution of ground reference points overlaid on the WorldView-4 image (yellow:

166

non-flooded; blue: flooded; total of 1,262 points).



Fig. 2. Floods in Al-Lith Governorate on 25 November 2018 (Elsebaie et al., 2023).

167

168

169

170

Table 1. Characteristics of the flood event and remotely sensed datasets employed.

Dataset	Acquisition Date	Spatial Resolution	Purpose
Flash Flood Event (peak inundation)	23-24 November 2018	—	Event reference timing: intense rainfall and partial dam breach (Ministry of Interior - General Directorate of Civil Defense, 2018).
Flash Flood effects (continued inundation/effects)	25 November 2018	—	Continued heavy rainfall and flood flow affected(Elsebaie et al., 2023; Ministry of Interior - General Directorate of Civil Defense, 2018).
WorldView-4	27 November 2018	0.31 m	Generation of ground reference points (validation)
Sentinel-2	28 November 2018	10 m	Methodology for calculations and evaluations employed in this study

171

3. METHODOLOGY

3.1 Data Pre-processing and Validation Point Generation

The Sentinel-2 imagery used in this study was a Level-2A product, providing atmospherically corrected surface reflectance data processed by the European Space Agency (ESA). The WorldView-4 image was acquired as an ortho-ready product, with radiometric and basic geometric corrections already applied by the provider (King Abdulaziz City for Science and Technology (KACST), 2018).

Both datasets were previously reprojected using ArcGIS Pro to the same projected coordinate system: World Geodetic System (WGS) 1984 / Universal Transverse Mercator (UTM) Zone 37N. To ensure greater accuracy, overlay consistency was evaluated through a careful, manual, swipe-based visual inspection, during which the Sentinel-2 image was swiped over the WorldView-4 image at comparable zoom levels to verify geometric alignment (Samela et al., 2022). This assessment relied on stable, high-contrast features, including major road intersections, building outlines, and the distinctive Red Sea coastline. The method proved fully sufficient, delivering the required spatial correspondence for reliable water index calculation, flood extent extraction, and validation against ground reference points.

The process began with the manual digitization of polygons to delineate clearly identifiable flooded zones (e.g., standing water in streets, low-lying residential areas, muddy ground, drainage channels, and inundated vegetation patches) and non-flooded zones (e.g., dry roads, building rooftops, and elevated ground). Polygons within the same class were then merged using the Dissolve tool to remove fragmentation and produce larger contiguous areas.

A 10 m inward buffer was applied to the merged polygons to eliminate edge pixels potentially affected by mixed spectral signatures or minor geometric offsets.

Finally, stratified random points were automatically generated within the buffered polygons using ArcGIS Pro. To ensure balanced representation between the two classes and adequate spatial distribution across the

195 study area, a total of 1,262 reference points were produced (559 flooded and 703 non-flooded), Fig. (1d),
196 providing a suitable dataset for the accuracy assessment of the water indices.

197 *3.2 Spectral Indices Calculation*

198 To assess the effectiveness of water indices in detecting urban floods, with a particular focus on quantifying
199 false alarm rates due to spectral confusion with built-up structures, this study computed eight indices,
200 including the newly proposed ENDWI, using Sentinel-2 Level-2A imagery to generate flood maps. Sentinel-
201 2 was selected for its 10 m spatial resolution in visible and NIR bands, as well as its atmospherically corrected
202 surface reflectance data, which enable reliable index application and comparative evaluation in complex
203 urban settings.

204 Validation was conducted using 1,262 ground reference points—559 representing flooded areas and 703
205 representing non-flooded areas—derived from high-resolution WorldView-4 imagery (0.31 m resolution)
206 through a semi-automated process that combined manual polygon delineation with stratified random point
207 generation. This approach allowed precise control over class representation and spatial distribution within
208 the urban landscape, while leveraging the detailed visual interpretability afforded by the very high-resolution
209 imagery. The resulting substantial sample size ($n = 1,262$), concentrated within a compact study area of
210 approximately $3.4 \text{ km} \times 5.3 \text{ km}$ ($\approx 18 \text{ km}^2$), yielded an exceptionally high validation density, thereby
211 enhancing the robustness and confidence of the reported results.

212 Preliminary experiments with various band combinations, conducted through iterative trial and error,
213 showed that raw ENDWI maps offered improved separation of inundated zones and reduced interference
214 from impervious surfaces and shadows. These initial visual findings, observed during the analysis of the
215 November 2018 flash flood event in Al-Lith, directly informed the selection of established indices for
216 systematic comparison and the development of the ENDWI index itself.

217 The classic NDWI, proposed by McFeeters (1996), is defined as shown in Eq. (1):

$$NDWI = \frac{Green - NIR}{Green + NIR} \quad (1)$$

where Green corresponds to Sentinel-2 Band 3 (B3) and NIR to Band 8 (B8). While NDWI effectively delineates open water by exploiting the strong NIR absorption and green reflectance of water surfaces, its primary limitation in urban environments is the spectral similarity between water and built-up land in these two bands, as both reflect green light more than NIR, causing NDWI to produce false positive values over impervious surfaces (Xu, 2006; McFeeters, 1996). This spectral confusion is the primary source of false alarms in optical urban flood detection. Motivated by the observed potential of the green band to further suppress urban noise — given its comparatively higher reflectance over impervious surfaces such as rooftops and asphalt relative to flooded pixels — The ENDWI, proposed in this study as an enhancement of the NDWI, is formulated as shown in Eq. (2):

$$ENDWI = \frac{NDWI}{Green} \quad (2)$$

Leveraging the previous understanding of NDWI performance in flood mapping, the spectral rationale for ENDWI's false alarm reduction lies in the differential ratio between NDWI and the Green band across surface types. While both water and built-up surfaces exhibit similar green band reflectance, as they reflect green light more than NIR (Xu, 2006; McFeeters, 1996), their NDWI values differ substantially due to water's strong NIR absorption. Water bodies, by strongly absorbing NIR radiation, produce markedly higher NDWI values, whereas built-up surfaces such as rooftops and asphalt — which reflect both green and NIR energy — yield comparatively lower NDWI values. When NDWI is divided by the green band, this fundamental difference in NIR absorption behaviour between surface types becomes the driving force of the suppression. Consequently, water pixels retain proportionally greater index values, while non-water urban surfaces experience a stronger attenuation effect. This selective suppression mechanism drives ENDWI's ability to reduce false alarms in complex built-up environments. To complete the comparative framework, the

238 remaining six indices are described below. The MNDWI, modified from the NDWI by Xu (2006), is defined
 239 as shown in Eq. (3):

$$\text{MNDWI} = \frac{\text{Green} - \text{SWIR}}{\text{Green} + \text{SWIR}} \quad (3)$$

240 where SWIR corresponds to Sentinel-2 Band 11 (B11).

241 The AWEInsh, proposed by Feyisa et al. (2014), is defined as shown in Eq. (4):

$$\begin{aligned} \text{AWEInsh} = & \text{Blue} + 2.5 \times \text{Green} - 1.5 \times (\text{NIR} + \text{SWIR1}) - \\ & 0.25 \times \text{SWIR2} \end{aligned} \quad (4)$$

242 The AWEIsh, proposed by Feyisa et al. (2014), is defined as shown in Eq. (5):

$$\begin{aligned} \text{AWEIsh} = & 4 \times (\text{Green} - \text{SWIR1}) - (0.25 \times \text{NIR} + 2.75 \times \\ & \text{SWIR2}) \end{aligned} \quad (5)$$

243 The Water Index (WI), proposed by Penueles et al. (, 1997), is defined as shown in Eq. (6):

$$\text{WI} = \frac{\text{Green} + \text{Red}}{\text{NIR} + \text{SWIR}} \quad (6)$$

244 The Sentinel Water Index (SWI), introduced by Jiang et al. (2020), is expressed in Eq. (7):

$$\text{SWI} = \frac{\text{Green} - \text{SWIR1}}{\text{Green} + \text{SWIR1}} \quad (7)$$

245 The Land Surface Water Index (LSWI), developed by Xiao et al. (2002), is given in Eq. (8):

$$\text{LSWI} = \frac{\text{NIR} - \text{SWIR}}{\text{NIR} + \text{SWIR}} \quad (8)$$

246 All indices were calculated per pixel using raster operations in GIS software, yielding raw index maps for
247 initial visual analysis as shown in Fig. 3. While all raw index maps exhibited visually discriminable patterns
248 of flooded and non-flooded areas, the binary classification of ENDWI via Otsu thresholding required an
249 additional preprocessing stage due to its near-zero value clustering, as described in the following section.

250 3.3 Zero-Preserving Split Normalization (Z-Split)

251 Most raw spectral indices derived from optical satellite data are inherently bipolar, typically yielding values
252 within the range of $[-1, +1]$. This was consistent with the indices evaluated in this study; for instance, NDWI
253 ranged from -0.523 to $+0.322$ and MNDWI from -0.493 to $+0.326$ in the study area, with the remaining
254 indices similarly distributed within this bipolar range. ENDWI, however, represents a notable exception: its
255 raw values exhibited an extremely narrow dynamic range concentrated near zero, spanning approximately
256 -0.000412 to $+0.000150$ — a compression exceeding three orders of magnitude. This is a direct consequence
257 of the green band division, which collapses the resulting quotient toward zero regardless of surface type.
258 Despite this extreme compression, the relative contrast between flooded and non-flooded pixels is preserved
259 — a reflection of the differential NIR absorption described above — making flooded areas visually
260 discriminable in the raw ENDWI image (Fig. 4).

261 However, this near-zero clustering poses a fundamental challenge for Otsu's thresholding algorithm (Otsu,
262 1979), which requires a clearly separable bimodal distribution to identify a reliable threshold. To address this
263 limitation, a novel normalization technique, herein introduced as Zero-Preserving Split Normalization (Z-
264 Split), was developed and applied exclusively to ENDWI before Otsu thresholding. Z-Split independently
265 normalizes the positive and negative components of the index while strictly preserving zero as the natural
266 boundary between water and non-water pixels. Let X denote the set of raw ENDWI values, where $X^+ = \{x \in$
267 $X : x > 0\}$ and $X^- = \{x \in X : x < 0\}$. The ENDWI_zsplit transformation is defined as shown in Eq. (9):

268

$$ENDWI_{zsplit} = \begin{cases} \frac{x - \min(X^+)}{\max(X^+) - \min(X^+)} & \text{if } x > 0 \\ 0 & \text{if } x = 0 \\ \frac{x - \min(X^-)}{\max(X^-) - \min(X^-)} - 1 & \text{if } x < 0 \end{cases} \quad (9)$$

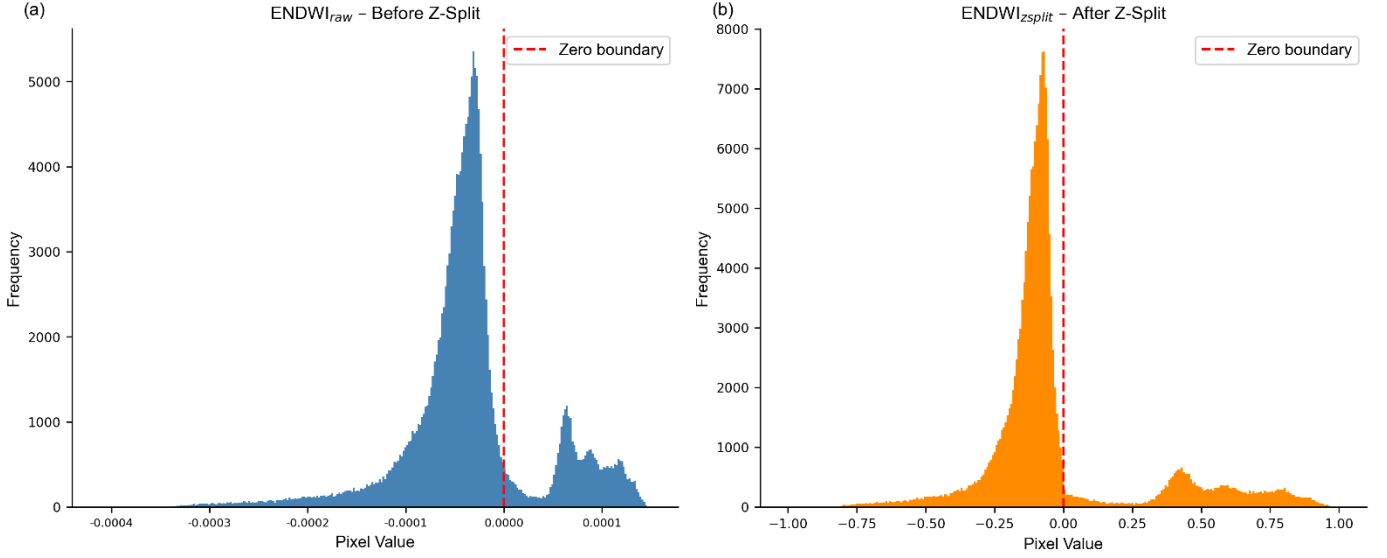


Fig. 3. Histogram of ENDWI raw values before (a) and after (b) Zero-Preserving Split Normalization (Z-Split). The red dashed line indicates the zero boundary. The narrow dynamic range in (a) spanning approximately -0.0004 to $+0.00015$ is expanded to $[-1, 1]$ in (b), producing a clearly separable bimodal distribution suitable for Otsu thresholding.

Z-Split maps positive values to $[0, 1]$ and negative values to $[-1, 0]$, while zero remains unchanged. The expanded dynamic range produces a clearly separable bimodal histogram, enabling Otsu's method to identify a reliable threshold between flooded and non-flooded pixels Fig. (3b). Z-Split was applied exclusively to ENDWI because its near-zero clustering arises from its unique formulation (NDWI divided by the Green band), rather than from the input scale — other indices retained sufficiently wide dynamic ranges for stable Otsu thresholding without additional normalization. Importantly, simple scaling by a constant factor (e.g., dividing by 10,000) does not resolve this issue, as the compressed distribution structure is preserved regardless of scale, and the zero boundary is displaced under conventional normalization — rendering automatic thresholding unreliable.

285 Z-Split addresses these challenges through three mathematically guaranteed properties: (1) zero is strictly
286 preserved as the natural spectral boundary between water and non-water pixels; (2) positive and negative
287 components are independently normalized to $[0, 1]$ and $[-1, 0]$ respectively, expanding the dynamic range
288 without distorting the relative contrast between surface classes; and (3) all output values are constrained to
289 $[-1, +1]$, ensuring scale-independent comparability with other bipolar spectral indices. These properties were
290 confirmed for both scaled integer and surface reflectance inputs, yielding consistent and stable thresholding
291 results.

292 It is important to note that Z-Split is not an intrinsic component of ENDWI itself — the raw index retains
293 full visual discriminability between flooded and non-flooded pixels, as evidenced by its AUC and the clear
294 tonal contrast observed in the raw imagery (Fig. 4). Z-Split is applied solely as a preprocessing step to ensure
295 reliable automatic thresholding in subsequent processing stages, and its broader applicability to any bipolar
296 spectral index exhibiting near-zero-value clustering represents a promising direction for future investigation.

297 *3.4 Thresholding Using Otsu's Method*

298 After obtaining the raw index maps, binary water/non-water classifications were generated for each of the
299 eight indices using automated thresholding. Otsu's method was selected for this purpose (Otsu, 1979), as it is
300 a widely adopted, non-parametric technique in remote sensing applications for extracting water bodies (Jiang
301 et al., 2020; Tan et al., 2023). This algorithm determines the optimal threshold by maximizing inter-class
302 variance, providing an objective and reproducible solution that is especially useful in complex urban
303 environments where manual thresholding may introduce subjectivity.

304 Otsu's method performs effectively when the index histogram exhibits reasonable bimodality, which was
305 observed for most of the tested indices—particularly those where water pixels cluster at lower values. For
306 each raw index, the Otsu threshold was calculated independently from the full-scene histogram. Pixels were
307 then classified as flooded if their index values fell on the expected water side of the threshold, with the

308 decision direction (greater than or less than) adjusted according to the polarity of each index. This process
309 yielded binary flood maps (Fig. 4) suitable for direct quantitative comparison with the reference points.

310 To evaluate classification performance, standard accuracy metrics were computed, including Overall
311 Accuracy, Precision, Recall, F1-Score, and Kappa coefficient. The False Alarm Rate (FAR) was adopted as
312 the primary metric for assessing urban noise suppression, defined as follows (Eq. 10):

$$313 \quad FAR = \frac{FP}{FP+TN} \quad (10)$$

314 where FP denotes non-flooded pixels incorrectly classified as flooded, and TN denotes non-flooded
315 pixels correctly classified as such, with FP + TN representing the total number of actual non-flooded pixels.

316 The application of Otsu thresholding generally enhanced classification sharpness and improved overall
317 accuracy across the indices. Nevertheless, residual false positives persisted in challenging areas, such as
318 shadowed built-up zones, even for stronger raw performers like AWEIsh. In contrast, ENDWI demonstrated
319 notable resilience to these urban artifacts after thresholding, achieving a lower false alarm rate despite its
320 slightly lower raw AUC. This complementary performance—where AWEIsh provided superior general
321 separability while ENDWI excelled in suppressing urban-induced errors (Table 2) motivated the
322 development of a simple hybrid maximum fusion strategy, detailed in the next subsection, to leverage the
323 respective strengths of both indices.

324 *3.5 Hybrid Max Fusion*

325 Building on observations from raw and thresholded indices—particularly the complementary strengths of
326 AWEIsh_raw (which provides the strongest overall separation) and ENDWI_raw (effective at suppressing
327 urban false positives) (Tables 2 and 3), we developed a simple hybrid approach to combine their advantages.
328 The goal was to create a fused index that retains high water detection capability while further reducing
329 spectral confusion in built-up and shadowed areas, without introducing complex parameters or requiring

330 additional data. The hybrid fusion was implemented as a straightforward pixel-wise maximum operation
331 between the raw values of ENDWI and AWEIsh, as formulated in Eq. (11):

$$332 \quad \text{Hybrid}_{\text{raw}} = \max (\text{ENDWI}_{\text{raw}}, \text{AWEIsh}_{\text{raw}}) \quad (11)$$

333 This “max” rule was chosen because both indices are formulated such that higher values generally indicate
334 a greater likelihood of water (or reduced non-water interference in urban contexts). By taking the maximum
335 value at each pixel, the fusion preserves the strongest water signal from either index while mitigating their
336 weaknesses: AWEIsh contributes robust shadow handling and broad separation, whereas ENDWI helps
337 reduce false positives from dark impervious surfaces through its emphasis on the green band.

338 The resulting hybrid raw map was then subjected to the same Otsu thresholding process described
339 previously, producing a final binary classification. This two-step workflow—fusion followed by automated
340 thresholding—kept the method computationally efficient and fully reproducible, making it practical for rapid
341 flood mapping applications.

342 Although simple in design, this hybrid strategy proved effective, as preliminary visual inspections revealed
343 cleaner urban flood extents with notably fewer isolated false positives compared to individual indices. A
344 comprehensive quantitative evaluation, including overall accuracy and false alarm rates, is presented in the
345 Results section.

346 **4. RESULTS**

347 *4.1 Performance of Individual Indices (Raw Values)*

348 The discriminatory power of the eight raw indices was first assessed using ROC analysis on 1,262
349 validation points. AUC values provided a threshold-independent measure of separation, complemented by
350 the mean index values for flooded and non-flooded classes, their differences, and t-test statistics (Table 2).

351 AWEIsh_raw emerged as the top performer, followed by NDWI_raw and the proposed ENDWI_raw
 352 (Table 2). All three indices achieved AUC values greater than 0.6, with highly significant class separation (p
 353 < 0.001), confirming their visual discriminability in raw index imagery before binary thresholding (Fig. 4).

354 Table 2. Separation performance of all eight raw spectral indices based on 1,262 ground-truth validation points.

Index	AUC	Mean Flooded Pixels	Mean Non-Flooded Pixels	Difference	t-stat	p-value
AWEIsh_raw	0.908	-0.714	-1.339	0.625	35.199	0.000
NDWI_raw	0.671	0.013	-0.027	0.040	9.837	0.000
ENDWI_raw	0.636	0.075	-0.098	0.173	7.799	0.000
AWEInsh_raw	0.415	0.056	0.027	-0.083	-7.819	0.000
WI_raw	0.309	0.903	0.991	-0.088	-11.722	0.000
SWI_raw	0.294	-0.104	-0.026	-0.078	-13.656	0.000
MNDWI_raw	0.294	-0.104	-0.026	-0.078	-13.656	0.000
LSWI_raw	0.104	-0.117	0.001	-0.118	-30.907	0.000

355

356 The superior AUC of AWEIsh_raw can be attributed to its explicit incorporation of shadow terms, which
 357 helps maintain a clear separation in complex urban environments. NDWI_raw performed reliably, as
 358 expected from a well-established baseline. Although ENDWI_raw ranked third in AUC, its mean values
 359 exhibited a distinctive pattern—higher flooded means driven by green band amplification—suggesting
 360 particular resilience against urban spectral confusion. These complementary characteristics motivated a
 361 focused analysis of these three indices in the subsequent thresholding and fusion stages.

362 4.2 Performance After Otsu's Thresholding

363 Applying Otsu's thresholding to the raw indices produced binary classifications, which were evaluated
 364 using standard accuracy metrics—including overall accuracy, precision, recall, F1-score, Kappa coefficient,
 365 and false alarm rate—based on the same validation points (Table 3).

366 Thresholding generally improved practical usability, with ENDWI_otsu standing out for its balance of high
 367 precision and low false alarm rates. Specifically, ENDWI_otsu achieved the highest precision (79.41%) and
 368 the lowest false alarm rate (10.95%) among all individual indices, nearly half that of AWEIsh_otsu (20.91%)
 369 and approximately one-third of NDWI_otsu (37.84%) while maintaining competitive overall performance.
 370 AWEIsh_otsu retained strong recall but exhibited slightly more false positives in shadowed urban areas, and

371 NDWI_otsu demonstrated solid intermediate performance (Table 3). The FAR was computed for each index
372 against the same 703 actual non-flooded validation points, as detailed in Eq. (12):

$$\begin{aligned} 373 \quad FAR_{ENDWI} &= \frac{77}{77+626} = \frac{77}{703} = 10.95\% \\ 374 \quad FAR_{AWEIsh} &= \frac{147}{147 + 556} = \frac{147}{703} = 20.91\% \\ FAR_{NDWI} &= \frac{266}{266 + 437} = \frac{266}{703} = 37.84\% \end{aligned} \quad (12)$$


375
376
377
378

True-Color of S2


Index- -Raw

Otsu-Thresholded



NDWI

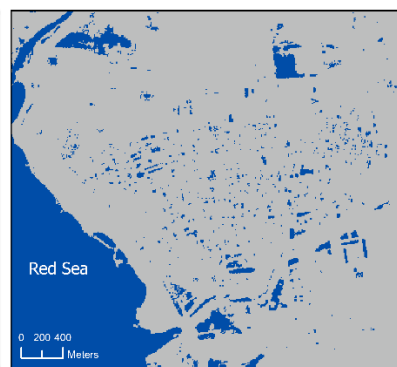



ENDWI

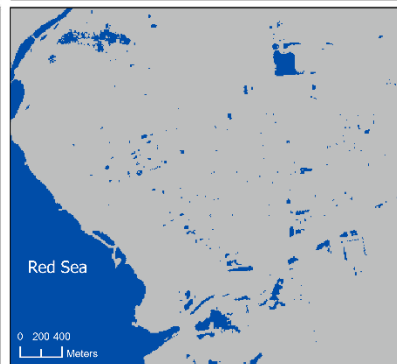

MNDWI

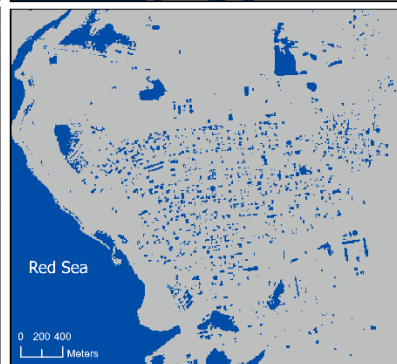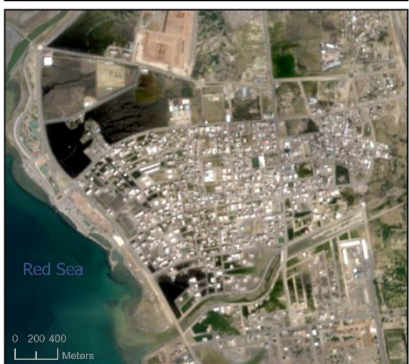

AWEIsh

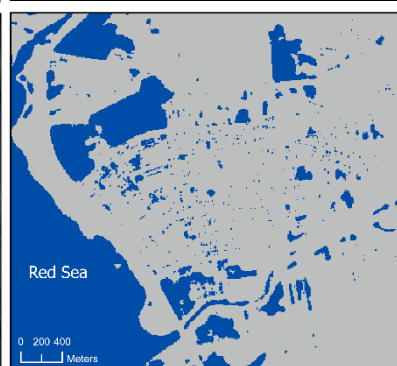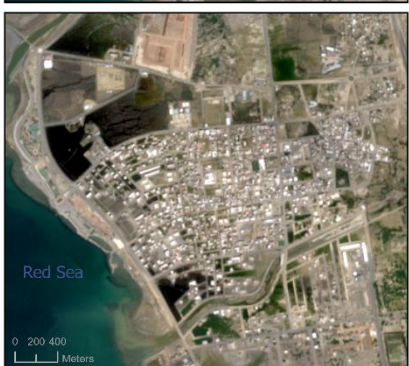

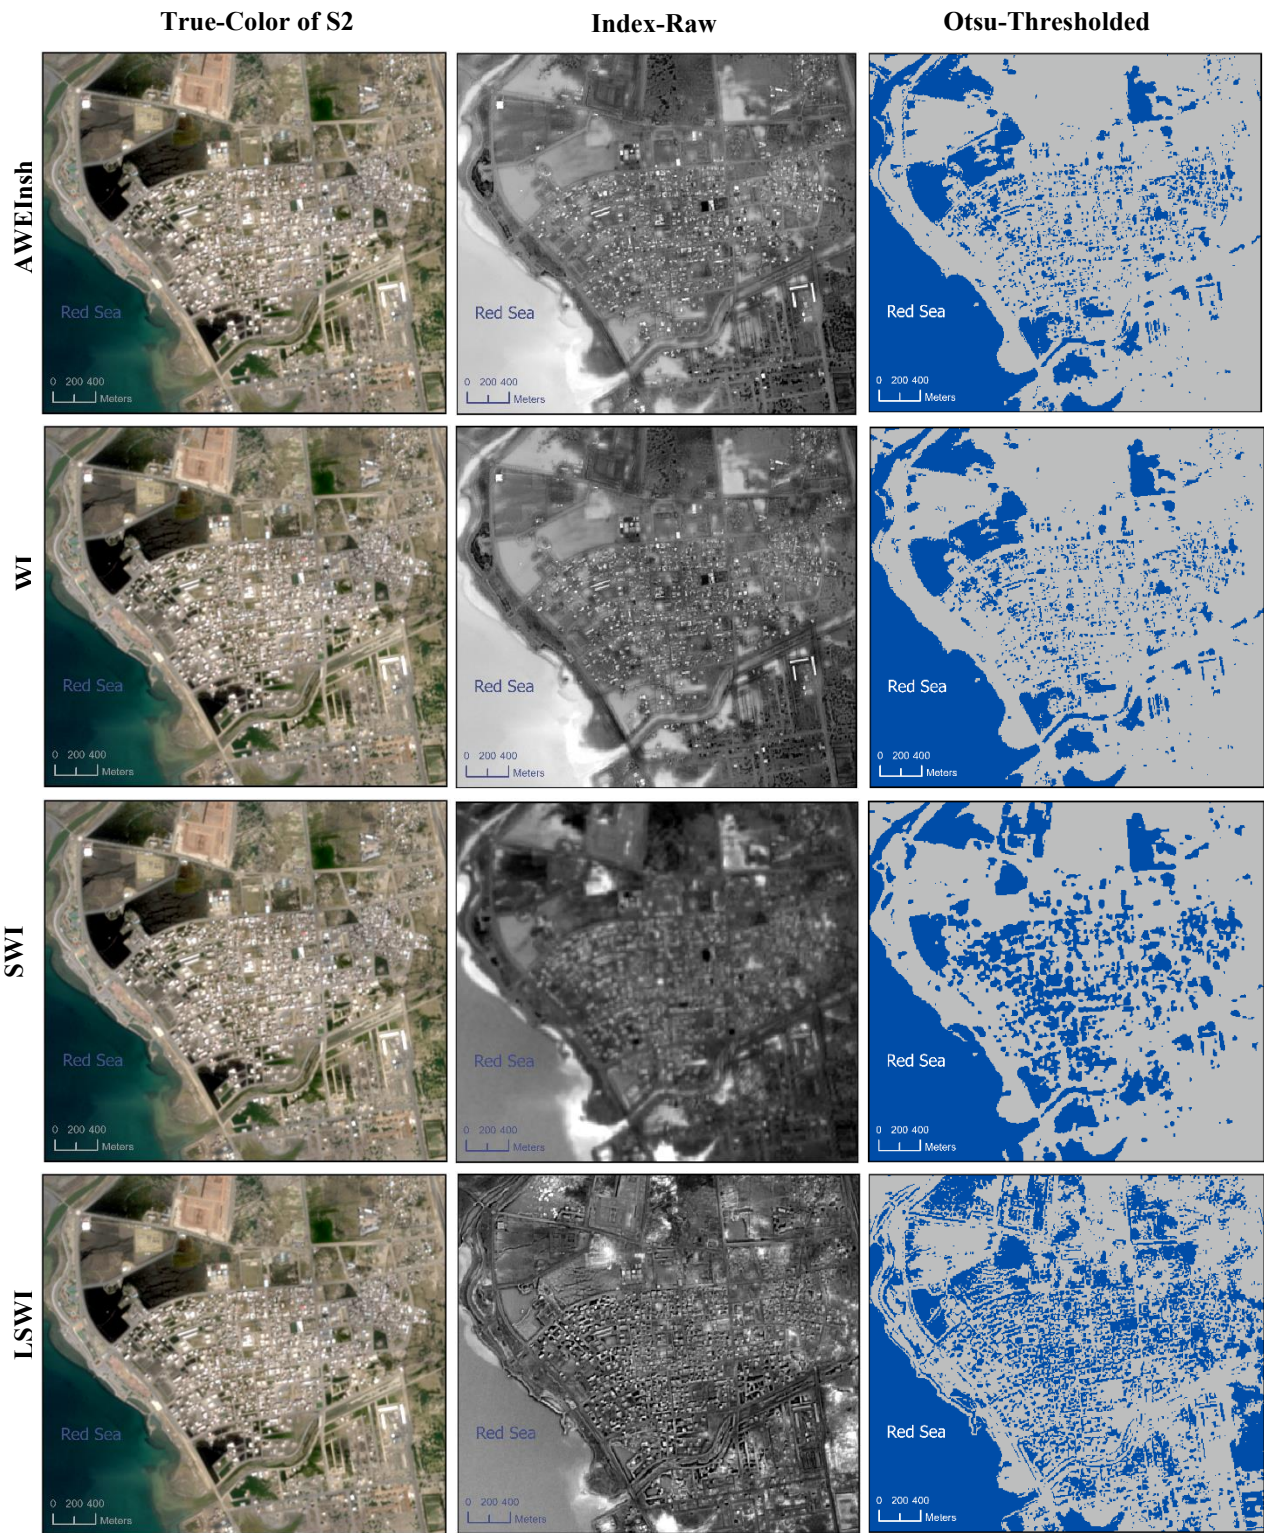


Fig. 4. Sentinel-2 true-color RGB composite (left column, acquired two days after peak inundation, showing persistent dark water signatures on surfaces), raw spectral water index maps (middle column,

grayscale), and corresponding Otsu-thresholded binary flood maps (right column, blue = flooded) derived from the eight evaluated indices for the Al-Lith urban flash flood event.

Table 3. Accuracy metrics for the top three performing indices using Otsu thresholding, based on 1,262 ground-truth validation points.

Index	Overall Accuracy (%)	Precision (%)	Recall (%)	F1-Score (%)	Kappa	False Alarm Rate (%)
ENDWI_otsu	73.14	79.41	53.13	63.67	0.437	10.95
AWEIsh_otsu	81.14	76.10	83.72	79.73	0.622	20.91
NDWI_otsu	61.09	55.67	59.75	57.64	0.217	37.84

A visual comparison of the binary maps (Fig. 4) further highlights ENDWI_otsu's clearer delineation of urban flood extents, with fewer erroneous water pixels detected on dark roofs or roads.

4.3 Performance of Hybrid Max Fusion

The hybrid max fusion of ENDWI_raw and AWEIsh_raw, followed by Otsu thresholding, yielded the most effective overall classification. capitalizing on AWEIsh's broad separation strength and ENDWI's ability to suppress urban false positives. The fused approach achieved an overall accuracy of 82.65%, precision of 94.50%, F1-score of 76.73%, and a Kappa coefficient of 0.637, with a false alarm rate of just 2.99% (21 false positives), representing a substantial reduction compared to individual indices (Fig. 5 and Table 4).

The hybrid max fusion of ENDWI_raw and AWEIsh_raw yielded the most effective overall classification, capitalizing on AWEIsh's broad separation strength and ENDWI's ability to suppress urban false positives. The fused approach achieved an overall accuracy of 82.65%, precision of 94.50%, F1-score of 76.73%, and a Kappa coefficient of 0.637. The false alarm rate was reduced to just 2.99%, as detailed in Eq. (13):

$$FAR_{Hybrid} = \frac{21}{21 + 682} = \frac{21}{703} = 2.99\% \quad (13)$$

representing a reduction of 73% relative to ENDWI_otsu and 86% relative to AWEIsh_otsu (Table 4).

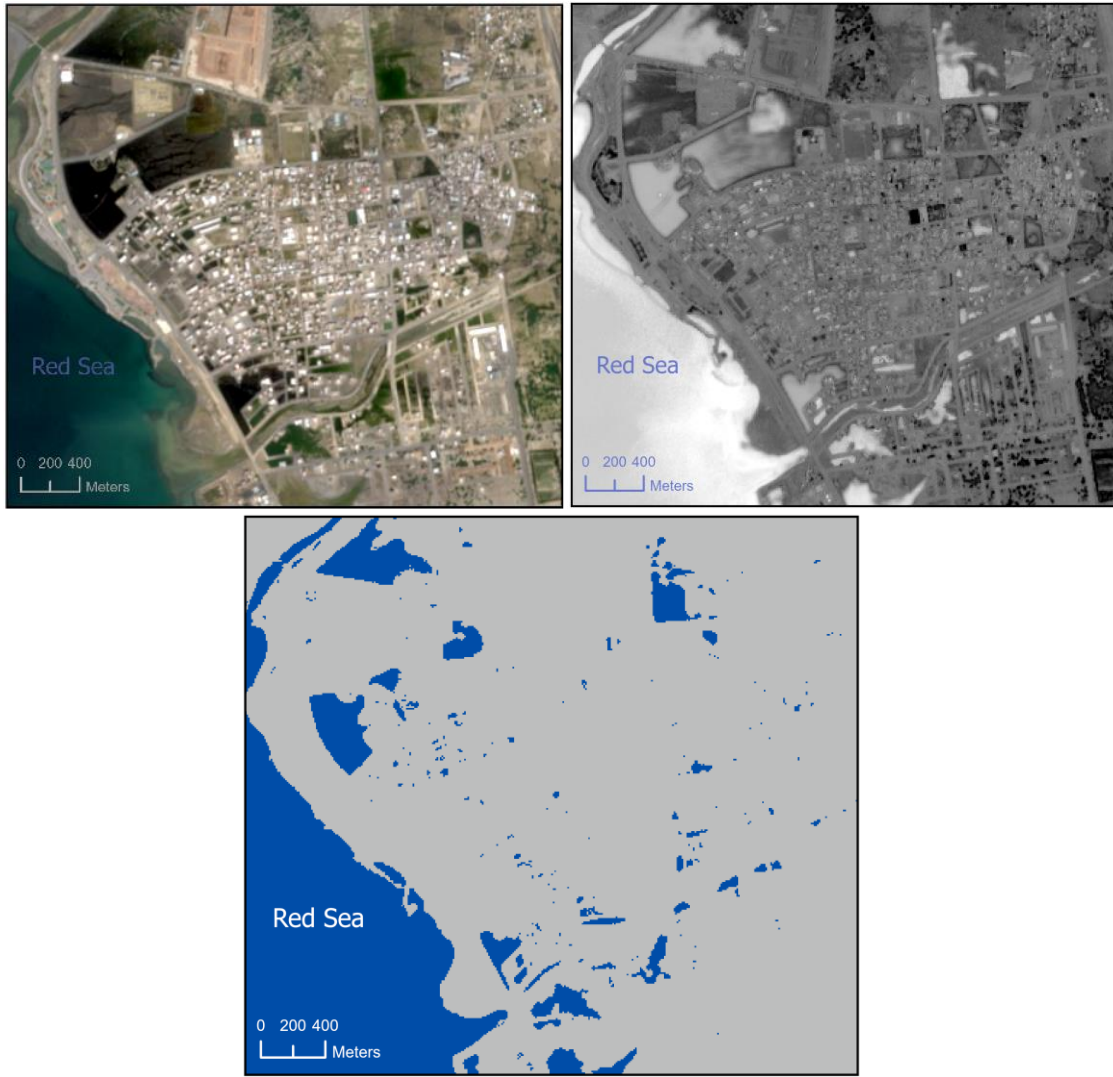


Fig. 5. Sentinel-2 true-color image post-flood (top-left); raw hybrid maximum fusion map of ENDWI and AWEIsh (top-right, grayscale normalized); and Otsu-thresholded binary flood map from the hybrid approach (bottom, blue = flooded) for the Al-Lith urban flash flood event. The hybrid method significantly reduces false alarms in built-up areas compared to individual indices.

Table 4. Performance comparison of the hybrid max fusion approach versus the top individual indices, based on 1,262 ground-truth validation points.

Method	Overall Accuracy	Precision	F1-Score	Kappa	False	False Alarm
Hybrid Max	82.65	94.5	76.73	0.64	21	2.99
ENDWI_otsu	73.14	79.4	63.67	0.437	77	10.95
AWEIsh_otsu	81.14	76.10	80	0.622	147	20.91

Corresponding flood extent maps (Fig. 5) illustrate the hybrid method’s superior ability to suppress noise in built-up areas while accurately preserving true inundation features, closely matching high-resolution reference imagery.

These results demonstrate that the proposed ENDWI, both as a standalone method and in hybrid form, represents a practical advancement in reducing false alarms in urban optical flood mapping.

5. DISCUSSION

The results highlight the persistent challenge of false alarms in optical urban flood mapping and demonstrate how targeted enhancements to established water indices can yield meaningful improvements. Among the individual indices tested, AWEIsh_raw confirmed its reputation as a strong performer in complex environments due to its built-in shadow suppression terms. This finding aligns with previous studies showing that AWEIsh often outperforms simpler indices, such as NDWI, in scenes with varied urban surfaces (Stateczny et al., 2023; Tesfaye and Breuer, 2024). NDWI_raw, serving as the long-standing baseline (Miura et al., 2025), provided reliable separation, consistent with its widespread application in Sentinel-2 analyses.

The proposed ENDWI, although ranking slightly lower in raw AUC, proved particularly valuable post-thresholding and in fusion applications. Its formulation—dividing NDWI by the Green band—effectively suppresses responses from dark impervious surfaces and shadows that plague NIR- or SWIR-dependent indices, while preserving the discriminative contrast of genuinely flooded pixels through their comparatively lower green reflectance. The Green band’s role in enhancing contrast for turbid or urban-influenced water has been documented in previous studies involving hyperspectral, multispectral, and UAV sensors (Yan et al., 2017; Zhao et al., 2024). Our empirical results extend this advantage to medium-resolution multispectral data, directly contributing to ENDWI_otsu’s superior precision and markedly lower false alarm rate compared to alternative indices.

The hybrid max fusion of ENDWI_raw and AWEIsh_raw represented the most significant advancement, achieving the highest overall accuracy and dramatically reducing false positives to below 3%. Taking the

pixel-wise maximum, this approach leveraged the complementary strengths of both indices: AWEIsh’s broad discriminatory power and ENDWI’s targeted suppression of urban noise. Such rule-based fusion is notably more efficient than deep learning or multi-sensor integrations (e.g., Sentinel-1 SAR combined with Sentinel-2), which, while powerful, demand greater computational resources and labeled training data—resources are often scarce during rapid disaster response.

From a cost–benefit perspective, ENDWI offers a compelling trade-off between implementation complexity and performance gain. The index relies exclusively on the Green and NIR bands — identical to NDWI — requiring no additional sensors, hyperspectral data, or computational overhead beyond a single division operation, which can be executed within seconds using standard raster analysis tools. Despite this minimal added complexity, ENDWI_otsu reduced the false alarm rate from 37.84% (NDWI_otsu) to 10.95 %, while the hybrid fusion further reduced it to 2.99 % — representing a 15-fold improvement over NDWI at negligible computational cost. This efficiency is particularly relevant for operational flood response, where processing speed and data accessibility are critical constraints. Our method's simplicity and effectiveness align with recent efforts to refine index combinations for flood extent mapping, yet it stands out for its focus on minimizing false alarms in purely optical, cloud-free urban scenarios.

These gains are encouraging for operational use, particularly in arid or semi-arid cities prone to flash flooding, where timely and accurate inundation maps are crucial for damage assessment and evacuation planning. However, the study relies on a single post-event image pair from one flood event, limiting its generalizability across different seasons, water turbidity levels, and vegetation phenology. Visual inspection of an independent flood event reported in Ahmadi et al. (2026) suggested lower false alarm rates for ENDWI compared to NDWI, providing preliminary evidence of transferability; however, formal multi-event validation remains a subject for future work. Additionally, reliance on cloud-free conditions remains a constraint of optical approaches, and the 10-meter resolution of Sentinel-2 may fail to detect narrow urban water features that higher-resolution data can capture.

469 Future work could explore adaptive weighting in the fusion step, the incorporation of additional bands
470 (e.g., red-edge for vegetation masking), or the extension to time-series analysis for multi-event validation.
471 Integrating ENDWI into ensemble frameworks with SAR data might further enhance all-weather capabilities.
472 Overall, this work underscores that modest, interpretable modifications to classic indices can substantially
473 mitigate urban spectral challenges, offering a practical tool for near-real-time flood monitoring using freely
474 available Sentinel-2 imagery.

475 **6. CONCLUSION**

476 This study addressed the long-standing issue of false alarms in optical urban flood mapping by introducing
477 the ENDWI — a novel enhancement of NDWI formulated as NDWI divided by the Green band — alongside
478 a Zero-Preserving Split Normalization technique (Z-Split) and a simple hybrid max fusion with AWEIsh,
479 applied to Sentinel-2 imagery from the 2018 Al-Lith flash flood event.

480 Raw index evaluation confirmed AWEIsh as the strongest separator, with ENDWI showing promising
481 resilience to urban spectral confusion through its differential green band suppression mechanism. Post-Otsu
482 thresholding highlighted ENDWI's superior precision and lower false alarm rate, while the hybrid fusion
483 delivered the best overall performance: 82.65% accuracy, 94.50% precision, and a false alarm rate of just
484 2.99%, a substantial reduction in erroneous water detections compared to individual indices.

485 A key methodological contribution of this study is the herein introduced Z-Split normalization, which
486 addresses the near-zero value clustering inherent to ENDWI's formulation by independently normalizing
487 positive and negative components while strictly preserving the zero boundary. This technique enabled
488 reliable Otsu thresholding for ENDWI and holds broader potential for any bipolar spectral index exhibiting
489 similar distributional characteristics.

490 These improvements stem from the complementary design of the fused approach, which combines broad
491 discriminatory power with targeted noise suppression in a lightweight, parameter-free manner. The
492 method's reliance on freely available Sentinel-2 data and standard GIS operations makes it particularly

suitable for rapid, operational flood response in data-limited or resource-constrained settings. From a cost–benefit standpoint, ENDWI requires no additional sensors or data beyond what NDWI already uses, yet achieves a 15-fold reduction in false alarm rate compared to NDWI when combined with hybrid fusion — at negligible computational cost.

Although demonstrated on a single well-documented flood event, visual inspection of an independent flood event reported in Ahmadi et al. (2026) suggested lower false alarm rates for ENDWI compared to NDWI, providing preliminary evidence of transferability. Future extensions could include formal multi-event validation, integration with SAR data for all-weather capability, or adaptive fusion weights to handle varying water turbidity and urban surface conditions. In summary, ENDWI, Z-Split, and the proposed hybrid method offer a practical and effective tool for more reliable urban inundation mapping, contributing to reduced false alarms and better-informed disaster management decisions.

Acknowledgements

The author thanks the European Space Agency (ESA) for providing open-access Sentinel-2 data. Sincere gratitude is extended to King Abdulaziz City for Science and Technology (KACST) for generously supplying the high-resolution WorldView-4 images to support scientific research. Appreciation is also expressed to the Saudi Civil Defense Directorate for their valuable flood report.

Disclosure Statement

The author reports there are no competing interests to declare.

Funding

This research received no external funding.

Generative AI Disclosure Statement

During the preparation of this work, the author used Grok 4.1 (developed by xAI) solely to enhance the English language, with the author reviewing and editing. All analytical content and scientific responsibility remain entirely with the author.

Data Availability Statement

The Sentinel-2 Level-2A imagery used in this study, including the specific product ID: *S2B_MSIL2A_20181128T075249_N0500_R135_T37QFC_20230727T143835.SAFE* (accessed on 08 May 2024) is freely available from the Copernicus Open Access Hub at <https://browser.dataspace.copernicus.eu/>. The raw WorldView-4 imagery used in this study was provided by King Abdulaziz City for Science and Technology (KACST). Restrictions apply to the availability of this data, which was used with agreement for this study. It can be requested directly by email Serv.sri@kacst.gov.sa or through the official KACST portal at <https://kacst.gov.sa/en/>. Reasonable requests for the data may also be directed to the author. The Z-Split (Zero-Preserving Split Normalization) equation, Sample images, the copyright statement, Ground truth points, and metadata for WorldView-4 satellite imagery are publicly available in the GitHub repository "endwi" at <https://github.com/aalmoadi/endwi> under the MIT License. This repository additionally includes the processed data and all figures presented in this study.

REFERENCES

- Albertini, C., Gioia, A., Iacobellis, V., and Manfreda, S.: Detection of Surface Water and Floods with Multispectral Satellites, *Remote Sens.*, 14, 6005, <https://doi.org/10.3390/rs14236005>, 2022.
- Amitrano, D., Di Martino, G., Di Simone, A., and Imperatore, P.: Flood Detection with SAR: A Review of Techniques and Datasets, *Remote Sens.*, 16, 656, <https://doi.org/10.3390/rs16040656>, 2024.
- Bersabe, J. T. and Jun, B.-W.: The Machine Learning-Based Mapping of Urban Pluvial Flood Susceptibility in Seoul Integrating Flood Conditioning Factors and Drainage-Related Data, *ISPRS Int. J. Geo-Inf.*, 14, 57, <https://doi.org/10.3390/ijgi14020057>, 2025.
- Doocy, S., Daniels, A., Murray, S., and Kirsch, T. D.: The Human Impact of Floods: a Historical Review of Events 1980-2009 and Systematic Literature Review, *PLoS Curr.*, <https://doi.org/10.1371/currents.dis.f4deb457904936b07c09daa98ee8171a>, 2013.
- Elkarim, A. A.: INTERGRATION REMOTE SENSING AND HYDROLOGIC, HYDROULIC MODELLING ON ASSESSMENT FLOOD RISK AND MITIGATION: AL-LITH CITY, KSA, *Int. J. GEOMATE*, 18, <https://doi.org/10.21660/2020.70.68180>, 2020.
- Elsebaie, I. H., Kawara, A. Q., and Alnahit, A. O.: Mapping and Assessment of Flood Risk in the Wadi Al-Lith Basin, Saudi Arabia, *Water*, 15, 902, <https://doi.org/10.3390/w15050902>, 2023.

544 Feyisa, G. L., Meilby, H., Fensholt, R., and Proud, S. R.: Automated Water Extraction Index: A new technique for surface water
545 mapping using Landsat imagery, *Remote Sens. Environ.*, 140, 23–35, <https://doi.org/10.1016/j.rse.2013.08.029>, 2014.

546 Hirabayashi, Y., Mahendran, R., Koirala, S., Konoshima, L., Yamazaki, D., Watanabe, S., Kim, H., and Kanae, S.: Global flood
547 risk under climate change, *Nat. Clim. Change*, 3, 816–821, <https://doi.org/10.1038/nclimate1911>, 2013.

548 Jiang, W., Ni, Y., Pang, Z., He, G., Fu, J., Lu, J., Yang, K., Long, T., and Lei, T.: A NEW INDEX FOR IDENTIFYING
549 WATER BODY FROM SENTINEL-2 SATELLITE REMOTE SENSING IMAGERY, *ISPRS Ann. Photogramm. Remote Sens.*
550 *Spat. Inf. Sci.*, V-3–2020, 33–38, <https://doi.org/10.5194/isprs-annals-V-3-2020-33-2020>, 2020.

551 J-P. Schumann, G.: Breakthroughs in satellite remote sensing of floods, *Front. Remote Sens.*, 4, 1280654,
552 <https://doi.org/10.3389/frsen.2023.1280654>, 2024.

553 King Abdulaziz City for Science and Technology (KACST), N. C. for R. S. T. (NCRST): WorldView Satellite Imagery,
554 <https://doi.org/https://kacst.gov.sa/en>, 2018.

555 Kundzewicz, Z. W., Kanae, S., Seneviratne, S. I., Handmer, J., Nicholls, N., Peduzzi, P., Mechler, R., Bouwer, L. M., Arnell, N.,
556 Mach, K., Muir-Wood, R., Brakenridge, G. R., Kron, W., Benito, G., Honda, Y., Takahashi, K., and Sherstyukov, B.: Flood risk
557 and climate change: global and regional perspectives, *Hydrol. Sci. J.*, 59, 1–28, <https://doi.org/10.1080/02626667.2013.857411>,
558 2014.

559 McFeeters, S. K.: The use of the Normalized Difference Water Index (NDWI) in the delineation of open water features, *Int. J.*
560 *Remote Sens.*, 17, 1425–1432, <https://doi.org/10.1080/01431169608948714>, 1996.

561 Ministry of Interior - General Directorate of Civil Defense: Report on the Collapse of the Dam and the Rainy Condition in Al-
562 Lith Governorate, General Directorate of Civil Defense, Ministry of Interior, Kingdom of Saudi Arabia, 2018.

563 Miura, Y., Shamsudduha, M., Suppasri, A., and Sano, D.: A Global Multi-Sensor Dataset of Surface Water Indices from
564 Landsat-8 and Sentinel-2 Satellite Measurements, *Sci. Data*, 12, 1253, <https://doi.org/10.1038/s41597-025-05562-z>, 2025.

565 Otsu, N.: A Threshold Selection Method from Gray-Level Histograms, 11, 285–296, 1979.

566 Özelkan, E.: Water Body Detection Analysis Using NDWI Indices Derived from Landsat-8 OLI, *Pol. J. Environ. Stud.*, 29, 1759–
567 1769, <https://doi.org/10.15244/pjoes/110447>, 2020.

568 Penuelas, J., Pinol, J., Ogaya, R., and Filella, I.: Estimation of plant water concentration by the reflectance water index WI
569 (R900/R970), *Int. J. Remote Sens.*, 18, 2869–2875, 1997.

570 Floods | Ready.gov: <https://www.ready.gov/floods>, last access: 12 October 2025.

571 Samela, C., Coluzzi, R., Imbrenda, V., Manfreda, S., and Lanfredi, M.: Satellite flood detection integrating hydrogeomorphic
572 and spectral indices, *GIScience Remote Sens.*, 59, 1997–2018, <https://doi.org/10.1080/15481603.2022.2143670>, 2022.

573 Singha, M., Dong, J., Sarmah, S., You, N., Zhou, Y., Zhang, G., Doughty, R., and Xiao, X.: Identifying floods and flood-affected
574 paddy rice fields in Bangladesh based on Sentinel-1 imagery and Google Earth Engine, *ISPRS J. Photogramm. Remote Sens.*,
575 166, 278–293, <https://doi.org/10.1016/j.isprsjprs.2020.06.011>, 2020.

576 Stateczny, A., Praveena, H. D., Krishnappa, R. H., Chythanya, K. R., and Babysarojam, B. B.: Optimized Deep Learning Model
577 for Flood Detection Using Satellite Images, *Remote Sens.*, 15, 5037, <https://doi.org/10.3390/rs15205037>, 2023.

578 Tan, J., Tang, Y., Liu, B., Zhao, G., Mu, Y., Sun, M., and Wang, B.: A Self-Adaptive Thresholding Approach for Automatic
579 Water Extraction Using Sentinel-1 SAR Imagery Based on OTSU Algorithm and Distance Block, *Remote Sens.*, 15, 2690,
580 <https://doi.org/10.3390/rs15102690>, 2023.

581 Tesfaye, M. and Breuer, L.: Performance of water indices for large-scale water resources monitoring using Sentinel-2 data in
582 Ethiopia, *Environ. Monit. Assess.*, 196, 467, <https://doi.org/10.1007/s10661-024-12630-1>, 2024.

583 NOAA: <https://www.weather.gov/safety/flood>, last access: 12 October 2025.

584 Flooding | US EPA: <https://www.epa.gov/natural-disasters/flooding>, last access: 8 October 2025.

585 Wang, Z., Zhang, C., and Atkinson, P. M.: Combining SAR images with land cover products for rapid urban flood mapping,
586 Front. Environ. Sci., 10, 973192, <https://doi.org/10.3389/fenvs.2022.973192>, 2022.

587 Yan, D., Wang, X., Zhu, X., Huang, C., and Li, W.: Analysis of the use of NDWI_{green} and NDWI_{red} for inland water mapping in
588 the Yellow River Basin using Landsat-8 OLI imagery, Remote Sens. Lett., 8, 996–1005,
589 <https://doi.org/10.1080/2150704X.2017.1341664>, 2017.

590 Zhao, Z., Yang, J., Wang, M., Chen, J., Sun, C., Song, N., Wang, J., and Feng, S.: The PCA-NDWI Urban Water Extraction
591 Model Based on Hyperspectral Remote Sensing, Water, 16, 963, <https://doi.org/10.3390/w16070963>, 2024.

592