Episodic sediment supply to alluvial fans: implications for fan incision and morphometry

Anya. S. Leenman^{1,2} and Brett. C. Eaton¹

Correspondence: Anya. S. Leenman (anya.leenman@chch.ox.ac.uk)

Abstract. Sediment supply is widely believed to be a key control on alluvial fan morphology and channel dynamics. Although the sediment supply to natural fans is rather episodic, experimental studies of alluvial fans often use constant sediment supply rates, making it difficult to relate fan dynamics to the magnitude and frequency of sediment supply in the field. This paper presents a series of experiments designed to test the impact of episodic sediment supply on fan evolution and dynamics. We compare four experiments, each with the same mean sediment supply but different durations of high- and low-supply periods. The experiments show that fan morphology and channel dynamics respond systematically to the temporal elongation of sediment supply oscillations: longer supply cycles generate flatter fans with more trenched channels. These results highlight how different basin conditions might generate different fan morphologies: supply limited basins with intermittent sediment supply might generate fans that are flatter than expected. Our results raise the question of whether a constant sediment supply in experimental models can adequately characterise the dynamics of natural fans in the field. We therefore suggest that experimental modellers should include variability when investigating fan responses to sediment supply.

1 Introduction

).

The shapes of alluvial fans reflect the fluxes of water and sediment from their source basins. Field and experimental studies show that, for a given flow rate, fans become steeper as the sediment supply (and importantly, the sediment concentration) increases (Ashworth et al., 2004; Bryant et al., 1995; Bull, 1964; Delorme et al., 2018; Hooke, 1968b; Whipple et al., 1998). Fan channel dynamics also change, with more frequent avulsions at higher sediment supply rates (Ashworth et al., 2004; Bryant et al., 1995). This influence of sediment concentration is reflected in the inverse relation between upstream catchment area and fan slope (e.g. Blair and McPherson, 1994b, Figure 23). Within-basin sediment storage means that while larger basins generate higher discharges, they typically have lower sediment concentration (often fluvial flows as opposed to debris flows), and hence form lower gradient fans (Blair and McPherson, 1994b; Crosta and Frattini, 2004; De Scally and Owens, 2004; Harvey, 1984; Kostaschuk

-(e.g. Blair and McPherson, 1994b; Crosta and Frattini, 2004; De Scally and Owens, 2004; de Haas et al., 2015; Harvey, 1984; Kostaschul

Despite these established linkages between sediment supply and fan forms, little is known about how oscillations in the sediment supply or concentration govern fan morphology. In the field, fans experience temporal variation in their sediment

¹Department of Geography, University of British Columbia, Vancouver, Canada

²School of Geography and the Environment, University of Oxford, Oxford, U.K.

supply, depending on the frequency and magnitude of erosion events in their source basins (e.g. Cabre et al., 2020; Davies and Korup, 2007; Frechette and Meyer, 2009; Kesel and Lowe, 1987; Meyer and Pierce, 2003; Pierce and Meyer, 2008; Talbot and Williams, 1979; Wells and Harvey, 1987, among others). The nature and timing of sediment delivery to a fan is moderated in turn by the size of the source basin and the connectivity of sediment transport pathways therein; disconnectivity within larger basins can mean that sediment inputs from erosional events do not make it to the basin outlet to build alluvial fans at all (Stokes and Mather, 2015; Wang et al., 2008).

The fan response to these episodic disturbances likely reflects the balance between disturbance frequency (and duration) and fan adjustment timescale. Theorists have proposed that disturbances with a periodicity less than the timescale of system adjustment will not be recorded in stratigraphy (e.g. Jerolmack and Paola, 2010); the same may be true for fan morphology. For many fans, short, frequent disturbances (such as debris flows or sediment-laden floods) aggrade the fan or its channels locally but not every event triggers a wholesale avulsion (e.g. de Haas et al., 2018; Field, 2001; Zubrycky et al., 2021); sequences of multiple events may be required to affect whole fan morphology, implying that these individual events are shorter than the adjustment timescale. Conversely, on fans experiencing longer (decadal) periods of heightened sediment supply, prolonged aggradation and progradation across the whole fan have been observed (De Rose et al., 1998; Leenman and Tunnicliffe, 2020; Marden et al., The balance between the magnitude, duration and frequency of sediment inputs and the timescale of fan adjustment is therefore key for understanding how fans respond to episodic sediment inputs. It is challenging to systematically investigate this balance in the field, but the manipulability of physical experiments makes them a useful tool for this problem.

While the episodic nature of sediment supply to fans is well documented, only a few alluvial fan experiments have explicitly investigated the effects of episodic sediment supply. Schumm et al. (1987, p. 316) conducted a preliminary study of fans built from episodic flood events generated via "a burst of artificial rainfall applied by a hand-held nozzle" to the experimental source basin. Davies and Korup (2007) generated random pulses in their "background" experimental sediment supply, while investigating the impact of large pulses superimposed on this input. Apart from these two studies, most alluvial fan experiments used a constant sediment supply "Moreover(e.g. Bryant et al., 1995; Clarke et al., 2010; Van Dijk et al., 2009; Hamilton et al., 2013; Reitz and Je). These constant-input studies were invaluable to our understanding of the autogenic dynamics and evolution of alluvial fans.

Nevertheless, there has not been a systematic experimental study of how episodic sediment supply affects alluvial fan morphology in the long-term, or the stability and patterns of stream channels upon the fan.

This paper presents four alluvial fan experiments designed to address this knowledge gap. The experiments demonstrate the impacts of variable sediment supply on alluvial fan morphology, channel patterns, and change thereof. All the experiments had the same mean sediment supply rate, but varying durations of high-supply and low-supply conditions. These scenarios allow us to investigate the effects of periodic oscillations around the mean sediment supply rate.

Through comparing the four experimental scenarios, this paper considers two key questions:

- 1. How do abrupt changes in sediment supply rate influence fan morphology, channel patterns and dynamics?
- 2. How does the duration of sediment supply oscillations govern their impact?

55

The experiments presented here show that abrupt sediment supply oscillations can generate distinctive responses in the fan gradient, channel patterns, lateral mobility and morphologic reworking rates. Moreover, comparisons between the experiments show that fan morphology changes systematically with oscillation duration. While the experiments indicate how fans are likely to respond to changes in sediment concentration during or between floods, they also highlight the distortions that arise from using a constant sediment supply rate to represent systems whose sediment supply is intermittent in the field.

2 Methods

This paper describes four experiments conducted in the alluvial fan simulator at the University of British Columbia's Biogeomorphology Experimental Laboratory. The experiments presented here are named Runs 1, 7, 8 and 9. CON, OSC10, OSC20 and OSC40. Results from Run 1-CON have been presented in detail in (Leenman and Eaton, 2021) Leenman and Eaton (2021), and compared to another set of fan experiments (Runs 2-4) in (Leenman et al., 2022) in Leenman et al. (2022), where Run CON was referred to as Run 1. Note that in Leenman (2021), Runs CON, OSC10, OSC20 and OSC40 are referred to as Runs 1, 7, 8 and 9, but the data are the same. The experimental set-up, sediment mixture, scaling approach and data collection system were used here are the same as in those papers publications, but they are summarised here for completeness.

2.1 Model set-up

Our stream table experiments used a physical model of a generic gravel-cobble alluvial fan. The stream table was measured $2.44 \times 2.44 \times 0.3$ m (Figure 1). We delivered water and sediment to the fan-head through a $0.2 \times 0.5 \times 0.3$ m feeder channel at one corner of the table. Water was input from a constant head tank. Sediment was input from a sediment feeder with a rotating pipe outlet; the sediment supply rate was set by the inclination of the pipe. Sediment and water were first mixed in a funnel, then dropped into the head of the feeder channel. Sediment aggraded and degraded freely in the feeder channel, as we would expect for a confined reach upstream of a natural fan in the field.

We tilted the stream table to 0.0002 m m^{-1} (0.02 %), the minimum slope required to trigger flow toward a drain in one corner and avoid the formation of a "lake" in the experiment. We roughened the experimental boundary with 2 mm sand grains and LEGO® sheets, glued to the table and walls respectively. The water was dyed blue to permit automatic channel extraction from overhead photographs.

We collected data with a system inspired by Structure-from-Motion photogrammetry. Leenman and Eaton (2021) and Leenman (2021) give detailed descriptions of the data collection system and its accuracy, so we present a brief summary here. The system consisted of an array of nine digital single-lens reflex cameras mounted above the stream table (locations shown in Figure 1). The cameras captured photos synchronously, at one-minute intervals. In experiments with sediment supply changes, the first photo was always ~30 seconds after the change in supply rate. We georeferenced each set of nine photos to a local coordinate system, using a set of eight ground control points on the table walls. We processed each photo set using Agisoft Photoscan (2018) to generate a topographic point cloud (~280,000 points per m²) and co-registered orthomosaic (1 mm resolution) for each minute of the experiment.

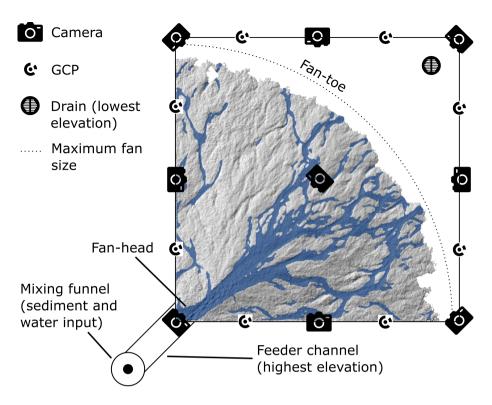


Figure 1. Experimental design (not to scale). Water and sediment mix in the funnel and drop into the experiment at the head of the feeder channel, where sediment aggrades and degrades freely. The hillshaded topography and flow map example are from Run +CON repeat 2, 20 hours into the experiment.

90 2.2 Experimental Approach

100

Our experimental alluvial fan is a "similarity-of-process" or "analogue" model (c.f. Hooke, 1968a; Paola et al., 2009), as are most physical models of fans (e.g. Bryant et al., 1995; Clarke et al., 2010; Davies and Korup, 2007; Van Dijk et al., 2009; De Haas et al., 2016, 2018; Hamilton et al., 2013; Hooke, 1967, 1968b; Hooke and Rohrer, 1979; Miller et al., 2019; Piliouras et al., 2017; Reitz and Jerolmack, 2012; Schumm et al., 1987). The key processes in the model (fluvial sediment entrainment, transport and deposition) are similar to those on fans in the field. In alluvial fan experiments, it is challenging to maintain Froude scaling between the model and any field prototype, due to the large scaling ratio that is necessary to build a conveniently small laboratory model. This lack of Froude scaling means that it is inappropriate to extrapolate rates and volumes measured in the experiment to field settings. Nevertheless, comparisons *between* the different experiments demonstrate how natural fans might respond to different frequencies and durations of sediment delivery. Such comparisons also highlight the distortions introduced through temporal averaging in the experimental inputs.

The slope of the fan itself, and the dimensions of the channels upon it, were self-formed. Therefore, it was not possible to control the Froude or Reynolds numbers during the experiments. To give readers an idea of the flow dynamics, we have

estimated these parameters for the fan-head (where flow was often confined to one channel) in run 1-Run CON (constant inputs). The estimated Froude number (Fr) was ~1.9; this value aligns with observations of supercritical flow during floods on fans in the field (Beaumont and Oberlander, 1971; Rahn, 1967). Further down-fan, flow likely became subcritical as it spread into multiple distributaries. The particle Reynolds number (Re^*) at the fan-head was estimated (using the D_{84} as a representative grain size) to be 66. This conforms to the threshold of 15 proposed by Parker (1979) and Ashworth et al. (1994), although it is below the minimum of 70 recommended by Schlichting and Gersten (2016) and Yalin (1971). The estimated Reynolds number (Re) at the fan-head was 1200, placing the flow in the transitional regime between laminar and turbulent flow (and preventing the attainment of Froude scaling). Nevertheless, Malverti et al. (2008) showed that even laminar flow can transport sediment at rates which fit the Meyer-Peter and Müller (1948) relation often used to predict bedload transport by turbulent flows. Moreover, many other experimental studies of fans also reported flows that were not fully turbulent (e.g. Davies et al., 2003; Davies and Korup, 2007; Delorme et al., 2017, 2018; Van Dijk et al., 2012; Guerit et al., 2014; Hamilton et al., 2013; Reitz et al., 2010; Reitz and Jerolmack, 2012; Whipple et al., 1998). Although those models did not achieve Froude scaling, they successfully reproduced the fan-channel dynamics that are of interest to us.

2.3 Experimental runs

We varied the sediment supply periodicity between the four experiments. In Run 1CON, the sediment supply was constant at 5 g s⁻¹. In Run 7OSC10, the supply rate was 10 g s⁻¹ for 5 minutes, followed by 0 g s⁻¹ for 5 minutes, and continued to oscillate between these two extremes every 5 minutes, creating a 10-minute cycle of high- to zero-supply conditions. In Run 8OSC20, the cycle duration doubled to 20 minutes (10 minutes each of high- and zero-supply). In Run 9OSC40, the duration doubled again to 40 minutes (20 minutes each of high- and zero-supply). These oscillations are summarised in Figure 2. Importantly, the mean sediment supply rate in Runs 7-9 OSC10-OSC40 was 5 g s⁻¹, equalling the constant supply rate in Run 1. CON. This meant that in all experiments, the same volume of sediment and water was delivered in any 40 minute period, but with a different temporal distribution in the sediment supply. The periods of the sediment supply oscillations in Runs 7-9 OSC10-OSC40 were chosen to explore the effects of sediment input duration, and are not intended to scale to a specific event, season or climate oscillation in the field.

Each experiment was ~20 hours long, which was approximately the duration over which the fan prograded to the far walls of the experimental table. For Run 1, we conducted CON, we then conducted two additional repeats (i.e. three repeats in total; here we present data from repeat 2, which was closest to the mean slope and area across the three repeats for that experiment. Runs 7-9 had only one repeat); the data for Run CON therefore appear more dense in Figures 5-9 and we have increased the transparency for Run CON to account for this. Runs OSC10-OSC40 were not repeated.

Using a length scale of 1:128, we approximated the experimental grain size distribution (GSD) from a surface gravel sample collected in the channel at Three Sisters Creek fan, Canada, which is a typical gravel-cobble fan (located at 51.055108, -115.333515; see also Figure A1). The experimental mixture ranged from 0.25–8–8 mm (Figure 3). This sandy GSD encouraged subsurface flow, which sometimes generated seepage channels on the lower fan during the experiments. Such processes

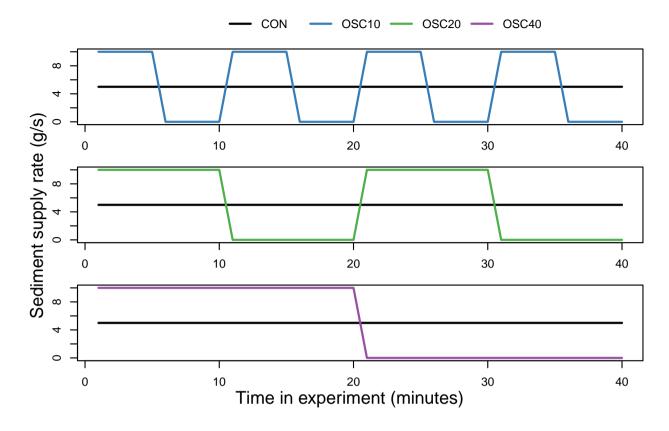


Figure 2. The durations of high-supply and zero-supply periods in Runs 1-CON and 7-9OSC10-OSC40. The constant sediment supply rate in Run 1-CON equals the mean supply rate in all other runs.

are common on fans in the field; for instance, both down-fan channel narrowing and spring formation have been attributed to infiltration on fans (Davidson et al., 2013; Kesel and Lowe, 1987; Woods et al., 2006).

All four experiments had a constant flow of 150 ml s⁻¹. This flow is approximately equal to the 20-year flood in the stream where grain size data were collected. While the model is generic and does not represent a specific field prototype, the above relation provides context for the size of this flow relative to the size of the sediment used in the experiments.

140

145

The sediment concentration was 3.6% by volume in the high-supply periods. The experimental grain size mixture was truncated at 0.25 mm, omitting the finest ~40% of material in the field sample, so the true bedload sediment concentration could be expected to be around 6% by volume. In mountain streams, bedload makes up between 10% and 99% of the total sediment load, with a mean of 44.5% and standard deviation of 31.1% (see Table A1 for values reported in the literature). Consequently, the maximum experimental truncated-bedload sediment concentration of 3.6% is roughly equal to a total volumetric sediment concentration of 13.5% (7.9-45.0-45.0%) in the field.

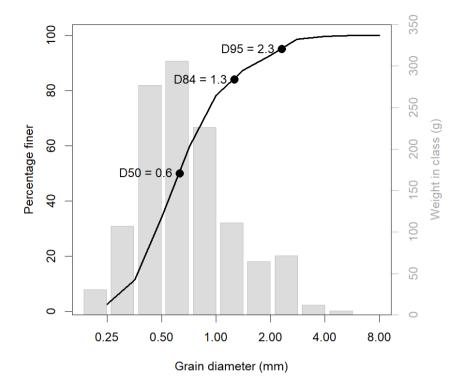


Figure 3. The grain size distribution (GSD) of our experimental sediment mixture. Cumulative distribution on primary y-axis; individual class weights on secondary y-axis.

The 150 ml s⁻¹ flow rate was relatively high, as was the sediment concentration. As a result, these experiments can be thought of as analogues for a system that alternates between debris floods and clearwater floods; "clearwater" refers to flows with low sediment concentration. This paper therefore explores the effect of abrupt, large-scale variations in the sediment concentration, and the timing thereof.

2.4 Data analysis

150

155

Our photogrammetry system generated a topographic point cloud and co-registered 1 mm orthomosaic for each minute of each experiment. We interpolated the point cloud (using a nearest neighbour approach) to generate a 1 mm resolution digital elevation model (DEM). DEM accuracy was assessed in Leenman (2021); elevation values for an individual cell in a topographically inactive area varied by less than -0.7, +0.8 mm (90% confidence) over any 30 minute period. Following Leenman and Eaton (2021) and Leenman et al. (2022), only data from 12 hours and onward were used, as some aspects of fan dynamics varied with fan size in the earlier stages of the the fan slope and wet fraction were scale-dependent earlier in the experiment.

Fan slope was measured from 88 equally-spaced down-fan profiles, extracted from the DEM (see Figure A2 for their locations). For each profile, slope was taken from a linear regression of elevation against distance down-fan (profiles were quasi-linear). For each time-step, the representative fan slope was taken as the median of these 88 measurements.

Fan-head entrenchment was measured from arcuate cross-fan profiles extracted from each DEM at 0.25 m down-fan (see Figure A2 for profile location). Fan-head entrenchment was measured as the difference between maximum and minimum elevations along the profile, for each time-step. We located the profile at 0.25 m because the method was not applicable farther down-fan: the convex nature of cross-fan profiles (e.g. Blair and McPherson, 1994a) meant that the minimum elevation was not always in the active channel for transects that were farther down-fan.

The orthomosaics were processed to generate binary (wet-or-dry) maps of the fan and channels at each time-step. These flow maps quantified the proportion of the fan area covered by flow (referred to as the "wet fraction"). The flow maps were also used to count the number of channels at an arcuate cross-section 1 m down-fan (discounting seepage channels that were not connected to the fan-head by surface flow; see Figure A2 for cross-section location). In addition we chose the 1 m cross-section as this was far enough down-fan that changes in flow pattern there represent changes on the fan as a whole. In addition to the cross-section analyses, change detection between successive flow maps revealed the area newly inundated in each minute, which was normalised by fan area to give F_n (equation 1), the percentage of the fan newly inundated in a minute:

$$F_n(t) = \frac{Area\ newly\ inundated\ in\ previous\ minute}{Fan\ area\ (t)} \times 100 \tag{1}$$

Change detection between the DEMs produced DEMs of Difference (DoDs) that quantified the erosion and deposition in each minute. The DEMs were first smoothed with a 7 × 7 mm moving average filter (approximately the size of the largest sand-grains). In the resulting DoDs, patches of erosion or deposition with a planform area of less than 2 cm² were discounted; elevation change of < 2 mm was also discounted. See Leenman (2021) for an uncertainty analysis of the DEMs, and further methodological detail.

3 Results

165

170

A general understanding of the fan responses to constant or oscillating sediment supply can be gained from the time-lapse videos (these show the fan from ~12 hrs onward): ,, and Run CON, Run OSC10, Run OSC20 and Run OSC40. Figure 4 also has links to these videos. Note that frames were collected at one-minute intervals for Run 1CON, and 10 s intervals for Runs 7-9OSC10-OSC40, so the video speed differs. These videos demonstrate how the fan responded to constant sediment supply (Run 1CON) or sediment supply oscillations (Runs 7-9OSC10-OSC40). Flow became more diverging when the sediment supply was turned on, and more channelised when the supply was cut off. Rapid lateral migration and channel readjustment followed each change in the sediment supply.

3.1 Fan morphology

190

Down-fan gradient is one of the simplest descriptors of fan morphology. As fans are self-formed, it provides a useful metric for their self-organised adjustment to the input conditions or changes thereof. Figure 5 shows how the median down-fan slope differed across the four experiments, and how it adjusted during high- and zero-supply conditions.



Figure 4. QR codes that link to the experimental time-lapse videos. The videos are also available at https://youtu.be/ML2LV28MQEM (Run 4CON), https://youtu.be/jXjWIkLU-7A (Run 7OSC10), https://youtu.be/T4JbZC9YkXQ (Run 8OSC20) and https://youtu.be/ECWYGIbsqA (Run 9OSC40).

Figure 5 shows that, compared to Run 1-CON (constant sediment supply), the fan was steeper with short-duration sediment supply oscillations (Run 70SC10); it became flatter as the duration of the oscillations increased (Runs 8-90SC20-OSC40). The fan steepened during high-supply periods and regraded to a lower slope during zero-supply periods. This partly explains the trend in slope across the four experiments: during high-supply periods, sediment was deposited on the fan-head, steepening the fan, but during zero-supply periods the channel incised this material, lowering the fan slope. There was a lag of 2-3-2-3 minutes between the onset of a new sediment supply rate and the geomorphic response. In the 10-minute cycle in Run 70SC10, the 5-minutes of zero-supply was insufficient to completely incise the new material at the fan-head, leading to a fan that was steeper than it would be with constant sediment supply (Run 1-CON). Conversely, in the 40-minute cycle in Run 90SC40, the fan-head was deeply incised during the 20-minutes of zero-supply, reducing overall fan gradient. The spatial pattern of erosion and deposition, linked to these slope adjustments, is considered further in section 3.4.

195

200

Figure 5 shows how median fan slope declined during zero-supply periods. However, the fan-head incision during zero-supply periods may in fact have meant that the slope along the fan-channel declined even farther than indicated by Figure 5. Table 1 suggests that the mean depth of fan-head trenching increased from Run 7-9 OSC10-OSC40 (see also Figures A5—A7). These values indicate that channel gradients (as opposed to fan gradients) at the end of the zero-supply periods were likely even lower than the median fan gradients shown in Figure 5.

Table 1. The mean(across all time-steps analysed) and, maximum and standard deviation in the depth of fan-head trenching (in mm) at an arcuate cross-section across the fan-head, placed at 0.25 m down-fan. Depth are estimates accurate to within 1.5 mm (90% confidence).

Run	Mean	Max.	Std. dev.
7	9	16	3
8	11	19	3
9	14	26	<u>5</u>

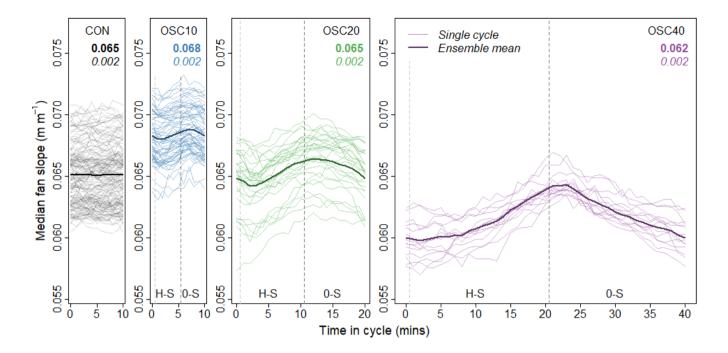


Figure 5. Median fan slope (for the whole fan) versus time in the sediment supply oscillation cycle. The thin lines represent each individual supply oscillation cycle; the thick line is the ensemble mean. H-S denotes the high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*.

205 3.2 Channel patterns

215

Channel patterns (and channel pattern change) provide a metric for how flow on the fan self-organises to transport the available sediment supply. Here, channel pattern is characterised using two variables: the number of connected channel threads at 1 m down-fan (Figure 6), and the portion of the fan occupied by flow (Figure 7).

Figure 6 shows that flow became more branching in high-supply periods, with the number of channel threads increasing. Conversely, flow became more channelised in zero-supply periods, with the number of channel threads decreasing.

The number of channel threads was slow to respond to a change in sediment supply rate. Consequently, the variability in the mean number of channels is similar between Run + CON (constant sediment supply) and Run 7-OSC10 (10-minute supply oscillation cycle). Moreover, there is insufficient time for flow to channelise in the 5-minute zero-supply periods, so that flow maintains a divergent pattern in Run 7-OSC10 with a fairly high number of channel threads (5-6-5-6 channel threads on average, at 1 m down-fan). In comparison, the 20-minute zero-supply duration in Run 9-OSC40 means that fan-head trenching extends down-fan to the 1-m cross-section, bringing the mean number of channels down to around 2 at the end of the 40-minute cycle.

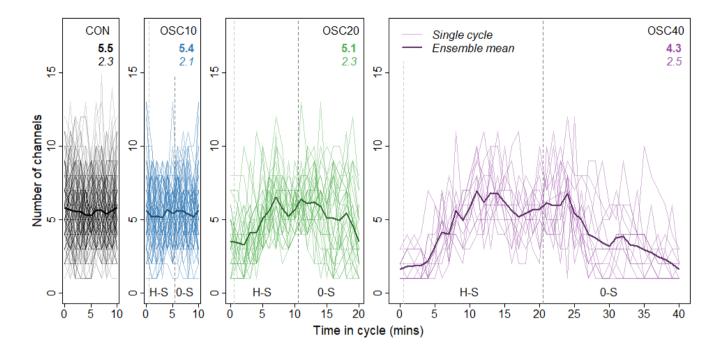


Figure 6. Number The number of **connected** channels versus time in the sediment supply oscillation cycle. The <u>number of channels was</u> measured along a transect 1 m down-fan. The thin lines represent each individual supply oscillation cycle; the thick line is the ensemble mean. H-S denotes the high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*.

Comparing Figure 5 and Figure 6 indicates that fan gradient adjusted more readily than the channel pattern: fan gradient has a clear response to the changing sediment supply rate in Run 7OSC10, while the number of channels in Run 7-OSC10 did not fluctuate more than in Run 1-CON (with constant sediment supply). This is likely because channels were counted at 1 m down-fan, but the channel response to a change in sediment supply typically started at the fan-head and propagated down-fan to the 1 m cross-section (e.g. see time-lapse video for Run 9OSC40). Extracting the number of channels at the 0.5 m cross-section confirms that the fan-head channel pattern responded more readily to changes in the sediment supply rate (see Figure A3).

220

225

230

The second metric for channel pattern was the "wet fraction": the proportion of the total fan area that was inundated with flow in a given minute. Variations in the wet fraction (Figure 7) were more subtle than those in the number of channels, and provide a nuanced measure of how the flow pattern adjusted to changes in the sediment supply rate.

Figure 7 shows that, as with the number of channel threads, there was a lag of a few minutes before the wet fraction began to adjust to a change in the sediment supply. Consequently, the rapid supply oscillations in Run 7-OSC10 (10 minute cycle) had little impact on the wet fraction; its variance variation through time was similar to that with constant sediment supply (Run 1CON). During Runs 8 and 9OSC20 and OSC40, the longer durations of high- and zero-supply show more clearly how the wet fraction adjusted to the sediment supply rate. At the start of high-supply periods, the wet-fraction increased after an initial lag,

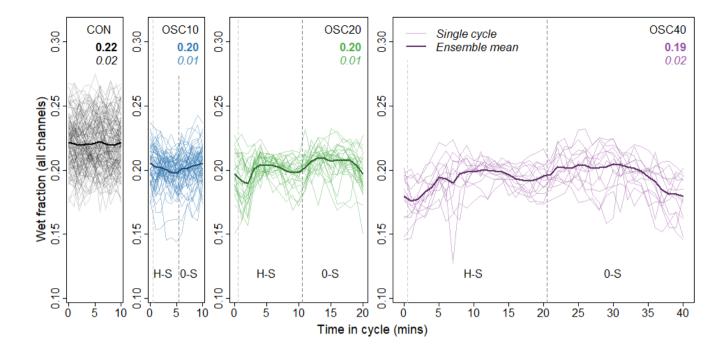


Figure 7. Wet fraction (across the whole fan, measured from **all** channels), versus time in the sediment supply oscillation cycle. The thin lines represent each individual supply oscillation cycle; the thick line is the ensemble mean. H-S denotes the high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*.

as flow widened and shallowed and/or slowed. A close examination of the experimental videos reveals that this increase was not through sheetflow or an the complete abandonment of channelised flow, but through flow divergence into numerous channel threads ; these that were often poorly defined and interconnected, as with braided streams. Toward the end of the high-supply period, the wet fraction decreased, suggesting that flow ultimately organised into fewer, deeper channels (although still more channels than during zero-supply periods). Close examination of Figure 6 supports this notion.

At the start of zero-supply periods, the wet fraction increased briefly, showing that a larger portion of the fan was inundated as flow re-adjusted to the reduced sediment concentration. However, the number of channel threads decreased during this period, as did the sector of the fan occupied by the flow (Figure 6 and Figure A4). Their decrease implies that flow was collecting into fewer channels, but that those channels were initially shallow (or slow) and wide as the total area of flow was high. Toward the end of the zero-supply period, the wet fraction decreased, suggesting that channels were becoming deeper (or faster) and narrower as the flow area decreased. These changes can also be seen in the experimental videosas well.

3.3 Lateral mobility

235

240

245

In addition to characterising channel patterns, we also monitored channel *change*. Here, we characterise lateral channel mobility by measuring F_n , the percentage of the fan area that is newly inundated in a given minute. High F_n values imply either avulsion,

a rapid channel sweep across the fan, or a rapid change in channel pattern (e.g. divergence from single- to multi-threaded flow). Conversely, a low F_n reflects a relatively stable channel.

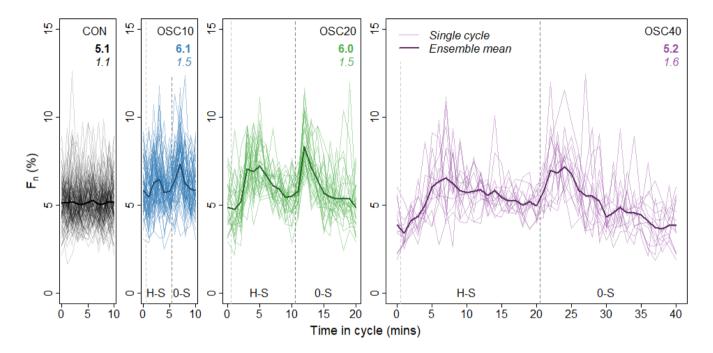


Figure 8. F_n (across the whole fan) versus time in the sediment supply oscillation cycle. The thin lines represent each individual supply oscillation cycle; the thick line is the ensemble mean. H-S denotes the high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged mean and standard deviation.

Figure 8 shows how lateral mobility (F_n) varied during each sediment supply oscillation cycle. After any change in the sediment supply, lateral mobility peaked, with the channel adjusting rapidly to the altered sediment concentration. The experimental videos show that, when the sediment supply was turned on, rapid divergence into a multi-threaded flow pattern caused this peak in lateral mobility. Conversely, when the sediment supply was cut, the videos show rapid fan-head trenching, cutting off the flow to the diverging channel threads and rapidly redirecting flow into a single (and often new) channel, again raising mobility rates. This peak decayed gradually during both high- and zero-supply periods. Lowest F_n values, implying the most stable channel pattern, were attained in Runs 8-and-9-OSC20 and OSC40 at the end of the zero-supply periods. This stability reflects an incised channel, which must be filled with sediment in the next high-supply period before rapid migration can re-commence. Such channel filling thus delayed the onset of peak mobility in the following high-supply period, with the high-supply mobility peak occurring later in Runs 8-and-9OSC20 and OSC40, as those runs had longer zero-supply periods in which the channel became more entrenched at the fan-head. These results mirror a set of experiments by Vincent et al. (2022), in which longer duration low-flow periods between debris floods increased the time required for a debris flood to cause avulsion.

250

255

3.4 Morphologic reworking

260

265

280

285

290

In addition to the lateral mobility computed by comparing flow maps, we calculated rates of vertical change (i.e. erosion and deposition) by performing change detection between successive DEMs. Figure 9 shows the volumes of sediment deposited or eroded in each minute of the sediment supply oscillation cycle.

Figure 9 indicates that the addition of short sediment supply oscillations in Run 7-OSC10 increased the erosion and deposition rates on the fan, compared to Run 1-CON with constant sediment supply. The variance temporal variation in erosion and deposition was similar in Run 7 and Run 1-OSC10 and Run CON, although the timing of peaks in Run 7-OSC10 followed the same pattern as Runs 8 and 9-OSC20 and OSC40, described below.

In Runs 8-9, deposition OSC20-OSC40, deposition (top row) increased during high-supply periods. The increase was gradual, with peak deposition coming several minutes after the onset of high-supply. This reflects the fact that deposition began in the feeder channel upstream of the fan-head, which buffered the fan from the immediate effect of changes in environmental conditions in the same way that a confined upstream reach would in a natural system. When the sediment supply was turned off, deposition rates remained high for a few minutes as sediment in the feeder channel was mined. Deposition rates then decayed decreased toward the end of the zero-supply period; this decline was most evident in Runs 8 and 9.

Erosion (bottom row) also increased at the start of the high-supply period, even though deposition rates were high. This reflects a period of channel adjustment in response to the sudden increase in sediment supply. After the initial peak, erosion decreased to a minimum in the second half of the high-supply period. When the zero-supply period commenced, erosion accelerated, reflecting the rapid lateral migration (Figure 8) at this time. After the initial increase, erosion rates stabilised during the zero-supply period. This was particularly evident in Runs 8 and 908C20 and 08C40, where erosion and deposition rates were approximately equal toward the end of the zero-supply. Their similarity implies that, through fan-head trenching during the zero-supply period, the fan reached a form of equilibrium with the imposed flow rate and the supply of sediment from incision. Although erosion and deposition occurred, there were no major peaks, suggesting that there was little channel reorganisation. Instead, a condition of relative stability persisted, with the channel gradually incising the fan-head and depositing sediment on the lower fan.

The average spatial patterns of erosion and deposition are revealed in Figure 10, which demonstrates the effects of length-ening the sediment supply oscillations. During high-supply periods (top row), deposition was concentrated at the fan-head, and particularly in the fan-head trench (most visible in Runs 8 and 90SC20 and 0SC40). Downstream of this deposition was a focused erosion zone. As the duration of the sediment supply oscillation cycle increased, this deposition-erosion couplet extended farther downstream. The deposition zone became more elongate, emphasising the filling of the fan-head trench, while the erosion zone shifted farther down-fan.

During zero-supply periods, trenching at the fan-head was again clear, with a zone of focused erosion at the fan-head. The erosion zone and fan-head trench extended down-fan as the duration of the zero-supply period increased. A zone of focused deposition radiated from the downstream end of the fan-head trench, and is particularly visible in Runs 8 and 9. OSC20 and OSC40. This pattern indicates that, during the longer zero-supply periods in Runs 8 and 9 OSC20 and OSC40, the fan-head

trench incised and acted as a conduit for sediment eroded from the feeder channel. The morphology of the fan-head trench is also visible in the cross-fan topographic profiles in Figure A5—A7.

The cumulative effect of this coupled fan-head trenching and lower-fan deposition can be viewed by comparing the fan shapes in Figure 10. Each DoD compilation in this figure was masked to the fan planform at 18 hours of experimental run time; the same total volume of water and sediment had been delivered to each fan. Nevertheless, as the durations of sediment supply oscillations increased, the fan shape became more elongate: the mid-fan (axial) radius increased from Run 7 to 90SC10 to 0SC40, while the side radius remained comparable across all runs. This reflects fan-head trenching and sediment transfer from the upper to lower fan during the zero-supply periods, which lengthened the central fan.

4 Discussion

295

300

305

310

315

320

325

By alternating between a high sediment supply rate and no sediment supply, and by varying the duration of oscillations, these experiments permit the investigation of two key phenomena on alluvial fans. First, that of how fan channels respond the fan-channel response to abrupt changes in sediment concentration. Second, that of how the response of fan dynamics and morphology to the frequency and duration of sediment supply oscillations affect fan dynamics and morphology. Through comparing constant- and oscillating-supply experiments, this paper also considers the (im)propriety of substituting a constant sediment supply for a naturally variable one when modelling alluvial fans in the lab.

These experiments have demonstrated how fan-channels respond to an abrupt increase in the sediment supply rate (and therefore, the sediment concentration). The primary responses were steepening, an increased number of channels, and increased inundated area. This was accompanied by a rapid increase in lateral mobility that tailed off as the flow pattern stabilised, and by a peak in erosion rate during this channel adjustment phase. Deposition was generally high during high-supply periods.

When sediment supply was abruptly cut off, the fan responded through slope reduction and channelisation. The inundated area was high at first, while flow adjusted toward a single channel, but then decreased as that channel incised. Similarly, there was a steep but short-lived peak in lateral mobility as the flow pattern adjusted. This pulse of lateral mobility was accompanied by an increase in erosion, that stayed high during the zero-supply period due to fan-head incision. Meanwhile, the deposition rate gradually decreased, eventually equilibrating with the erosion rate in the runs with longer zero-supply periods.

Extending the length of the sediment supply oscillations altered fan morphology, even though the mean sediment supply rate was unchanged. Short oscillations led to sediment accumulation at the fan-head, steepening the fan in comparison to the constant supply experiment, and generating diverging, laterally active channels. Conversely, longer oscillations allowed the channel to incise the fan-head, shifting the zone of geomorphic activity farther down-fan and giving rise to a flatter gradient and more elongate elongated fan shape.

4.1 Sediment concentration variability on fans in the field

These "similarity-of-process" experiments are a simple but useful model of fan dynamics (Hooke, 1968a; Paola et al., 2009). The different scenarios explore the limits of fan behaviour: while there are few situations in which fans abruptly alternate

between high-supply and clearwater floods, wide temporal variations in sediment concentration do occur on fans and in steep, gravel-bed streams (e.g. Garcia et al., 2000; Habersack et al., 2001; Hayward and Sutherland, 1974; Kuhnle, 1992; Mao et al., 2014; Meyer and Wells, 1997; Reid et al., 1985; Wasson, 1974; Wells and Harvey, 1987). Our experiments show how fan channels respond to some of the widest possible variations in sediment concentration; one could expect lower-amplitude variability to generate dampened but qualitatively similar responses.

330

335

340

345

350

355

On fans in the field, wide variations in sediment concentration can occur during a single flood event, or between successive events. For instance, sediment exhaustion over the course of a storm can rapidly decrease sediment concentration during a flood event (Meyer and Wells, 1997; Wasson, 1974; Wells and Harvey, 1987). Similarly, debris flow control nets are designed to trap coarse sediment but transmit water and fine sediment (Wendeler et al., 2007; Wendeler and Volkwein, 2015); therefore, their emplacement in source basins can lower the bedload sediment concentration in flows reaching fans. Lower amplitude sediment concentration variations have also been observed during floods in gravel bed rivers (e.g. Garcia et al., 2000; Habersack et al., 2001; Hayward and Sutherland, 1974; Kuhnle, 1992; Mao et al., 2014; Reid et al., 1985).

The experiments presented in this paper provide a controlled analogue to the scenarios described above; the experimental results indicate how fans in the field may respond to these different scales of variability. For instance, the changes in channel pattern and lateral migration in Run 7-OSC10 (see Figures 6 and 8) were minor, suggesting that short-term fluctuations in the sediment concentration do not strongly influence channel pattern. Although Run 7-OSC10 had the steepest slope (Figure 5), this likely reflects the high-amplitude high amplitude of the sediment supply rate variations, from 0 to 10 g s⁻¹. A preliminary experiment with lower amplitude variations but the same mean sediment supply rate and oscillation duration generated a less-steep fan (Figure A8). Consequently, it seems that small-scale, short variations in sediment concentration during a flood will have little influence on the overall channel pattern or fan gradient.

Conversely, the experiments show that longer-duration or larger-amplitude variations in the sediment concentration do impact fan-channel adjustment during high flows, and may have longer term implications for fan morphology. For instance, depletion of the sediment supply to a fan during a storm event may mean the channel responds through rapid lateral migration and erosion, as in Runs 8 and 9 OSC20 and OSC40 (Figures 8). Similarly, emplacement of a debris retention structure which reduces sediment concentration during subsequent flood events might lead at first to lateral migration, and eventually to fan-head trenching.

While these experiments highlight the impact of rapid changes in sediment concentration, they also underscore the importance of clearwater flow for shaping fan and channel morphology, and particularly the fan-head trench. Such trenches are ubiquitous in natural fans of varying ages in varying climates (e.g. Bowman, 1978; Bluck, 1964; Davies and Korup, 2007; Dorn et al., 1987; Harvey, 1987; Mather and Hartley, 2005, among others). Previous experimental studies have suggested that an incised fan-head trench can develop in the absence of external perturbations; that is, when water and sediment are supplied at constant rates (Clarke et al., 2010; Van Dijk et al., 2012; Schumm et al., 1987; Whipple et al., 1998; Zarn and Davies, 1994). Nevertheless, in the constant flow and sediment supply experiment presented here (Run 1), a single-channel CON) had a relatively high sediment supply and wide grain size distribution relative to previous experiments, so that the channel planform

was highly dynamic throughout the experiment (see Leenman and Eaton, 2021). This dynamism meant that a single channel never persisted for long enough to allow significant fan-head trenching.

In contrast, a distinct fan-head trench did develop in Runs 8-90SC20-OSC40, with longer sediment supply oscillations. It is interesting to note that there was no notable fan-head trench in a related set of experiments with short-duration flow variability (published in Leenman et al., 2022) or in the experiment with short-duration sediment supply variability (Run 70SC10). These results suggest that longer-term sediment concentration variations (and particularly periods of lower-than-average sediment supply) encourage the formation of an incised fan-head trench. Figure 6 suggests one explanation for this phenomenon: the number of channels decreases decreased during periods of low sediment concentration, as flow collects collected into a few main channel threads. This concentrates flow contraction then concentrated the erosive activity of the channel into a narrow sector of the fan (see also Figure A4), which likely enhances enhanced the rate of down-cutting and trench formation. This down-cutting further concentrated flow at the fan-head in a positive feedback, as lateral migration was most restricted at the end of the zero-supply periods (especially in Run OSC40). The zero-supply periods in Run OSC10 were too short for this down-cutting mechanism to be effective and so a distinct trench did not form all the way down to the 1 m transect we analysed. This result highlights how fan responses to disturbance are governed by the fan's adjustment timescale. Disturbances may not alter fan morphology if the duration of or time between disturbances is shorter than the adjustment timescale. Figure 6 therefore suggest that, at least for the formation of a fan-head trench in response to sediment supply exhaustion, our experiments' adjustment timescale must be between five and ten minutes.

In our experiments and in some active fans in the field, the fan-head trench fills when sediment supply is high; in nature, this may occur when landslides temporarily raise the sediment supply (e.g. Davies and Korup, 2007). A fan-head trench does not necessarily require a clearwater flood event in order to develop: experiments by Vincent et al. (2022) showed that even low flow periods with no sediment supply were capable of incising a fan-head trench, given a sufficiently long period. An additional implication of the experiments in this paper, supported by the work of Davies and Korup (2007) and Vincent et al. (2022), is that the impact of floods with high sediment concentration is mediated by the depth and length of the fan-head trench, as this depression must be filled before avulsion can occur at the fan-head.

In the field, depositional events on fans have formed deposits of a comparable size to that generated by the high-supply periods in these experiments. In Runs 7-9OSC10-OSC40, fan-head trenches were on average 9-14-9-14 mm deep respectively; over all areas of topographic change (including erosion) the mean depth of topographic change in high-supply periods was 2-4 2-4 mm respectively. The ratio of deposition depth to trench depth therefore ranged from 0.2-0.3-0.3. On fans in southwest New Zealand, Davies and Korup (2007) observed depositional lobes of ~1-5-5 m thick on fans with trenches ~10 m deep, giving similar ratios of 0.1-0.5-0.5. Following the 2010 landslide and debris-flow at Mount Meager, British Columbia, debris-flow sediment completely filled a creek in an incised trench of 5-15-5-15 m depth (a ratio of 1.0), thinning downstream to around 2 m (a ratio of 0.1-0.4-0.4) (Guthrie et al., 2012). In northeast New Zealand, post-logging deposition on fans ranged from <1 to ~10 m in depth, in one case filling an incised fan-head trench by 12 m (Leenman and Tunnicliffe, 2020). These comparisons demonstrate how the size of depositional events relative to fan channel dimensions are similar in the model and

some field examples. Moreover, the comparisons highlight the relatively large depth of fan-head incision that can occur during prolonged periods of clearwater flow.

Parallels can be drawn between our experimental fans and natural fans formed by basins that are supply- or transport-limited. For instance, a transport-limited basin is less likely to have frequent or prolonged clearwater floods. Such a basin is most similar to Run 1 or 7CON or OSC10, and one might therefore expect it to generate a steeper fan with diverging, laterally active channels, all other things being equal. Conversely, a supply- or "weathering-limited" basin (Bovis and Jakob, 1999) might have more frequent or prolonged clearwater floods, or floods with low sediment concentration. It is therefore more similar to Runs 8 or 9OSC20 or OSC40, and one might expect it to generate a fan with a lower gradient and more incised fan-head trench that is relatively stable, punctuated by periods of high lateral activity and more divergent flow when hillslope erosion generates peaks in the sediment concentration (such as that observed on the Poerua fan by Davies and Korup (2007)).

Climate change is increasing the frequency and severity of extreme weather events that lead to floods (IPCC, 2022). In transport-limited basins, such changes could increase the frequency of flood events with high sediment concentration, making fan behaviour more similar to Run 1 or 7. CON or OSC10. Conversely, in supply-limited basins, this hydroclimatic change could increase the frequency of floods capable of reworking the fan, and may have less impact on the sediment supply (depending on the nature of hillslope erosion). Such a change might make fans more similar to Runs 8 or 9. OSC20 or OSC40.

410 4.2 Sediment supply oscillations and fan form

395

400

405

415

420

425

Studies of alluvial fans have sought for many decades to relate fan area and slope to source basin morphometry (e.g. Al-Farraj and Harvey, 2005; Beaumont, 1972; Bull, 1964; Crosta and Frattini, 2004; Denny, 1965; De Scally and Owens, 2004; Harvey, 1984; Hooke, 1968b; Kostaschuk et al., 1986; Lecce, 1991; Melton, 1965; Milana and Ruzycki, 1999; Oguchi and Ohmori, 1994; Saito and Oguchi, 2005; Silva et al., 1992; Stokes and Mather, 2015; Stokes and Gomes, 2020; Tomczyk, 2021). A key goal of those studies was to untangle the sources of scatter in such relationships, thereby elucidating the controls on fan slope and area. For instance, scatter has been attributed to fan setting (e.g. tributary-junction vs mountain-front; Al-Farraj and Harvey, 2005), down-stream valley width (Stokes and Mather, 2015), and depositional process (debris flow vs fluvial; De Scally and Owens, 2004).

While studies of fan and catchment morphometry have contributed a great deal to our understanding of alluvial fans, linking catchment and fan variables rests upon the assumption that fans have reached (or will reach) an equilibrium with their source catchment. This is not always the case; the sediment supply to fans oscillates at periods ranging from single events (e.g. Cabre et al., 2020) to orbital cycles (e.g. Blechschmidt et al., 2009). In fact, this temporal variability gives rise to the concept of alluvial fans as environmental "indicators" that record changes in sediment supply (Harvey, 2012). Our experiments show how, over many successive cycles, such oscillations in the "upstream" conditions of an alluvial fan can alter fan morphology, even for the same average sediment supply rate. Consequently, our results reveal another potential source of scatter in relationships between basin and fan morphometry: the periodicity of sediment inputs.

The flattening and lengthening of our experimental fans with increasing oscillation duration (see Figure 10 in particular) also suggests that, in the field, we can infer something of the sediment-supply histories of fans based on their elongation. For instance, fans that have a shorter, more "stacked" morphology might form from high-frequency oscillations. Conversely, fans with more "telescoping" morphologies (like that of Run 90SC40) might reflect a more intermittent sediment supply, with longer-term periods of high and then low sediment supply. In particular, longer periods of low sediment supply likely allow for sediment redistribution from the upper to lower fan, forming a fan-head trench and "telescoping" lower fan. Figure 10 suggests that the fan-head trench becomes more elongate (and the intersection point farther down-fan) as the duration of a low sediment supply period lengthens. One example of a set of natural fans with elongate, "telescoping" morphologies is the mountain front fans along the west of the Musandam Mountains (Al-Farraj and Harvey, 2005). Prolonged periods of higher monsoonal rainfall throughout the Late Quaternary have driven long-term changes in the sediment supply to these fans-in this region (Blechschmidt et al., 2009), which may account for their these fans' telescoping morphology.

4.3 A representative sediment supply rate?

430

435

450

460

These experiments show how sediment supply fluctuations can affect fan morphology and channel patterns. However, they also highlight a problem in the common approach to physical models of alluvial fans: that of constant sediment supply as an approximation for a range of variable sediment supply rates in the field. While the temporal variations imposed in Runs 7-9 OSC10-OSC40 were almost as simple as possible, they nevertheless generated fans with morphology, channel patterns and behaviour that were different from Run 1CON, with constant sediment supply. Moreover, fan morphology varied systematically with the duration of high- and zero-supply periods. These findings indicate that constant sediment supply rates poorly represent fans in the field that are governed by episodic sediment supply.

It might be possible to find a "representative" sediment supply rate which generates the same fan slope as would a series of episodic sediment delivery events. For instance, median fan slope was similar in Run 1-CON (constant sediment supply) and Run 8-OSC20 (20-minute oscillation cycle). One could infer that the 20-minute cycle in Run 8-OSC20 may represent some kind of "characteristic event periodicity" for the given sediment supply and flow rates, with the 10-minute cycle being too short (and therefore producing steeper fans) and the 40-minute cycle being too long. However, while Runs 1-and 8-CON and OSC20 produced similar fan slope, geomorphic activity was much more variable in Run 8OSC20, with higher extreme values of lateral and topographic change. Consequently, when seeking to model natural hazards on fans, it might be appropriate to choose a higher "representative" sediment supply, or to include oscillations about the mean. Although doing so may mis-represent misrepresent fan slopes, it is more likely to capture the extreme values of erosion or lateral migration which are of interest for understanding and managing natural hazards.

Other experimental studies have explored how sediment supply alters fan gradients and channel dynamics (Ashworth et al., 2004; Bryant et al., 1995; Delorme et al., 2018; Whipple et al., 1998). However, those experiments featured constant sediment supply rates. The experiments presented here show that both fan gradient and channel dynamics vary systematically with the duration of sediment supply oscillations. These results raise the possibility of equifinality: natural fans with steeper gradients and laterally active channels may result from high sediment supply, from rapid fluctuations between high and low sediment

concentrations, or from some combination of both these influences. Moreover, it is possible that long-term average sediment supply and the intermittency of sediment inputs could covary in natural fans, making these two controls difficult to separate. Series of shorter and longer sediment supply periods likely occur as well, which may generate legacy effects depending on their sequences equencing. Further experiments varying both the mean sediment supply and the duration of supply oscillations could aid in addressing these questions.

5 Conclusions

465

475

480

485

490

This paper presents the results of four experiments with the same mean sediment supply rate and a constant flow. Three of the experiments alternated between a high supply rate and no sediment supply, with the duration of the oscillations varying between experiments. The experiments addressed a) how fan-channels respond to abrupt changes in sediment concentration, and b) how fan dynamics and morphology vary with the duration of sediment supply oscillations.

The experiments showed that, when sediment concentration increased abruptly, fans steepened and flow diverged into more channel threads, inundating a larger fraction of the fan. Lateral mobility and erosion rates were high at first, before the channel pattern stabilised. Deposition rates remained high while sediment concentration was high. Conversely, when sediment concentration decreased abruptly, fans adjusted through slope reduction and channelisation. The inundated area, lateral mobility and erosion rate were high at first, until flow adjusted toward a single-channel state. The erosion rate remained elevated while sediment concentration was low, due to fan-head trenching.

The duration of high- and zero-supply periods systematically affected fan morphology and channel dynamics. Short-term oscillations promoted fan-head deposition, steepening the fan and generating diverging, laterally active channels. Long-term oscillations promoted fan-head incision, shifting the zone of geomorphic "activity" down-fan and generating a flatter, more elongate fan.

These experiments, conducted with a constant "flood" flow, highlight how sediment concentration governs the geomorphic impact of a flood event on an alluvial fan. Debris retention structures designed to pass floodwater only, or natural sediment exhaustion during floods, prompt a reduction in sediment concentration. These experiments indicate the possible channel response in such a scenario.

The varying durations of high- and zero-supply periods in the experiments also demonstrate how different basin conditions might generate different fan morphology. Transport-limited basins, more similar to the short-oscillation experiment presented here, might be expected to have steeper slopes and more diverging flow. Supply-limited basins, more similar to the long-oscillation experiments here, might have gentler slopes and more channelised flow. The exact responses are likely to depend on the sediment concentration (and its variability) in the flow to fans, which was monitored only indirectly in this study by using sediment supply as a proxy.

Finally, the duration of sediment supply oscillations produced systematic variation in fan slope and area, even though all experiments had the same mean sediment supply rate. This raises the question of how closely experimental fans built with constant sediment supply can be said to represent fans in the field. While such experimental studies have revealed the importance

of autogenic fan dynamics, our work builds on this foundation by modelling more "real-world" scenarios that are relevant
for hazard management in changing hydroclimates. Future studies of alluvial fans could consider including supply variability
when modelling how sediment supply affects alluvial fans.

Code and data availability. Basic data processing steps were conducted using the code at https://github.com/a-leenman/phd_code. Code to conduct further analysis and produce the figures can be found at https://github.com/a-leenman/Leenman_Eaton_2022. Data underlying the figures can be downloaded at https://doi.org/10.5281/zenodo.6499441. The raw data from these experiments is still under analysis for subsequent publications; please email the corresponding author if you would like a copy.

500

Video supplement. Time-lapse videos of the experiments are available at https://youtu.be/ML2LV28MQEM (Run CON), https://youtu.be/jXjWIkLU-7A (Run OSC10), https://youtu.be/T4JbZC9YkXQ (Run OSC20) and https://youtu.be/EcCWYGIbsqA (Run OSC40).

Appendix A: Supplementary Material

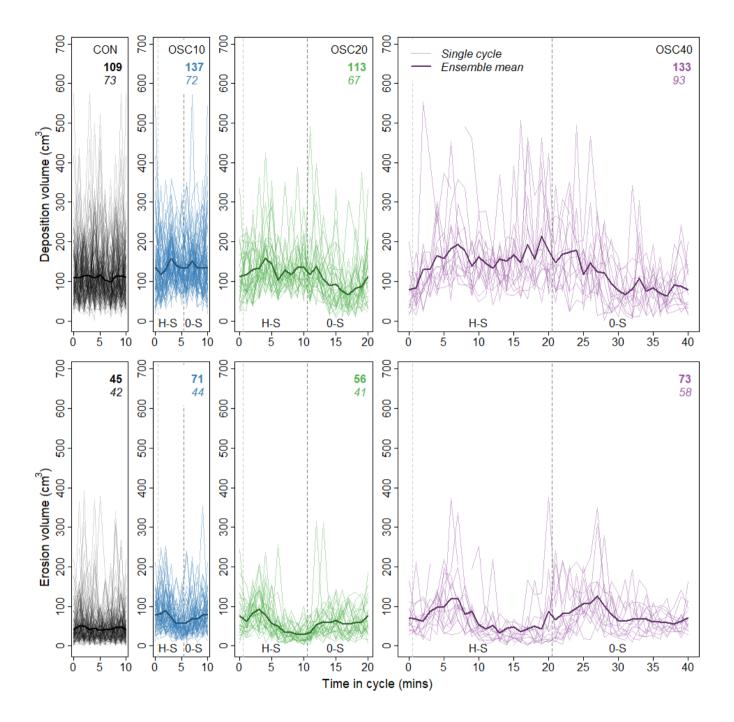


Figure 9. Deposition (blue) and erosion volumes (redacross the whole fan) volumes versus time in the sediment supply oscillation cycle. The thin lines represent each individual supply oscillation cycle; the thick lines are the ensemble means. H-S denotes the high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*. Figure A9 overlays these data for comparison.

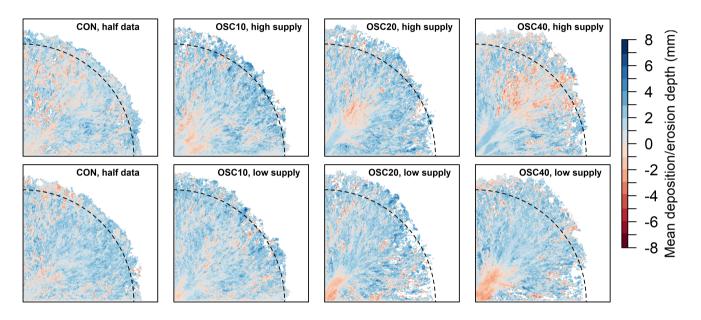


Figure 10. Spatial patterns of erosion (red) and deposition (blue). All one-minute DoDs for high-supply (above) and zero-supply periods (below) were averaged to show the typical pattern. Data from Run + CON are split into the same groups as Run 70SC10, although the former had no sediment supply oscillations; the Run + CON data show how deposition and erosion varied randomly in comparison to the spatially organised erosion and deposition in Runs 7-90SC10-OSC40. The semicircle at 2 m down-fan shows how the central fan became more elongate as the sediment supply oscillations lengthened. To maintain the same data density (and therefore, signal-to-noise ratio), the data for Run CON displayed here are only from the second repeat of this experiment, which was closest to the mean slope and area across the three repeats of Run CON.



Figure A1. Three-Sisters Three Sisters Creek catchment and fan, on the southwest side (right bank) of the Bow River, Alberta, Canada, near the town of Canmore. The surface grain size sample was collected at approximately the location of the yellow circle. Photo © Google Earth.

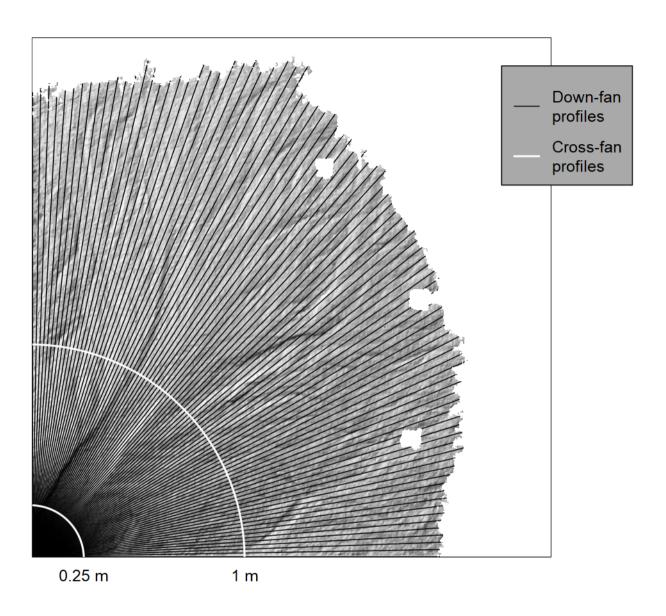


Figure A2. Locations of down-fan and cross-fan transects where measurements were taken. The 88 down-fan transects (black lines) were used to measure fan gradient. The arcuate cross-fan profile at 0.25 m down-fan (inner white line) shows where fan-head entrenchment measurements were conducted. The cross-fan profile at 1 m down-fan (outwer white line) shows where the number of channel threads was measured. Underlying hillshade (displayed with $3 \times$ elevation exaggeration) is from Run 9-QSC40 at 19 hrs of experimental time, close to the end of the experiment.

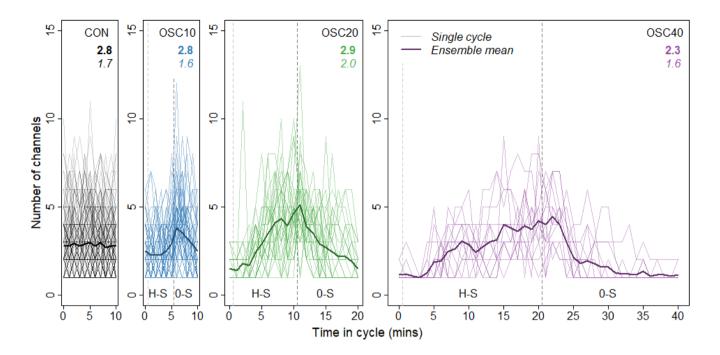


Figure A3. Number of **connected** channels at a transect 0.5 m down-fan, versus time in experimental cycle. Thin lines represent each individual high-zero sediment supply cycle; thick line is the ensemble mean. H-S denotes high-supply period; 0-S denotes zero-supply. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*.

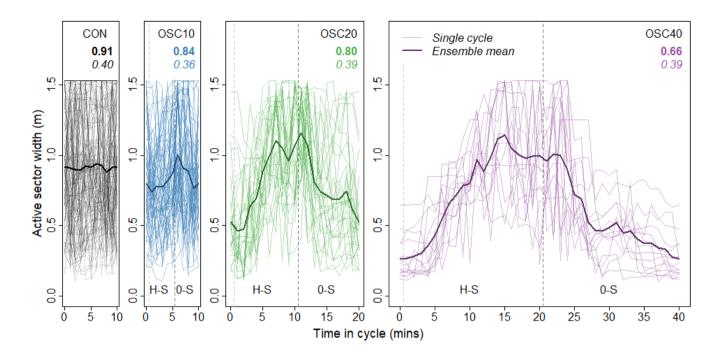


Figure A4. Width of active sector measured across **connected** channels at a transect 1 m down-fan, versus time in experimental cycle. Thin lines represent each individual high-zero sediment supply cycle; thick line is the ensemble mean. Coloured text indicates each experiment's time-averaged **mean** and *standard deviation*.

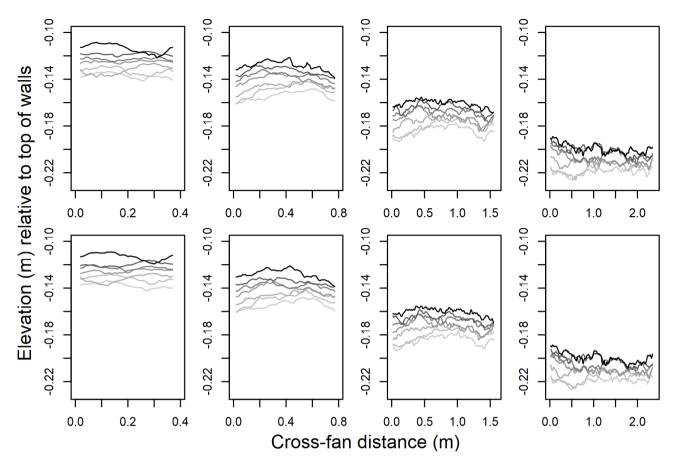


Figure A5. Fan elevation at arcuate cross-fan profiles in Run <u>FOSC10</u>, located 0.25, 0.5, 1.0 and 1.5 m downfan (left to right). **Upper panel:** examples of fan topography at the end of zero-supply periods. **Lower panel:** examples of fan topography at the end of high-supply periods. Example data are from time steps 80 minutes apart; darker colours denote later time steps.

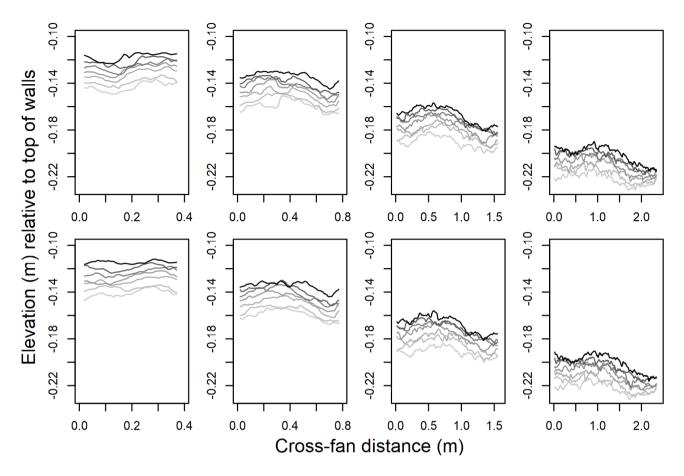


Figure A6. Fan elevation at arcuate cross-fan profiles in Run 8OSC20, located 0.25, 0.5, 1.0 and 1.5 m downfan (left to right). **Upper panel:** examples of fan topography at the end of zero-supply periods. **Lower panel:** examples of fan topography at the end of high-supply periods. Example data are from time steps 80 minutes apart; darker colours denote later time steps.

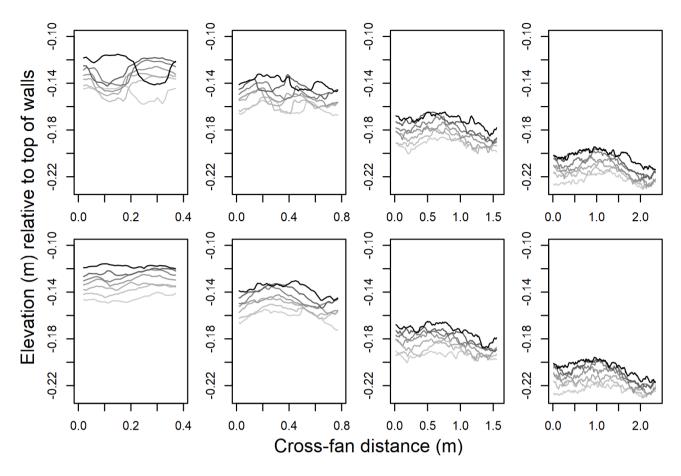


Figure A7. Fan elevation at arcuate cross-fan profiles in Run 90SC40, located 0.25, 0.5, 1.0 and 1.5 m downfan (left to right). **Upper panel:** examples of fan topography at the end of zero-supply periods. **Lower panel:** examples of fan topography at the end of high-supply periods. Example data are from time steps 80 minutes apart; darker colours denote later time steps.

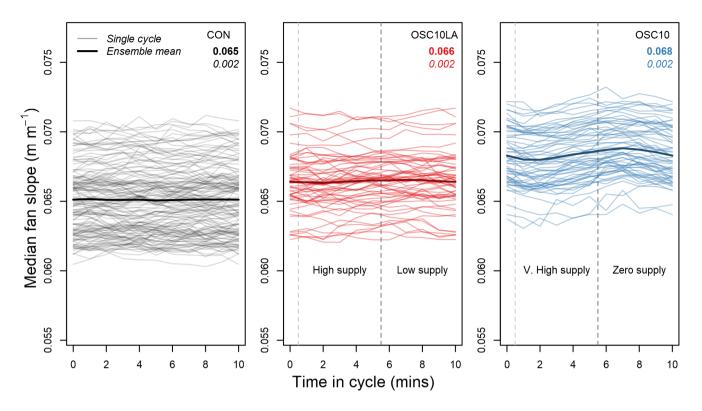


Figure A8. Median fan slope versus time in experimental cycle, for Runs 4CON, 6-OSC10LA and 7-OSC10. Run 6-OSC10LA has the same mean sediment supply rate and timing of supply oscillations as Run 7-OSC10, but has lower-amplitude (LA) oscillations. Thin lines represent each individual high-zero-supply cycle; thick line is the ensemble mean. Coloured text indicates each experiment's time-averaged mean and standard deviation.

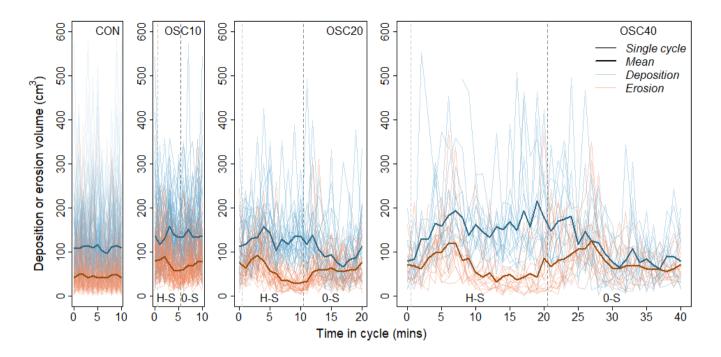


Figure A9. Deposition (blue) and erosion (red) volumes across the whole fan, versus time in the sediment supply oscillation cycle. The thin lines represent each individual supply oscillation cycle; the thick lines are the ensemble means. H-S denotes the high-supply period; 0-S denotes zero-supply.

Table A1. The percentage of total sediment load or yield made up by bedload in mountain streams.

Study	Location	% Bedload
Schoklitsch 1926 ¹	"Alpine Mountain Rivers"	70
Mcpherson 1971	Two O'Clock Creek, Alberta, Canada	0.5
Bradley and Mears 1980	Boulder Creek, Colorado, USA	90
Hayward 1980	Torlesse Stream, Canterbury, NZ	90
Alvera and García-Ruiz 2000	Izas catchment, Spain	30
Lenzi et al. 2003	Rio Cordon, Italy	24
Métivier et al. 2004	Ürümqi River (Chinese Tian Shan)	45^{2}
Meunier et al. 2006	Torrent de St Pierre, France	$\frac{15-60}{0}15-60^3$
Pratt-Sitaula et al. 2007	Marsyandi River, Nepal	36
Alexandrov et al. 2009	Nahal Eshtemoa, Israel	5
	1	

¹As cited in Jarocki (1957), p104.

Author contributions. A. S. Leenman conceptualised the project, conducted the experiments, analysed the data, and wrote the manuscript.

B. C. Eaton conceptualised the project, edited the manuscript, and provided supervision throughout the project.

Competing interests. The authors have no competing interests to declare.

Acknowledgements. A. S. Leenman was funded through a UBC Four-Year Fellowship. Experimental construction was funded through an NSERC Discovery Grant to B. C. Eaton. Thanks to Mike Church, Scott McDougall, and Sam Woor for lively discussions of fan dynamics and for helpful comments on an earlier draft.

²At the range front.

³Values quoted are minimum and maximum during a week of observations.

510 References

530

- Agisoft PhotoScan Professional, structure-from-Motion photogrammetry software, accessed via https://www.agisoft.com/downloads/installer/, 2018.
- Al-Farraj, A. and Harvey, A. M.: Morphometry and depositional style of Late Pleistocene alluvial fans: Wadi Al-Bih, northern UAE and Oman, Geological Society, London, Special Publications, 251, 85–94, 2005.
- Alexandrov, Y., Cohen, H., Laronne, J. B., and Reid, I.: Suspended sediment load, bed load, and dissolved load yields from a semiarid drainage basin: A 15-year study, Water Resources Research, 45, W08 408, https://doi.org/https://doi.org/10.1029/2008WR007314, 2009.
 - Alvera, B. and García-Ruiz, J. M.: Variability of Sediment Yield from a High Mountain Catchment, Central Spanish Pyrenees, Arctic, Antarctic, and Alpine Research, 32, 478–484, https://doi.org/10.1080/15230430.2000.12003392, 2000.
- Ashworth, M. K., PJ, B., JL, L., and JO, G.: The physical modelling of braided rivers and deposition of fine-grained sediment, Process Models and Theoretical Geomorphology (Ed. by MJ Kirkby), pp. 115–139, 1994.
 - Ashworth, P. J., Best, J. L., and Jones, M.: Relationship between sediment supply and avulsion frequency in braided rivers, Geology, 32, 21–24, 2004.
 - Beaumont, P.: Alluvial fans along the foothills of the Elburz Mountains, Iran, Palaeogeography, Palaeoclimatology, Palaeoecology, 12, 251 273, https://doi.org/10.1016/0031-0182(72)90022-3, 1972.
- 525 Beaumont, P. and Oberlander, T.: Observations on stream discharge and competence at Mosaic Canyon, Death Valley, California, Geological Society of America Bulletin, 82, 1695–1698, 1971.
 - Blair, T. C. and McPherson, J. G.: Alluvial fans and their natural distinction from rivers based on morphology, hydraulic processes, sedimentary processes, and facies assemblages, Journal of sedimentary research, 64, 450–489, 1994a.
 - Blair, T. C. and McPherson, J. G.: Alluvial fan processes and forms, in: Geomorphology of desert environments, pp. 354–402, Springer, 1994b.
 - Blechschmidt, I., Matter, A., Preusser, F., and Rieke-Zapp, D.: Monsoon triggered formation of Quaternary alluvial megafans in the interior of Oman, Geomorphology, 110, 128–139, https://doi.org/https://doi.org/10.1016/j.geomorph.2009.04.002, 2009.
 - Bluck, B. J.: Sedimentation of an alluvial fan in southern Nevada, Journal of Sedimentary Research, 34, 395-400, 1964.
- Bovis, M. J. and Jakob, M.: The role of debris supply conditions in predicting debris flow activity, Earth surface processes and landforms, 24, 1039–1054, 1999.
 - Bowman, D.: Determination of intersection points within a telescopic alluvial fan complex, Earth Surface Processes, 3, 265–276, 1978.
 - Bradley, W. C. and Mears, A. I.: Calculations of Flows Needed to Transport Coarse Fraction of Boulder Creek Alluvium at Boulder, Colorado, GSA Bulletin, 91, 1057–1090, https://doi.org/10.1130/GSAB-P2-91-1057, 1980.
- Bryant, M., Falk, P., and Paola, C.: Experimental study of avulsion frequency and rate of deposition, Geology, 23, 365–368, https://doi.org/10.1130/0091-7613(1995)023<0365:ESOAFA>2.3.CO, 1995.
 - Bull, W. B.: Geomorphology of segmented alluvial fans in western Fresno County, California, Tech. Rep. 352-E, US Geological Survey, 1964.
 - Cabre, A., Aguilar, G., Mather, A. E., Fredes, V., and Riquelme, R.: Tributary-junction alluvial fan response to an ENSO rainfall event in the El Huasco watershed, northern Chile, Progress in Physical Geography: Earth and Environment, 44, 679–699, 2020.
- Clarke, L., Quine, T. A., and Nicholas, A.: An experimental investigation of autogenic behaviour during alluvial fan evolution, Geomorphology, 115, 278–285, 2010.

- Crosta, G. B. and Frattini, P.: Controls on modern alluvial fan processes in the central Alps, northern Italy, Earth Surface Processes and Landforms, 29, 267–293, 2004.
- Davidson, S. K., Hartley, A. J., Weissmann, G. S., Nichols, G. J., and Scuderi, L. A.: Geomorphic elements on modern distributive fluvial systems, Geomorphology, 180-181, 82 95, https://doi.org/https://doi.org/10.1016/j.geomorph.2012.09.008, 2013.
 - Davies, T. R. and Korup, O.: Persistent alluvial fanhead trenching resulting from large, infrequent sediment inputs, Earth Surface Processes and Landforms, 32, 725–742, 2007.
 - Davies, T. R., McSaveney, M. J., and Clarkson, P. J.: Anthropic aggradation of the Waiho River, Westland, New Zealand: microscale modelling, Earth Surface Processes and Landforms, 28, 209–218, 2003.
- de Haas, T., Kleinhans, M. G., Carbonneau, P. E., Rubensdotter, L., and Hauber, E.: Surface morphology of fans in the high-Arctic periglacial environment of Svalbard: Controls and processes, Earth-Science Reviews, 146, 163–182, https://doi.org/10.1016/j.earscirev.2015.04.004, 2015.
 - De Haas, T., Van Den Berg, W., Braat, L., and Kleinhans, M. G.: Autogenic avulsion, channelization and backfilling dynamics of debris-flow fans, Sedimentology, 63, 1596–1619, 2016.
- de Haas, T., Densmore, A. L., Stoffel, M., Suwa, H., Imaizumi, F., Ballesteros-Cánovas, J. A., and Wasklewicz, T.: Avulsions and the spatio-temporal evolution of debris-flow fans, Earth-Science Reviews, 177, 53–75, https://doi.org/10.1016/j.earscirev.2017.11.007, 2018.
 - De Haas, T., Kruijt, A., and Densmore, A.: Effects of debris-flow magnitude–frequency distribution on avulsions and fan development, Earth Surface Processes and Landforms, 43, 2779–2793, 2018.
- De Rose, R. C., Gomez, B., Marden, M., and Trustrum, N. A.: Gully erosion in Mangatu Forest, New Zealand, estimated from digital elevation models, Earth Surface Processes and Landforms, 23, 1045–1053, https://doi.org/10.1002/(SICI)1096-9837(1998110)23:11<1045::AID-ESP920>3.0.CO;2-T, 1998.
 - De Scally, F. A. and Owens, I. F.: Morphometric controls and geomorphic responses on fans in the Southern Alps, New Zealand, Earth Surface Processes and Landforms, 29, 311–322, 2004.
- Delorme, P., Voller, V., Paola, C., Devauchelle, O., Lajeunesse, É., BARRIER, L., and Métivier, F.: Self-similar growth of a bimodal laboratory fan, Earth Surface Dynamics, 5, 239 252, https://doi.org/10.5194/esurf-5-239-2017, 2017.
 - Delorme, P., Devauchelle, O., Barrier, L., and Métivier, F.: Growth and shape of a laboratory alluvial fan, Physical Review E, 98, 012 907, 2018.
 - Denny, C. S.: Alluvial fans in the Death Valley region, California and Nevada, Tech. Rep. 466, US Geological Survey, Washington DC, 1965.
- Dorn, R. I., DeNiro, M., and Ajie, H.: Isotopic evidence for climatic influence on alluvial-fan development in Death Valley, California, Geology, 15, 108–110, 1987.
 - Field, J.: Channel avulsion on alluvial fans in southern Arizona, Geomorphology, 37, 93–104, 2001.
 - Frechette, J. D. and Meyer, G. A.: Holocene fire-related alluvial-fan deposition and climate in ponderosa pine and mixed-conifer forests, Sacramento Mountains, New Mexico, USA, The Holocene, 19, 639–651, 2009.
- Garcia, C., Laronne, J. B., and Sala, M.: Continuous monitoring of bedload flux in a mountain gravel-bed river, Geomorphology, 34, 23–31, 2000.
 - Guerit, L., Métivier, F., Devauchelle, O., Lajeunesse, E., and Barrier, L.: Laboratory alluvial fans in one dimension, Physical Review E, 90, 022 203, 2014.

- Guthrie, R., Friele, P., Allstadt, K., Roberts, N., Evans, S., Delaney, K., Roche, D., Clague, J., and Jakob, M.: The 6 August 2010 Mount Meager rock slide-debris flow, Coast Mountains, British Columbia: characteristics, dynamics, and implications for hazard and risk assessment,

 Natural Hazards and Earth System Sciences, 12, 1277–1294, 2012.
 - Habersack, H., Nachtneb El, H., and Laronne, J.: The continuous measurement of bedload discharge in a large alpine gravel bed river, Journal of Hydraulic Research, 39, 125–133, 2001.
 - Hamilton, P. B., Strom, K., and Hoyal, D. C.: Autogenic incision-backfilling cycles and lobe formation during the growth of alluvial fans with supercritical distributaries, Sedimentology, 60, 1498–1525, 2013.
- 590 Harvey, A.: Debris flows and fluvial deposits in Spanish Quaternary alluvial fans: implications for fan morphology, Sedimentology of Gravels and Conglomerates — Memoir 10, pp. 123–132, 1984.
 - Harvey, A.: Alluvial fan dissection: relationships between morphology and sedimentation, Geological Society, London, Special Publications, 35, 87–103, 1987.
- Harvey, A. M.: The coupling status of alluvial fans and debris cones: a review and synthesis, Earth Surface Processes and Landforms, 37, 64–76, 2012.
 - Hayward, J. A.: Hydrology and stream sediments in a mountain catchment, Tussock Grasslands and Mountain Lands Institute, Lincoln College, 1980.
 - Hayward, J. A. and Sutherland, A. J.: The Torlesse Stream vortex-tube sediment trap, Journal of Hydrology (New Zealand), 13, 41–53, 1974. Hooke, R. L.: Processes on arid-region alluvial fans, The Journal of Geology, 75, 438–460, 1967.
- Hooke, R. L.: Model geology: prototype and laboratory streams: discussion, Geological Society of America Bulletin, 79, 391–394, 1968a.
 - Hooke, R. L.: Steady-state relationships on arid-region alluvial fans in closed basins, American Journal of Science, 266, 609-629, 1968b.
 - Hooke, R. L. and Rohrer, W. L.: Geometry of alluvial fans: Effect of discharge and sediment size, Earth Surface Processes, 4, 147–166, https://doi.org/10.1002/esp.3290040205, 1979.
- IPCC: Chapter 4: Water, in: Climate Change 2022: Impacts, Adaptation and Vulnerability: Working Group II Contribution to the Sixth

 Assessment Report of the Intergovernmental Panel on Climate Change, edited by Pörtner, H.-O. and Roberts, D. C., chap. 4, IPCC,

 Geneva, 2022.
 - Jarocki, W.: A study of sediment (Badanie rumowiska), This edition translated from Polish and published by the National Science Foundation and the Department of the Interior, 1957.
- Jerolmack, D. J. and Paola, C.: Shredding of environmental signals by sediment transport, Geophysical Research Letters, 37, 610 https://doi.org/10.1029/2010GL044638, 2010.
 - Kesel, R. H. and Lowe, D. R.: Geomorphology and sedimentology of the Toro Amarillo alluvial fan in a humid tropical environment, Costa Rica, Geografiska Annaler: Series A, Physical Geography, 69, 85–99, 1987.
 - Kostaschuk, R., MacDonald, G., and Putnam, P.: Depositional process and alluvial fan-drainage basin morphometric relationships near Banff, Alberta, Canada, Earth Surface Processes and Landforms, 11, 471–484, 1986.
- Kuhnle, R. A.: Bed load transport during rising and falling stages on two small streams, Earth Surface Processes and Landforms, 17, 191–197, 1992.
 - Lecce, S. A.: Influence of lithologic erodibility on alluvial fan area, western White Mountains, California and Nevada, Earth Surface Processes and Landforms, 16, 11–18, 1991.
- Leenman, A.: Environmental variability and geomorphic responses on alluvial fans: An experimental study, Ph.D. thesis, University of British Columbia, Vancouver, Canada, 2021.

- Leenman, A. and Eaton, B.: Mechanisms for avulsion on alluvial fans: Insights from high-frequency topographic data, Earth Surface Processes and Landforms, 46, 1111–1127, https://doi.org/https://doi.org/10.1002/esp.5059, 2021.
- Leenman, A. and Tunnicliffe, J.: Tributary-junction fans as buffers in the sediment cascade: a multi-decadal study, Earth Surface Processes and Landforms, 45, 265–279, https://doi.org/10.1002/esp.4717, 2020.
- Leenman, A. S., Eaton, B. C., and MacKenzie, L. G.: Floods on Alluvial Fans: Implications for Reworking Rates, Morphology and Fan Hazards, Journal of Geophysical Research: Earth Surface, 127, https://doi.org/10.1029/2021jf006367, 2022.
 - Lenzi, M. A., Mao, L., and Comiti, F.: Interannual variation of suspended sediment load and sediment yield in an alpine catchment, Hydrological Sciences Journal, 48, 899–915, https://doi.org/10.1623/hysj.48.6.899.51425, 2003.
 - Malverti, L., Lajeunesse, E., and Métivier, F.: Small is beautiful: Upscaling from microscale laminar to natural turbulent rivers, Journal of Geophysical Research: Earth Surface, 113, F04 004, https://doi.org/10.1029/2007JF000974, 2008.

630

- Mao, L., Dell'Agnese, A., Huincache, C., Penna, D., Engel, M., Niedrist, G., and Comiti, F.: Bedload hysteresis in a glacier-fed mountain river, Earth Surface Processes and Landforms, 39, 964–976, 2014.
- Marden, M., Fuller, I. C., Herzig, A., and Betts, H. D.: Badass gullies: Fluvio-mass-movement gully complexes in New Zealand's East Coast region, and potential for remediation, Geomorphology, 307, 12–23, https://doi.org/10.1016/j.geomorph.2017.11.012, 2018.
- Mather, A. E. and Hartley, A.: Flow events on a hyper-arid alluvial fan: Quebrada Tambores, Salar de Atacama, northern Chile, Geological Society, London, Special Publications, 251, 9–24, 2005.
 - Mcpherson, H.: Dissolved, suspended and bed load movement patterns in Two O'Clock Creek, Rocky Mountains, Canada, summer, 1969, Journal of Hydrology, 12, 221–233, https://doi.org/https://doi.org/10.1016/0022-1694(71)90007-2, 1971.
- Melton, M. A.: The geomorphic and paleoclimatic significance of alluvial deposits in southern Arizona, The Journal of geology, 73, 1–38, 1965.
 - Métivier, F., Meunier, P., Moreira, M., Crave, A., Chaduteau, C., Ye, B., and Liu, G.: Transport dynamics and morphology of a high mountain stream during the peak flow season: The Ürümqi River (Chinese Tian Shan), in: River Flow: Proceedings of the Second International Conference on Fluvial Hydraulics, edited by Greco, M., pp. 761–777, Taylor and Francis, Philadelphia, 2004.
- Meunier, P., Métivier, F., Lajeunesse, E., Mériaux, A., and Faure, J.: Flow pattern and sediment transport in a braided river: The "Torrent de St Pierre" (French Alps), Journal of Hydrology, 330, 496–505, https://doi.org/10.1016/j.jhydrol.2006.04.009, 2006.
 - Meyer, G. A. and Pierce, J. L.: Climatic controls on fire-induced sediment pulses in Yellowstone National Park and central Idaho: a long-term perspective, Forest Ecology and Management, 178, 89–104, 2003.
 - Meyer, G. A. and Wells, S. G.: Fire-related sedimentation events on alluvial fans, Yellowstone National Park, USA, Journal of Sedimentary Research, 67, 776–791, 1997.
- 650 Meyer-Peter, E. and Müller, R.: Formulas for bed-load transport, in: IAHSR 2nd meeting, Stockholm, appendix 2, IAHR, 1948.
 - Milana, J. P. and Ruzycki, L.: Alluvial-fan slope as a function of sediment transport efficiency, Journal of Sedimentary Research, 69, 553–562, 1999.
 - Miller, K. L., Kim, W., and McElroy, B.: Laboratory Investigation on Effects of Flood Intermittency on Fan Delta Dynamics, Journal of Geophysical Research: Earth Surface, 124, 383–399, 2019.
- Oguchi, T. and Ohmori, H.: Analysis of relationships among alluvial fan area, source basin area, basin slope, and sediment yield, Zeitschrift für Geomorphologie, 38, 405–420, 1994.
 - Paola, C., Straub, K., Mohrig, D., and Reinhardt, L.: The "unreasonable effectiveness" of stratigraphic and geomorphic experiments, Earth-Science Reviews, 97, 1–43, 2009.

- Parker, G.: Hydraulic geometry of active gravel rivers, Journal of the Hydraulics Division, 105, 1185–1201, 1979.
- Pierce, J. and Meyer, G.: Long-term fire history from alluvial fan sediments: the role of drought and climate variability, and implications for management of Rocky Mountain forests, International Journal of Wildland Fire, 17, 84–95, 2008.
 - Piliouras, A., Kim, W., and Carlson, B.: Balancing aggradation and progradation on a vegetated delta: The importance of fluctuating discharge in depositional systems, Journal of Geophysical Research: Earth Surface, 122, 1882–1900, 2017.
- Pratt-Sitaula, B., Garde, M., Burbank, D. W., Oskin, M., Heimsath, A., and Gabet, E.: Bedload-to-suspended load ra-665 tio and rapid bedrock incision from Himalayan landslide-dam lake record, Quaternary Research, 68, 111–120, https://doi.org/https://doi.org/10.1016/j.yqres.2007.03.005, 2007.
 - Rahn, P. H.: Sheetfloods, streamfloods, and the formation of pediments, Annals of the Association of American Geographers, 57, 593–604, 1967.
- Reid, I., Frostick, L. E., and Layman, J. T.: The incidence and nature of bedload transport during flood flows in coarse-grained alluvial channels, Earth Surface Processes and Landforms, 10, 33–44, 1985.
 - Reitz, M. D. and Jerolmack, D. J.: Experimental alluvial fan evolution: Channel dynamics, slope controls, and shoreline growth, Journal of Geophysical Research: Earth Surface, 117, F02 021, 2012.
 - Reitz, M. D., Jerolmack, D. J., and Swenson, J. B.: Flooding and flow path selection on alluvial fans and deltas, Geophysical Research Letters, 37, L06 401, https://doi.org/10.1029/2009GL041985, 2010.
- Saito, K. and Oguchi, T.: Slope of alluvial fans in humid regions of Japan, Taiwan and the Philippines, Geomorphology, 70, 147–162, 2005. Schlichting, H. and Gersten, K.: Boundary-layer theory, Springer, 2016.
 - Schoklitsch, A.: Geschiebebewegung in Flüssen und an Stauwerken, Springer-Verlag, Vienna, 1926.
 - Schumm, S. A., Mosley, M. P., and Weaver, W.: Experimental fluvial geomorphology, John Wiley and Sons Inc., New York, 1987.
- Silva, P., Harvey, A., Zazo, C., and Goy, J.: Geomorphology, depositional style and morphometric relationships of Quaternary alluvial fans in the Guadalentin Depression (Murcia, Southeast Spain), Zeitschrift für Geomorphologie, 36, 325–341, 1992.
 - Stokes, M. and Gomes, A.: Alluvial fans on volcanic islands: A morphometric perspective (São Vicente, Cape Verde), Geomorphology, 368, 107 356, https://doi.org/10.1016/j.geomorph.2020.107356, 2020.
 - Stokes, M. and Mather, A. E.: Controls on modern tributary-junction alluvial fan occurrence and morphology: High Atlas Mountains, Morocco, Geomorphology, 248, 344–362, 2015.
- Talbot, M. and Williams, M.: Cyclic alluvial fan sedimentation on the flanks of fixed dunes, Janjari, central Niger, Catena, 6, 43–62, 1979.
 - Tomczyk, A. M.: Morphometry and morphology of fan-shaped landforms in the high-Arctic settings of central Spitsbergen, Svalbard, Geomorphology, 392, 107 899, https://doi.org/10.1016/j.geomorph.2021.107899, 2021.
 - Van Dijk, M., Postma, G., and Kleinhans, M. G.: Autocyclic behaviour of fan deltas: an analogue experimental study, Sedimentology, 56, 1569–1589, 2009.
- Van Dijk, M., Kleinhans, M. G., Postma, G., and Kraal, E.: Contrasting morphodynamics in alluvial fans and fan deltas: effect of the downstream boundary, Sedimentology, 59, 2125–2145, 2012.
 - Vincent, L. T., Eaton, B. C., Leenman, A. S., and Jakob, M.: Secondary Geomorphic Processes and Their Influence on Alluvial Fan Morphology, Channel Behavior and Flood Hazards, Journal of Geophysical Research: Earth Surface, 127, https://doi.org/10.1029/2021jf006371, 2022.
- 695 Wang, H., Harvey, A. M., Xie, S., Kuang, M., and Chen, Z.: Tributary-junction fans of China's Yangtze Three-Gorges valley: morphological implications, Geomorphology, 100, 131–139, 2008.

- Wasson, R.: Intersection point deposition on alluvial fans: an Australian example, Geografiska Annaler. Series A. Physical Geography, pp. 83–92. 1974.
- Wells, S. G. and Harvey, A. M.: Sedimentologic and geomorphic variations in storm-generated alluvial fans, Howgill Fells, northwest England, Geological Society of America Bulletin, 98, 182–198, 1987.
 - Wendeler, C. and Volkwein, A.: Laboratory tests for the optimization of mesh size for flexible debris-flow barriers., Natural Hazards & Earth System Sciences, 15, 2015.
 - Wendeler, C., Volkwein, A., Roth, A., Denk, M., and Wartmann, S.: Field measurements and numerical modelling of flexible debris flow barriers, Debris-Flow Hazards Mitig. Mech. Predict. Assess. Millpress, Rotterdam, pp. 681–687, 2007.
- Whipple, K. X., Parker, G., Paola, C., and Mohrig, D.: Channel dynamics, sediment transport, and the slope of alluvial fans: Experimental study, Journal of Geology, 106, 677–693, 1998.
 - Woods, S. W., MacDonald, L. H., and Westbrook, C. J.: Hydrologic interactions between an alluvial fan and a slope wetland in the central Rocky Mountains, USA, Wetlands, 26, 230–243, 2006.
 - Yalin, M. S.: Theory of hydraulic models, Macmillan International Higher Education, 1971.
- 710 Zarn, B. and Davies, T. R.: The significance of processes on alluvial fans to hazard assessment, Zeitschrift für Geomorphologie, pp. 487–500, 1994.
 - Zubrycky, S., Mitchell, A., McDougall, S., Strouth, A., Clague, J. J., and Menounos, B.: Exploring new methods to analyse spatial impact distributions on debris-flow fans using data from south-western British Columbia, Earth Surface Processes and Landforms, 46, 2395–2413, https://doi.org/10.1002/esp.5184, 2021.