

A numerical model for solving the linearized gravity-wave equations by a multilayer method

Alexandru Doicu¹, Dmitry S. Efremenko², and Thomas Trautmann²

¹Independent researcher, 82110 Germering, Germany

²Deutsches Zentrum für Luft- und Raumfahrt (DLR), Institut für Methodik der Fernerkundung (IMF), 82234 Oberpfaffenhofen, Germany

Correspondence: Dmitry S. Efremenko (dmitry.efremenko@dlr.de)

Abstract. We developed a numerical model for solving the linearized gravity-wave equations using a multilayer approach that explicitly accounts for viscosity, thermal conduction, and ion drag. The solution strategy is based on a matrix-exponential formalism and comprises two classes of methods: global matrix methods and scattering matrix methods. The model supports both single-frequency waves and time-dependent wave packets. Particular emphasis is placed on the global matrix method, which exploits the structured form of the multilayer system to achieve high computational efficiency while maintaining numerical accuracy. Numerical experiments demonstrate that all methods yield identical accuracy, although the global matrix method is significantly more efficient than the scattering matrix method, especially for time-dependent wave packets. The impact of ion drag on wave characteristics is quantified within this framework. The implementation is freely available as open-source code at <https://github.com/AlexandruDoicu/Gravity-Waves>.

1 Introduction

Time-step methods (Liu et al., 2013; Heale et al., 2014; Fritts et al., 2015) are commonly used to solve fully nonlinear sets of governing equations for upper-atmospheric gravity waves, thereby allowing the modeling of wave breaking, secondary wave generation, and weakly nonlinear effects. However, as compared to linear methods for gravity waves (Midgley and Liemohn, 1966; Volland, 1969a, b; Francis, 1973; Yeh and Liu, 1974; Klostermeyer, 1972, 1980; Knight et al., 2024) they are computationally expensive. In Pütz et al. (2019) it was found that a time-step model took several hours to run, while a linear method only took several seconds. In this regard, linear methods are more suitable for analyzing measured data.

The linearized equations can be transformed into a linear system of ordinary differential equations with variable coefficients that depend on the background atmospheric parameters and their height derivatives (the atmospheric parameters are assumed to be horizontally uniform but vertically varying). A common technique for integrating the linearized equations is the multilayer method first applied by Pfeffer and Zarichny (1962). In this method, the atmosphere is divided into a sequence of thin layers, and in each layer, a linear system of ordinary differential equations with constant coefficients is solved. The analytic wave solutions in neighboring layers are matched by the continuity condition of the variables across the interface. There are two methods for deriving a linear system of ordinary differential equations with constant coefficients.

1. In the physical multilayer method, the atmospheric parameters, and in particular, the temperature and wind velocity, are assumed to be constant within each layer (Midgley and Liemohn, 1966; Volland, 1969a, b; Francis, 1973; Yeh and Liu, 1974). As a result of the piecewise constant approximation, the height derivatives of the atmospheric parameters are zero within each layer.
2. In the numerical multilayer method, the coefficients as a whole are approximated by their values in the middle of the layer (Klostermeyer, 1972). As a result, the height derivatives of the atmospheric parameters (approximated by their values in the middle of the layers) are also included in the resulting system of equations.

The criticism of physical multilayer methods by Hines (1973) concerns whether the equations describing the state variables in a layer are physically realistic. He concluded that it is impossible to find the appropriate variables when either (i) the viscosity and the wind velocity are nonzero or (ii) the thermal conductivity and the temperature height derivative are nonzero. However, as mentioned by Knight et al. (2022), Hines' concern about the physical meaning of the state variables is not relevant for a numerical multilayer method. The reason is that in a purely mathematical context, it is sufficient to prove that the method, converges to a correct solution in the infinitesimally thin layer limit. A justification of this result, based on a matrix–exponential representation for the solution, can be found in Klostermeyer (1980).

According to Volland (1969a), a layer is said to be isothermal if the background temperature is constant, and homogeneous if the kinematic viscosity is constant. In the case of an isothermal, homogeneous, and windless atmosphere, as in Midgley and Liemohn (1966); Volland (1969a, b); Francis (1973); Yeh and Liu (1974), the dispersion relation, associated to the system of ordinary differential equations, separates into three pairs of ascending and descending gravity-wave, viscosity-wave, and thermal conduction-wave modes. The viscosity-wave and thermal conduction-wave modes are also referred to as dissipative modes. The main distinction between the two pairs of dissipative modes and the pair of gravity-wave modes is that the latter have smaller vertical wavenumber imaginary parts. This means that ascending gravity-wave modes do not decrease in amplitude as rapidly with increasing altitude as dissipative modes. On the other hand, the assumption of locally constant kinematic viscosity is unrealistic as discussed in Knight et al. (2019). If one assumes instead that the dynamic viscosity is constant within each layer, it is generally not possible to distinguish between ascending and descending modes for certain wavenumbers, frequencies, and background parameters (Knight et al., 2022, 2019, 2021). In this context, Knight et al. (2022) explained that the problem of distinguishing ascending from descending modes is related to the problematic branch points of the root functions giving the vertical wavenumber as a function of complex frequency. Along this line, the authors proposed a technique called imaginary frequency shift to assist in achieving this separation.

The inclusion of dissipative modes in a linearized model produces a numerical swamping (Maeda, 1985) in which certain descending modes grow so rapidly in the upward direction that numerical overflow occurs when the system of differential equation is subject to lower and upper boundary conditions. Several methods have been proposed to reduce numerical swamping.

1. Midgley and Liemohn (1966) employed an iterative method that can be regarded as a Gauss–Seidel group iteration. However, the Gauss–Seidel iteration may fail to converge in certain situations, in particular when gravity and dissipa-

tive modes become strongly coupled, as discussed in Volland (1969a, b). Klostermeyer (1980) avoids this difficulty by introducing the concept of a transfer matrix, which relates the wave amplitudes at different altitude levels and provides a more robust framework for treating such coupling.

2. Volland (1969b) applied the scattering matrix formalism to a three-layer atmosphere assuming (i) abrupt changes in variables at the interfaces between the different layers and (ii) that certain background parameters remain constant in the lower and upper layers. Knight et al. (2019) also formulated the problem in terms of scattering matrices which are closely related to the reflection and transmission matrices appearing in seismology (Pérez-Álvarez and García-Moliner, 2004). However, in contrast to Volland, the authors used a more rigorous approach, i.e., a sequence of composed scattering matrices instead of just a one stand-alone scattering matrix.

3. Maeda (1985) defined numerical swamping as the annihilation of linear independence among supposedly independent solutions. To address this challenge and obtain a comprehensive set of special solutions that are linearly independent, he utilized a technique developed by Inoue and Horowitz (1966).

In radiative transfer, it is also necessary to solve a linear system of ordinary differential equations with constant coefficients. This arises by transforming the continuous dependence of radiance on directions into a dependence on a discrete set of direction. The standard methods for solving the linear system of ordinary differential equations are the discrete ordinate method (Stamnes, 1986; Wick, 1943; Chandrasekhar, 1950; Stamnes and Swanson, 1981) and the matrix operator method (Plass et al., 1973; Kattawar et al., 1973; van de Hulst, 1963; Nakajima and Tanaka, 1986). In the classical discrete ordinate method, the solution to these equations is expressed as a linear combination of characteristic solutions of the discretized problem. Conversely, the matrix operator method focuses on numerical computations of reflection and transmission matrices. Both methods can be formulated using the matrix exponential formalism. In the framework of the so called discrete ordinate method with matrix exponential, Doicu and Trautmann (2009a, b) designed stable numerical algorithms for computing the radiance field in a multi-layered atmosphere, while in the framework of the matrix operator method with matrix exponential, Budak et al. (2011, 2012) provided explicit and stable representations for the reflection and transmission matrices. A consistent overview of the matrix exponential description of radiative transfer can be found in Efremenko et al. (2017).

The main purpose of this article is to apply radiative transfer techniques to solve the linearized gravity-wave equations. As a prototype, we will consider the equations that describe gravity waves in the ionosphere, and that include viscosity, thermal conduction, and ion drag. In principle, a full wave model for the ionosphere comprises the hydrodynamic equations for the neutral atmosphere and the ionospheric equations. These two sets of equations are coupled through the ion drag, and should be solved together. However, to simplify the analysis, we decouple the two sets of equations by adopting a fast field-aligned diffusion approximation, which may be viewed as a generalization of an approximation originally proposed by Klostermeyer (1972).

Our paper is organized as follows. In Section 2, we present the derivation of the matrix exponential solution of the linearized equations, while Section 3 describes stable numerical methods for computing the amplitudes of the characteristic solution in a stratified atmosphere. Section 4, which is largely inspired by the works of Knight et al. (2019, 2021, 2022, 2024), addresses

the computation of the perturbed quantities for both harmonic and non-harmonic source functions, that is, for single-frequency waves and time-dependent wave packets. The concepts of causality and the imaginary frequency shift, which are rigorously treated in Knight et al. (2019, 2021, 2022), are also briefly discussed. Aspects of the numerical implementation are addressed in Section 5, and representative simulation results are presented in Section 6. Additional theoretical issues are discussed in the appendices. Appendix A contains the linearized hydrodynamic equations for the neutral atmosphere and the derivation of the underlying system of differential equations. Appendix B outlines the linearized ionospheric equations and discusses the assumptions employed to decouple the hydrodynamic and ionospheric systems. Appendix C describes methods for computing grid-point values of the state vector in a stratified atmosphere. Appendix D addresses several implementation issues, including a practical, albeit heuristic, approach for determining the imaginary frequency shift.

2 Matrix exponential solution of the linearized equations

To design a full wave model for the ionosphere, we use the hydrodynamic equations for the neutral atmosphere and the ionospheric equations. In a linearized (perturbation) method, a quantity f is expressed as

$$f = f_0 + f', \quad (1)$$

where f_0 and f' are the unperturbed (background) and the perturbed quantity, respectively. The perturbations are assumed to be small so that it is justified to neglect all terms of higher than the first order.

Concretely, we solve the linearized hydrodynamic equations for the neutral atmosphere together with the linearized ion continuity and momentum equations. The linearized neutral-atmosphere equations are solved under the following assumptions:

A1. The geographic and geomagnetic coordinates are identical.

A2. The wave propagates in the meridional plane (the x -coordinate is positive southwards while the z -coordinate is positive upwards), i.e.,

$$f = f(x, z, t). \quad (2)$$

A3. All background (unperturbed) quantities vary only in the z -direction, i.e.,

$$f_0 = f_0(z), \quad (3)$$

while all perturbations vary harmonically in time and the x -direction, i.e.,

$$f' = f'(x, z, t) = \bar{f}(z) e^{j(\omega t - k_x x)}, \quad (4)$$

where ω is the angular frequency and k_x the horizontal wavenumber. Note that in some gravity-wave studies, the opposite sign convention for frequency and horizontal wavenumber is used (e.g. Knight et al. (2025)).

The linearization model is described in Appendix A. It provides a general framework that accounts for the altitude derivatives of the background velocity u_0 , temperature T_0 , density scale height H_ρ , and dynamic viscosity μ_0 . Apart from the ion-drag terms, the formulation follows a structure similar to those employed by Vadas and Nicolls (2012) and Knight et al. (2024).

The computation of the ion-drag force and ion-drag heating is presented in Appendix B. The ion-drag terms are introduced in an approximate manner, with the explicit aim of decoupling the hydrodynamic and ion equation systems. To this end, we adopt the following assumptions:

- B1.** In the ion continuity equation, the perturbed production and loss terms are neglected.
- B2.** In the ion momentum equation, ion inertia and ion–ion collisions are neglected, and only transport parallel to the magnetic field lines is retained. Under these assumptions, the ion momentum equation reduces to the ambipolar diffusion equation.
- B3.** To decouple the ion continuity equation from the diffusion equation, fast field-aligned diffusion is assumed, meaning that the field-aligned diffusion is sufficiently strong for the relative ion perturbation and the perturbed diffusion velocity to remain nearly constant along a magnetic field line.

The linearized equations lead to a linear system of ordinary differential equations, written in matrix form as

$$\frac{1}{k_x} \frac{d\mathbf{e}}{dz} = \mathbf{A}\mathbf{e}, \quad (5)$$

where

$$\mathbf{e} = [\hat{u}, \hat{w}, \hat{T}, \hat{\mathcal{U}}, \hat{\mathcal{W}}, \hat{\mathcal{T}}]^T \quad (6)$$

is the state vector, and $\mathbf{A}$ is the propagation matrix with altitude independent elements (whose expressions follow from Eqs. (A41)–(A46) of Appendix A). In general, the unknowns (the hat quantities in Eq. (6)) are defined through the relation

$$\bar{f}(z) = C(z)\hat{f}(z), \quad (7)$$

where $\bar{f}$ is defined by Eq. (4), and C is a known quantity that ensures that $\hat{f}$ is dimensionless and that may or may not depend on altitude (here, we indicate that C depend on z). Specifically, for the background velocity $\mathbf{u}_0 = (u_0, 0, 0)$, and the perturbed velocity $\mathbf{u}' = (u', 0, w')$, we have (cf. Eqs. (A39) and (A40) of Appendix A)

$$\bar{u}(z) = \frac{\omega_0}{k_x} \hat{u}(z), \quad (8)$$

$$\bar{w}(z) = \frac{\omega_0}{k_x} \hat{w}(z), \quad (9)$$

$$\bar{T}(z) = T_0(z)\hat{T}(z), \quad (10)$$

and

$$\hat{\mathcal{U}} = \frac{d\hat{u}}{dz}, \quad \hat{\mathcal{W}} = \frac{d\hat{w}}{dz}, \quad \hat{\mathcal{T}} = \frac{d\hat{T}}{dz}. \quad (145)$$

where ω_0 is a reference frequency.

If $(\lambda_n, \mathbf{v}_n)$ is an eigenpair of the matrix A , i.e., $A\mathbf{v}_n = \lambda_n \mathbf{v}_n$ for $n = 1, \dots, N$, where $N = \dim(\mathbf{e})$, the general solution of Eq. (5) is a linear combination of the characteristic solutions $\exp(k_x \lambda_n z) \mathbf{v}_n$, that is,

$$\begin{aligned}
 \mathbf{e}(z) &= \sum_{n=1}^N a_n \mathbf{e}^{k_x \lambda_n z} \mathbf{v}_n \\
 150 \quad &= [\mathbf{v}_1, \dots, \mathbf{v}_N] \begin{bmatrix} \mathbf{e}^{k_x \lambda_1 z} & \dots & 0 \\ \vdots & \ddots & \vdots \\ 0 & \dots & \mathbf{e}^{k_x \lambda_N z} \end{bmatrix} \begin{bmatrix} a_1 \\ \vdots \\ a_N \end{bmatrix} \\
 &= V \text{diag}[\mathbf{e}^{k_x \lambda_n z}] \mathbf{a},
 \end{aligned} \tag{11}$$

where

$$V = [\mathbf{v}_1, \dots, \mathbf{v}_N], \quad \text{diag}[\mathbf{e}^{k_x \lambda_n z}] = \begin{bmatrix} \mathbf{e}^{k_x \lambda_1 z} & \dots & 0 \\ \vdots & \ddots & \vdots \\ 0 & \dots & \mathbf{e}^{k_x \lambda_N z} \end{bmatrix}, \tag{12}$$

and $\mathbf{a} = [a_1, \dots, a_N]^T$. At $z = 0$, we have $\mathbf{e}(0) = V\mathbf{a}$; thus,

$$155 \quad \mathbf{a} = V^{-1} \mathbf{e}(0), \tag{13}$$

implying (cf. Eq. (11)),

$$\mathbf{e}(z) = V \text{diag}[\mathbf{e}^{k_x \lambda_n z}] V^{-1} \mathbf{e}(0) = \mathbf{e}^{k_x A z} \mathbf{e}(0), \tag{14}$$

and conversely,

$$\mathbf{e}(0) = V \text{diag}[\mathbf{e}^{-k_x \lambda_n z}] V^{-1} \mathbf{e}(z) = \mathbf{e}^{-k_x A z} \mathbf{e}(z). \tag{15}$$

160 From the theory of gravity waves within an isothermal, nondissipative atmosphere, it is generally known that the amplitude of an ascending modes increases like $\exp[z/(2H_a)]$, where H_a is the atmospheric scale height (Hines, 1960). This is necessary to keep the wave energy constant in an atmosphere where the pressure decreases exponentially with height. In this regard, we define the vertical wavenumber k_{zn} through the relation

$$\text{diag}[\mathbf{e}^{k_x \lambda_n z}] = \text{diag}[\mathbf{e}^{z/(2H_a)} \mathbf{e}^{-j k_{zn} z}], \tag{16}$$

165 yielding

$$\lambda_n = -\frac{j}{k_x} k_{zn} + \frac{1}{2} \alpha, \tag{17}$$

and conversely,

$$k_{zn} = j k_x \left(\lambda_n - \frac{1}{2} \alpha \right), \tag{18}$$

where $\alpha = 1/(k_x H_a)$. The characteristic equation $\det(A - \lambda I_N) = 0$ has $N = 6$ solutions. As shown in Appendix A, for a constant kinematic viscosity the solutions occur in pairs and correspond to (i) ascending and descending gravity-wave modes, (ii) ascending and descending viscosity-wave modes, and (iii) ascending and descending thermal-conduction wave modes (Volland, 1969b; Francis, 1973). In that appendix, this pairing is explicitly demonstrated by deriving the dispersion relation for the special case of an isothermal (constant background temperature), homogeneous (constant kinematic viscosity), and windless atmosphere without ion drag. This solution classification is made according to the imaginary part of the vertical wavenumber k_{zn} . In the more realistic case of a constant background dynamic viscosity, it is generally not possible to define ascending and descending modes as corresponding pairs (see Eq. (A52) in Appendix A). However, in our model we will use the same rule as in the case of a homogeneous atmosphere, even though the traditional concept of classifying waves in pairs is no longer applicable. Specifically, we compute k_{zn} for $n = 1, \dots, N$ by means of Eq. (18), and order the set $\{k_{zn}\}_{n=1}^N$, and accordingly, $\{\lambda_n\}_{n=1}^N$, such that

$$\text{Im}(k_{z3}) < \text{Im}(k_{z2}) < \text{Im}(k_{z1}) < \text{Im}(k_{z4}) < \text{Im}(k_{z5}) < \text{Im}(k_{z6}). \quad (19)$$

By convention, (i) the pairs $(k_{z1} = k_{z1}^+, \lambda_1 = \lambda_1^+)$ and $(k_{z4} = k_{z1}^-, \lambda_4 = \lambda_1^-)$ will correspond to ascending and descending gravity-wave modes, respectively, (ii) the pairs $(k_{z2} = k_{z2}^+, \lambda_2 = \lambda_2^+)$ and $(k_{z5} = k_{z2}^-, \lambda_5 = \lambda_2^-)$ to ascending and descending viscosity-wave modes, respectively, and (iii) the pairs $(k_{z3} = k_{z3}^+, \lambda_3 = \lambda_3^+)$ and $(k_{z6} = k_{z3}^-, \lambda_6 = \lambda_3^-)$ to ascending and descending thermal conduction-wave modes, respectively. Thus, the vertical wavenumber is an auxiliary quantity that is used only to identify the different modes. According to the notation introduced above, $\{\lambda_m^+\}_{m=1}^M$, where $M = N/2$ is the number of modes, is the set of eigenvalues defining ascending modes, and $\{\lambda_m^-\}_{m=1}^M$ is the set of eigenvalues defining descending modes. Because $\text{Re}(\lambda_n) = \text{Im}(k_{zn})/k_x + \alpha/2$, it is obvious that we can put aside the concept of vertical wavenumber when identifying the different wave modes. We can simply order the set $\{\lambda_n\}_{n=1}^N$, such that

$$\text{Re}(\lambda_3) < \text{Re}(\lambda_2) < \text{Re}(\lambda_1) < \text{Re}(\lambda_4) < \text{Re}(\lambda_5) < \text{Re}(\lambda_6), \quad (20)$$

and use the same classification rule as above. A commonly cited interpretation of condition (20) is that, for increasing z , the exponential term $\exp(k_x \lambda_n z)$ will tend to be damped more for ascending modes than for descending modes; conversely, for decreasing z , the roles of ascending and descending modes are reversed. However, such a classification of upgoing and downgoing roots (e.g., Volland (1969b) and related works) was primarily heuristic and lacked a rigorous theoretical justification. By contrast, the approach of Knight et al. (2019), which is discussed in Section 4, introduces additional constraints beyond condition (20) that are explicitly related to causality and is therefore grounded in theoretical considerations rather than heuristic arguments.

To highlight the different wave modes, we organize the state vector $e(z)$ as

$$\begin{aligned}
\mathbf{e}(z) &= \mathbf{e}_+(z) + \mathbf{e}_-(z) \\
&= \left(\sum_{m=1}^M a_m^+ \mathbf{e}^{k_x \lambda_m^+ z} \mathbf{v}_m^+ \right) + \left(\sum_{m=1}^M a_m^- \mathbf{e}^{k_x \lambda_m^- z} \mathbf{v}_m^- \right) \\
200 \quad &= [\mathbf{V}_+, \mathbf{V}_-] \begin{bmatrix} \text{diag}[\mathbf{e}^{k_x \lambda_m^+ z}] & 0_M \\ 0_M & \text{diag}[\mathbf{e}^{k_x \lambda_m^- z}] \end{bmatrix} \begin{bmatrix} \mathbf{a}_+ \\ \mathbf{a}_- \end{bmatrix}, \tag{21}
\end{aligned}$$

where the eigenvector $\mathbf{v}_m^\pm$ corresponds to the eigenvalue $\lambda_m^\pm$,

$$\mathbf{V} = [\mathbf{V}_+, \mathbf{V}_-], \quad \mathbf{V}_\pm = [\mathbf{v}_1^\pm, \dots, \mathbf{v}_M^\pm], \tag{22}$$

$$\mathbf{a} = \begin{bmatrix} \mathbf{a}_+ \\ \mathbf{a}_- \end{bmatrix}, \quad \mathbf{a}_\pm = \begin{bmatrix} a_1^\pm \\ \vdots \\ a_M^\pm \end{bmatrix}, \tag{23}$$

and 0_M is the zero matrix of dimension $M \times M$. Some useful relations are listed below

205 1. From Eq. (13), we find

$$\mathbf{a}_+ = [\mathbf{I}_M, 0_M] \mathbf{a} = [\mathbf{I}_M, 0_M] \mathbf{V}^{-1} \mathbf{e}(0), \tag{24}$$

$$\mathbf{a}_- = [0_M, \mathbf{I}_M] \mathbf{a} = [0_M, \mathbf{I}_M] \mathbf{V}^{-1} \mathbf{e}(0), \tag{25}$$

where $\mathbf{I}_M$ is the identity matrix of dimension $M \times M$.

2. From Eq. (21), that is,

$$210 \quad \mathbf{e}_\pm(z) = \sum_{m=1}^M a_m^\pm \mathbf{e}^{k_x \lambda_m^\pm z} \mathbf{v}_m^\pm = \mathbf{V}_\pm \text{diag}[\mathbf{e}^{k_x \lambda_m^\pm z}] \mathbf{a}_\pm, \tag{26}$$

we deduce that

$$\mathbf{e}_\pm(0) = \mathbf{V}_\pm \mathbf{a}_\pm. \tag{27}$$

3. From Eq. (14), we obtain

$$\mathbf{e}_+(z) = \mathbf{T}_+ \mathbf{e}(0), \tag{28}$$

215 where

$$\mathbf{T}_+ = \mathbf{V} \begin{bmatrix} \text{diag}[\mathbf{e}^{k_x \lambda_m^+ z}] & 0_M \\ 0_M & 0_M \end{bmatrix} \mathbf{V}^{-1}, \tag{29}$$

while from Eq. (15), we find

$$\mathbf{e}_-(0) = \mathbf{T}_- \mathbf{e}(z), \quad (30)$$

where

$$\mathbf{T}_- = \mathbf{V} \begin{bmatrix} 0_M & 0_M \\ 0_M & \text{diag}[\mathbf{e}^{-k_x \lambda_m^- z}] \end{bmatrix} \mathbf{V}^{-1}. \quad (31)$$

3 Solution of the linearized equations for a stratified atmosphere

Consider an equidistant discretization of the atmosphere, i.e., $\hat{z}_i = z_{\min} + (i-1)\Delta\hat{z}$ for $i = 1, \dots, 2L+1$. A layer l , where $l = 1, \dots, L$ and L is the number of layers, is bounded from below and from above by the grid points $z_l = \hat{z}_{2l-1}$ and $z_{l+1} = \hat{z}_{2l+1}$, respectively, and its center is located at the grid point $\bar{z}_l = \hat{z}_{2l}$. The atmosphere extends from $z_{\min} = z_1 = \hat{z}_1$ to $z_{\max} = \hat{z}_{2L+1} = z_{\min} + L(2\Delta\hat{z})$. We adopt a numerical multilayer method (Klostermeyer, 1972; Knight et al., 2022, 2019), and approximate the altitude dependent matrix $\mathbf{A}$ in each layer l by its value at the layer center, i.e., $\mathbf{A}_l = \mathbf{A}(\bar{z}_l)$. The eigenpairs of the propagation matrix $\mathbf{A}_l$ are denote by $(\lambda_{nl}, \mathbf{v}_{nl})$ for $n = 1, \dots, N$. The matrix differential equation (5) can be solved either (i) in terms of the amplitudes $\mathbf{a}_l$, $l = 1, \dots, L$ of the characteristic solutions, or (ii) in terms of the grid-point values $\mathbf{e}_l = \mathbf{e}(z_l)$, $l = 1, \dots, L$ of the state vector $\mathbf{e}(z)$. In the following we present the method based on the amplitude of the characteristic solutions, whereas the second method is described in Appendix C.

In the layers l and $l+1$, the solutions are given by (cf. Eq. (11))

$$\mathbf{e}_l(z) = \mathbf{V}_l \text{diag}[\mathbf{e}^{k_x \lambda_{nl}(z-z_l)}] \mathbf{a}_l, \quad z_l \leq z \leq z_{l+1}, \quad (32)$$

and

$$\mathbf{e}_{l+1}(z) = \mathbf{V}_{l+1} \text{diag}[\mathbf{e}^{k_x \lambda_{n,l+1}(z-z_{l+1})}] \mathbf{a}_{l+1}, \quad z_{l+1} \leq z \leq z_l, \quad (33)$$

respectively. The continuity condition at the interface $z = z_{l+1}$,

$$\mathbf{e}_l(z_{l+1}) = \mathbf{e}_{l+1}(z_{l+1}), \quad (34)$$

gives

$$\mathbf{V}_l^{-1} \mathbf{V}_{l+1} \mathbf{a}_{l+1} = \text{diag}[\mathbf{e}^{k_x \lambda_{n,l} \Delta_l}] \mathbf{a}_l, \quad (35)$$

where $\Delta_l = z_{l+1} - z_l$. To obtain a stable system of equations, we define a scaling matrix $\mathbf{K}_l^1$ with entries

$$[\mathbf{K}_l^1]_{nn} = \begin{cases} \mathbf{e}^{-k_x \lambda_{nl} \Delta_l}, & \text{Re}(\lambda_{nl}) > 0 \\ 1, & \text{Re}(\lambda_{nl}) \leq 0 \end{cases}, \quad (36)$$

and a second scaling matrix K_l^0 by

$$K_l^0 = K_l^1 \text{diag}[e^{k_x \lambda_{nl} \Delta_l}], \text{ i.e., } [K_l^0]_{nn} = \begin{cases} 1, & \text{Re}(\lambda_{nl}) > 0 \\ e^{k_x \lambda_{nl} \Delta_l}, & \text{Re}(\lambda_{nl}) \leq 0 \end{cases}. \quad (37)$$

Multiplying Eq. (35) from the left with K_l^1 yields the continuity equation

$$\mathbb{A}_{l,l+1}^1 \mathbf{a}_{l+1} - \mathbb{A}_{l,l+1}^0 \mathbf{a}_l = \mathbf{0}_{2M}, \quad l = 1, \dots, L-1, \quad (38)$$

245 where $\mathbf{0}_{2M}$ is the $2M$ -dimensional zero vector, and

$$\mathbb{A}_{l,l+1}^1 = K_l^1 (V_l^{-1} V_{l+1}), \quad (39)$$

$$\mathbb{A}_{l,l+1}^0 = K_l^0. \quad (40)$$

The scaling matrices K_l^1 and K_l^0 prevent a possible blow-up of the exponential terms for $\text{Re}(\lambda_{nl}) > 0$ and $\text{Re}(\lambda_{nl}) \leq 0$, respectively. Such scaling techniques are standard in radiative transfer theory and are commonly used to obtain stable numerical
250 algorithms for computing the radiance field in multilayered atmospheres (Doicu and Trautmann, 2009a, b).

Actually, we have $L-1$ continuity equations imposed at the levels $z_2, \dots, z_L$ for the L unknowns $\mathbf{a}_1, \dots, \mathbf{a}_L$. The two missing equations are obtained from the lower and upper boundary conditions.

1. At the lower boundary, i.e., at $z = z_1 (= z_{\min})$, we assume that only the ascending wave modes transport energy upward.

In this regard, we impose that in the layer $l = 1$, we have $a_{1,l=1}^+ = s = \text{finite}$, and that the rest of $a_{m,l=1}^+$ are zero,
255 that is, $a_{m,l=1}^+ = 0$ for $m \neq 1$ (Klostermeyer, 1972). Note that $a_{1,l=1}^+$ is the amplitude of the ascending gravity-wave modes, while the condition $a_{m,l=1}^+ = 0$ for $m \neq 1$ means that the amplitudes of the ascending viscosity-wave and thermal conduction-wave modes are assumed to be zero. In this case, the boundary condition for ascending modes is

$$\mathbf{e}_{l=1}^+(z_1) = \begin{bmatrix} \hat{u}_{l=1}^+(z_1) \\ \hat{w}_{l=1}^+(z_1) \\ \hat{T}_{l=1}^+(z_1) \\ \hat{\mathcal{U}}_{l=1}^+(z_1) \\ \hat{\mathcal{W}}_{l=1}^+(z_1) \\ \hat{\mathcal{T}}_{l=1}^+(z_1) \end{bmatrix} = \sum_{m=1}^M a_{m,l=1}^+ \mathbf{v}_{m,l=1}^+ = s \mathbf{v}_{1,l=1}^+. \quad (41)$$

Excluding for the moment the scale factor s , we express the boundary condition for amplitudes,

$$260 \quad \mathbf{a}_{l=1}^+ = \begin{bmatrix} a_{1,l=1}^+ \\ a_{2,l=1}^+ \\ \vdots \\ a_{M,l=1}^+ \end{bmatrix} = \mathbf{i}_1 \text{ with } \mathbf{i}_1 = \begin{bmatrix} 1 \\ 0 \\ \vdots \\ 0 \end{bmatrix}, \quad (42)$$

in matrix form as

$$[\mathbf{I}_M, 0_M] \mathbf{a}_1 = [\mathbf{I}_M, 0_M] \begin{bmatrix} \mathbf{a}_1^+ \\ \mathbf{a}_1^- \end{bmatrix} = \mathbf{i}_1, \quad (43)$$

where in general, $\mathbf{a}_{l_0}^\pm = \mathbf{a}_{l=l_0}^\pm$, for $l_0 = 1, \dots, L$. The boundary condition (41) is a modal (eigenvector-based) boundary condition, which imposes that the state at z_1 is exactly aligned with a chosen eigenmode. In this way, a pure normal mode is injected into the system.

265

2. A reasonable upper boundary condition is that there is no downgoing energy at great altitudes, so that the amplitudes of all descending wave modes must be zero at the upper boundary (Klostermeyer, 1972). In this regard, we impose $a_{m,l=L}^- = 0$ for all $m = 1, \dots, M$, in which case, in the layer L , the boundary condition for descending modes is

$$\mathbf{e}_{l=L}^-(z) = \sum_{m=1}^M a_{m,l=L}^- \mathbf{e}^{k_x \lambda_{m,l=L}^- z} \mathbf{v}_{m,l=L}^- = \mathbf{0}_{2M} \quad (44)$$

270

for all $z_L \leq z \leq z_{L+1}$. In matrix form, the boundary condition for amplitudes

$$\mathbf{a}_{l=L}^- = \begin{bmatrix} a_{1,l=L}^- \\ a_{2,l=L}^- \\ \vdots \\ a_{M,l=L}^- \end{bmatrix} = \mathbf{0}_M \quad (45)$$

is written as

$$[0_M, \mathbf{I}_M] \mathbf{a}_L = [0_M, \mathbf{I}_M] \begin{bmatrix} \mathbf{a}_L^+ \\ \mathbf{a}_L^- \end{bmatrix} = \mathbf{0}_M. \quad (46)$$

Comments.

275

1. The scaling matrices defined by Eqs. (36) and (37) do not take into account a classification of the wave modes as ascending and descending (as defined by Eq. (20)). Consequently, the continuity equations (38) do not account for this classification, and the only equations in which it is necessary to distinguish between ascending and descending modes are the boundary condition equations (43) and (46). From this point of view, the method is similar to finite-difference methods (Lindzen and Kuo, 1969; Hickey et al., 1998, 2009).

280

2. An alternative type of lower boundary condition was proposed by Knight et al. (2022, 2019). In this approach, the lower boundary condition for ascending modes is prescribed in terms of M values $b_{1,k}$, $k = 1, \dots, M$, according to (compare with Eq. (41))

$$\left[\frac{d^{k-1} \mathbf{e}_{l=1}^+(z_1)}{dz^{k-1}} \right]_q = b_{1,k}, \quad k = 1, \dots, M, \quad (47)$$

where the notation $[\mathbf{x}]_q$ denotes the q th component of the vector $\mathbf{x}$. In the present context, this refers to the first M components, corresponding to $\hat{u}$ ($q = 1$), $\hat{w}$ ($q = 2$), and $\hat{T}$ ($q = 3$). In Eq. (47), k denotes the derivative order, and in the case $M = 3$, we have explicitly,

$$[\mathbf{e}_{l=1}^+(z_1)]_q = b_{1,1}, \quad \left[\frac{d\mathbf{e}_{l=1}^+}{dz}(z_1) \right]_q = b_{1,2}, \quad \left[\frac{d^2\mathbf{e}_{l=1}^+}{dz^2}(z_1) \right]_q = b_{1,3}. \quad (48)$$

Note that Eq. (47) generalizes Eq. (2.19) in Knight et al. (2022), which is formulated for the first state variable rather than for an arbitrary state variable. Using the relations

$$\frac{d^{k-1}\mathbf{e}_{l=1}^+}{dz^{k-1}}(z_1) = \sum_{m=1}^M a_{m,l=1}^+ (k_x \lambda_{m,l=1}^+)^{k-1} \mathbf{v}_{m,l=1}^+, \quad k = 1, \dots, M, \quad (49)$$

and

$$\left[\frac{d^{k-1}\mathbf{e}_{l=1}^+}{dz^{k-1}}(z_1) \right]_q = \hat{\mathbf{i}}_q^T \frac{d^{k-1}\mathbf{e}_{l=1}^+}{dz^{k-1}}(z_1) = \sum_{m=1}^M a_{m,l=1}^+ (k_x \lambda_{m,l=1}^+)^{k-1} \hat{\mathbf{i}}_q^T \mathbf{v}_{m,l=1}^+, \quad (50)$$

where $\hat{\mathbf{i}}_q$ is a $2M$ -dimensional vector with components (compare with Eq. (42))

$$[\hat{\mathbf{i}}_q]_k = \begin{cases} 1, & k = q \\ 0, & k \neq q \end{cases}, \quad k = 1, \dots, 2M, \quad (51)$$

we find

$$\sum_{m=1}^M [\mathbf{B}]_{mk} a_{m,l=1}^+ = b_{1,k}, \quad k = 1, \dots, M, \quad (52)$$

where $\mathbf{B}$ is a matrix with entries

$$[\mathbf{B}]_{mk} = (k_x \lambda_{m,l=1}^+)^{k-1} \hat{\mathbf{i}}_q^T \mathbf{v}_{m,l=1}^+, \quad m, k = 1, \dots, M. \quad (53)$$

Setting $\mathbf{b}_1 = [b_{1,1}, \dots, b_{1,M}]^T$, we consider the boundary condition for amplitudes

$$\mathbf{a}_1^+ = \mathbf{B}^{-1} \mathbf{b}_1, \quad (54)$$

that is (compare with Eq. (43))

$$[\mathbf{I}_M, 0_M] \mathbf{a}_1 = \mathbf{B}^{-1} \mathbf{b}_1. \quad (55)$$

For the choice $b_{1,k} = 0$ with $k \geq 2$, the first component of the boundary-value vector $\mathbf{b}_1$ can be identified with the scale factor s , that is, $s = b_{1,1}$. Consequently, for a unit scale factor and $M = 3$, we have $\mathbf{b}_1 = [1, 0, 0]^T$. The boundary condition (48) is a localized condition that prescribes the value of a single state variable while enforcing vanishing slope and curvature at the boundary. It effectively acts as an external driver applied to one variable and is appropriate for non-harmonic source functions. Note that this form of the lower boundary condition is used in the statement of Theorem 1 in Knight et al. (2019). For causality considerations, boundary conditions must be expressed in terms of state variables rather than modal amplitudes, since modes are defined in the frequency domain.

310 3. The eigenvectors are not uniquely defined and may be scaled by an arbitrary nonzero complex factor. When the LAPACK routine ZGEEV is used, the eigenvectors are returned with a built-in normalization, namely unit Euclidean norm together with a fixed phase convention. In the present work, we follow Knight et al. (2022, 2019) and apply a component-wise normalization, i.e.,

$$[\mathbf{v}_n]_j = \frac{1}{|[\mathbf{v}_n]_q|} [\mathbf{v}_n]_j, \quad j = 1, \dots, N,$$

315 in which each eigenvector is rescaled such that a selected reference component has unit magnitude ($|[\mathbf{v}_n]_q| = 1$). This reference component is chosen to correspond to a boundary value, thereby fixing the overall amplitude of the eigenmode in a manner consistent with the imposed boundary conditions.

Starting from the continuity equation (38), we will determine the amplitudes $\mathbf{a}_l$ by using two solution methods, namely, (i) the so-called global matrix method with matrix exponential and (ii) the scattering matrix method.

320 3.1 Global matrix method with matrix exponential

The continuity equations (38), and the boundary conditions (43) and (46) for a unit scale factor, are assembled into a system of equations for the stratified atmosphere, i.e.,

$$\mathbb{A}\mathbf{a} = \mathbf{b}, \tag{56}$$

where

$$325 \quad \mathbb{A} = \begin{bmatrix} [0_M, \mathbf{I}_M] & 0 & \dots & 0 & 0 \\ \mathbb{A}_{L-1,L}^1 & -\mathbb{A}_{L-1,L}^0 & \dots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \dots & \mathbb{A}_{12}^1 & -\mathbb{A}_{12}^0 \\ 0 & 0 & \dots & 0 & [\mathbf{I}_M, 0_M] \end{bmatrix}, \tag{57}$$

$$\mathbf{a} = \begin{bmatrix} \mathbf{a}_L \\ \mathbf{a}_{L-1} \\ \vdots \\ \mathbf{a}_2 \\ \mathbf{a}_1 \end{bmatrix}, \text{ and } \mathbf{b} = \begin{bmatrix} \mathbf{0}_M \\ \mathbf{0}_{2M} \\ \vdots \\ \mathbf{0}_{2M} \\ \mathbf{i}_1 \end{bmatrix}. \tag{58}$$

For the lower boundary condition (55), $\mathbf{i}_1$ in Eq. (58) should be replaced by $\mathbf{B}^{-1}\mathbf{b}_1$, where, for a unit scale factor, $\mathbf{b}_1 = [1, 0, 0]^T$. The matrix $\mathbb{A}$ has $3M - 1$ sub- and superdiagonals (excluding the main diagonal) and can therefore be stored in banded form and treated using standard band-matrix techniques. To solve the resulting banded system of linear equations, we employed the
330 LAPACK routines ZGBTRF and ZGBTRS. The routine ZGBTRF performs an LU factorization with partial pivoting of the

complex band matrix, and ZGBTRS subsequently uses this factorization to solve the linear system for the prescribed right-hand side. In this approach, the inverse of the full system matrix is not computed explicitly, which improves the computational efficiency.

After solving Eq. (56), we compute the state vector as

$$335 \quad \mathbf{e}_l = \mathbf{e}(z_l) = \begin{bmatrix} \hat{u}(z_l) \\ \hat{w}(z_l) \\ \hat{T}(z_l) \\ \hat{\mathcal{U}}(z_l) \\ \hat{\mathcal{W}}(z_l) \\ \hat{\mathcal{T}}(z_l) \end{bmatrix} = \mathbf{V}_l \mathbf{a}_l, \quad l = 1, \dots, L, \quad (59)$$

and the wave amplitudes by means of the relation

$$\bar{f}(z) = C(z) \hat{f}(z), \quad (60)$$

where f stands for u , w , and T . The ascending and descending solution modes are computed by using Eq. (27), that is,

$$\mathbf{e}_l^\pm = \mathbf{V}_l^\pm \mathbf{a}_l^\pm, \quad l = 1, \dots, L. \quad (61)$$

340 3.2 Scattering matrix method

We consider the continuity equation (38) and partition the matrices $\mathbb{A}_{l,l+1}^i$, with $i = 0, 1$, as

$$\mathbb{A}_{l,l+1}^i = \begin{bmatrix} [\mathbb{A}_{l,l+1}^i]_{11} & [\mathbb{A}_{l,l+1}^i]_{12} \\ [\mathbb{A}_{l,l+1}^i]_{21} & [\mathbb{A}_{l,l+1}^i]_{22} \end{bmatrix}. \quad (62)$$

Further, we define the scattering matrix at the interface between the layers l and $l+1$ (in fact, at the layer grid point z_{l+1}), $S_{l,l+1}$ through the relation

$$345 \quad \begin{bmatrix} \mathbf{a}_l^- \\ \mathbf{a}_{l+1}^+ \end{bmatrix} = S_{l,l+1} \begin{bmatrix} \mathbf{a}_l^+ \\ \mathbf{a}_{l+1}^- \end{bmatrix}, \quad (63)$$

where

$$S_{l,l+1} = \begin{bmatrix} \mathbf{R}_{l,l+1}^+ & \mathbf{T}_{l,l+1}^- \\ \mathbf{T}_{l,l+1}^+ & \mathbf{R}_{l,l+1}^- \end{bmatrix}, \quad (64)$$

and $\mathbf{R}_{l,l+1}^\pm$ and $\mathbf{T}_{l,l+1}^\pm$ with $\dim(\mathbf{R}_{l,l+1}^\pm) = \dim(\mathbf{T}_{l,l+1}^\pm) = M \times M$, are the reflection and transmission matrices, respectively. In analogy with radiative transfer theory (e.g., Budak et al. (2011, 2012)), Eq. (63) is referred to as the interaction principle

equation at the interface $(l, l+1)$. It shows that the scattering matrix $S_{l,l+1}$ relates the amplitudes $\mathbf{a}_l^-$ and $\mathbf{a}_{l+1}^+$ of the waves leaving the interface with the amplitudes $\mathbf{a}_l^+$ and $\mathbf{a}_{l+1}^-$ of the waves entering the interface. From Eqs. (38) and (63), we find

$$\begin{bmatrix} \mathbf{R}_{l,l+1}^+ & \mathbf{T}_{l,l+1}^- \\ \mathbf{T}_{l,l+1}^+ & \mathbf{R}_{l,l+1}^- \end{bmatrix} = \begin{bmatrix} [\mathbb{A}_{l,l+1}^0]_{12} & -[\mathbb{A}_{l,l+1}^1]_{11} \\ [\mathbb{A}_{l,l+1}^0]_{22} & -[\mathbb{A}_{l,l+1}^1]_{21} \end{bmatrix}^{-1} \begin{bmatrix} -[\mathbb{A}_{l,l+1}^0]_{11} & [\mathbb{A}_{l,l+1}^1]_{12} \\ -[\mathbb{A}_{l,l+1}^0]_{21} & [\mathbb{A}_{l,l+1}^1]_{22} \end{bmatrix}. \quad (65)$$

We organize the computational process as an upward recurrence using the concept of a “stack”. The stack $\mathcal{S}_{l_0 l}$ with $l_0 < l$, is a group of interfaces characterized by the interaction principle equation

$$\begin{bmatrix} \mathbf{a}_{l_0}^- \\ \mathbf{a}_l^+ \end{bmatrix} = \begin{bmatrix} \mathcal{R}_{l_0 l}^+ & \mathcal{T}_{l_0 l}^- \\ \mathcal{T}_{l_0 l}^+ & \mathcal{R}_{l_0 l}^- \end{bmatrix} \begin{bmatrix} \mathbf{a}_{l_0}^+ \\ \mathbf{a}_l^- \end{bmatrix}, \quad (66)$$

where the matrices $\mathcal{R}_{l_0 l}^\pm$ and $\mathcal{T}_{l_0 l}^\pm$ are obtained through a successive application of the interaction principle equation at the interfaces $(l_0, l_0+1), (l_0+1, l_0+2), \dots, (l-1, l)$. Adding a new layer $l+1$, and taking into account that at the interface $(l, l+1)$, the reflection and transmission matrices are $\mathbf{R}_{l,l+1}^\pm$ and $\mathbf{T}_{l,l+1}^\pm$, respectively, we find that the interaction principle equation for the stack $\mathcal{S}_{l_0, l+1}$, is

$$\begin{bmatrix} \mathbf{a}_{l_0}^- \\ \mathbf{a}_{l+1}^+ \end{bmatrix} = \begin{bmatrix} \mathcal{R}_{l_0, l+1}^+ & \mathcal{T}_{l_0, l+1}^- \\ \mathcal{T}_{l_0, l+1}^+ & \mathcal{R}_{l_0, l+1}^- \end{bmatrix} \begin{bmatrix} \mathbf{a}_{l_0}^+ \\ \mathbf{a}_{l+1}^- \end{bmatrix}, \quad (67)$$

where $\mathcal{R}_{l_0, l+1}^\pm$ and $\mathcal{T}_{l_0, l+1}^\pm$ are computed recursively by using of the “adding formulas”

$$\mathcal{R}_{l_0, l+1}^+ = \mathcal{R}_{l_0 l}^+ + \mathcal{T}_{l_0 l}^- (\mathbf{I} - \mathbf{R}_{l, l+1}^+ \mathcal{R}_{l_0 l}^-)^{-1} \mathbf{R}_{l, l+1}^+ \mathcal{T}_{l_0 l}^+, \quad (68)$$

$$\mathcal{T}_{l_0, l+1}^- = \mathcal{T}_{l_0 l}^- (\mathbf{I} - \mathbf{R}_{l, l+1}^+ \mathcal{R}_{l_0 l}^-)^{-1} \mathbf{T}_{l, l+1}^-, \quad (69)$$

$$\mathcal{T}_{l_0, l+1}^+ = \mathbf{T}_{l, l+1}^+ (\mathbf{I} - \mathcal{R}_{l_0 l}^- \mathbf{R}_{l, l+1}^+)^{-1} \mathcal{T}_{l_0 l}^+, \quad (70)$$

$$\mathcal{R}_{l_0, l+1}^- = \mathbf{R}_{l, l+1}^- + \mathbf{T}_{l, l+1}^+ (\mathbf{I} - \mathcal{R}_{l_0 l}^- \mathbf{R}_{l, l+1}^+)^{-1} \mathcal{R}_{l_0 l}^- \mathbf{T}_{l, l+1}^-, \quad (71)$$

for $l = l_0 + 1, \dots, L-1$. Note that Eqs. (68)–(71) are mathematically equivalent to Eqs. (4.30)–(4.33) in Knight et al. (2019). The procedure is initialized with $\mathcal{R}_{l_0, l_0+1}^\pm = \mathbf{R}_{l_0, l_0+1}^\pm$ and $\mathcal{T}_{l_0, l_0+1}^\pm = \mathbf{T}_{l_0, l_0+1}^\pm$, and is repeated until the last interface is added to the stack. For the stack $\mathcal{S}_{1L}$, the interaction principle equation is

$$\begin{bmatrix} \mathbf{a}_1^- \\ \mathbf{a}_L^+ \end{bmatrix} = \begin{bmatrix} \mathcal{R}_{1L}^+ & \mathcal{T}_{1L}^- \\ \mathcal{T}_{1L}^+ & \mathcal{R}_{1L}^- \end{bmatrix} \begin{bmatrix} \mathbf{a}_1^+ \\ \mathbf{a}_L^- \end{bmatrix}, \quad (72)$$

and from the boundary conditions for amplitudes (42) and (45), that is, from the relations $\mathbf{a}_1^+ = \mathbf{i}_1$ and $\mathbf{a}_L^- = \mathbf{0}_M$, respectively, we find

$$\mathbf{a}_1^- = \mathcal{R}_{1L}^+ \mathbf{a}_1^+ \text{ and } \mathbf{a}_L^+ = \mathcal{T}_{1L}^+ \mathbf{a}_1^+. \quad (73)$$

For the lower boundary condition (55), $\mathbf{a}_1^+$ in Eq. (73) is given by $\mathbf{a}_1^+ = \mathbf{B}^{-1} \mathbf{b}_1$, where, for a unit scale factor, $\mathbf{b}_1 = [1, 0, 0]^T$. To restore the entire set of amplitude vectors $\mathbf{a}_l$, we consider the interaction principle equations for the stacks $\mathcal{S}_{1l}$ and $\mathcal{S}_{lL}$.

375 yielding

$$\mathbf{a}_l^+ = (I - \mathcal{R}_{ll}^- \mathcal{R}_{lL}^+)^{-1} \mathcal{T}_{ll}^+ \mathbf{a}_1^+, \quad (74)$$

$$\mathbf{a}_l^- = \mathcal{R}_{lL}^+ \mathbf{a}_l^+, \quad (75)$$

for $l = L - 1, \dots, 1$. The state vector and the wave amplitudes are then computed by using Eqs. (59) and (60), respectively. In contrast to the previous method, this approach requires a clear differentiation between ascending and descending modes as defined by Eq. (20).

4 Source function

In the derivation so far, the amplitude vector is uniquely defined up to a multiplicative factor, namely the scale factor s . Accordingly, the general solution can be written as $\mathbf{a}_s = s\mathbf{a}$, where, here and it what follows, the subscript s indicates the dependence on s . Since $\mathbf{a}_s$ satisfies the equation $\mathbb{A}\mathbf{a}_s = s\mathbf{b}$ (cf. Eq. (56)), the scale factor can be interpreted as a source factor. The source factor is constant in the case of a harmonic (monochromatic) source function, corresponding to a single-frequency wave, but is time dependent for a non-harmonic source function, corresponding to a time-dependent wave packet. In this section, we describe the computation of the perturbed quantities for both harmonic and non-harmonic source functions. We also present a brief overview of the causality condition and the imaginary frequency shift introduced by Knight et al. (2019), and latter extended and applied in Knight et al. (2021, 2022, 2024, 2025). Although it would be sufficient to simply refer to these works, we include a short discussion here because the underlying mathematical structure provides valuable insight into the method.

4.1 Non-harmonic source (time-dependent wave packet)

If the source term is not purely harmonic in time (i.e., it cannot be written as a single factor $\exp(j\omega t)$), the perturbed quantity $f'(x, z, t)$ is not a single-frequency wave with a specified angular frequency ω . In this case, the equations are treated in the frequency domain by considering the Fourier transform in time (Knight et al., 2019, 2021, 2022). This is defined by

$$F'(x, z, \omega) = \int_{-\infty}^{\infty} f'(x, z, t) e^{-j\omega t} dt = \mathcal{F}[f'(x, z, t)](x, z, \omega) \quad (76)$$

and its inverse by

$$f'(x, z, t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F'(x, z, \omega) e^{j\omega t} d\omega = \mathcal{F}^{-1}[F'(x, z, \omega)](x, z, t). \quad (77)$$

Applying the Fourier transform to the linearized equations (A29)–(A31) of Appendix A, using the result

$$\mathcal{F}\left[\frac{\partial f'}{\partial t}(x, z, t)\right](x, z, \omega) = j\omega F'(x, z, \omega), \quad (78)$$

and setting

$$F'(x, z, \omega) = \bar{F}(z, \omega) e^{-jk_x x} \quad (79)$$

as the counterpart of Eq. (A32) (in which the exponential term $\exp(j\omega t)$ is absorbed into $\bar{f}(z)$), together with

$$\bar{F}(z, \omega) = C(z) \hat{F}(z, \omega) \quad (80)$$

405 as the counterpart of Eq. (7), we are led to the system of differential equations (A41)–(A46) of Appendix A (or equivalently, to the matrix differential equation (5)), but with $\hat{F}(z, \omega)$ replacing $\hat{f}(z)$.

At the lower boundary z_1 , we consider the localized boundary conditions

$$f'_{sq_0}(x, z_1, t) = C_{q_0}(z_1) s(x, t), \quad \frac{\partial f'_{sq_0}}{\partial z}(x, z_1, t) = 0, \quad \frac{\partial^2 f'_{sq_0}}{\partial z^2}(x, z_1, t) = 0, \quad (81)$$

where q_0 takes the values 1, 2, and 3 for the horizontal velocity, vertical velocity, and temperature, respectively. In Eq. (81),
410 the source function is given by

$$s(x, t) = As(t) e^{-jk_x x}, \quad (82)$$

with A denoting the scalar source amplitude and $s(t)$ its prescribed time dependence. In our implementation, the time-dependent part of the source function is chosen as

$$s(t) = e^{j\omega_0(t-t_0)} e^{-\frac{(t-t_0)^2}{2\sigma_t^2}} \quad (83)$$

415 with the Fourier transform

$$S(\omega) = \frac{\sqrt{2\pi}}{\sigma_\omega} e^{-j\omega t_0} e^{-\frac{(\omega - \omega_0)^2}{2\sigma_\omega^2}}, \quad (84)$$

where ω_0 is the reference frequency (the central frequency in the Fourier spectrum), t_0 is the time at which the source function is maximum, and σ_t and $\sigma_\omega = 1/\sigma_t$ are the standard deviations in the time and frequency domains, respectively. The amplitude of the source function A is specified by imposing the normalization condition:

$$420 \quad |\text{Re}\{f'_{sq_0}(x=0, z_1, t_0)\}| = f_{bq_0}, \quad (85)$$

for some prescribed boundary value $f_{bq_0} > 0$. For example, in the case $q_0 = 1$, f_{bq_0} may be chosen as a fraction of the maximum horizontal velocity of neutrals in the south direction over the altitude range, whereas in the case $q_0 = 3$, f_{bq_0} may be chosen as a fraction of the maximum temperature of neutrals over the altitude range.

Applying the Fourier transform to Eq. (81) and using Eqs. (79) and (80), we obtain the following boundary conditions in the
425 frequency domain (note that $AS(\omega)$ is the Fourier transform of $As(t)$):

$$\hat{F}_{sq_0}(z_1, \omega) = AS(\omega), \quad \frac{\partial \hat{F}_{sq_0}}{\partial z}(z_1, \omega) = 0, \quad \frac{\partial^2 \hat{F}_{sq_0}}{\partial z^2}(z_1, \omega) = 0. \quad (86)$$

Comparing Eqs. (86) and (48), we see that the latter corresponds to the choice $b_{1,2} = b_{1,3} = 0$. In this case, the source factor $s = b_{1,1}$ can be identified with $AS(\omega)$. Therefore, as in Section 3, we define $\widehat{F}_q(z, \omega) = [\mathbf{e}(z, \omega)]_q$, $q = 1, 2, 3$, where $\mathbf{e}(z, \omega)$ denotes the solution of the differential equation (5) for a unit source factor in the frequency domain (i.e., for $\mathbf{b}_1 = [1, 0, 0]^T$).

430 The perturbed quantity $f'_{sq}(x, z, t)$ is then obtained by applying the inverse transform (77) to

$$F'_{sq}(x, z, \omega) = AS(\omega)e^{-jk_x x}C_q(z)\widehat{F}_q(z, \omega), \quad (87)$$

that is,

$$f'_{sq}(x, z, t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F'_{sq}(x, z, \omega)e^{j\omega t}d\omega = A\bar{f}_q(z, t)e^{-jk_x x}, \quad (88)$$

where

$$435 \quad \bar{f}_q(z, t) = \frac{C_q(z)}{2\pi} \int_{-\infty}^{\infty} S(\omega)\widehat{F}_q(z, \omega)e^{j\omega t}d\omega. \quad (89)$$

For $S(\omega)$ as above, $\bar{f}_q(z, t)$ can be written as

$$\bar{f}_q(z, t) = \frac{C_q(z)}{2\pi} \int_{-\infty}^{\infty} \mathcal{S}(\omega)\widehat{F}_q(z, \omega)e^{j\omega(t-t_0)}d\omega, \quad (90)$$

with

$$\mathcal{S}(\omega) = \frac{\sqrt{2\pi}}{\sigma_\omega} e^{-\frac{(\omega - \omega_0)^2}{2\sigma_\omega^2}}. \quad (91)$$

440 The computation of $\widehat{F}_q(z, \omega)$ can be performed using any of the methods presented in Section 3. The computed quantity is $\bar{f}_q(z, t)$, the amplitude $A > 0$, is determined from the normalization condition (85) as

$$A = \frac{f_{bq_0}}{|\text{Re}\{\bar{f}_{q_0}(z_1, t_0)\}|}, \quad (92)$$

and the perturbed quantity $f'_{sq}(x, z, t)$ is computed from Eq. (88).

4.2 Monochromatic source (single-frequency wave)

445 The case of a monochromatic source is obtained as a special case of the above approach by choosing

$$s(t) = e^{j\omega_0 t}, \quad (93)$$

whose Fourier transform is

$$S(\omega) = \int_{-\infty}^{\infty} s(t)e^{-j\omega t}dt = \int_{-\infty}^{\infty} e^{-j(\omega - \omega_0)t}dt = 2\pi\delta(\omega - \omega_0), \quad (94)$$

where the equality is understood in the sense of distributions.

450 The lower boundary conditions in the time domain are specified as

$$f'_{sq_0}(x, z_1, t) = \frac{1}{2\pi} C_{q_0}(z_1) s(x, t), \quad \frac{\partial f'_{sq_0}}{\partial z}(x, z_1, t) = 0, \quad \frac{\partial^2 f'_{sq_0}}{\partial z^2}(x, z_1, t) = 0, \quad (95)$$

with

$$s(x, t) = A s(t) e^{-j k_x x} = A e^{j(\omega_0 t - k_x x)}. \quad (96)$$

Applying the Fourier transform with respect to time yields

$$455 \quad \widehat{F}_{sq_0}(z_1, \omega) = A \delta(\omega - \omega_0). \quad (97)$$

Since the forcing is monochromatic, the frequency-domain problem is solved only at the excitation frequency $\omega = \omega_0$. Accordingly, the localized boundary conditions are imposed directly on the harmonic amplitudes at ω_0 , namely

$$\widehat{F}_{sq_0}(z_1, \omega_0) = A, \quad \frac{\partial \widehat{F}_{sq_0}}{\partial z}(z_1, \omega_0) = 0, \quad \frac{\partial^2 \widehat{F}_{sq_0}}{\partial z^2}(z_1, \omega_0) = 0. \quad (98)$$

Again, by comparing Eqs. (98) and (48), we see that the source factor $s = b_{1,1}$ can be identified with A . In this regard,
 460 let $\widehat{F}_q(z, \omega_0) = [\mathbf{e}(z, \omega_0)]_q$, $q = 1, 2, 3$, where $\mathbf{e}(z, \omega_0)$ denotes the solution of the differential equation (5) for a unit source factor in the frequency domain. The perturbed quantity $f'_{sq}(x, z, t)$ is then obtained by the inverse Fourier transform (77) of $\widehat{F}_{sq}(x, z, \omega)$ (cf. Eq. (87)), and the result is

$$f'_{sq}(x, z, t) = A \bar{f}_{sq}(z) e^{j(\omega_0 t - k_x x)}, \quad (99)$$

where

$$465 \quad \bar{f}_{sq}(z) = C_q(z) \widehat{F}_q(z, \omega_0). \quad (100)$$

Thus, the computed quantity is $\bar{f}_{sq}(z)$, and the amplitude A is determined from the normalization condition

$$|\text{Re}\{f'_{sq_0}(x = 0, z_1, t = 0)\}| = f_{bq_0}, \quad (101)$$

which yields

$$A = \frac{f_{bq_0}}{|\text{Re}\{\bar{f}_{sq}(z_1)\}|}. \quad (102)$$

470 Note that for a monochromatic source, the modal boundary condition (41) can be used instead of the localized boundary condition (98).

4.3 Causality and imaginary frequency shifting

Causality means that the wave field in response to any source function cannot be nonzero prior to the earliest time at which the source function is nonzero. According to the classification rule (20), we have

$$475 \quad \text{Re}[\lambda_{1l}^+(\omega)] < \text{Re}[\lambda_{1l}^-(\omega)], \quad (103)$$

for any layer $l = 1, \dots, L$ and any real frequency ω . To preserve causality in solutions of two-point boundary value problems, a stronger condition is required, namely

$$\max_{l=1, \dots, L} \text{Re}[\lambda_{1l}^+(\omega)] < \min_{l=1, \dots, L} \text{Re}[\lambda_{1l}^-(\omega)] \quad (104)$$

for all $\omega \in \mathbb{R}$. Equivalently, this condition requires that there exists a single real constant σ , such that

$$480 \quad \text{Re}[\lambda_{1l}^+(\omega)] < \sigma < \text{Re}[\lambda_{1l}^-(\omega)], \quad (105)$$

for all l and all $\omega \in \mathbb{R}$.

In some situations, condition (105) is not satisfied on the real frequency axis but can be enforced by introducing an imaginary frequency shift $\omega \rightarrow \omega - j\delta$. Following Knight et al. (2019), we impose a causality requirement, which we refer to as the Global Causality (GC) condition. This condition demands that there exists a single real constant σ , such that

$$485 \quad \text{Re}[\lambda_{1l}^+(\omega - j\delta)] < \sigma < \text{Re}[\lambda_{1l}^-(\omega - j\delta)], \quad (106)$$

for all l and all $\omega \in \mathbb{R}$.

Knight et al. (2024) subsequently relaxed the requirement that (106) hold for all layers l for a fixed σ . The new condition, which we refer to as the Layerwise Causality (LC) condition, requires that at each layer l there is a σ_l such that

$$\text{Re}[\lambda_{1l}^+(\omega - j\delta)] < \sigma_l < \text{Re}[\lambda_{1l}^-(\omega - j\delta)], \quad (107)$$

$$490 \quad \text{for all } \omega \in \mathbb{R}. \text{ Equivalently, if at each layer } l,$$

$$d_l(\omega) = \text{Re}[\lambda_{1l}^-(\omega - j\delta)] - \text{Re}[\lambda_{1l}^+(\omega - j\delta)] > 0, \quad (108)$$

for all $\omega \in \mathbb{R}$, then the multilayer algorithm will still preserve causality. The LC condition requires a strict separation between the two eigenvalue families within each layer, but it does not require that the same separator works for all layers. Thus, each layer may have its own separating value σ_l . Equivalently, $d_l(\omega) > 0$ means that, in layer l , the real parts of the eigenvalues associated with the ascending and descending gravity waves remain separated (and therefore do not cross) as functions of the real frequency ω after the shift.

To summarize the approach for computing $f'_{sq}(x, z, t)$ in the case of imaginary frequency shifting, we introduce the shifted spectrum

$$S_\delta(\omega) = S(\omega - j\delta) = \int_{-\infty}^{\infty} s(t)e^{-j(\omega - j\delta)t} dt = \int_{-\infty}^{\infty} [s(t)e^{-\delta t}]e^{-j\omega t} dt, \quad (109)$$

500 which can be viewed as the analytic continuation of $S(\omega)$ to complex frequencies. Note that the shift $\omega \rightarrow \omega - j\delta$ corresponds in the time domain to multiplication by $\exp(-\delta t)$. Let

$$F'_{\delta sq}(x, z, \omega) = AS(\omega - j\delta)C_q(z)\widehat{F}_q(z, \omega - j\delta)e^{-jk_x x} \quad (110)$$

be the Fourier transform (in time) of the perturbed quantity with frequency shifting $f'_{\delta sq}(x, z, t)$, where as usual, $\widehat{F}_q(z, \omega - j\delta) = [\mathbf{e}(z, \omega - j\delta)]_q$ is solution of the differential equation (5) for a unit source factor in the frequency domain. Under the usual
505 analyticity and decay assumptions (so that contour shifting is permitted), Cauchy's theorem yields the shift relation

$$f'_{\delta sq}(x, z, t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} F'_{\delta sq}(x, z, \omega)e^{j\omega t} d\omega = e^{-\delta t} f'_{sq}(x, z, t), \quad (111)$$

where f'_{sq} is the perturbed quantity without frequency shifting given by Eq. (88). Equivalently, this implies the shift-invariance property

$$f'_{sq}(x, z, t) = e^{\delta t} f'_{\delta sq}(x, z, t). \quad (112)$$

510 Summarizing, the computational steps for the frequency-shifting approach are as follows:

1. Compute $\mathbf{e}(z, \omega - j\delta)$ as the solution of the differential equation (5) for a unit source factor, and set $\widehat{F}_q(z, \omega - j\delta) = [\mathbf{e}(z, \omega - j\delta)]_q$.
2. Calculate $F'_{\delta sq}$ by means of Eq. (110) with $S(\omega)$ replaced by $S(\omega - j\delta)$ and $\widehat{F}_q(z, \omega)$ replaced by $\widehat{F}_q(z, \omega - j\delta)$.
3. Compute $f'_{\delta sq}$ by inverse Fourier transform

$$515 \quad f'_{\delta sq}(x, z, t) = Ae^{-jk_x x} \frac{C_q(z)}{2\pi} \int_{-\infty}^{\infty} S(\omega - j\delta) \widehat{F}_q(z, \omega - j\delta) e^{j\omega t} d\omega. \quad (113)$$

4. Recover f'_{sq} from the shift-invariance property (112).

For $S(\omega)$ as in Eq. (84), it is convenient to write the recovered solution in the form

$$f'_{sq}(x, z, t) = A\bar{f}_{\delta q}(z, t)e^{-jk_x x}, \quad (114)$$

where (compare with Eq. (90))

$$520 \quad \bar{f}_{\delta q}(z, t) = e^{\delta(t-t_0)} \frac{C_q(z)}{2\pi} \int_{-\infty}^{\infty} \mathcal{S}(\omega - j\delta) \hat{F}_q(z, \omega - j\delta) e^{j\omega(t-t_0)} d\omega, \quad (115)$$

and $\mathcal{S}$ is given by Eq. (91). The computed quantity is $\bar{f}_{\delta q}(z, t)$, the amplitude $A > 0$ is determined from the normalization condition (85) as

$$A = \frac{f_{bq_0}}{|\text{Re}\{\bar{f}_{\delta q}(z_1, t_0)\}|}, \quad (116)$$

and the perturbed quantity $f'_{sq}(x, z, t)$ is computed from Eq. (114). The Fourier integral in Eq. (115) is evaluated using a direct
525 discrete Fourier transform (FT) rather than a fast Fourier transform (FFT). The frequency and time discretization used in the Fourier transform are discussed in Appendix D.

A potential numerical issue with this approach is that a large frequency shift δ , while ensuring the causality condition, may amplify rounding errors when recovering f'_{sq} from $\bar{f}_{\delta sq}$ through the exponential term $\exp[\delta(t - t_0)]$. For large t , this may lead to an uncontrolled growth of the right-hand side of Eq. (115). Therefore, care is required in selecting δ : it must be large
530 enough to ensure the layerwise causality condition, but not significantly larger than that. Rigorous methods for determining the minimum sufficient δ were described by Knight et al. (2019, 2021, 2022), while the numerical blow-up associated with the exponential growth term was discussed in Appendix B of Knight et al. (2021). In our implementation we employ a heuristic approach that combines (i) the Layerwise Causality (LC) condition applied at selected altitude levels, and (ii) a Source-Function Reconstruction (SFR) test. First, an admissible interval $[\delta_{\min}, \delta_{\max}]$ is constructed by enforcing the SFR criterion, and within
535 this interval, the LC condition is applied at selected altitude levels to obtain a refined lower bound $\delta_{\min}$. In the final selection step, a discrete set of candidate shifts is evaluated, and for each candidate the LC condition is checked over the entire altitude range. Among all shifts that satisfy causality at all altitudes, the algorithm selects the one whose maximum-amplitude vector is closest to the center of mass of the admissible solutions. A detailed description of this approach is provided in Appendix D.

5 Numerical implementation

540 An implementation of the method is freely available as an open-source code at <https://github.com/AlexandruDoicu/Gravity-Waves>. The code uses as input the data file produced by the International Reference Ionosphere (IRI) code available at <https://ccmc.gsfc.nasa.gov/models/IRI~2016/> is used. From these date, we read

1. the date (year, month, and day) and the time,
2. the geographic latitude and longitude,
- 545 3. the magnetic dip angle,
4. the solar radio flux f10.7 and its 81-day average,

Table 1. Geographic locations and heights of the IRI data sets

Location	Latitude [deg]	Longitude [deg]	Height [km]
Jicamarca (Peru)	-12	283	300
Arecibo (Puerto Rico)	+18	293	300
Millstone Hill (USA)	+42	288	300
Saint-Santin (France)	+44	2	300
EISCAT Tromsø (Auroral)	+70	19	300
Svalbard archipelago (Norway)	+80	15	300

5. the number density of O^+ ions as a function of altitude.

In its present implementation, the IRI data files correspond to the locations summarized in Table 1. The altitude grid extends from $z_{\min} = 80$ km to $z_{\max} = 500$ km with a step size of $dz = 1.0$ km. Users may generate custom data files by running the IRI code and specifying the corresponding file names in the input namelist.

The IRI data are subsequently used in a manner analogous to that in the SAMI2 model of the Naval Research Laboratory (<https://github.com/NRL-Plasma-Physics-Division/SAMI2>). In the present implementation, the ionospheric equations follow the SAMI2 framework originally developed by Huba et al. (2000) and described in detail by Huba (2023). In SAMI2, the neutral atmospheric parameters—namely the neutral number density, total mass density, and temperature—are specified using the MSIS family of models. In this study, these parameters are based on the MSIS formulation of Hedin (1987), while we note that more recent updates are provided by the NRLMSIS 2.0 model of Emmert et al. (2021). The meridional and zonal winds are specified using the Horizontal Wind Model. In the present implementation, we follow the formulation of Hedin et al. (1991), while more recent updates are described by Drob et al. (2015).

The derivatives of the background parameters are computed using central finite differences. Prior to applying the finite-difference calculations, the background parameters are smoothed by means of cubic spline interpolation with regularization.

Other features of the model are summarized as follows:

1. Two linearization models are included in the code:

- (a) a general model that accounts for the altitude derivatives of the background velocity, temperature, density scale height, and dynamic viscosity; and
- (b) a simplified model for an isothermal, homogeneous, and windless atmosphere without ion drag.

2. The methods for solving the linearized equations based on the matrix exponential formalism comprise:

- (a) the Global Matrix Method for the Amplitudes (GMMA) of the characteristic solutions;
- (b) the Scattering Matrix Method for the Amplitudes (SMMA) of the characteristic solutions; and

(c) the Global Matrix Method for the Nodal (grid-point) values (GMMN) of the state vector.

- 570 3. At the lower boundary, we impose that a selected component of the state vector is finite and that its first and second derivatives with respect to height vanish. At the upper boundary, we assume that there is no downward energy propagation, i.e., the amplitudes of all descending wave modes are set to zero.
4. The code first computes the wave parameters for a single-frequency wave and then for a time-dependent wave packet.
5. Typical values of the horizontal wavelength lie in the range 300–700 km.
- 575 6. The algorithm computes lower and upper bounds for the wave period by solving the inviscid dispersion equation for two prescribed minimum and maximum values of the vertical wavelength. The computational procedure is described in Appendix D. The user then selects an appropriate value within this range.
7. For a single-frequency wave, the output quantity of interest is $A\bar{f}_{sq}(z)$, where $\bar{f}_{sq}(z)$ and A are given by Eqs. (100) and (102), respectively, whereas for a time-dependent wave packet the corresponding output quantity is $A\bar{f}_{\delta q}(z, t)$, where
580 $\bar{f}_{\delta q}(z, t)$ and A are given by Eqs. (115) and (116), respectively.

6 Numerical simulations

The simulations are performed using, as input, an IRI data file corresponding to the EISCAT Tromsø (auroral) location on 11 February 2012 at 10:00. The solar zenith angle is 84.2° , the magnetic inclination angle is 78.28° , the daily solar radio flux F10.7 is 109.4 sfu, and the 81-day averaged solar radio flux is 116.9 sfu, where $1 \text{ sfu} = 10^{-22} \text{ Wm}^{-2} \text{ Hz}^{-1}$. In the simulations,
585 the Prandtl number is 0.66, the magnetic index is 7.0, and the horizontal wind model 14 implemented in SAMI2 is used. The altitude grid extends from 80 km to 500 km and contains 801 grid points. The lower boundary can, in principle, be set to smaller altitudes (e.g., 50 km), but we choose 80 km because this level is typically adopted as the lower boundary for ionospheric equations. Unless stated otherwise, the horizontal wavelength is $\lambda_x = 400 \text{ km}$, the wave period is $\lambda_t = 40 \text{ min}$, and the imaginary frequency shift for a single-frequency wave is 10^{-6} s^{-1} . The lower boundary conditions are imposed on the
590 vertical velocity with $f_{b2} = 5 \times 10^{-2} \text{ ms}^{-1}$ in Eqs. (85) and (101).

Accuracy and efficiency of the solution methods. Taking the global matrix method for amplitudes as a reference, we find that the relative root-mean-square errors in the perturbed temperature, vertical velocity, and horizontal velocity obtained with the other two solution methods are smaller than 10^{-6} . Thus, all methods exhibit comparable accuracy. On the other hand, we find that the scattering matrix method is more time-consuming than the global matrix methods, particularly for time-dependent
595 wave packets. This is because the scattering matrix approach requires numerous matrix operations in each layer, whereas solving a system of equations compressed into band storage is computationally less expensive.

Background atmospheric parameters. The code provides altitude-dependent profiles of the input parameters used in the numerical model. These include the temperature, mass density, pressure, southward horizontal velocity, atmospheric scale

height, density scale height, specific heat capacity, ratio of specific heats, sound speed, number density of O^+ ions, neutral-
600 ion collision frequency, ion-neutral collision frequency, and the diffusion velocity. In addition, altitude derivatives of the
temperature, horizontal velocity, mass density, pressure, density scale height, and ion number density are also provided. As
an illustrative example, Fig. 1 shows the background temperature T_0 , horizontal velocity u_0 and the ion number density n_{i0} ,
together with their corresponding altitude derivatives.

Pairwise classification of ascending and descending modes. In the upper and middle panels of Fig. 2, we plot the imaginary
605 part of the vertical wavenumber for ascending (k_{z1}) and descending (k_{z4}) gravity waves, computed using the general and
the simplified models, respectively. The plots demonstrate that only in the latter case do the vertical wavenumbers appear in
pairs. In the former case, a problematic altitude range for gravity waves is observed between 80 km and 120 km, where the
imaginary parts of the vertical wavenumbers for the ascending and descending modes are nearly identical, being either both
positive or both negative. In the lower panel of Fig. 2, we show the imaginary part of the vertical wavenumber k_z for all wave
610 types ($k_{zn}, n = 1, \dots, 6$), computed using the general model. The plots reveal a clear distinction between gravity waves and
viscosity- and thermal-conduction waves. However, the viscosity and thermal-conduction waves are very close to each other.
In the upper panel of Fig. 2, we also compare the imaginary part of the vertical wavenumber computed with and without ion
drag. No pronounced effect of ion drag on the vertical wavenumber is observed. A small effect appears in the altitude range
from 180 to 300 km, where the ion number density is relatively high. This finding is consistent with the results of Shibata
615 (1983), who showed that, for gravity waves, plasma diffusion is of minor importance with respect to the vertical wavenumber,
which is mainly controlled by dissipation due to viscosity and thermal conduction in the neutral gas.

General and simplified models. The altitude profiles of the perturbed temperature, vertical velocity, and horizontal velocity
computed using the general and simplified models are shown in Fig. 3. The plots show that, in the altitude range 150–300
km, the amplitudes obtained with the general model are larger than those obtained with the simplified model. If the imaginary
620 parts of the vertical wavenumber for ascending gravity waves computed with the general and simplified models were plotted
on the same graph (i.e. by merging the lower and middle panels of Fig. 2), it would be seen that the imaginary part of the
vertical wavenumber corresponding to the general model is negative but larger (i.e., less negative) than that obtained with
the simplified model. As a consequence, the exponential attenuation with altitude is weaker in the general model, leading to
systematically larger wave amplitudes in this region. This difference reflects the modified balance between wave propagation
625 and dissipation introduced by the inclusion of altitude-dependent background properties and by relaxing the assumption of
constant kinematic viscosity in the general model, which reduces the effective vertical damping compared to the simplified,
homogeneous approximation.

Ion Drag. The effect of ion drag on the perturbed temperature, vertical velocity, and horizontal velocity is illustrated in Fig.
4. A moderate attenuation is observed in the altitude range from 180 to 350 km, where the ion number density is relatively
630 high. When $\mathbf{E} \times \mathbf{B}$ drifts are not included, ion drag does not exhibit the classical regime in which auroral convection strongly
drives the neutral atmosphere. Instead, ion drag mainly arises from diffusion- and pressure-gradient-driven ion motion along
the magnetic field, as well as from any relative ion-neutral motion induced by neutral winds. Consequently, ion drag does not
constitute the dominant forcing mechanism for the neutral perturbations in this configuration.

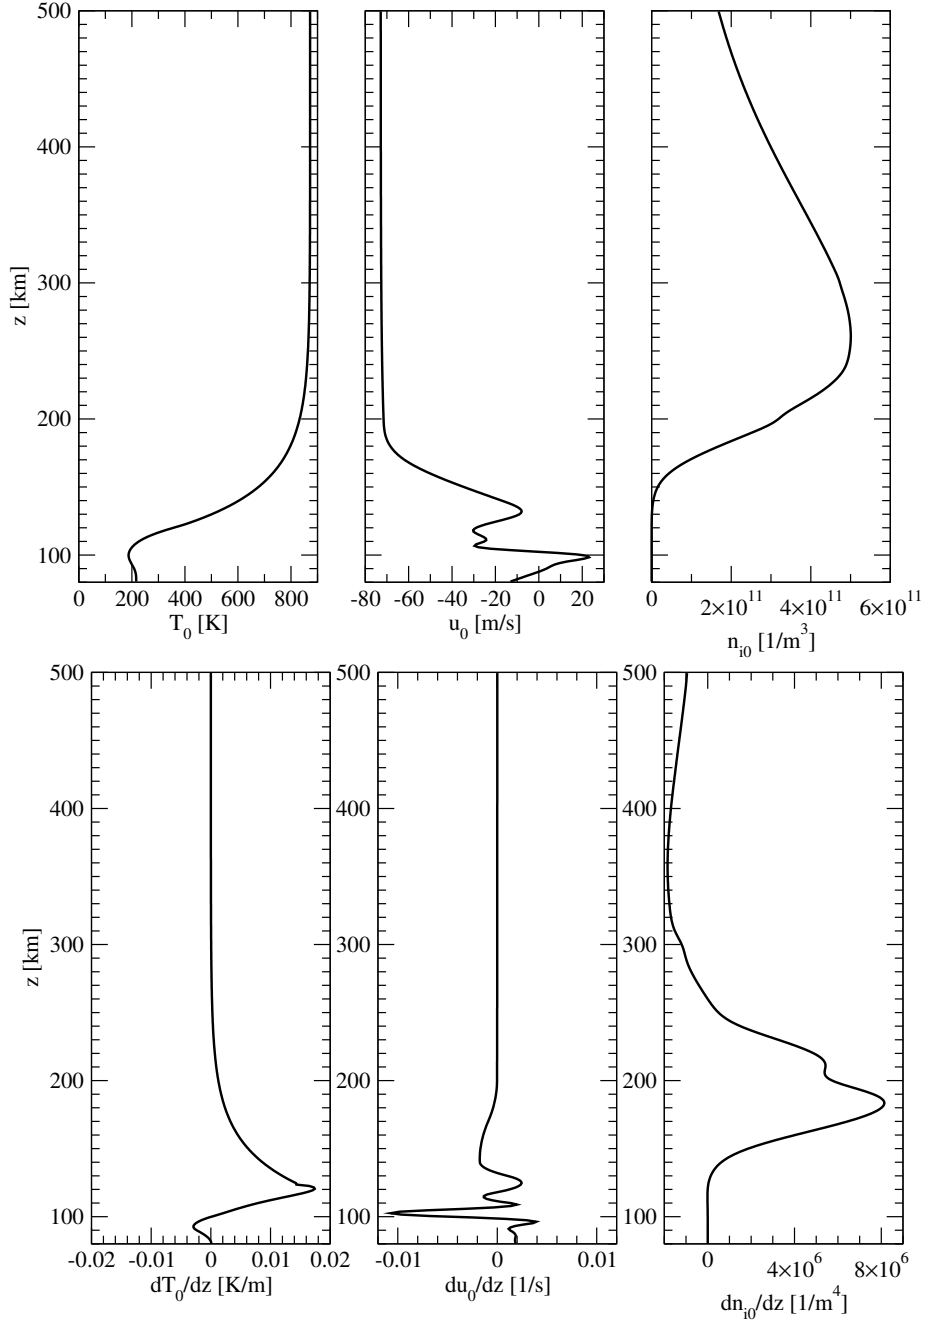


Figure 1. Background temperature T_0 , horizontal velocity u_0 and ion number density n_{i0} ($i = \text{O}^+$) (upper panels), and their height derivatives (lower panels).

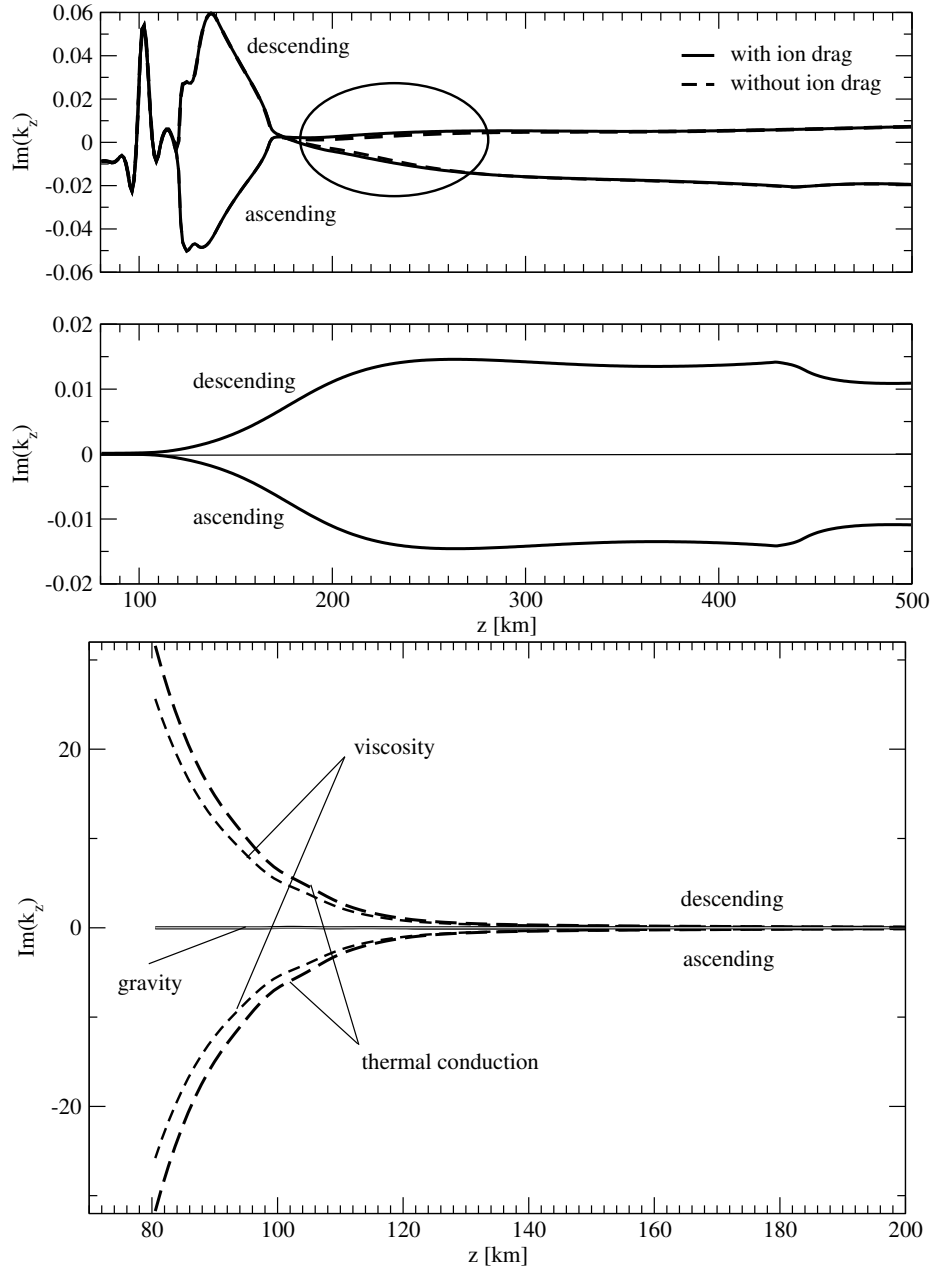


Figure 2. Upper panel: The imaginary part of the vertical wavenumber k_z for ascending (k_{z1}) and descending (k_{z4}) gravity waves, with and without ion drag, computed using the general model. Middle panel: The imaginary part of the vertical wavenumber k_z for ascending (k_{z1}) and descending (k_{z4}) gravity waves, computed using the simplified model. Lower panel: The imaginary part of the vertical wavenumber k_z for all types of waves ($k_{zn}, n = 1, \dots, 6$), computed using the general model. The results correspond to $\lambda_x = 400$ km and $\lambda_t = 40$ min

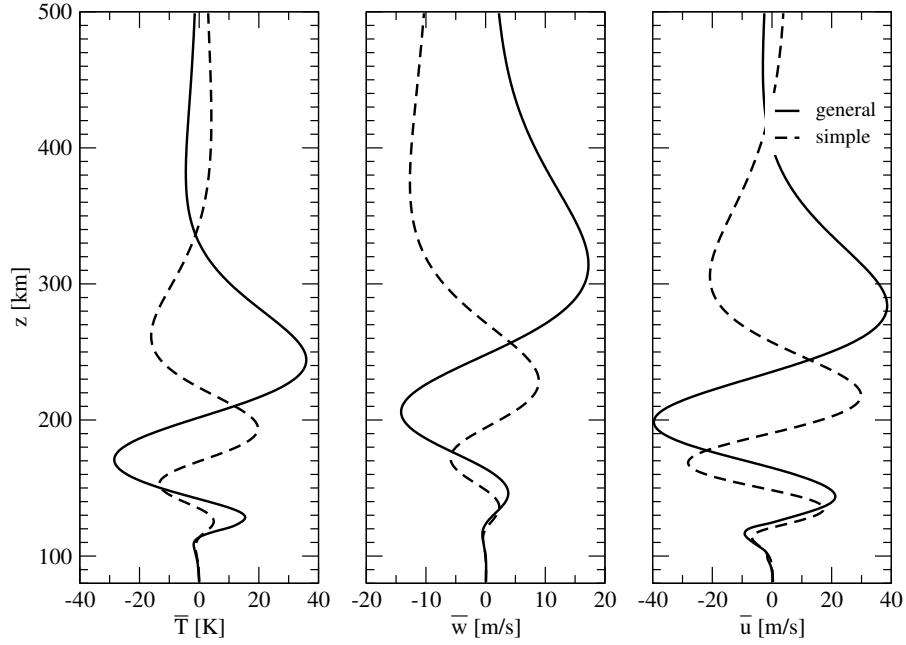


Figure 3. Altitude profiles of the perturbed temperature $\bar{T}$, vertical velocity $\bar{w}$, and horizontal velocity $\bar{u}$ for the general and simplified models. The results correspond to $\lambda_x = 400$ km and $\lambda_t = 40$ min

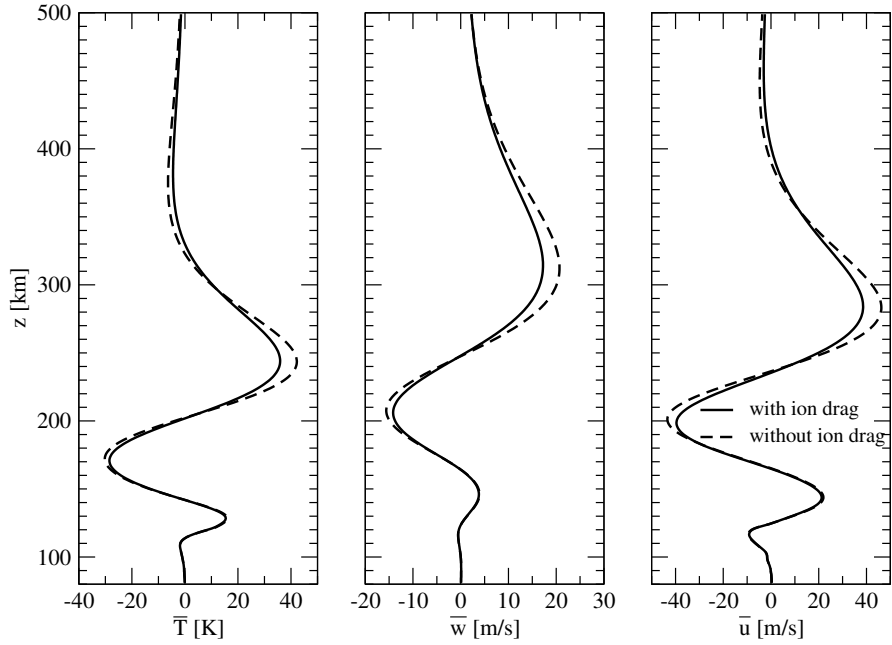


Figure 4. Altitude profiles of the perturbed temperature $\bar{T}$, vertical velocity $\bar{w}$, and horizontal velocity $\bar{u}$ for the general model, with and without ion drag. The results correspond to $\lambda_x = 400$ km and $\lambda_t = 40$ min

Horizontal wavelength and time period. The influence of the horizontal wavelength λ_x and the wave period λ_t on the
 635 perturbed quantities is shown in Fig. 5. These plots indicate that the wave amplitude decreases with increasing λ_x and λ_t . The
 underlying reasons are as follows:

1. Horizontal wavelength. As the horizontal wavelength increases, horizontal pressure gradients become weaker, which re-
 duces the driving of the wave motion. This also weakens the coupling between horizontal and vertical motions, resulting
 in smaller gravity-wave amplitudes.
- 640 2. Wave period. As the wave period increases, the buoyancy restoring force acts more slowly, leading to weaker oscillations
 for a given forcing. In addition, dissipative processes such as viscosity and thermal diffusion act more effectively on low-
 frequency waves, further reducing their amplitudes.

Computing ascending and descending wave modes. The ascending and descending solution modes in layer l , denoted by $\mathbf{e}_l^+$
 and $\mathbf{e}_l^-$, respectively, can be computed using the GMMA through Eq. (61) or using the GMMN via the recurrence relations
 645 (C11) and (C12). The total solution mode $\mathbf{e}_l$, obtained from Eq. (59) in the GMMA formulation and by solving Eq. (C8) in the
 GMMN formulation, should satisfy the relation $\mathbf{e}_l = \mathbf{e}_l^+ + \mathbf{e}_l^-$. In all our simulations, this identity is satisfied. Furthermore, the
 results shown in Fig. 6 indicate that the ascending mode is dominant, except in the altitude range between 120 km and 180 km
 in the case of the general model. This finding, which is consistent with the results presented by Knight et al. (2019) (see their
 Fig. 6), suggests that in a simplified model one may assume the ascending modes to be dominant at altitudes above 200 km,
 650 that is, $\mathbf{e}_l \approx \mathbf{e}_l^+$ for $l = 1, \dots, L$. Under this assumption, the state vector can be computed using the upward recurrence relation
 (C11). In Knight et al. (2019), this approach was referred to as the transmission-only approximation, whereas in Knight et al.
 (2021) a related single-mode approximation was introduced.

Time-dependent wave packet. For the source function (82)–(83), Fig. 7 shows the perturbed temperature and vertical velocity
 as functions of time and altitude. Note the different time intervals used for each horizontal wavelength λ_x in these plots. The
 655 maximum values of the perturbed temperature are 32.21 K, 31.15 K, and 32.73 K for the horizontal wavelengths 300 km, 500
 km, and 700 km, respectively, whereas the corresponding maximum values of the vertical velocity are 21.40 ms^{-1} , 16.21 ms^{-1} ,
 and 12.08 ms^{-1} .

Imaginary frequency shift. For the time-dependent wave packet, we choose the minimum and maximum values of the imag-
 inary frequency shift as $\delta_{\min} = 10^{-6} \text{ s}^{-1}$ and $\delta_{\max} = 10^{-4} \text{ s}^{-1}$, respectively, and set the discrete step to $\Delta\delta = \delta_{\min}$. Referring
 660 to Appendix D, the results obtained with the imaginary frequency shift approach for $\lambda_x = 500 \text{ km}$ and $\lambda_t = 40 \text{ min}$ are sum-
 marized as follows:

- In the first step, the input value $\delta_{\min} = 10^{-6} \text{ s}^{-1}$ passes the Source-Function Reconstruction (SFR) test.
- In the second step, the SFR test reduces the input value $\delta_{\max} = 10^{-4} \text{ s}^{-1}$ to $\delta_{\max} = 32.24 \times 10^{-6} \text{ s}^{-1}$.
- In the third step, it is found the the interval $[\delta_{\min}, \delta_{\max}]$ contains a sufficient number of internal grid points, spaced by
 665 $\Delta\delta$, to be used in the subsequent step.

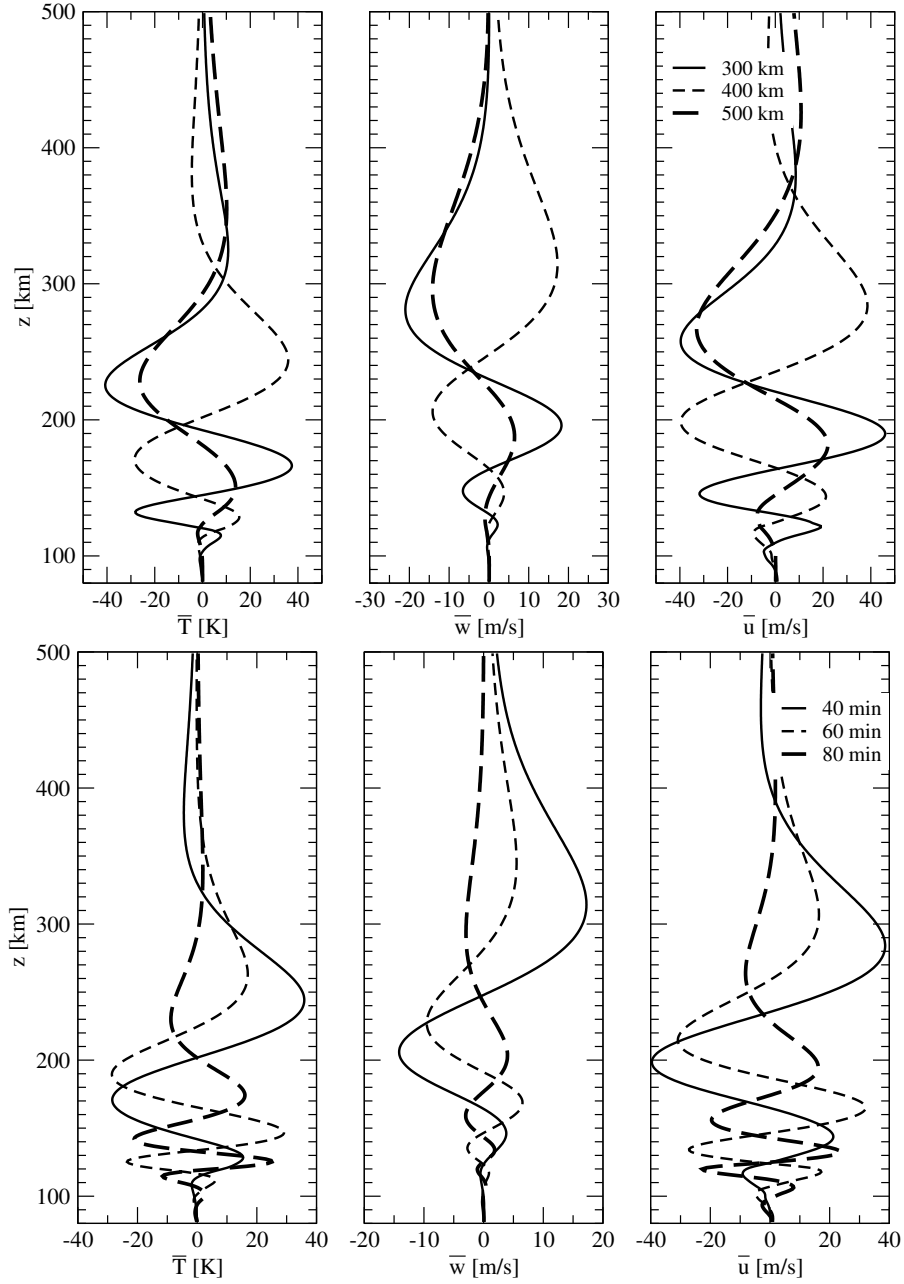


Figure 5. Altitude profiles of the perturbed temperature $\bar{T}$, vertical velocity $\bar{w}$, and horizontal velocity $\bar{u}$ for (i) $\lambda_x = 300, 400$, and 500 km with $\lambda_t = 40$ min (upper panels), and (ii) $\lambda_x = 400$ km with $\lambda_t = 40, 60$, and 80 min (lower panels). The results correspond to the general model with ion drag.

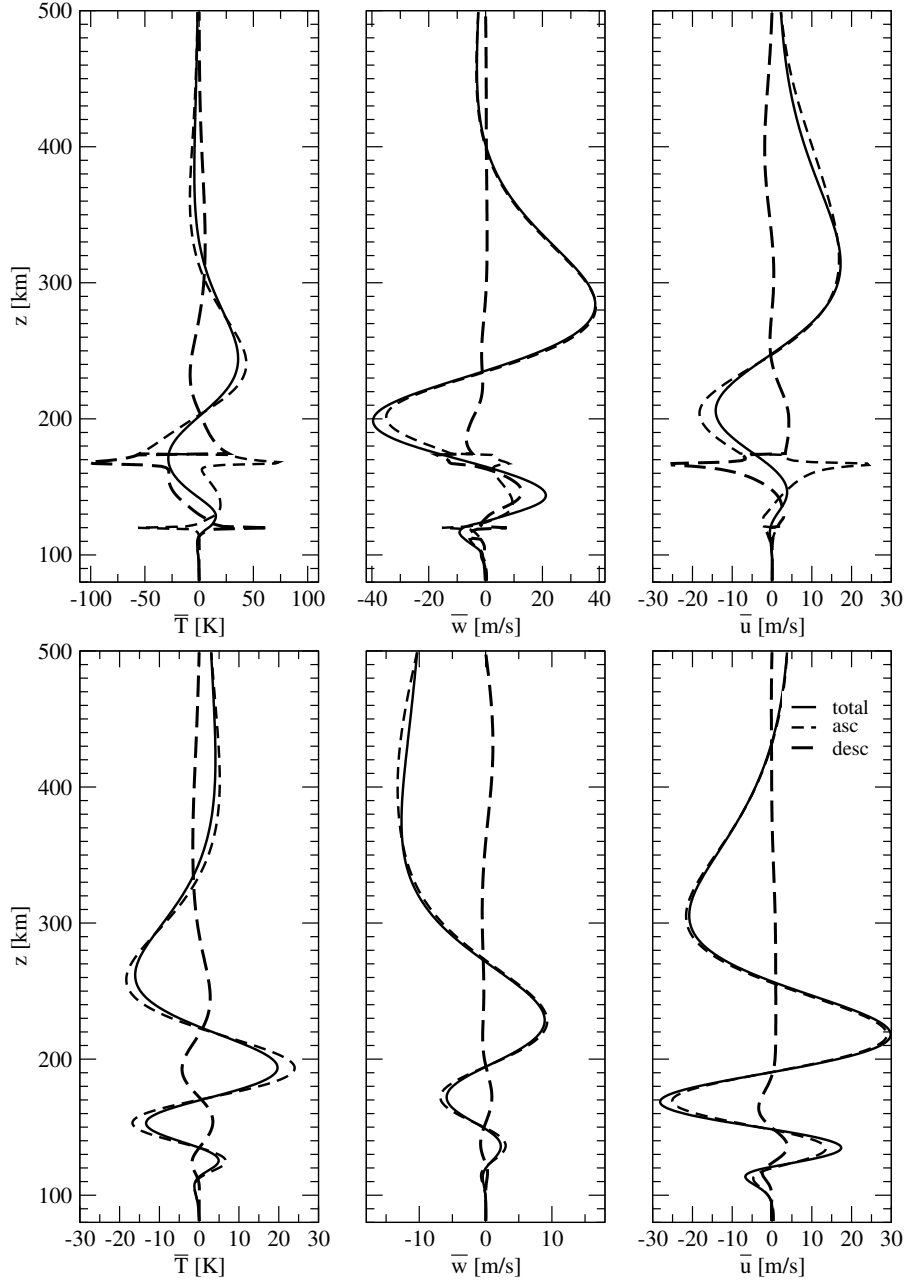


Figure 6. Altitude profiles of the perturbed temperature $\bar{T}$, vertical velocity $\bar{w}$, and horizontal velocity $\bar{u}$ for the total mode ($\mathbf{e}_l = \mathbf{e}_l^+ + \mathbf{e}_l^-$ in layer l), the ascending mode ($\mathbf{e}_l^+$), and the descending mode ($\mathbf{e}_l^-$). The upper panels correspond to the general model, and the lower panels to the simplified model. The horizontal wavelength is $\lambda_x = 400$ km and the wave period is $\lambda_t = 40$ min

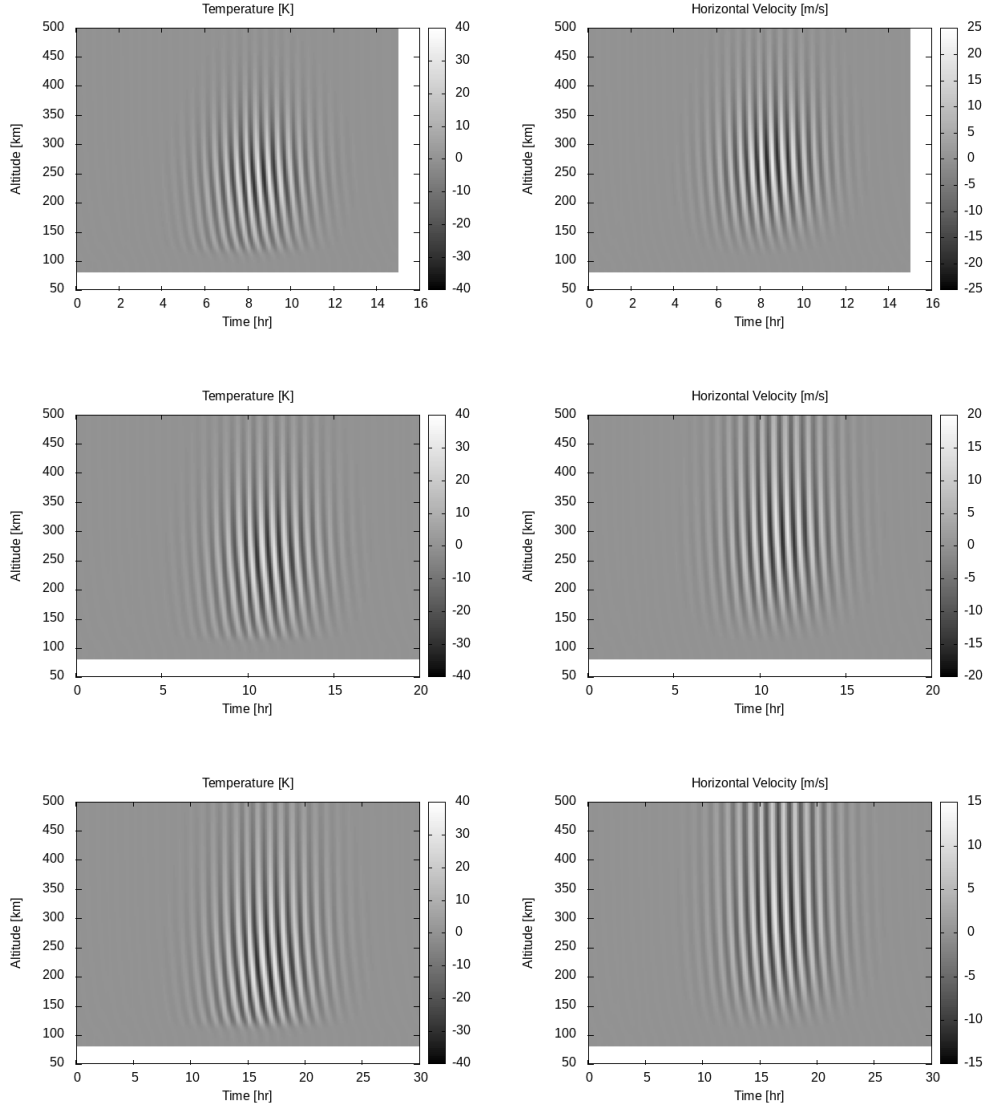


Figure 7. Perturbed temperature (left panels) and vertical velocity (right panels) as functions of time and altitude. The upper panels correspond to $\lambda_x = 300$ km and $\lambda_t = 30$ min, the middle panels to $\lambda_x = 500$ km and $\lambda_t = 40$ min, and the lower panels to $\lambda_x = 700$ km and $\lambda_t = 60$ min

Table 2. Maximum values of the perturbed horizontal velocity ($\bar{u}_{\max}$), vertical velocity ($\bar{w}_{\max}$), and temperature ($\bar{T}_{\max}$) for different values of the imaginary frequency shift δ

$\delta [10^{-6} \text{s}^{-1}]$	$\bar{u}_{\max} [\text{ms}^{-1}]$	$\bar{w}_{\max} [\text{ms}^{-1}]$	$\bar{T}_{\max} [\text{K}]$
32.24	38.084	16.210	31.153
24.43	38.115	16.224	31.132
16.62	38.079	16.210	31.158
8.81	38.110	16.225	31.186
1.00	38.017	16.186	31.113

- In the fourth step, the Layerwise Causality (LC) condition is evaluated at 10 altitude starting at 80 km with a spacing of 20 km. It is found to be satisfied for $\delta_{\text{LC}} = \delta_{\min}$, and therefore for all $\delta \in [\delta_{\min}, \delta_{\max}]$, for which the SFR test also holds.
- In the fifth step, five equidistant frequency shifts in $[\delta_{\min}, \delta_{\max}]$ are considered; for each, the wave parameters and their maximum values are computed and the layerwise causality condition is verified over the full altitude range. All five frequency shifts satisfy this condition and yield very similar maximum amplitudes (Table 2). The final solution is selected as the one whose maximum-amplitude vector is closest to the center of mass in the space of perturbed horizontal velocity, vertical velocity, and temperature, corresponding to $\delta = 16.62 \times 10^{-6} \text{s}^{-1}$. The maxima occur at 11.06 hr and 248.00 km for the horizontal velocity, 10.98 hr and 303.64 km for the vertical velocity, and 10.90 hr and 257.45 km for the temperature.

7 Conclusions

We designed a numerical model for solving the linearized gravity-wave equations using a multilayer method, which is freely available as open-source code at <https://github.com/AlexandruDoicu/Gravity-Waves>. To decouple the hydrodynamic equations for the neutral atmosphere from the ionospheric equations, which are coupled through ion drag, we adopt a fast field-aligned diffusion approximation. This approximation may be viewed as a generalization of an approach originally proposed by Klostermeyer (1972).

To solve the linearized equations, we employ (i) global matrix methods based on matrix exponentials and (ii) scattering matrix methods to determine either (a) the amplitudes of the characteristic solutions or (b) the grid-point values of the state vector. Ascending and descending wave modes are identified according to the criterion that the real parts of the eigenvalues of the characteristic equation for ascending modes are smaller than those for descending modes (or, equivalently, that the imaginary parts of the vertical wavenumbers are smaller). Global matrix methods using the scaling matrices (36) and (37) require the classification of ascending and descending modes only at the lower and upper boundaries, whereas scattering matrix methods require an explicit determination of the mode type at every altitude. The model is devoted to solving the

linearized equations including viscosity, thermal conduction, and ion drag. A simplified model, corresponding to an isothermal, homogeneous atmosphere with constant kinematic viscosity, no background wind, and no ion drag, is also considered.

690 Depending on the form of the source function, either single-frequency waves or time-dependent wave packets can be analyzed. A heuristic approach for determining the imaginary frequency shift introduced by Knight et al. (2019) is also considered. This approach is based on (i) a layerwise causality condition applied at selected altitude levels, and (ii) a source-function reconstruction test.

Numerical simulations demonstrate that both global matrix and scattering matrix methods achieve comparable accuracy. 695 However, the former are significantly more efficient than the latter, particularly in simulations involving time-dependent wave packets. Among the global matrix methods, the approach based on solving for the amplitudes of the characteristic solutions appears to provide the highest efficiency and accuracy.

The linearized equations on which the solution methods were tested correspond to ionospheric conditions. The ultimate goal of our research is to develop a comprehensive model for analyzing ionospheric gravity waves using satellite measurements. The 700 approach presented in this paper represents only the first component of such a model. Two options are envisaged for extending it to a more complete formulation.

1. Fully coupled neutral–ion model. The linearized hydrodynamic equations would be solved together with the ion equations. In this case, the ion continuity equation would include perturbed production and loss terms, whereas ion inertia and ion–ion collisions would continue to be neglected in the ion momentum equation, and only transport parallel to the 705 magnetic field lines would be retained. The state vector would then be augmented by two additional components, namely the perturbed ion number density and the ion diffusion velocity.
2. Two-step coupling strategy. In the first step, the neutral-atmosphere equations are solved using the fast field-aligned diffusion approximation. In the second step, the wave-induced perturbations obtained from the neutral solution are used as input to solve the ionospheric equations for the perturbed O^+ ion density. The ionospheric equations may be solved 710 using the SAMI2 model (Huba et al., 2000) for low latitudes, where the $\mathbf{E} \times \mathbf{B}$ drift is neglected, or the SAMI3 model (Huba et al., 2008) at higher altitudes, where the $\mathbf{E} \times \mathbf{B}$ drift is included and the electric field is determined from the solution of a two-dimensional potential equation. In this strategy, priority is given to the ionospheric equations of the SAMI framework, while wave-induced perturbations are handled using the approximate approach developed in the present study. Along similar lines, Knight et al. (2025) solved the neutral-atmosphere equations without ion drag in a first 715 step, and subsequently addressed the ionospheric response using the Field-Line Interhemispheric Plasma (FLIP) model (Richards and Peterson, 2008).

The development and application of these complete models will be addressed in future papers.

Appendix A: Derivation of the linear system of ordinary differential equations

In this appendix, we derive the explicit representation of the linear system of ordinary differential equations (5).

The hydrodynamic equations for the neutral atmosphere consist in the continuity, momentum, heat, and ideal gas equations (e.g., Midgley and Liemohn (1966); Volland (1969a))

$$\frac{D\rho}{Dt} = -\rho \nabla \cdot \mathbf{u}, \quad (\text{A1})$$

$$\rho \frac{D\mathbf{u}}{Dt} = -\nabla p + \rho \mathbf{g} + \nabla \cdot \bar{\boldsymbol{\sigma}} - \mathbf{f}_{\text{ID}}, \quad (\text{A2})$$

$$725 \quad \rho c_v \frac{DT}{Dt} = -p \nabla \cdot \mathbf{u} + \bar{\boldsymbol{\sigma}} : \nabla \mathbf{u} + \nabla \cdot (\Lambda \nabla T) - q_{\text{ID}}, \quad (\text{A3})$$

$$p = \rho R_M T, \quad (\text{A4})$$

where ρ is the density, p the pressure, T the temperature, $\mathbf{u}$ the velocity, $D/Dt = \partial/\partial t + \mathbf{u} \cdot \nabla$ the material (substantial) derivative, c_v the specific heat at constant volume, Λ the coefficient of thermal conductivity, R_M the specific gas constant, and $\bar{\boldsymbol{\sigma}}$ the viscous stress tensor. The quantities $\mathbf{f}_{\text{ID}}$ and q_{ID} denote the ion-drag force exerted by neutrals on ions per unit volume, and
730 the frictional heating rate per unit volume arising from ion–neutral collisions, respectively. In a Cartesian coordinate system (x_1, x_2, x_3) , the components of the viscous stress tensor are given by

$$\sigma_{ij} = \mu \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} - \frac{2}{3} \delta_{ij} \nabla \cdot \mathbf{u} \right), \quad (\text{A5})$$

where μ is the dynamic viscosity and δ_{ij} the Kroneker delta. Accordingly, the double dot product of $\bar{\boldsymbol{\sigma}} = \sum_{ij} \sigma_{ij} \hat{\mathbf{x}}_i \otimes \hat{\mathbf{x}}_j$ with $\nabla \mathbf{u} = \sum_{ij} \partial u_i / \partial x_j \hat{\mathbf{x}}_i \otimes \hat{\mathbf{x}}_j$ is

$$735 \quad \bar{\boldsymbol{\sigma}} : \nabla \mathbf{u} = \sum_{ij} \sigma_{ij} \frac{\partial u_i}{\partial x_j}. \quad (\text{A6})$$

Using the ideal-gas law $p = \rho R_M T$ so that $\nabla p = \rho R_M \nabla T + R_M T \nabla \rho$, the momentum equation can be written as

$$\frac{\partial \mathbf{u}}{\partial t} = -\frac{R_M T}{\rho} \nabla \rho - R_M \nabla T - (\mathbf{u} \cdot \nabla) \mathbf{u} + \mathbf{g} + \frac{1}{\rho} \nabla \cdot \bar{\boldsymbol{\sigma}} - \frac{1}{\rho} \mathbf{f}_{\text{ID}}. \quad (\text{A7})$$

Moreover, using

$$c_p = c_v + R_M, \quad \gamma = \frac{c_p}{c_v}, \quad \Lambda = \frac{c_p \mu}{\text{Pr}}, \quad (\text{A8})$$

740 where c_p is the specific heat at constant pressure, γ the ratio of specific heats, and Pr the Prandtl number, and assuming that c_p and Pr are constant, the heat equation becomes

$$\frac{\partial T}{\partial t} = -(\gamma - 1) T \nabla \cdot \mathbf{u} - \mathbf{u} \cdot \nabla T + \frac{1}{\rho c_v} \bar{\boldsymbol{\sigma}} : \nabla \mathbf{u} + \frac{\gamma}{\rho \text{Pr}} \nabla \cdot (\mu \nabla T) - \frac{1}{\rho c_v} q_{\text{ID}}. \quad (\text{A9})$$

In the momentum and heat equations, the ion-drag force and the corresponding heating per unit mass are given by

$$\frac{1}{\rho} \mathbf{f}_{\text{ID}} = \nu_{ni} (\mathbf{u} - \mathbf{u}_i), \quad (\text{A10})$$

$$745 \quad \frac{1}{\rho} q_{\text{ID}} = \frac{1}{\rho} \mathbf{f}_{\text{ID}} \cdot (\mathbf{u} - \mathbf{u}_i) = \nu_{ni} |\mathbf{u} - \mathbf{u}_i|^2, \quad (\text{A11})$$

where ν_{ni} is the neutral-ion collision frequency (the collision frequency between a neutral particle and all kind of ions).

We choose a rectangular coordinate system such that the x -axis is directed to the geographic south, the y -axis to the east and the z -axis upward. The wave propagates in the meridional plane, i.e., in the (x, z) plane. The viscous terms per unit mass in the momentum equation are then given by

$$750 \quad \frac{1}{\rho}(\nabla \cdot \bar{\sigma})_x = \mu_k \left[\left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 w}{\partial x \partial z} \right) \right] + \frac{1}{\rho} \frac{\partial \mu}{\partial z} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \quad (\text{A12})$$

$$\frac{1}{\rho}(\nabla \cdot \bar{\sigma})_z = \mu_k \left[\left(\frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u}{\partial x \partial z} + \frac{\partial^2 w}{\partial z^2} \right) \right] + \frac{1}{\rho} \frac{\partial \mu}{\partial z} \left(\frac{4}{3} \frac{\partial w}{\partial z} - \frac{2}{3} \frac{\partial u}{\partial x} \right), \quad (\text{A13})$$

while the viscous dissipation term per unit mass appearing in the heat equation is

$$\begin{aligned} \frac{1}{\rho} \bar{\sigma} : \nabla \mathbf{u} = & \frac{4}{3} \mu_k \left(\frac{\partial u}{\partial x} \right)^2 - \frac{4}{3} \mu_k \frac{\partial u}{\partial x} \frac{\partial w}{\partial z} + \frac{4}{3} \mu_k \left(\frac{\partial w}{\partial z} \right)^2 \\ & + \mu_k \left(\frac{\partial u}{\partial z} \right)^2 + 2 \mu_k \frac{\partial u}{\partial z} \frac{\partial w}{\partial x} + \mu_k \left(\frac{\partial w}{\partial x} \right)^2. \end{aligned} \quad (\text{A14})$$

755 Here, $\mu_k = \mu/\rho$ is the kinematic viscosity, and we have assumed that the viscosity depends only on altitude, so that

$$\frac{\partial \mu}{\partial x} = 0. \quad (\text{A15})$$

Using Eqs. (A12)–(A14) together with assumption (A15), we express the hydrodynamic equations as

$$\begin{aligned} \frac{\partial u}{\partial t} = & -\frac{R_M T}{\rho} \frac{\partial \rho}{\partial x} - R_M \frac{\partial T}{\partial x} - \left(u \frac{\partial u}{\partial x} + w \frac{\partial u}{\partial z} \right) \\ & + \mu_k \left[\left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 w}{\partial x \partial z} \right) \right] \\ 760 \quad & + \frac{1}{\rho} \frac{\partial \mu}{\partial z} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) - \frac{1}{\rho} f_{\text{ID}x}, \end{aligned} \quad (\text{A16})$$

$$\begin{aligned} \frac{\partial w}{\partial t} = & -\frac{R_M T}{\rho} \frac{\partial \rho}{\partial z} - R_M \frac{\partial T}{\partial z} - \left(u \frac{\partial w}{\partial x} + w \frac{\partial w}{\partial z} \right) - g \\ & + \mu_k \left[\left(\frac{\partial^2 w}{\partial x^2} + \frac{\partial^2 w}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u}{\partial x \partial z} + \frac{\partial^2 w}{\partial z^2} \right) \right] \\ & + \frac{1}{\rho} \frac{\partial \mu}{\partial z} \left(\frac{4}{3} \frac{\partial w}{\partial z} - \frac{2}{3} \frac{\partial u}{\partial x} \right) - \frac{1}{\rho} f_{\text{ID}z}, \end{aligned} \quad (\text{A17})$$

$$\begin{aligned} \frac{\partial T}{\partial t} = & -(\gamma - 1) T \left(\frac{\partial u}{\partial x} + \frac{\partial w}{\partial z} \right) - \left(u \frac{\partial T}{\partial x} + w \frac{\partial T}{\partial z} \right) \\ & + \frac{1}{c_v} \left[\frac{4}{3} \mu_k \left(\frac{\partial u}{\partial x} \right)^2 - \frac{4}{3} \mu_k \frac{\partial u}{\partial x} \frac{\partial w}{\partial z} + \frac{4}{3} \mu_k \left(\frac{\partial w}{\partial z} \right)^2 \right. \\ & \left. + \mu_k \left(\frac{\partial u}{\partial z} \right)^2 + 2 \mu_k \frac{\partial u}{\partial z} \frac{\partial w}{\partial x} + \mu_k \left(\frac{\partial w}{\partial x} \right)^2 \right] \\ & + \frac{\mu_k \gamma}{\text{Pr}} \left(\frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial z^2} \right) + \frac{\gamma}{\rho \text{Pr}} \frac{\partial \mu}{\partial z} \frac{\partial T}{\partial z} - \frac{1}{c_v \rho} q_{\text{ID}}, \end{aligned} \quad (\text{A18})$$

770 where f_{IDx} and f_{IDz} are the components of the ion drag force $\mathbf{f}_{\text{ID}}$ on the x - and z -axis, respectively.

In the above hydrodynamic equations, the Coriolis force has been neglected. For a two-dimensional wave geometry in which both the background flow and the perturbation velocities are confined to the vertical (x, z) plane and all variables are independent of the transverse horizontal coordinate y , the Coriolis acceleration associated with the Earth's rotation is directed entirely along the transverse direction and therefore does not enter the momentum equations considered here. More
775 precisely, for $\mathbf{u} = (u, 0, w)$ and $\mathbf{\Omega} = (-\Omega \cos \phi, 0, \Omega \sin \phi)$, where ϕ is the geographic latitude and $\Omega = 7.29 \times 10^{-5} \text{ s}^{-1}$ the Earth's angular velocity, the Coriolis force per unit mass is $\mathbf{f}_C = -2\mathbf{\Omega} \times \mathbf{u} = (0, 2\Omega(\cos \phi w + \sin \phi u), 0)$. Thus, the Coriolis acceleration is directed entirely along the transverse horizontal direction y and does not affect the two-dimensional (x, z) momentum equations.

A2 Linearized equations

780 To linearize the hydrodynamic equations, we assume that all background (unperturbed) quantities vary only in the z -direction and write

$$f(x, z, t) = f_0(z) + f'(x, z, t),$$

where f denotes any state variable. In particular, we assume

$$\mathbf{u}_0(z) = (u_0(z), 0, w_0(z) = 0), \quad \rho_0 = \rho_0(z), \quad T_0 = T_0(z). \quad (\text{A19})$$

785 Furthermore, we neglect the second derivative of the background horizontal wind and background temperature,

$$\frac{d^2 u_0}{dz^2} = 0, \quad \frac{d^2 T_0}{dz^2} = 0, \quad (\text{A20})$$

1. The linearized continuity equation is

$$\frac{\partial \rho'}{\partial t} = -u_0 \frac{\partial \rho'}{\partial x} + \frac{\rho_0}{H_\rho} w' - \rho_0 \left(\frac{\partial u'}{\partial x} + \frac{\partial w'}{\partial z} \right). \quad (\text{A21})$$

2. The linearized momentum equations are

$$\begin{aligned} \frac{\partial u'}{\partial t} = & -\frac{du_0}{dz} w' - u_0 \frac{\partial u'}{\partial x} - \frac{c_s^2}{\gamma \rho_0} \frac{\partial \rho'}{\partial x} - \frac{c_s^2}{\gamma T_0} \frac{\partial T'}{\partial x} \\ & + \mu_{k0} \left[\left(\frac{\partial^2 u'}{\partial x^2} + \frac{\partial^2 u'}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u'}{\partial x^2} + \frac{\partial^2 w'}{\partial x \partial z} \right) \right] \\ & + \frac{1}{\rho_0} \frac{d\mu_0}{dz} \left(\frac{\partial u'}{\partial z} + \frac{\partial w'}{\partial x} \right) + \frac{1}{\rho_0} \frac{du_0}{dz} \frac{\partial \mu'}{\partial z} - \frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} \frac{\rho'}{\rho_0} - \left(\frac{1}{\rho} f_{\text{IDx}} \right)' \end{aligned} \quad (\text{A22})$$

and

$$\begin{aligned} \frac{\partial w'}{\partial t} = & -\frac{c_s^2}{\gamma \rho_0} \frac{\partial \rho'}{\partial z} + \frac{c_s^2}{\gamma H_\rho} \left(\frac{T'}{T_0} - \frac{\rho'}{\rho_0} \right) - \frac{c_s^2}{\gamma T_0} \frac{\partial T'}{\partial z} - u_0 \frac{\partial w'}{\partial x} \\ & + \mu_{k0} \left[\left(\frac{\partial^2 w'}{\partial x^2} + \frac{\partial^2 w'}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u'}{\partial x \partial z} + \frac{\partial^2 w'}{\partial z^2} \right) \right] \\ & + \frac{1}{\rho_0} \frac{d\mu_0}{dz} \left(\frac{4}{3} \frac{\partial w'}{\partial z} - \frac{2}{3} \frac{\partial u'}{\partial x} \right) - \left(\frac{1}{\rho} f_{\text{IDz}} \right)', \end{aligned} \quad (\text{A23})$$

where

$$c_s = \sqrt{\gamma R_M T_0} \quad (\text{A24})$$

is the speed of sound and H_ρ is the density scale height defined by

$$\frac{d\rho_0}{dz} = -\frac{\rho_0}{H_\rho}. \quad (\text{A25})$$

Here, $(f_{\text{IDx}}/\rho)'$ and $(f_{\text{IDz}}/\rho)'$ denote the perturbations of the x - and z -components, respectively, of the ion-drag force per unit mass f_{IDx}/ρ and f_{IDz}/ρ .

3. The linearized heat equation is

$$\begin{aligned} \frac{\partial T'}{\partial t} = & -(\gamma - 1)T_0 \left(\frac{\partial u'}{\partial x} + \frac{\partial w'}{\partial z} \right) - \left(u_0 \frac{\partial T'}{\partial x} + \frac{dT_0}{dz} w' \right) \\ & + \frac{2\mu_{k0}}{c_v} \frac{du_0}{dz} \left(\frac{\partial u'}{\partial z} + \frac{\partial w'}{\partial x} \right) + \frac{\mu_0}{c_v \rho_0} \left(\frac{du_0}{dz} \right)^2 \left(\frac{\mu'}{\mu_0} - \frac{\rho'}{\rho_0} \right) \\ & + \frac{\mu_{k0}\gamma}{\text{Pr}} \left(\frac{\partial^2 T'}{\partial x^2} + \frac{\partial^2 T'}{\partial z^2} \right) + \frac{\gamma}{\rho_0 \text{Pr}} \left(\frac{d\mu_0}{dz} \frac{\partial T'}{\partial z} + \frac{dT_0}{dz} \frac{\partial \mu'}{\partial z} \right) - \frac{1}{c_v} \left(\frac{1}{\rho} q_{\text{ID}} \right)', \end{aligned} \quad (\text{A26})$$

where $(q_{\text{ID}}/\rho)'$ denotes the perturbation of the ion-drag heating per unit mass.

The linearized equations (A21), (A22), (A23), and (A26) are structurally consistent with Eqs. (7), (4), (5), and (6) in Vadas and Nicolls (2012), respectively, when only the terms in black and blue are considered (the terms indicated in red are not included).

They are likewise related to Eqs. (3.5), (3.1), (3.3), and (3.4) in Knight et al. (2024), when only the terms indicated in black are considered (the additional contributions indicated in red and blue are not included).

Using the following representation for the dynamic viscosity μ (Dalgarno and Smith, 1962)

$$\mu = 3.34 \times 10^{-7} T^{0.71}, \quad (\text{A27})$$

we obtain

$$\mu' = 0.71\mu_0 \frac{T'}{T_0}, \quad \frac{\partial \mu'}{\partial z} = 0.71 \frac{d\mu_0}{dz} \left(\frac{T'}{T_0} \right) + 0.71\mu_0 \frac{\partial}{\partial z} \left(\frac{T'}{T_0} \right). \quad (\text{A28})$$

With these relations, the linearized equations can be written as follows:

1. x -momentum equation

$$\begin{aligned} \frac{\partial u'}{\partial t} = & -\frac{du_0}{dz} w' - u_0 \frac{\partial u'}{\partial x} - \frac{c_s^2}{\gamma \rho_0} \frac{\partial \rho'}{\partial x} - \frac{c_s^2}{\gamma T_0} \frac{\partial T'}{\partial x} \\ & + \mu_{k0} \left[\left(\frac{\partial^2 u'}{\partial x^2} + \frac{\partial^2 u'}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u'}{\partial x^2} + \frac{\partial^2 w'}{\partial x \partial z} \right) \right] \\ & + \frac{1}{\rho_0} \frac{d\mu_0}{dz} \left(\frac{\partial u'}{\partial z} + \frac{\partial w'}{\partial x} \right) + \frac{1}{\rho_0} \frac{du_0}{dz} \left[0.71 \frac{d\mu_0}{dz} \frac{T'}{T_0} + 0.71\mu_0 \frac{\partial}{\partial z} \left(\frac{T'}{T_0} \right) \right] \\ & - \frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} \frac{\rho'}{\rho_0} - \left(\frac{1}{\rho} f_{\text{IDx}} \right)', \end{aligned} \quad (\text{A29})$$

2. z -momentum equation

$$\begin{aligned}
 \frac{\partial w'}{\partial t} = & -\frac{c_s^2}{\gamma \rho_0} \frac{\partial \rho'}{\partial z} + \frac{c_s^2}{\gamma H_\rho} \left(\frac{T'}{T_0} - \frac{\rho'}{\rho_0} \right) - \frac{c_s^2}{\gamma T_0} \frac{\partial T'}{\partial z} - u_0 \frac{\partial w'}{\partial x} \\
 & + \mu_{k0} \left[\left(\frac{\partial^2 w'}{\partial x^2} + \frac{\partial^2 w'}{\partial z^2} \right) + \frac{1}{3} \left(\frac{\partial^2 u'}{\partial x \partial z} + \frac{\partial^2 w'}{\partial z^2} \right) \right] \\
 & + \frac{1}{\rho_0} \frac{d\mu_0}{dz} \left(\frac{4}{3} \frac{\partial w'}{\partial z} - \frac{2}{3} \frac{\partial u'}{\partial x} \right) - \left(\frac{1}{\rho} f_{\text{ID}z} \right)', \tag{A30}
 \end{aligned}$$

3. heat equation

$$\begin{aligned}
 \frac{\partial T'}{\partial t} = & -(\gamma - 1) T_0 \left(\frac{\partial u'}{\partial x} + \frac{\partial w'}{\partial z} \right) - \left(u_0 \frac{\partial T'}{\partial x} + \frac{dT_0}{dz} w' \right) \\
 & + \frac{2\mu_{k0}}{c_v} \frac{du_0}{dz} \left(\frac{\partial u'}{\partial z} + \frac{\partial w'}{\partial x} \right) + \frac{\mu_0}{c_v \rho_0} \left(\frac{du_0}{dz} \right)^2 \left(0.71 \frac{T'}{T_0} - \frac{\rho'}{\rho_0} \right) \\
 & + \frac{\mu_{k0} \gamma}{\text{Pr}} \left(\frac{\partial^2 T'}{\partial x^2} + \frac{\partial^2 T'}{\partial z^2} \right) + \frac{\gamma}{\rho_0 \text{Pr}} \frac{d\mu_0}{dz} \frac{\partial T'}{\partial z} \\
 & + \frac{\gamma}{\rho_0 \text{Pr}} \frac{dT_0}{dz} \left[0.71 \frac{d\mu_0}{dz} \left(\frac{T'}{T_0} \right) + 0.71 \mu_0 \frac{\partial}{\partial z} \left(\frac{T'}{T_0} \right) \right] - \frac{1}{c_v} \left(\frac{1}{\rho} q_{\text{ID}} \right)'. \tag{A31}
 \end{aligned}$$

A3 Plane wave solution

We assume that all perturbations vary harmonically in time and in the x -direction, that is,

$$f'(x, z, t) = \bar{f}(z) e^{j(\omega t - k_x x)}, \tag{A32}$$

where ω is the angular frequency and k_x the horizontal wavenumber. It then follows that

$$\frac{\partial f'}{\partial t} = j\omega f', \quad \frac{\partial f'}{\partial x} = -jk_x f', \quad \frac{\partial^2 f'}{\partial x^2} = -k_x^2 f'. \tag{A33}$$

The linearized continuity equation becomes

$$\frac{\bar{\rho}}{\rho_0} = \frac{k_x}{\Omega} \bar{u} - \frac{j}{\Omega H_\rho} \bar{w} + \frac{j}{\Omega} \frac{d\bar{w}}{dz}, \tag{A34}$$

where

$$\Omega = \omega - k_x u_0 \tag{A35}$$

is the intrinsic frequency. Further, using

$$\frac{d}{dz} \left(\frac{\bar{\rho}}{\rho_0} \right) = \frac{1}{\rho_0} \frac{d\bar{\rho}}{dz} + \frac{1}{H_\rho} \frac{\bar{\rho}}{\rho_0} \tag{A36}$$

together with

$$\frac{d\Omega}{dz} = -k_x \frac{du_0}{dz}, \quad \frac{d\rho_0}{dz} = -\frac{\rho_0}{H_\rho}, \tag{A37}$$

we obtain

$$\begin{aligned}
 845 \quad \frac{1}{\rho_0} \frac{d\bar{\rho}}{dz} + \frac{1}{H_\rho} \frac{\bar{\rho}}{\rho_0} &= \frac{k_x^2}{\Omega^2} \frac{du_0}{dz} \bar{u} - \frac{j}{\Omega H_\rho} \left(\frac{k_x}{\Omega} \frac{du_0}{dz} - \frac{1}{H_\rho} \frac{dH_\rho}{dz} \right) \bar{w} \\
 &+ \frac{k_x}{\Omega} \frac{d\bar{u}}{dz} + \frac{j}{\Omega} \left(\frac{k_x}{\Omega} \frac{du_0}{dz} - \frac{1}{H_\rho} \right) \frac{d\bar{w}}{dz} + \frac{j}{\Omega} \frac{d^2 \bar{w}}{dz^2}.
 \end{aligned} \tag{A38}$$

In a first step, we use Eqs. (A34) and (A38), together with the linearized forms of the momentum and the heat equation given in Eqs. (A29)–(A31), to express the governing equations in terms of $\bar{u}$, $\bar{w}$, $\bar{T}/T_0$, and their vertical derivatives.

In a second step, we introduce the dimensionless state variables $\hat{u}$, $\hat{w}$, and $\hat{T}$, defined by

$$850 \quad \bar{u}(z) = \frac{\omega_0}{k_x} \hat{u}(z), \quad \bar{w}(z) = \frac{\omega_0}{k_x} \hat{w}(z), \quad \bar{T}(z) = T_0(z) \hat{T}(z), \tag{A39}$$

where ω_0 is a reference frequency, together with their vertical derivatives

$$\hat{\mathcal{U}} = \frac{d\hat{u}}{dz}, \quad \hat{\mathcal{W}} = \frac{d\hat{w}}{dz}, \quad \hat{\mathcal{T}} = \frac{d\hat{T}}{dz}. \tag{A40}$$

The state vector is organized as

$$\mathbf{e} = [\hat{u}, \hat{w}, \hat{T}, \hat{\mathcal{U}}, \hat{\mathcal{W}}, \hat{\mathcal{T}}]^T$$

855 and the corresponding system of ordinary differential equations is given by

$$\frac{1}{k_x} \frac{d\hat{u}}{dz} = \frac{1}{k_x} \hat{\mathcal{U}}, \tag{A41}$$

$$\frac{1}{k_x} \frac{d\hat{w}}{dz} = \frac{1}{k_x} \hat{\mathcal{W}}, \tag{A42}$$

$$\frac{1}{k_x} \frac{d\hat{T}}{dz} = \frac{1}{k_x} \hat{\mathcal{T}}, \tag{A43}$$

$$\begin{aligned}
 860 \quad k_x \mu_{k0} \left(\frac{1}{k_x} \frac{d\hat{\mathcal{U}}}{dz} \right) &= \left[j\Omega + \frac{4}{3} k_x^2 \mu_{k0} + \frac{k_x}{\Omega} \left(\frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} - jk_x \frac{c_s^2}{\gamma} \right) \right] \hat{u} \\
 &+ \left[\frac{du_0}{dz} + jk_x \frac{1}{\rho_0} \frac{d\mu_0}{dz} - \frac{j}{\Omega H_\rho} \left(\frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} - jk_x \frac{c_s^2}{\gamma} \right) \right] \hat{w} \\
 &- \frac{k_x}{\omega_0} \left(jk_x \frac{c_s^2}{\gamma} + 0.71 \frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} \right) \hat{T} - \frac{1}{\rho_0} \frac{d\mu_0}{dz} \hat{\mathcal{U}} \\
 &+ \left[\frac{1}{3} jk_x \mu_{k0} + \frac{j}{\Omega} \left(\frac{1}{\rho_0} \frac{d\mu_0}{dz} \frac{du_0}{dz} - jk_x \frac{c_s^2}{\gamma} \right) \right] \hat{\mathcal{W}} \\
 &- 0.71 \frac{\mu_0}{\rho_0} \frac{du_0}{dz} \frac{k_x}{\omega_0} \hat{\mathcal{T}} + \frac{k_x}{\omega_0} \overline{\left(\frac{1}{\rho} f_{\text{IDx}} \right)},
 \end{aligned} \tag{A44}$$

$$\begin{aligned}
865 \quad k_x \left(\frac{4}{3} \mu_{k0} - \frac{j c_s^2}{\gamma \Omega} \right) \left(\frac{1}{k_x} \frac{d\widehat{\mathcal{W}}}{dz} \right) &= \left(-\frac{2}{3} j k_x \frac{1}{\rho_0} \frac{d\mu_0}{dz} + \frac{c_s^2 k_x^2}{\gamma \Omega^2} \frac{du_0}{dz} \right) \widehat{u} \\
&+ \left[j\Omega + k_x^2 \mu_{k0} - \frac{j c_s^2}{\gamma \Omega H_\rho} \left(\frac{k_x}{\Omega} \frac{du_0}{dz} - \frac{1}{H_\rho} \frac{dH_\rho}{dz} \right) \right] \widehat{w} \\
&- \frac{c_s^2 k_x}{\gamma \omega_0} \left(\frac{1}{H_\rho} - \frac{1}{T_0} \frac{dT_0}{dz} \right) \widehat{T} + \left(\frac{1}{3} j k_x \mu_{k0} + \frac{k_x c_s^2}{\gamma \Omega} \right) \widehat{\mathcal{U}} \\
&+ \left[j c_s^2 \left(\frac{k_x}{\Omega} \frac{du_0}{dz} - \frac{1}{H_\rho} \right) - \frac{4}{3} \frac{1}{\rho_0} \frac{d\mu_0}{dz} \right] \widehat{\mathcal{W}} \\
&+ \frac{c_s^2 k_x}{\gamma \omega_0} \widehat{\mathcal{T}} + \frac{k_x}{\omega_0} \left(\frac{1}{\rho} f_{IDz} \right), \tag{A45}
\end{aligned}$$

$$\begin{aligned}
870 \quad k_x \frac{\mu_{k0} \gamma}{\text{Pr}} \left(\frac{1}{k_x} \frac{d\widehat{\mathcal{T}}}{dz} \right) &= \omega_0 \left[-j(\gamma - 1) + \frac{1}{\Omega} \frac{\mu_0}{c_v T_0 \rho_0} \left(\frac{du_0}{dz} \right)^2 \right] \widehat{u} \\
&+ \frac{\omega_0}{k_x} \left[\frac{1}{T_0} \frac{dT_0}{dz} + j \frac{2\mu_{k0} k_x}{c_v T_0} \frac{du_0}{dz} - \frac{j}{\Omega H_\rho} \frac{\mu_0}{c_v T_0 \rho_0} \left(\frac{du_0}{dz} \right)^2 \right] \widehat{w} \\
&+ \left[j\Omega + \frac{\mu_{k0} \gamma}{\text{Pr}} k_x^2 - C_1 \frac{\gamma}{\rho_0 \text{Pr}} \frac{d\mu_0}{dz} \frac{1}{T_0} \frac{dT_0}{dz} - 0.71 \frac{\mu_0}{c_v T_0 \rho_0} \left(\frac{du_0}{dz} \right)^2 \right] \widehat{T} \\
&- \frac{2\mu_{k0} \omega_0}{c_v T_0 k_x} \frac{du_0}{dz} \widehat{\mathcal{U}} + \frac{\omega_0}{k_x} \left[(\gamma - 1) + \frac{j}{\Omega} \frac{\mu_0}{c_v T_0 \rho_0} \left(\frac{du_0}{dz} \right)^2 \right] \widehat{\mathcal{W}} \\
&- \frac{\gamma}{\text{Pr}} \left(\frac{1}{\rho_0} \frac{d\mu_0}{dz} + C_2 \mu_{k0} \frac{1}{T_0} \frac{dT_0}{dz} \right) \widehat{\mathcal{T}} + \frac{1}{c_v T_0} \left(\frac{1}{\rho} q_{ID} \right). \tag{A46}
\end{aligned}$$

Equations (A44), (A45), and (A46) with the constants $C_1 = 1.71$ and $C_2 = 2.71$ correspond to the general model, in which all altitude derivatives of the background parameters u_0 , T_0 , H_ρ , and μ_0 are retained. The terms shown in black and blue in these equations, with the constants $C_1 = 1.0$ and $C_2 = 2.0$, correspond to the model of Vadas and Nicolls (2012). Moreover, Eqs. (A44), (A45), and (A46), when only the black terms are retained and the constants are set to $C_1 = C_2 = 0$, are consistent in form with Eqs. (3.32), (3.31), and (3.33) in Knight et al. (2024), respectively. Note that in Knight et al. (2024), the wave propagates in three-dimensional space, the harmonic dependence of the perturbed quantities is taken as $\exp[-j(\omega t - k_x x - k_y y)]$, rather than $\exp[j(\omega t - k_x x)]$, the characteristic solutions have an $\exp(jmz)$ dependence, rather than $\exp(k_x \lambda z)$, and the state vector is defined as $[\bar{u}, \bar{w}, \widehat{T}, \bar{\mathcal{U}}, \bar{\mathcal{W}}, \widehat{\mathcal{T}}]^T$ instead of $[\widehat{u}, \widehat{w}, \widehat{T}, \widehat{\mathcal{U}}, \widehat{\mathcal{W}}, \widehat{\mathcal{T}}]^T$, where $\bar{\mathcal{U}} = d\bar{u}/dz$ and $\bar{\mathcal{W}} = d\bar{w}/dz$. Essentially, the difference between the model of Vadas and Nicolls (2012) and that of Knight et al. (2024) is that, in the latter, the derivative of the dynamic viscosity $d\mu_0/dz$ is omitted. In the code, for testing purposes, we included a hard-coded logical flag that selects the linearized model to be used. Our numerical simulations show that there are no significant differences between the general model and that of Vadas and Nicolls (2012), and that the effect of the assumption $d\mu_0/dz = 0$ is relatively small. This latter assumption was discussed in detail in Knight et al. (2024). In the general model, the derivative $d\mu_0/dz$ is computed as

$$\frac{d\mu_0}{dz} = 0.71 \mu_0 \frac{1}{T_0} \frac{dT_0}{dz},$$

whereas the derivatives of u_0 , T_0 , and H_ρ are computed using central finite differences.

The model can be particularized as follows:

890 1. For an isothermal ($T_0 = \text{constant}$), homogeneous ($\mu_{k0} = \mu_0/\rho_0 = \text{constant}$), and windless atmosphere ($u_0 = 0$), we set

$$\frac{du_0}{dz} = 0, \quad \frac{dT_0}{dz} = 0, \quad \Omega = \omega_0, \quad \frac{dH_\rho}{dz} = 0, \quad \text{and} \quad \frac{1}{\rho_0} \frac{d\mu_0}{dz} = -\frac{\mu_{k0}}{H_\rho}. \quad (\text{A47})$$

In this case, the density scale height H_ρ coincides with the atmospheric scale height H_a , which satisfies

$$\frac{1}{\rho_0} \frac{d\rho_0}{dz} = \frac{1}{p_0} \frac{dp_0}{dz} = -\frac{1}{H_a} \quad (\text{A48})$$

and is given by

895 $H_a = \frac{p_0}{\rho_0 g} = \frac{R_M T_0}{g} = \text{constant}. \quad (\text{A49})$

2. For an atmosphere without ion drag, we set

$$f_{\text{IDx}} = 0, \quad f_{\text{IDz}} = 0, \quad \text{and} \quad q_{\text{ID}} = 0. \quad (\text{A50})$$

A4 Dispersion equation

For $\hat{f}(z) \propto \exp(k_x \lambda z)$, we obtain

900 $\hat{\mathcal{F}} = \frac{d\hat{f}}{dz} = k_x \lambda \hat{f}, \quad \frac{d\hat{\mathcal{F}}}{dz} = k_x^2 \lambda^2 \hat{f}, \quad (\text{A51})$

where f denotes u , w , and T , and $\mathcal{F}$ denotes $\mathcal{U}$, $\mathcal{W}$, and $\mathcal{T}$. Inserting Eq. (A51) into Eqs. (A44)–(A46) yields a homogeneous system of equations. Requiring the determinant of this system to vanish, and neglecting the ion-drag terms, leads to the following dispersion equation:

$$\begin{aligned} & -\frac{\Omega}{c_s^2} \left[\Omega - j \frac{\gamma \mu_{k0}}{\text{Pr}} k_x^2 (1 - \lambda^2) \right] \left[\Omega - j \mu_{k0} k_x^2 (1 - \lambda^2) \right] \left[\Omega - j \frac{4\mu_{k0}}{3} k_x^2 (1 - \lambda^2) \right] \\ 905 & + \left[\Omega - j \mu_{k0} k_x^2 (1 - \lambda^2) \right] \left[\Omega - j \frac{\mu_{k0}}{\text{Pr}} k_x^2 (1 - \lambda^2) \right] \left[k_x^2 (1 - \lambda^2) + \frac{k_x \lambda}{H_\rho} \right] - \frac{k_x^2 c_s^2}{\gamma^2 H_\rho^2} (\gamma - 1) \\ & = 0. \end{aligned} \quad (\text{A52})$$

The dispersion equation (A52) is the counterpart of dispersion relation (3.35) in Knight et al. (2024), under the aforementioned equivalences. Remarkably, it does not include derivatives of the background parameters u_0 , T_0 , H_ρ , and μ_0 . This result follows from the variable-change method discussed by Knight et al. (2024) in their Section 2.2.

910 For an isothermal, homogeneous, and windless atmosphere without ion drag, the dispersion equation reduces to the cubic equation (Midgley and Liemohn, 1966)

$$C_3 R^3 + C_2 R^2 + C_1 R + C_0 = 0, \quad (\text{A53})$$

for $R = -\lambda^2 + \alpha\lambda + 1$, where $\alpha = 1/k_x H_a$, or equivalently, $R = \kappa^2 - j\alpha\kappa + 1$, where

$$\kappa = j\lambda = \frac{1}{k_x} \left(k_z + j \frac{1}{2H_a} \right). \quad (\text{A54})$$

915 The coefficients of the cubic equations are given by

$$C_3 = -3\eta\nu(1 + 4\eta), \quad (\text{A55})$$

$$C_2 = \frac{3\eta(1 + 4\eta)}{\gamma - 1} + \nu\beta(1 + 7\eta) + 3\eta, \quad (\text{A56})$$

$$C_1 = -[\beta^2 - 2\eta\alpha^2(1 + 3\eta)]\nu - \frac{\beta(1 + 7\eta)}{\gamma - 1} - \beta, \quad (\text{A57})$$

$$C_0 = \frac{\beta^2 - 2\eta\alpha^2(1 + 3\eta)}{\gamma - 1} + \alpha^2(1 + 3\eta), \quad (\text{A58})$$

920 where

$$\eta = j \frac{\omega_0 \mu_0}{3p_0}, \quad \nu = j \frac{k_x^2 \Lambda_0 T_0}{\omega_0 p_0}, \quad \Lambda_0 = \frac{\gamma c_v \mu_0}{\text{Pr}}, \quad \beta = \frac{\omega_0^2}{k_x^2 g H_a}. \quad (\text{A59})$$

If R_m , $m = 1, \dots, 3$ are the solutions of the dispersion equation, the corresponding vertical wavenumbers $k_{zm}^\pm$ are given by

$$k_{zm}^\pm = \mp k_x \sqrt{R_m - 1 - \frac{\alpha^2}{4}}. \quad (\text{A60})$$

The wavenumbers k_{zm}^+ with $\text{Im}(k_{zm}^+) < 0$ are associated with ascending modes, whereas the wavenumbers k_{zm}^- with $\text{Im}(k_{zm}^-) >$

925 0 correspond to descending modes. Ordering the ascending wavenumbers as

$$\text{Im}(k_{z3}^+) < \text{Im}(k_{z2}^+) < \text{Im}(k_{z1}^+) < 0,$$

we identify (i) k_{z1}^+ and k_{z1}^- as ascending and descending gravity-wave modes, respectively, (ii) k_{z2}^+ and k_{z2}^- as ascending and descending viscosity-wave modes, respectively, and (iii) k_{z3}^+ and k_{z3}^- as ascending and descending thermal-conduction wave modes, respectively. A similar cubic equation was derived by Francis (1973) under the assumption that the geomagnetic field

930 is either in the horizontal or the vertical direction.

For an isothermal, homogeneous, and windless atmosphere, without viscosity and ion drag, the dispersion equation (A53) reduces to the quadratic equation

$$C_2 R^2 + C_1 R + C_0 = 0, \quad (\text{A61})$$

with

$$935 \quad C_2 = \nu\beta, \quad (\text{A62})$$

$$C_1 = -\beta^2\nu - \beta \frac{\gamma}{\gamma - 1}, \quad (\text{A63})$$

$$C_0 = \frac{\beta^2}{\gamma - 1} + \alpha^2. \quad (\text{A64})$$

For $\text{Im}(k_{z2}^+) < \text{Im}(k_{z1}^+) < 0$, the permissible modes are (i) the ascending and descending gravity-wave modes associated to the pair (k_{z1}^+, k_{z1}^-) , and (ii) the ascending and descending thermal conduction-wave modes associated to the pair (k_{z2}^+, k_{z2}^-) .

940 Appendix B: Derivation of the ion-drag terms

In this appendix we derive the expressions for the ion-drag terms that enter the hydrodynamic equations (A44)–(A46).

B1 Ion equations

For each ion species i , the ion continuity equation is

$$\frac{\partial n_i}{\partial t} + \nabla \cdot (n_i \mathbf{u}_i) = P_i - n_i \mathcal{L}_i, \quad (\text{B1})$$

945 and the corresponding ion momentum equation, including pressure gradient, electric field, magnetic field, gravity, and collisions, is

$$\begin{aligned} \frac{\partial \mathbf{u}_i}{\partial t} + (\mathbf{u}_i \cdot \nabla) \mathbf{u}_i = & -\frac{1}{m_i n_i} \nabla p_i + \frac{q_i}{m_i} \mathbf{E} + \frac{q_i}{m_i} \mathbf{u}_i \times \mathbf{B} + \mathbf{g} \\ & - \nu_{in} (\mathbf{u}_i - \mathbf{u}) - \sum_j \nu_{ij} (\mathbf{u}_i - \mathbf{u}_j). \end{aligned} \quad (\text{B2})$$

Here n_i , $\mathbf{u}_i$, T_i , m_i , and $p_i = n_i k_B T_i$ are the number density, velocity, temperature, mass, and pressure of ion species i ; $\mathbf{E}$ is the electric field, $\mathbf{B}$ the magnetic field, q_i the ion charge, $\mathbf{g}$ the gravitational acceleration, and k_B the Boltzmann constant. The quantities P_i and $\mathcal{L}_i$ denote the ionization production rate and the loss rate due to chemical processes of ion i , respectively. The neutral wind velocity is $\mathbf{u}$, and the collision frequencies ν_{in} and ν_{ij} describe ion–neutral and ion–ion collisions.

In addition to ion equations, we consider the electron momentum equation

$$0 = -\frac{1}{m_e n_e} \nabla p_e - \frac{e}{m_e} \mathbf{E} - \frac{e}{m_e} \mathbf{u}_e \times \mathbf{B}, \quad (\text{B3})$$

955 where n_e , $\mathbf{u}_e$, T_e , m_e , and $p_e = n_e k_B T_e$ are the number density, velocity, temperature, mass, and pressure of electrons. In Eq. (B3), electron inertia is neglected because of the small electron mass, while electron collisional terms are neglected because $\nu_e \ll \Omega_e$, where ν_e denotes the electron collision frequencies and Ω_e is the electron cyclotron frequency.

In the ion momentum equation we neglect the ion inertia and the ion–ion collisions, and introduce the drift velocity $\mathbf{u}_D$ by writing $\mathbf{u}_i = \mathbf{u} + \mathbf{u}_D$. This yields

$$960 \quad m_i \nu_{in} \mathbf{u}_D = q_i [\mathbf{E} + (\mathbf{u} + \mathbf{u}_D) \times \mathbf{B}] - \frac{1}{n_i} \nabla p_i + m_i \mathbf{g}. \quad (\text{B4})$$

The momentum equation is projected along the direction of the magnetic field $\hat{\mathbf{b}}$ and perpendicular to it. The parallel and perpendicular force-balance equations are

$$m_i \nu_{in} u_{D\parallel} = q_i E_{\parallel} - \frac{1}{n_i} (\nabla p_i)_{\parallel} + m_i g_{\parallel}, \quad (\text{B5})$$

and

$$965 \quad m_i \nu_{in} \mathbf{u}_{D\perp} = q_i [\mathbf{E}_{\perp} + (\mathbf{u}_{\perp} + \mathbf{u}_{D\perp}) \times \mathbf{B}] - \frac{1}{n_i} (\nabla p_i)_{\perp} + m_i \mathbf{g}_{\perp}, \quad (\text{B6})$$

respectively, where in general $\mathbf{a}_{\parallel} = (\mathbf{a} \cdot \hat{\mathbf{b}})\hat{\mathbf{b}} = a_{\parallel}\hat{\mathbf{b}}$ and $\mathbf{a}_{\perp} = \mathbf{a} - \mathbf{a}_{\parallel}$. The parallel transport equation for electrons reduces to

$$E_{\parallel} = -\frac{1}{en_e} \frac{\partial p_e}{\partial b}. \quad (\text{B7})$$

The parallel and perpendicular force-balance equations are solved as follows. We first consider the ambipolar diffusion velocity, and then the electromagnetic drift velocity.

970 1. **Ambipolar diffusion velocity.** For a single dominant ion species of charge $q_i = +e$, the parallel force balance equation for ions becomes

$$m_i \nu_{in} u_{D\parallel} = eE_{\parallel} - \frac{1}{n_i} \frac{\partial p_i}{\partial b} + m_i g_{\parallel}, \quad (\text{B8})$$

where $\partial p_i / \partial b = \nabla p_i \cdot \hat{\mathbf{b}}$. Inserting Eq. (B7) into Eq. (B8), gives

$$m_i \nu_{in} u_{D\parallel} = -\left(\frac{1}{n_e} \frac{\partial p_e}{\partial b} + \frac{1}{n_i} \frac{\partial p_i}{\partial b} \right) + m_i g_{\parallel}, \quad (\text{B9})$$

975 where $g_{\parallel} = \mathbf{g} \cdot \hat{\mathbf{b}}$. Using the ideal-gas relations $p_i = n_i k_B T_i$ and $p_e = n_e k_B T_e$, assuming quasi-neutrality $n_e = n_i$, and thermal equilibrium $T_i = T_e = T$, we obtain

$$u_{D\parallel} = -D_A \left(\frac{1}{n_i} \frac{\partial n_i}{\partial b} + \frac{1}{T} \frac{\partial T}{\partial b} \right) + \frac{g_{\parallel}}{\nu_{in}}, \quad (\text{B10})$$

where

$$D_A = \frac{2k_B T}{m_i \nu_{in}} \quad (\text{B11})$$

980 is the ambipolar diffusion coefficient.

2. **Electromagnetic drift velocity.** Neglecting perpendicular pressure-gradient and gravity terms, which are often small compared to the electromagnetic drift terms, and assuming a collisionless or weakly collisional limit in which the ion-neutral drag term is negligible, the perpendicular momentum balance reduces to

$$\mathbf{E}_{\perp} + (\mathbf{u}_{\perp} + \mathbf{u}_{D\perp}) \times \mathbf{B} = 0. \quad (\text{B12})$$

985 With $\mathbf{u}_{i\perp} = \mathbf{u}_{\perp} + \mathbf{u}_{D\perp}$, this gives $\mathbf{u}_{i\perp} \times \mathbf{B} = -\mathbf{E}_{\perp}$, whose solution is the electromagnetic drift velocity

$$\mathbf{u}_E = \frac{\mathbf{E}_{\perp} \times \mathbf{B}}{B^2} = \frac{\mathbf{E} \times \mathbf{B}}{B^2}. \quad (\text{B13})$$

Consequently,

$$\mathbf{u}_{D\perp} = \mathbf{u}_E - \mathbf{u}_{\perp}. \quad (\text{B14})$$

Collecting all contributions, the ion velocity can be written as

990 $\mathbf{u}_i = \mathbf{u}_{\parallel} + \mathbf{u}_{D\parallel} + \mathbf{u}_E, \quad (\text{B15})$

where $\mathbf{u}_{\parallel} = (\mathbf{u} \cdot \hat{\mathbf{b}})\hat{\mathbf{b}}$ is the field-aligned neutral velocity, $\mathbf{u}_{D\parallel} = u_{D\parallel}\hat{\mathbf{b}}$ is the ambipolar diffusion velocity given by Eq. (B10), and $\mathbf{u}_E$ is the electromagnetic drift velocity given by Eq. (B13). This expression follows from the decomposition $\mathbf{u}_i = \mathbf{u} + \mathbf{u}_D$, together with $\mathbf{u}_{D\perp} = \mathbf{u}_E - \mathbf{u}_{\perp}$, so that the perpendicular neutral velocity cancels.

In our model, the ion velocity is assumed to be aligned with the magnetic field lines. This assumption is introduced to
 995 decouple the hydrodynamic and ion equation systems. Accordingly, the ion velocity is approximated by

$$\mathbf{u}_i \approx (\mathbf{u} \cdot \hat{\mathbf{b}})\hat{\mathbf{b}} + u_{D\parallel}\hat{\mathbf{b}}. \quad (\text{B16})$$

This approximation is justified when perpendicular ion transport is small compared to the dominant field-aligned diffusion. The resulting formulation captures the leading-order effects of ambipolar diffusion along the magnetic field lines, while deliberately neglecting perpendicular electrodynamic coupling, such as cross-field advection and $\mathbf{E} \times \mathbf{B}$ drifts. Consequently, the model is
 1000 applicable to regimes in which field-aligned transport dominates and perpendicular electrodynamic effects play a secondary role. We note, however, that the neglect of the electromagnetic drift velocity is not appropriate for all geophysical regimes. At high latitudes, ion convection is largely controlled by magnetospheric forcing (Dungey, 1961), and realistic modeling generally requires externally imposed convection electric fields, for example from empirical models such as Weimer (2005). At mid-latitudes, perpendicular ion motion may be influenced by inter-hemispheric coupling and neutral-wind differences
 1005 between conjugate hemispheres (Laundal et al., 2025; Buchert, 2020). A fully self-consistent electrodynamic formulation, in which the electric field is obtained from an electrostatic potential Φ via $\mathbf{E} = -\nabla\Phi$, with Φ determined from quasi-neutral current continuity and the conductivity-tensor relation (Weimer, 2005), is therefore beyond the scope of the present study but constitutes an important extension for future work.

In the following, for simplicity, the subscript $\parallel$ is omitted, and we write $\mathbf{u}_D$ and u_D instead of $\mathbf{u}_{D\parallel}$ and $u_{D\parallel}$, respectively. Let
 1010 $\mathbf{g} = (0, 0, -g)$, $\hat{\mathbf{b}} = (-\cos I, 0, -\sin I)$, $\mathbf{u} = (u, 0, w)$, (B17)

where I is the geomagnetic inclination. The field-aligned derivative is

$$\frac{\partial}{\partial b} = \nabla \cdot \hat{\mathbf{b}} = -\left(\cos I \frac{\partial}{\partial x} + \sin I \frac{\partial}{\partial z}\right),$$

and the scalar field-aligned diffusion velocity becomes (cf. Eq. (B10))

$$u_D = D_A \left(\cos I \frac{1}{n_i} \frac{\partial n_i}{\partial x} + \sin I \frac{1}{n_i} \frac{\partial n_i}{\partial z} + \cos I \frac{1}{T} \frac{\partial T}{\partial x} + \sin I \frac{1}{T} \frac{\partial T}{\partial z} \right) + \frac{g}{\nu_{in}} \sin I. \quad (\text{B18})$$

1015 **B2 Linearized equations**

The linearized continuity equation, together with the linearized expressions for the diffusion velocity, ion-drag force, and ion-drag heating, are as follows.

1. **Ion continuity equation.** Neglecting the perturbed production and loss terms, the perturbed ion continuity equation is

$$\frac{\partial n'_i}{\partial t} + n'_i \nabla \cdot \mathbf{u}_{i0} + \mathbf{u}_{i0} \cdot \nabla n'_i + n_{i0} \nabla \cdot \mathbf{u}'_i + \mathbf{u}'_i \cdot \nabla n_{i0} = 0. \quad (\text{B19})$$

1020

Using Eq. (B17) and the standard assumptions $n_{i0} = n_{i0}(z)$, $\mathbf{u}_0(z) = (u_0(z), 0, 0)$, and $u_{D0} = u_{D0}(z)$, we obtain

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{n'_i}{n_{i0}} \right) = & -u_{D0} \left[\frac{\partial}{\partial b} \left(\frac{n'_i}{n_{i0}} \right) - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \left(\frac{n'_i}{n_{i0}} \right) \right] + \frac{du_{D0}}{dz} \sin I \left(\frac{n'_i}{n_{i0}} \right) \\ & + \left(\frac{\partial u'}{\partial b} - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I u' \right) \cos I + \left(\frac{\partial w'}{\partial b} - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I w' \right) \sin I \\ & - \left(\frac{\partial u'_D}{\partial b} - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I u'_D \right) + u_0 \cos I \frac{\partial}{\partial b} \left(\frac{n'_i}{n_{i0}} \right) \\ & - \cos I \sin I \left(\frac{du_0}{dz} + u_0 \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \right) \left(\frac{n'_i}{n_{i0}} \right). \end{aligned} \quad (\text{B20})$$

1025

2. **Diffusion velocity.** For the perturbed diffusion velocity u'_D , we have the representation

$$\begin{aligned} u'_D = & -D_{A0} \frac{\partial}{\partial b} \left(\frac{T'}{T_0} \right) - D_{A0} \frac{\partial}{\partial b} \left(\frac{n'_i}{n_{i0}} \right) \\ & + \left(\frac{1}{n_{i0}} \frac{dn_{i0}}{dz} + \frac{1}{T_0} \frac{dT_0}{dz} \right) \sin I D'_A - \frac{g \sin I}{\nu_{in0}} \left(\frac{\nu'_{in}}{\nu_{in0}} \right). \end{aligned} \quad (\text{B21})$$

3. **Ion-drag force and ion-drag heating.** For the ion-drag force per unit mass (cf. Eq. (A10) of Appendix A),

$$\frac{1}{\rho} \mathbf{f}_{ID} = \nu_{ni} (\mathbf{u} - \mathbf{u}_i),$$

1030

we obtain

$$\begin{aligned} \left(\frac{1}{\rho} f_{IDx} \right)' = & \nu_{ni0} \left[\sin^2 I u' - \sin I \cos I w' + \cos I u'_D \right. \\ & \left. + (u_{D0} \cos I + u_0 \sin^2 I) \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right], \end{aligned} \quad (\text{B22})$$

$$\begin{aligned} \left(\frac{1}{\rho} f_{IDz} \right)' = & \nu_{ni0} \left[-\sin I \cos I u' + \cos^2 I w' + \sin I u'_D \right. \\ & \left. + (u_{D0} \sin I - u_0 \cos I \sin I) \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right]. \end{aligned} \quad (\text{B23})$$

1035

For the ion-drag heating per unit mass (cf. Eq. (A11) of Appendix A)

$$\frac{1}{\rho} q_{ID} = \nu_{ni} |\mathbf{u} - \mathbf{u}_i|^2,$$

we find

$$\begin{aligned} \left(\frac{1}{\rho} q_{ID} \right)' = & \nu_{ni0} \left[2 (\sin^2 I u_0 u' - \cos I \sin I u_0 w' + u_{D0} u'_D) \right. \\ & \left. + (u_0^2 \sin^2 I + u_{D0}^2) \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right]. \end{aligned} \quad (\text{B24})$$

1040

Under the assumption that, in the ionosphere, the atomic oxygen O and O⁺-ions are the main neutral and ionic constituents, we compute the background neutral-ion and ion-neutral collision frequencies as (Shibata, 1983; Stubbe, 1968)

$$\nu_{ni0} = 7.22 \times 10^{-17} T_0^{0.37} n_{i0}, \quad \nu_{in0} = \frac{\nu_{ni0}}{n_{i0}} n_n, \quad n = \text{O}, i = \text{O}^+$$

and their perturbed values as

$$D'_A = D_{A0} \left(\frac{T'}{T_0} - \frac{\nu'_{in}}{\nu_{in0}} \right), \quad (\text{B25})$$

$$1045 \quad \frac{\nu'_{in}}{\nu_{in0}} = 0.37 \frac{T'}{T_0} + \frac{\rho'}{\rho_0}, \quad (\text{B26})$$

$$\frac{\nu'_{ni}}{\nu_{ni0}} = 0.37 \frac{T'}{T_0} + \frac{n'_i}{n_{i0}}. \quad (\text{B27})$$

B3 Decoupled system of equations

From Eqs. (B20)–(B24) we deduce that the hydrodynamic equations should be solved together with the ion continuity and momentum equations by introducing two additional state variables, namely n'_i/n_{i0} and u'_D . The resulting system then consists of eight equations, obtained by augmenting the hydrodynamic system with the ion continuity and momentum equations. This fully coupled approach was used by Shibata (1983).

In our analysis we instead employ a simplified, approximate model that decouples the hydrodynamic and ion equations. We have several options.

1. **Klostermeyer Approximation.** Klostermeyer (1972) solved the ion-continuity equation by neglecting the diffuse velocity and neutral winds, i.e.,

$$\begin{aligned} \frac{\partial}{\partial t} \left(\frac{n'_i}{n_{i0}} \right) = & - \left(\cos I \frac{\partial u'}{\partial x} + \sin I \frac{\partial u'}{\partial z} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I u' \right) \cos I \\ & - \left(\cos I \frac{\partial w'}{\partial x} + \sin I \frac{\partial w'}{\partial z} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I w' \right) \sin I, \end{aligned} \quad (\text{B28})$$

and then computed the ion-drag force and ion-drag heating by including the background neutral wind, i.e.,

$$\left(\frac{1}{\rho} f_{\text{IDx}} \right)' = \nu_{ni0} \left[\sin^2 I u' - \sin I \cos I w' + u_0 \sin^2 I \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right], \quad (\text{B29})$$

$$1060 \quad \left(\frac{1}{\rho} f_{\text{IDz}} \right)' = \nu_{ni0} \left[-\sin I \cos I u' + \cos^2 I w' - u_0 \cos I \sin I \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right], \quad (\text{B30})$$

and

$$\left(\frac{1}{\rho} q_{\text{ID}} \right)' = \nu_{ni0} \left[2 (\sin^2 I u_0 u' - \cos I \sin I u_0 w') + u_0^2 \sin^2 I \left(\frac{\nu'_{ni}}{\nu_{ni0}} \right) \right]. \quad (\text{B31})$$

Klostermeyer's method is best viewed as a semi-diagnostic approximation: one solves a simplified ion continuity equation driven only by the wave-induced divergence, and then evaluates ion-drag force and heating, including u_0 and ν'_{ni} , but assuming no diffusion velocity. In other words, field-aligned diffusion and background neutral wind are neglected in the ion continuity equation when computing n'_i , and the ion drag is treated as a diagnostic based on the neutral wave field and background wind.

2. **Fast Field-Aligned Diffusion.** In the second method, we assume that field-aligned diffusion is sufficiently strong that the relative ion perturbation and the perturbed diffusion velocity are nearly constant along the magnetic field line (but

1070 can vary across it):

$$\frac{\partial}{\partial b} \left(\frac{n'_i}{n_{i0}} \right) = - \left(\cos I \frac{\partial}{\partial x} + \sin I \frac{\partial}{\partial z} \right) \left(\frac{n'_i}{n_{i0}} \right) \approx 0 \quad (\text{B32})$$

and

$$\frac{\partial u'_D}{\partial b} = \cos I \frac{\partial u'_D}{\partial x} + \sin I \frac{\partial u'_D}{\partial z} \approx 0. \quad (\text{B33})$$

We then obtain

$$\begin{aligned} 1075 \quad \frac{\partial}{\partial t} \left(\frac{n'_i}{n_{i0}} \right) &= \left(u_{D0} \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} - \cos I \frac{du_0}{dz} - \cos I u_0 \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \right. \\ &\quad \left. + \frac{du_{D0}}{dz} \right) \sin I \left(\frac{n'_i}{n_{i0}} \right) + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I u'_D \\ &\quad - \left(\cos I \frac{\partial u'}{\partial x} + \sin I \frac{\partial u'}{\partial z} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I u' \right) \cos I \\ &\quad - \left(\cos I \frac{\partial w'}{\partial x} + \sin I \frac{\partial w'}{\partial z} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I w' \right) \sin I \end{aligned} \quad (\text{B34})$$

and

$$\begin{aligned} 1080 \quad u'_D &= D_{A0} \left[\cos I \frac{\partial}{\partial x} \left(\frac{T'}{T_0} \right) + \sin I \frac{\partial}{\partial z} \left(\frac{T'}{T_0} \right) \right] \\ &\quad + \left(\frac{1}{n_{i0}} \frac{dn_{i0}}{dz} + \frac{1}{T_0} \frac{dT_0}{dz} \right) \sin I D'_A - \frac{g \sin I}{\nu_{in0}} \left(\frac{\nu'_{in}}{\nu_{in0}} \right). \end{aligned} \quad (\text{B35})$$

The ion-drag force and ion-drag heating are still computed from Eqs. (B22)–(B24).

B4 Plane wave solutions

Let

$$1085 \quad n'_i(x, z, t) = \bar{n}_i(z) e^{j(\omega t - k_x x)}, \quad \bar{n}_i(z) = n_{i0}(z) \hat{n}_i(z), \quad (\text{B36})$$

and (cf. Eq. (A32) of Appendix A)

$$f'(x, z, t) = \bar{f}(z) e^{j(\omega t - k_x x)}.$$

As in Appendix A, we introduce the dimensionless state variables $\hat{u}$, $\hat{w}$, and $\hat{T}$, defined by

$$\bar{u} = \frac{\omega_0}{k_x} \hat{u}, \quad \bar{w} = \frac{\omega_0}{k_x} \hat{w}, \quad \frac{\bar{T}}{T_0} = \hat{T},$$

1090 together with their derivatives

$$\frac{d\bar{u}}{dz} = \frac{\omega_0}{k_x} \hat{\mathcal{U}}, \quad \frac{d\bar{w}}{dz} = \frac{\omega_0}{k_x} \hat{\mathcal{W}}, \quad \frac{d}{dz} \left(\frac{\bar{T}}{T_0} \right) = \frac{d\hat{T}}{dz} = \hat{\mathcal{T}}$$

1. **Representation of $\bar{u}_D$.** From Eq. (B35) we obtain

$$\begin{aligned}\bar{u}_D = & -jk_x D_{A0} \cos I \hat{T} + D_{A0} \sin I \hat{T} \\ & + \left(\frac{1}{n_{i0}} \frac{dn_{i0}}{dz} + \frac{1}{T_0} \frac{dT_0}{dz} \right) \sin I \bar{D}_A - \frac{g \sin I}{\nu_{in0}} \left(\frac{\bar{\nu}_{in}}{\nu_{in0}} \right).\end{aligned}\quad (B37)$$

Using

$$\frac{\bar{D}_A}{D_{A0}} = \frac{\bar{T}}{T_0} - \frac{\bar{\nu}_{in}}{\nu_{in0}}, \quad (B38)$$

$$\frac{\bar{\nu}_{in}}{\nu_{in0}} = 0.37 \frac{\bar{T}}{T_0} + \frac{\bar{\rho}}{\rho_0}, \quad (B39)$$

together with (cf. Eq. (A34) of Appendix A)

$$\frac{\bar{\rho}}{\rho_0} = \frac{k_x}{\Omega} \bar{u} - \frac{j}{\Omega H_\rho} \bar{w} + \frac{j}{\Omega} \frac{d\bar{w}}{dz}$$

we express $\bar{u}_D$ as

$$\bar{u}_D = U_u \hat{u} + U_w \hat{w} + U_T \hat{T} + U_W \widehat{\mathcal{W}} + U_{\mathcal{T}} \widehat{\mathcal{T}}, \quad (B40)$$

where the U coefficients are given by

$$U_u = -\frac{\omega_0}{\Omega} (D_{A0} E + G), \quad (B41)$$

$$U_w = j \frac{\omega_0}{\Omega} \frac{1}{k_x H_\rho} (D_{A0} E + G), \quad (B42)$$

$$U_T = -jk_x D_{A0} \cos I + 0.63 D_{A0} E - 0.37 G, \quad (B43)$$

$$U_W = -j \frac{\omega_0}{\Omega} \frac{1}{k_x} (D_{A0} E + G), \quad (B44)$$

$$U_{\mathcal{T}} = D_{A0} \sin I, \quad (B45)$$

with

$$E = \sin I \left(\frac{1}{n_{i0}} \frac{dn_{i0}}{dz} + \frac{1}{T_0} \frac{dT_0}{dz} \right), \quad G = \frac{g \sin I}{\nu_{in0}}. \quad (B46)$$

2. **Representation of $\hat{n}_i$.** From Eq. (B34) we obtain

$$\begin{aligned}& \left(j\omega - u_{D0} \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I + \frac{du_0}{dz} \cos I \sin I \right. \\ & \left. + u_0 \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \cos I \sin I - \frac{du_{D0}}{dz} \sin I \right) \hat{n}_i \\ & = \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \bar{u}_D + \left(jk_x \cos I - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \right) \cos I \frac{\omega_0}{k_x} \hat{u} \\ & + \left(jk_x \cos I - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \right) \sin I \frac{\omega_0}{k_x} \hat{w} - \cos I \sin I \frac{\omega_0}{k_x} \widehat{\mathcal{U}} - \sin^2 I \frac{\omega_0}{k_x} \widehat{\mathcal{W}}.\end{aligned}\quad (B47)$$

After some manipulations, the expression for $\hat{n}_i$ reads

$$\hat{n}_i = N_u \hat{u} + N_w \hat{w} + N_T \hat{T} + N_{\mathcal{U}} \hat{\mathcal{U}} + N_{\mathcal{W}} \hat{\mathcal{W}} + N_{\mathcal{T}} \hat{\mathcal{T}}, \quad (\text{B48})$$

where the N coefficients are given by

$$N_u = \frac{1}{N_0} \left[\left(j k_x \cos I - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \right) \cos I \frac{\omega_0}{k_x} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I U_u \right], \quad (\text{B49})$$

$$N_w = \frac{1}{N_0} \left[\left(j k_x \cos I - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I \right) \sin I \frac{\omega_0}{k_x} + \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I U_w \right], \quad (\text{B50})$$

1120

$$N_T = \frac{1}{N_0} \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I U_T, \quad (\text{B51})$$

$$N_{\mathcal{U}} = -\frac{1}{N_0} \cos I \sin I \frac{\omega_0}{k_x}, \quad (\text{B52})$$

$$N_{\mathcal{W}} = -\frac{1}{N_0} \left(\sin^2 I \frac{\omega_0}{k_x} - \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I U_{\mathcal{W}} \right), \quad (\text{B53})$$

$$N_{\mathcal{T}} = \frac{1}{N_0} \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I U_{\mathcal{T}}, \quad (\text{B54})$$

and

1125

$$\begin{aligned} N_0 = & j\omega - u_{D0} \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \sin I + \frac{du_0}{dz} \cos I \sin I \\ & + u_0 \frac{1}{n_{i0}} \frac{dn_{i0}}{dz} \cos I \sin I - \frac{du_{D0}}{dz} \sin I. \end{aligned} \quad (\text{B55})$$

3. Ion-drag force and ion-drag heating. Using Eqs. (B40) and (B48), together with

$$\frac{\bar{\nu}_{ni}}{\nu_{ni0}} = 0.37 \frac{\bar{T}}{T_0} + \frac{\bar{n}_i}{n_{i0}} = 0.37 \hat{T} + \hat{n}_i, \quad (\text{B56})$$

we obtain

1130

$$\frac{1}{\nu_{ni0}} \overline{\left(\frac{1}{\rho} f_{\text{IDx}} \right)} = F_{xu} \hat{u} + F_{xw} \hat{w} + F_{xT} \hat{T} + F_{x\mathcal{U}} \hat{\mathcal{U}} + F_{x\mathcal{W}} \hat{\mathcal{W}} + F_{x\mathcal{T}} \hat{\mathcal{T}}, \quad (\text{B57})$$

$$\frac{1}{\nu_{ni0}} \overline{\left(\frac{1}{\rho} f_{\text{IDz}} \right)} = F_{zu} \hat{u} + F_{zw} \hat{w} + F_{zT} \hat{T} + F_{z\mathcal{U}} \hat{\mathcal{U}} + F_{z\mathcal{W}} \hat{\mathcal{W}} + F_{z\mathcal{T}} \hat{\mathcal{T}}, \quad (\text{B58})$$

$$\frac{1}{\nu_{ni0}} \overline{\left(\frac{1}{\rho} q_{\text{ID}} \right)} = P_u \hat{u} + P_w \hat{w} + P_T \hat{T} + P_{\mathcal{U}} \hat{\mathcal{U}} + P_{\mathcal{W}} \hat{\mathcal{W}} + P_{\mathcal{T}} \hat{\mathcal{T}}. \quad (\text{B59})$$

With

$$A_x = u_{D0} \cos I + u_0 \sin^2 I, \quad A_z = u_{D0} \sin I - u_0 \cos I \sin I, \quad B = u_{D0}^2 + u_0^2 \sin^2 I, \quad (\text{B60})$$

1135 the coefficients corresponding to f_{IDx} are

$$F_{xu} = \sin^2 I \frac{\omega_0}{k_x} + A_x N_u + \cos I U_u, \quad (\text{B61})$$

$$F_{xw} = -\sin I \cos I \frac{\omega_0}{k_x} + A_x N_w + \cos I U_w, \quad (\text{B62})$$

$$F_{xT} = 0.37 A_x + A_x N_T + \cos I U_T, \quad (\text{B63})$$

$$F_{xu} = A_x N_u, \quad (\text{B64})$$

1140 $F_{xW} = A_x N_W + \cos I U_W, \quad (\text{B65})$

$$F_{xT} = A_x N_T + \cos I U_T, \quad (\text{B66})$$

the coefficients corresponding to f_{IDz} are

$$F_{zu} = -\sin I \cos I \frac{\omega_0}{k_x} + A_z N_u + \sin I U_u, \quad (\text{B67})$$

$$F_{zw} = \cos^2 I \frac{\omega_0}{k_x} + A_z N_w + \sin I U_w, \quad (\text{B68})$$

1145 $F_{zT} = 0.37 A_z + A_z N_T + \sin I U_T, \quad (\text{B69})$

$$F_{zu} = A_z N_u, \quad (\text{B70})$$

$$F_{zW} = A_z N_W + \sin I U_W, \quad (\text{B71})$$

$$F_{zT} = A_z N_T + \sin I U_T, \quad (\text{B72})$$

and the coefficients corresponding to q_{ID} are

1150 $P_u = 2 \sin^2 I \frac{\omega_0}{k_x} u_0 + B N_u + 2 u_{D0} U_u, \quad (\text{B73})$

$$P_w = -2 \cos I \sin I \frac{\omega_0}{k_x} u_0 + B N_w + 2 u_{D0} U_w, \quad (\text{B74})$$

$$P_T = 0.37 B + B N_T + 2 u_{D0} U_T, \quad (\text{B75})$$

$$P_u = B N_u, \quad (\text{B76})$$

$$P_W = B N_W + 2 u_{D0} U_W, \quad (\text{B77})$$

1155 $P_T = B N_T + 2 u_{D0} U_T. \quad (\text{B78})$

Note that, in the algorithm implementation, the derivatives dn_{i0}/dz and du_{D0}/dz are computed using central finite differences.

Appendix C: Solution methods for the grid-point values of the state vector

In this appendix, the global matrix method with matrix exponential and the scattering matrix method will be formulated for the grid-point values of the state vector.

1160 C1 Global matrix method with matrix exponential

In the layer l , with boundaries z_l and z_{l+1} , the discrete values $\mathbf{e}_{l+1} = \mathbf{e}(z_{l+1})$ and $\mathbf{e}_l = \mathbf{e}(z_l)$ are related through the relation (cf. Eq. (14))

$$\mathbf{e}_{l+1} = \mathbf{V}_l \text{diag}[\mathbf{e}^{k_x \lambda_{nl} \Delta_l}] \mathbf{V}_l^{-1} \mathbf{e}_l, \quad (\text{C1})$$

or equivalently,

$$1165 \quad \mathbf{V}_l^{-1} \mathbf{e}_{l+1} = \text{diag}[\mathbf{e}^{k_x \lambda_{nl} \Delta_l}] \mathbf{V}_l^{-1} \mathbf{e}_l. \quad (\text{C2})$$

Taking into account that by Eqs. (13) and (14), we have $\mathbf{e}_l = \mathbf{V}_l \mathbf{a}_l$ and $\mathbf{e}_{l+1} = \mathbf{V}_{l+1} \mathbf{a}_{l+1}$, we see that Eq. (35) and (C2) are completely equivalent. Multiplying Eq. (C2) with the scaling matrix $\mathbf{K}_l^1$, we obtain the layer equation

$$\mathbb{A}_l^1 \mathbf{e}_{l+1} - \mathbb{A}_l^0 \mathbf{e}_l = \mathbf{0}_{2M}, \quad l = 1, \dots, L-1, \quad (\text{C3})$$

where

$$1170 \quad \mathbb{A}_l^1 = \mathbf{K}_l^1 \mathbf{V}_l^{-1}, \quad (\text{C4})$$

$$\mathbb{A}_l^0 = \mathbf{K}_l^0 \mathbf{V}_l^{-1}, \quad (\text{C5})$$

and $\mathbf{K}_l^1$ and $\mathbf{K}_l^0$, are given by Eqs. (36) and (37), respectively. Essentially, we have $L-1$ equations imposed on layers $1, \dots, L-1$ for the L unknowns $\mathbf{e}_1, \dots, \mathbf{e}_L$. On the layer $l = 1$, the boundary condition (cf. Eq. (42)) $\mathbf{a}_1^+ = \mathbf{i}_1$, translates into (cf. Eq. (24))

$$[\mathbf{I}_M, \mathbf{0}_M] \mathbf{V}_1^{-1} \mathbf{e}_1 = \mathbf{i}_1, \quad (\text{C6})$$

1175 while on the layer $l = L$, the boundary condition (cf. Eq. (45)) $\mathbf{a}_L^- = \mathbf{0}_M$ translates into (cf. Eq. (25))

$$[\mathbf{0}_M, \mathbf{I}_M] \mathbf{V}_L^{-1} \mathbf{e}_L = \mathbf{0}_M. \quad (\text{C7})$$

As in Section 3, the layer equations (C3) together with the boundary conditions (C6) and (C7) for a unit scale factor, are assembled into a system of equations for the stratified atmosphere, i.e.,

$$\mathbb{A} \mathbf{e} = \mathbf{b}, \quad (\text{C8})$$

1180 where

$$\mathbb{A} = \begin{bmatrix} [0_M, \mathbf{I}_M] \mathbf{V}_L^{-1} & 0 & \dots & 0 & 0 \\ \mathbb{A}_{L-1}^1 & -\mathbb{A}_{L-1}^0 & \dots & 0 & 0 \\ \vdots & \vdots & \ddots & \vdots & \vdots \\ 0 & 0 & \dots & \mathbb{A}_1^1 & -\mathbb{A}_1^0 \\ 0 & 0 & \dots & 0 & [\mathbf{I}_M, 0_M] \mathbf{V}_1^{-1} \end{bmatrix}, \quad (\text{C9})$$

$$\mathbf{e} = \begin{bmatrix} \mathbf{e}_L \\ \mathbf{e}_{L-1} \\ \vdots \\ \mathbf{e}_2 \\ \mathbf{e}_1 \end{bmatrix} \text{ and } \mathbf{b} = \begin{bmatrix} \mathbf{0}_M \\ \mathbf{0}_{2M} \\ \vdots \\ \mathbf{0}_{2M} \\ \mathbf{i}_1 \end{bmatrix}. \quad (\text{C10})$$

When applying the lower boundary condition (55), $\mathbf{i}_1$ in Eq. (C10) should be replaced by $\mathbf{B}^{-1} \mathbf{b}_1$, where, for a unit scale factor, $\mathbf{b}_1 = [1, 0, 0]^T$. After solving Eq. (C8), we compute the wave amplitudes by using Eq. (60).

1185 Comments.

1. The ascending and descending solution modes can be derived by using the upward and downward recurrence relations (cf. Eqs. (28)–(31), (41) and (44))

$$\mathbf{e}_{l+1}^+ = \mathbf{T}_l^+ \mathbf{e}_l, \text{ for } l = 1, \dots, L-1, \text{ with } \mathbf{e}_1^+ = \mathbf{v}_1^+, \text{ and} \quad (\text{C11})$$

$$\mathbf{e}_l^- = \mathbf{T}_l^- \mathbf{e}_{l+1}, \text{ for } l = L-1, \dots, 1, \text{ with } \mathbf{e}_L^- = \mathbf{0}_{2M}, \quad (\text{C12})$$

1190 respectively, where

$$\mathbf{T}_l^+ = \mathbf{V}_l \begin{bmatrix} \text{diag}[\mathbf{e}^{k_x \lambda_{ml}^+ \Delta_l}] & 0_M \\ 0_M & 0_M \end{bmatrix} \mathbf{V}_l^{-1}, \quad (\text{C13})$$

$$\mathbf{T}_l^- = \mathbf{V}_l \begin{bmatrix} 0_M & 0_M \\ 0_M & \text{diag}[\mathbf{e}^{-k_x \lambda_{ml}^- \Delta_l}] \end{bmatrix} \mathbf{V}_l^{-1}. \quad (\text{C14})$$

Obviously, the relation $\mathbf{e}_l = \mathbf{e}_l^+ + \mathbf{e}_l^-$, $l = 1, \dots, L$, can be used to verify the numerical algorithm.

2. If we assume that the ascending modes are the dominant modes, i.e., $\mathbf{e}_l \approx \mathbf{e}_l^+$ for $l = 1, \dots, L$, we may compute the state vector by means of the upward recurrence relation (cf. Eq. (C11))

1195

$$\mathbf{e}_{l+1} = \mathbf{T}_l^+ \mathbf{e}_l, \text{ for } l = 1, \dots, L-1, \text{ with } \mathbf{e}_1 = \mathbf{v}_1^+. \quad (\text{C15})$$

3. The layer equation (C3) was derived from the solution representation (C1). In fact, this equation is simply the matrix-exponential representation of the solution, i.e., $\mathbf{e}_{l+1} = \exp(\mathbf{A}_l k_x \Delta_l) \mathbf{e}_l$, where the matrix exponential is calculated us-

ing an eigendecomposition of the propagation matrix A_l , i.e., $A_l = V_l \text{diag}[\lambda_{nl}] V_l^{-1}$. However, instead of an eigen-
 1200 decomposition method, we can use the Padé approximation to compute the matrix exponential (Doicu and Traut-
 mann, 2009a, b). The n th diagonal Padé approximation to the matrix exponential is $\exp(Ax) = [D(Ax)]^{-1} N(Ax)$,
 where $D(Ax)$ and $N(Ax)$ are polynomials in Ax of degree n given respectively, by $D(Ax) = \sum_{k=0}^n (-1)^k c_k x^k A^k$ and
 $N(Ax) = D(-Ax) = \sum_{k=0}^n c_k x^k A^k$. The coefficients c_k can be computed recursively by means of the relation

$$c_k = \frac{n-k+1}{k(2n-k+1)} c_{k-1}, \quad k \geq 1 \quad (\text{C16})$$

1205 with the initial value $c_0 = 1$. The layer equation then becomes

$$\mathbb{A}_l^1 \mathbf{e}_{l+1} - \mathbb{A}_l^0 \mathbf{e}_l = \mathbf{0}_{2M}, \quad l = 1, \dots, L-1, \quad (\text{C17})$$

where $\mathbb{A}_l^1 = D(A_l k_x \Delta_l)$ and $\mathbb{A}_l^0 = N(A_l k_x \Delta_l)$. The resulting system of layer equations, together with the boundary
 conditions, is assembled into a banded linear system. Eigendecomposition is required only in the lower and upper layers
 to apply the boundary conditions, whereas the Padé approximation is used in all interior layers. This approach is presum-
 1210 ably more efficient than a full eigendecomposition. However, since the first-order Padé approximation corresponds to
 a centered finite-difference scheme, whereas the first-order Taylor expansion yields a forward finite-difference scheme,
 the method is less accurate. For this reason, the Padé approximation of the matrix exponential is not implemented in our
 computer code and is included here solely for theoretical completeness.

C2 Scattering matrix method

1215 In principle, the scattering matrix method can also be formulated in terms of the discrete values of the state vector. Starting
 from the interaction principle equation (67), using Eq. (27), i.e., $\mathbf{e}_l^\pm = V_l^\pm \mathbf{a}_l^\pm$, and Eqs. (24)–(25), i.e.,

$$\mathbf{a}_l^+ = [\mathbf{I}_M, 0_M] \mathbf{a}_l = [\mathbf{I}_M, 0_M] V_l^{-1} \mathbf{e}_l, \quad (\text{C18})$$

$$\mathbf{a}_l^- = [0_M, \mathbf{I}_M] \mathbf{a}_l = [0_M, \mathbf{I}_M] V_l^{-1} \mathbf{e}_l, \quad (\text{C19})$$

we find that for the stack $S_{l_0 l}$, the interaction principle equation involving the discrete values of the state vector is

$$1220 \begin{bmatrix} \mathbf{e}_{l_0}^- \\ \mathbf{e}_{l+1}^+ \end{bmatrix} = \begin{bmatrix} \mathcal{R}_{l_0 l}^+ & \mathcal{T}_{l_0 l}^- \\ \mathcal{T}_{l_0 l}^+ & \mathcal{R}_{l_0 l}^- \end{bmatrix} \begin{bmatrix} \mathbf{e}_{l_0}^+ \\ \mathbf{e}_{l+1}^- \end{bmatrix}, \quad (\text{C20})$$

where $\dim(\mathcal{R}_{l_0 l}^\pm) = \dim(\mathcal{T}_{l_0 l}^\pm) = 2M \times 2M$, and

$$\begin{bmatrix} \mathcal{R}_{l_0 l}^+ & \mathcal{T}_{l_0 l}^- \\ \mathcal{T}_{l_0 l}^+ & \mathcal{R}_{l_0 l}^- \end{bmatrix} = (\mathbf{I}_{4M} - \mathbf{A})^{-1} \mathbf{A}, \quad (\text{C21})$$

with

$$A = \begin{bmatrix} V_{l_0}^- \mathcal{R}_{l_0 l}^+ [V_{l_0}^{-1}]_1 & V_{l_0}^- \mathcal{T}_{l_0 l}^- [V_l^{-1}]_2 \\ V_l^+ \mathcal{T}_{l_0 l}^+ [V_{l_0}^{-1}]_1 & V_l^+ \mathcal{R}_{l_0 l}^- [V_l^{-1}]_2 \end{bmatrix}, \quad (C22)$$

$$1225 \quad V_l = [V_l^+, V_l^-], \text{ and } V_l^{-1} = \begin{bmatrix} [V_l^{-1}]_1 \\ [V_l^{-1}]_2 \end{bmatrix}. \quad (C23)$$

Since the matrices $\mathcal{R}_{l_0 l}^\pm$ and $\mathcal{T}_{l_0 l}^\pm$ are twice the size of the matrices $\mathcal{R}_{l_0 l}^\pm$ and $\mathcal{T}_{l_0 l}^\pm$, the associated computational cost is significantly higher. Owing to its low numerical efficiency, this method is therefore of purely theoretical interest and is not implemented in our computer code.

Appendix D: Implementation issues

1230 In this appendix, we discuss several implementation issues related to the computation of lower and upper bounds for the wave period, the choice of frequency and time discretization for the Fourier transform, and the determination of the imaginary frequency shift.

D1 Wave period

To define practical bounds for the wave period λ_t , we solve the inviscid dispersion equation (cf. Eq. (A61) with $\nu = 0$ and with
1235 the intrinsic frequency $\Omega = \omega - k_x u_0$ replacing ω)

$$\Omega^4 - [\omega_a^2 + c_s^2 (k_x^2 + k_z^2)] \Omega^2 + c_s^2 k_x^2 \omega_g^2 = 0, \quad (D1)$$

for an assumed value of the vertical wavenumber k_z , where $\omega_g = \sqrt{\gamma - 1}g/c_s$ is the buoyancy (gravity-wave) frequency and $\omega_a = \gamma g/(2c_s)$ is the acoustic cutoff frequency. Thus, for a stratified atmosphere, the solution Ω_{inv} depends on the altitude z and the wavenumber k_z , and satisfies $\Omega_{\text{inv}}(z, k_z) < \omega_g(z)$. In this context we define $\omega_{\text{inv}}(k_z) = \min_z [\Omega_{\text{inv}}(z, k_z) + k_x u_0(z)]$.

1240 The equation is solved for two assumed minimum and maximum values of the vertical wavelength λ_z , namely $\lambda_{z\text{min}} = 125$ km and $\lambda_{z\text{max}} = 250$ km, implying $k_{z\text{min}} = 2\pi/\lambda_{z\text{max}}$ and $k_{z\text{max}} = 2\pi/\lambda_{z\text{min}}$. The corresponding solutions are denoted by $\omega_{\text{min}} = \omega_{\text{inv}}(k_{z\text{max}})$ and $\omega_{\text{max}} = \omega_{\text{inv}}(k_{z\text{min}})$, and the resulting time periods are $\lambda_{t,\text{min}} = 2\pi/\omega_{\text{max}}$ and $\lambda_{t,\text{max}} = 2\pi/\omega_{\text{min}}$. These values are likely underestimates, since dissipative effects ($\nu \neq 0$) tend to reduce the oscillation frequencies and thus increase the wave periods. For this reason, we round the bounds upward to the nearest multiple of 10 min, and set $\lambda_{t,\text{min}} = 10 [\lambda_{t,\text{min}}/10]$ and
1245 $\lambda_{t,\text{max}} = 10 [\lambda_{t,\text{max}}/10]$, where $[x]$ denotes the upward rounding of x to the next integer.

To provide a physical interpretation of this approach, we note that Eq. (D1) yields

$$k_z^2 = \frac{\Omega^2 - \omega_a^2}{c_s^2} + k_x^2 \left(\frac{\omega_g^2}{\Omega^2} - 1 \right), \quad (D2)$$

so that, under the assumption $\Omega \ll \omega_a$, we obtain

$$\frac{k_z}{k_x} = \pm \sqrt{\frac{\omega_g^2}{\Omega^2} - 1 - \frac{1}{4k_x^2 H_a^2}}. \quad (D3)$$

1250 If

$$\frac{\omega_g^2}{\Omega^2} - 1 - \frac{1}{4k_x^2 H_a^2} > 0 \text{ for all } z, \quad (\text{D4})$$

then k_z is real and $\exp(-jk_z z) \in \mathbb{C}$; thus, the wave is propagating. When this condition is not satisfied, k_z is purely imaginary and $\exp(-jk_z z) \in \mathbb{R}$; thus, for $\text{Im}(k_z) < 0$, the wave is evanescent. This condition yields

$$\omega < \Omega_{\text{inv}}(z, k_z = 0) + k_x u_0(z) \text{ for all } z, \quad (\text{D5})$$

1255 where

$$\Omega_{\text{inv}}(z, k_z = 0) = \frac{\omega_g}{\sqrt{1 + \frac{1}{4k_x^2 H_a^2}}} \quad (\text{D6})$$

is the solution of the inviscid dispersion equation in the case $k_z = 0$ ($\lambda_z \rightarrow \infty$). We conclude that the condition $\omega_{\text{inv}}(k_z) = \min_z [\Omega_{\text{inv}}(z, k_z) + k_x u_0(z)]$ implies that the time period is chosen such that only propagating waves are considered. Condition (D5), written $\Omega(z) < \Omega_{\text{inv}}(z, k_z = 0)$ was used by Knight et al. (2024) to determine the intrinsic evanescent frequencies that lead to the so-called “anomalous results”. In practice, evanescent frequencies occur at altitudes up to at least 100 km; consequently, these anomalous results are of limited relevance for upper-thermospheric gravity-wave studies, since evanescence below about 100 km and critical layers in the lower thermosphere strongly attenuate such waves before they can reach higher altitudes (Knight et al., 2024).

D2 Frequency and time discretization for the Fourier transform

1265 In the code, we do not use a Fast Fourier Transform (FFT). Instead, we perform a direct (discrete) Fourier Transform (FT) by explicitly discretizing the Fourier integral. The discretization parameters are chosen to resolve a source that is localized both in frequency and in time.

1. **Frequency band centered on ω_0 .** The Fourier transform is performed over a frequency band centered on the reference frequency ω_0 . We introduce a frequency standard deviation σ_ω defined as a fraction of ω_0 , i.e., $\sigma_\omega = \omega_0 / \kappa_\omega$, where $\kappa_\omega \geq 6$ is an input parameter. The effective frequency band of interest is chosen to cover approximately plus/minus three standard deviations of the source spectrum: $\omega_{\min} = \omega_0 - 3\sigma_\omega$ and $\omega_{\max} = \omega_0 + 3\sigma_\omega$. The total frequency interval and the frequency step are, respectively, $L_\omega = \omega_{\max} - \omega_{\min} = 6\omega_0 / \kappa_\omega$ and $\Delta\omega = L_\omega / (N_{\text{FT}} - 1)$, where N_{FT} is the number of discrete points. The discrete frequency grid ω_k is then constructed as $\omega_k = \omega_{\min} + (k - 1)\Delta\omega$, $k = 1, 2, \dots, N_{\text{FT}}$.
2. **Time interval and time step.** The time grid is chosen to be consistent with the assumed temporal localization of the source and with the chosen frequency bandwidth. First, we define the time standard deviation σ_t as $\sigma_t = 1 / \sigma_\omega$. The time interval L_t is chosen to contain N_p periods of the reference frequency. The time period is given by $\lambda_t = 2\pi / \omega_0$, and therefore, $L_t = N_p \lambda_t$. The time step Δt is then computed as $\Delta t = L_t / (N_{\text{FT}} - 1)$. The time grid t_k is defined on the interval $[t_{\min}, t_{\max}]$, where $t_{\min}$ is an input parameter and $t_{\max} = t_{\min} + L_t$, by $t_k = t_{\min} + (k - 1)\Delta t$, $k = 1, 2, \dots, N_{\text{FT}}$.

We also define a time shift by $t_0 = (t_{\max} - t_{\min})/2$ which places the reference time close to the center of the time window.

In the code, N_{FT} , κ_ω , N_p and $t_{\min}$ are input parameters. Specifically, κ_ω determines the length of the frequency interval L_ω , whereas N_p determines the length of the time interval L_t . The discretization is considered adequate if the following conditions are satisfied:

1. The time window is long enough for the chosen frequency bandwidth. This requires that the number of time standard deviations contained in the interval satisfies $L_t/\sigma_t > 6$, which ensures that the main part of the source is well contained within the time window and that truncation effects are negligible.
2. The Nyquist condition $\Delta t < \pi/\omega_{\max}$, and the dual Nyquist condition $\Delta\omega < 2\pi/L_t$ are satisfied. These conditions ensure that the temporal signal is properly sampled in time and frequency, prevent aliasing effects, and guarantee a consistent discrete Fourier transform between the time and frequency domains

Since the Fourier transform is computed by direct discretization of the Fourier integral, no FFT-specific constraint is imposed between the frequency step $\Delta\omega$ and the time step Δt . In particular, the grid relation $\Delta t \Delta\omega = 2\pi/N_{\text{FT}}$, which is characteristic of discrete Fourier transforms based on periodic sampling and exact discrete orthogonality, is not required here. Instead, the frequency and time grids are chosen independently, based on the desired frequency band and time window needed to resolve a source that is localized in both domains. This provides greater flexibility in selecting the bandwidth, resolution, and window length.

D3 Imaginary frequency shift

The imaginary frequency shift is determined using a heuristic approach that combines two criteria: application of the Layerwise Causality (LC) condition at selected altitude levels, and a Source-Function Reconstruction (SFR) test.

1. **LC condition at selected altitude levels.** Choose a subset $L_0 \subset \{1, 2, \dots, L\}$ of altitude indices, and let N_{L_0} be the number of elements of the set L_0 , i.e., $N_{L_0} = |L_0|$. At each altitude level $l_0 \in L_0$, start with $\delta_{l_0} = \delta_{\text{start}}$ and increases δ_{l_0} in steps of $\Delta\delta$, i.e., $\delta_{l_0} \leftarrow \min(\delta_{l_0} + \Delta\delta, \delta_{\text{stop}})$, until the LC condition (c.f. Eq. (108))

$$d_{l_0}(\omega_k) = \text{Re}[\lambda_{1l_0}^-(\omega_k - j\delta_{l_0})] - \text{Re}[\lambda_{1l_0}^+(\omega_k - j\delta_{l_0})] > \epsilon_{\text{LC}} \quad (\text{D7})$$

is satisfied for all $\omega_k = \omega_{\min} + (k-1)\Delta\omega$, $k = 1, 2, \dots, N_{\text{FT}}$, and some prescribed tolerance $\epsilon_{\text{LC}} = 10^{-10}$. If there exists an altitude level for which it is not possible to satisfy the LC condition for all frequencies ω_k by increasing the imaginary frequency shift within the interval from the start value δ_{start} to the stop value δ_{stop} , then the subset-based LC criterion is said to fail. Otherwise, the LC frequency shift is computed as

$$\delta_{\text{LC}} = \max_{l_0 \in L_0} \delta_{l_0}. \quad (\text{D8})$$

2. **SFR.** A frequency shift δ is considered valid if the relative RMS error between the source function $s(t)$ and the inverse Fourier transform applied to $S(\omega - j\delta)$ is below a prescribed tolerance $\epsilon_{\text{SFR}} = 5 \times 10^{-3}$. In practice, we compare the normalized functions

$$\hat{s}(t) = \frac{s(t)}{\max_t \text{Re}\{s(t)\}}, \quad \hat{s}_\delta(t) = \frac{s_\delta(t)}{\max_t \text{Re}\{s_\delta(t)\}},$$

where (compare with Eq. (115))

$$s_\delta(t) = A e^{\delta(t-t_0)} \frac{1}{2\pi} \int_{-\infty}^{\infty} \mathcal{S}(\omega - j\delta) e^{j\omega(t-t_0)} d\omega, \quad (\text{D9})$$

and $s(t)$ and $\mathcal{S}(\omega)$ are given by Eqs. (83) and (91), respectively. The relative RMS error is computed as

$$\epsilon_{s\delta} = \sqrt{\frac{\sum_{k=1}^{N_{\text{FT}}} [\hat{s}(t_k) - \hat{s}_\delta(t_k)]^2}{\sum_{k=1}^{N_{\text{FT}}} \hat{s}(t_k)^2}} \quad (\text{D10})$$

with $t_k = t_{\min} + (k-1)\Delta t$, $k = 1, 2, \dots, N_{\text{FT}}$. In the algorithm,

- (a) if $\epsilon_{s\delta} > \epsilon_{\text{SFR}}$, the frequency shift is relaxed according to $\delta \leftarrow \max(\delta - \Delta\delta, \delta_{\text{stop}})$, and
- (b) if $\epsilon_{s\delta} > \epsilon_{\text{SFR}}$ also holds for $\delta = \delta_{\text{stop}}$, the SFR test fails.

The algorithm proceeds as follows.

1320 **Step 1: Initialization and SFR test at $\delta_{\min}$**

We choose $\delta_{\min} = \Delta\delta$ and $\delta_{\max} = k_\delta \Delta\delta$, where $\Delta\delta$ (e.g., $\Delta\delta = 10^{-6} \text{ s}^{-1}$) is the initial discrete step of the imaginary frequency shift and k_δ is an integer. We first apply the SFR test to the input $\delta_{\min}$, using $\delta_{\text{stop}} = \Delta\delta$ and the step $\Delta\delta$ as a decreasing update of δ . With this choice, the algorithm effectively checks whether $\delta_{\min}$ passes the SFR test, that is, without invoking a frequency-shift relaxation. If the SFR test fails, we stop the algorithm. Otherwise, the value $\delta_{\min}$ is accepted as SFR-admissible. Based on the monotonic behavior of the SFR error in δ , we assume that any $\delta \leq \delta_{\min}$ would also satisfy the SFR test.

Step 2: SFR test at $\delta_{\max}$ and refinement of $\delta_{\max}$

We apply the SFR test to the input $\delta_{\max}$, using $\delta_{\text{stop}} = \delta_{\min}$ and the step $\Delta\delta$ again as a decreasing update of δ . Since the SFR test has already been successful at $\delta_{\min}$, this second SFR call is guaranteed to succeed: if necessary, the procedure can always relax δ down to $\delta_{\min}$. Let $\delta_{\text{SFR}} = k_{\text{SFR}} \Delta\delta$ denote the value returned by the SFR routine. We then reset $\delta_{\max} \leftarrow \delta_{\text{SFR}}$. By construction, every $\delta \in [\delta_{\min}, \delta_{\max}]$ satisfies the SFR test.

Step 3: Construction and adjustment of an internal δ -grid

The next steps require an internal grid of discrete values of δ between $\delta_{\min}$ and $\delta_{\max}$, with a sufficiently large number of points (e.g., at least five) to reliably apply the LC procedure. This internal grid uses the spacing $\Delta\delta$, but is independent of the number

1335 N_δ used later in the final selection step. To avoid a degenerate interval and to obtain a reasonably fine internal spacing, we adjust $\delta_{\min}$ and $\Delta\delta$ according to the following rules: if $\delta_{\max} - \delta_{\min} < \Delta\delta/2$ (i.e., $\delta_{\max} \approx \delta_{\min}$), then set $\delta_{\min} \leftarrow \delta_{\max} - \Delta\delta/2$ and $\Delta\delta \leftarrow \Delta\delta/8$; else if $\Delta\delta/2 < \delta_{\max} - \delta_{\min} < 3\Delta\delta/2$ (i.e., $\delta_{\max} - \delta_{\min} \approx \Delta\delta$), then set $\Delta\delta \leftarrow \Delta\delta/4$; else if $3\Delta\delta/2 < \delta_{\max} - \delta_{\min} < 5\Delta\delta/2$ (i.e., $\delta_{\max} - \delta_{\min} \approx 2\Delta\delta$), then set $\Delta\delta \leftarrow 2\Delta\delta/3$. After this adjustment, the interval $[\delta_{\min}, \delta_{\max}]$ contains a suitable number of internal grid points spaced by $\Delta\delta$. These internal points are used only in the LC procedure described in the

1340 next step.

Step 4: LC procedure and update of $\delta_{\min}$

We apply the subset-based LC procedure to δ , starting from the current value $\delta_{\min}$ and moving towards larger values, with an upper bound $\delta_{\text{stop}} = \delta_{\max} - \Delta\delta$ and an increasing step $\Delta\delta$. If there exists an altitude level for which the LC test fails, we stop the algorithm. Otherwise, let $\delta_{\text{LC}} = k_{\text{LC}} \Delta\delta$ denote the LC-based estimate returned by the procedure. We then update

1345 $\delta_{\min} \leftarrow \delta_{\text{LC}}$. By construction, for every $\delta \in [\delta_{\min}, \delta_{\max}]$, both the SFR test and the LC condition at the selected altitude levels are satisfied.

Step 5: Final selection of the frequency shift

The final selection step is based on a separate set of N_δ equidistant values of δ in the interval $\delta_{\min} \leq \delta \leq \delta_{\max}$. Here, N_δ is chosen independently of the internal grid used in Steps 3 and 4, and we define $\delta_j = \delta_{\min} + (j-1)\Delta\delta_{\text{final}}$, $j = 1, 2, \dots, N_\delta$,

1350 with $\Delta\delta_{\text{final}} = (\delta_{\max} - \delta_{\min})/(N_\delta - 1)$. For each δ_j , we perform the following tasks:

1. Compute the wave parameters corresponding to δ_j .
2. Evaluate the maximum perturbed horizontal velocity, the maximum perturbed vertical velocity, and the maximum perturbed temperature.
3. Check whether the layerwise causality condition is satisfied over the entire altitude range.

1355 Finally, among all frequency shifts for which the causality condition is satisfied over the full altitude range, the algorithm determines the center of mass in the space spanned by the maximum values of the perturbed horizontal velocity, vertical velocity, and temperature, and selects the solution whose maximum-amplitude vector is closest to this center of mass.

Comments:

- 1360 1. The algorithm determines not a single value but an interval of admissible imaginary frequency shifts. This is necessary for two reasons.
- (a) First, the LC procedure evaluates the layerwise causality condition only at a selected subset of altitude levels. As a consequence, the value returned by the LC test guarantees causality only at these selected levels, but not necessarily across the entire altitude range. By retaining an interval rather than a single value, we ensure that the subsequent

1365 analysis can identify those values of the frequency shift that satisfy the LC condition everywhere, not just at the sampled altitudes.

(b) Second, even when the LC condition is applied across the full altitude range, it is often the case that more than one frequency shift satisfies the LC condition over all altitudes. Since these admissible shifts may lead to solutions with different numerical behaviors, a mechanism is needed to select an optimal value. For this purpose, the algorithm
1370 evaluates the wave parameters for a discrete set of shifts within the admissible interval and selects the optimal value based on the distance to the center of mass.

2. In principle, a Global Causality (CG) test can be applied at selected frequencies. Such a test proceeds as follows. Choose a set of N_{K_0} equidistant frequencies $\omega_{k_0} \in \{\omega_k\}_{k=1}^{N_{FT}}$ with $k_0 \in K_0 = \{1, 2, \dots, N_{K_0}\}$. For each test frequency ω_{k_0} , start with $\delta_{k_0} = \delta_{\text{start}}$ and increases δ_{k_0} in steps of $\Delta\delta$, i.e., $\delta_{k_0} \leftarrow \min(\delta_{k_0} + \Delta\delta, \delta_{\text{stop}})$, until the GC condition (c.f. Eq. (104))

1375
$$\max_{l=1, \dots, L} \text{Re}[\lambda_{1l}^+(\omega_{k_0} - j\delta_{k_0})] < \min_{l=1, \dots, L} \text{Re}[\lambda_{1l}^-(\omega_{k_0} - j\delta_{k_0})]$$

is satisfied. If there exists a test frequency for which the GC condition is not satisfied, we say that the subset-based GC criterion fails for δ_{stop} . Otherwise, the GC frequency shift is computed as

$$\delta_{\text{GC}} = \max_{k_0 \in K_0} \delta_{k_0}.$$

This test can be applied after the first step to determine $\delta_{\text{max}} = \delta_{\text{GC}}$. However, our numerical experiments indicate that
1380 this test is computationally very expensive and typically yields an excessively large value of δ_{GC} . In the subsequent step, this large value would be reduced by the SFR test. Importantly, if one instead prescribes a moderate but still sufficiently large input value for δ_{max} , the source-function reconstruction test reduces δ_{max} to the same final value as when starting from δ_{GC} . Since the LC test alone is sufficient to ensure causality, we therefore do not employ the GC test in practice and use a prescribed moderate value of δ_{max} .

1385 *Author contributions.* AID: writing (original draft preparation), and conceptualization. DSE: writing (original draft preparation), and validation. TT: writing (original draft preparation), and formal analysis.

Code and data availability. The designed model is freely available as open-source code at <https://github.com/AlexandruDoicu/Gravity-Waves>. The International Reference Ionosphere (IRI) code data files are available at <https://ccmc.gsfc.nasa.gov/models/IRI~2016/>. The SAMI2 model of the Naval Research Laboratory is available at <https://github.com/NRL-Plasma-Physics-Division/SAMI2>.

1390 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. We are grateful to Harold Knight for his helpful and insightful comments and for his detailed explanations of the theoretical results of his work. We also thank Stephan Buchert for his pertinent comments, especially those concerning ion drag.

References

- Buchert, S. C.: Entangled dynamos and Joule heating in the Earth's ionosphere, *Annales Geophysicae*, 38, 1019–1030, <https://doi.org/10.5194/angeo-38-1019-2020>, 2020.
- Budak, V. P., Klyuykov, D. A., and Korkin, S. V.: Complete matrix solution of radiative transfer equation for PILE of horizontally homogeneous slabs, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 112, 1141–1148, <https://doi.org/10.1016/j.jqsrt.2010.08.028>, 2011.
- Budak, V. P., Efremenko, D. S., and Shagalov, O. V.: Efficiency of algorithm for solution of vector radiative transfer equation in turbid medium slab, *Journal of Physics: Conference Series*, 369, 012 021, <https://doi.org/10.1088/1742-6596/369/1/012021>, 2012.
- Chandrasekhar, S.: *Radiative Transfer*, Dover Publications, Inc., New York, 1950.
- Dalgarno, A. and Smith, F.: The thermal conductivity and viscosity of atomic oxygen, *Planetary and Space Science*, 9, 1–2, [https://doi.org/10.1016/0032-0633\(62\)90064-8](https://doi.org/10.1016/0032-0633(62)90064-8), 1962.
- Doicu, A. and Trautmann, T.: Discrete-ordinate method with matrix exponential for a pseudo-spherical atmosphere: Scalar case, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 110, 146–158, <https://doi.org/10.1016/j.jqsrt.2008.09.04>, 2009a.
- Doicu, A. and Trautmann, T.: Discrete-ordinate method with matrix exponential for a pseudo-spherical atmosphere: Vector case, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 110, 159–172, <https://doi.org/10.1016/j.jqsrt.2008.09.013>, 2009b.
- Drob, D. P., Emmert, J. T., Meriwether, J. W., Makela, J. J., Doornbos, E., Conde, M., Hernandez, G., Noto, J., Zawdie, K. A., McDonald, S. E., Huba, J. D., and Klenzing, J. H.: An update to the Horizontal Wind Model (HWM): The quiet time thermosphere, *Earth and Space Science*, 2, 301–319, <https://doi.org/10.1002/2014ea000089>, 2015.
- Dungey, J. W.: Interplanetary Magnetic Field and the Auroral Zones, *Physical Review Letters*, 6, 47–48, <https://doi.org/10.1103/physrevlett.6.47>, 1961.
- Efremenko, D. S., Molina García, V., Gimeno García, S., and Doicu, A.: A review of the matrix-exponential formalism in radiative transfer, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 196, 17–45, <https://doi.org/10.1016/j.jqsrt.2017.02.015>, 2017.
- Emmert, J. T., Drob, D. P., Picone, J. M., Siskind, D. E., Jones, M., Mlynczak, M. G., Bernath, P. F., Chu, X., Doornbos, E., Funke, B., Goncharenko, L. P., Hervig, M. E., Schwartz, M. J., Sheese, P. E., Vargas, F., Williams, B. P., and Yuan, T.: NRLM-SIS 2.0: A Whole-Atmosphere Empirical Model of Temperature and Neutral Species Densities, *Earth and Space Science*, 8, <https://doi.org/10.1029/2020ea001321>, 2021.
- Francis, S. H.: Acoustic-gravity modes and large-scale traveling ionospheric disturbances of a realistic, dissipative atmosphere, *Journal of Geophysical Research*, 78, 2278–2301, <https://doi.org/10.1029/ja078i013p02278>, 1973.
- Fritts, D. C., Laughman, B., Lund, T. S., and Snively, J. B.: Self-acceleration and instability of gravity wave packets: 1. Effects of temporal localization, *Journal of Geophysical Research: Atmospheres*, 120, 8783–8803, <https://doi.org/10.1002/2015jd023363>, 2015.
- Heale, C. J., Snively, J. B., Hickey, M. P., and Ali, C. J.: Thermospheric dissipation of upward propagating gravity wave packets, *Journal of Geophysical Research: Space Physics*, 119, 3857–3872, <https://doi.org/10.1002/2013ja019387>, 2014.
- Hedin, A. E.: MSIS-86 Thermospheric Model, *Journal of Geophysical Research: Space Physics*, 92, 4649–4662, <https://doi.org/10.1029/ja092ia05p04649>, 1987.
- Hedin, A. E., Biondi, M. A., Burnside, R. G., Hernandez, G., Johnson, R. M., Killeen, T. L., Mazaudier, C., Meriwether, J. W., Salah, J. E., Sica, R. J., Smith, R. W., Spencer, N. W., Wickwar, V. B., and Viridi, T. S.: Revised global model of thermosphere winds using satellite and ground-based observations, *Journal of Geophysical Research: Space Physics*, 96, 7657–7688, <https://doi.org/10.1029/91ja00251>, 1991.

- 1430 Hickey, M. P., Taylor, M. J., Gardner, C. S., and Gibbons, C. R.: Full-wave modeling of small-scale gravity waves using Airborne Lidar and Observations of the Hawaiian Airglow (ALOHA-93) O(1S) images and coincident Na wind/temperature lidar measurements, *Journal of Geophysical Research: Atmospheres*, 103, 6439–6453, <https://doi.org/10.1029/97jd03373>, 1998.
- Hickey, M. P., Schubert, G., and Walterscheid, R. L.: Propagation of tsunami-driven gravity waves into the thermosphere and ionosphere, *Journal of Geophysical Research: Space Physics*, 114, <https://doi.org/10.1029/2009ja014105>, 2009.
- 1435 Hines, C. O.: Internal atmospheric gravity waves at ionospheric heights, *Canadian Journal of Physics*, 38, 1441–1481, <https://doi.org/10.1139/p60-150>, 1960.
- Hines, C. O.: A critique of multilayer analyses in application to the propagation of acoustic-gravity waves, *Journal of Geophysical Research*, 78, 265–273, <https://doi.org/10.1029/ja078i001p00265>, 1973.
- Huba, J. D.: On the Development of the SAMI2 Ionosphere Model, *Perspectives of Earth and Space Scientists*, 4, <https://doi.org/10.1029/2022cn000195>, 2023.
- 1440 Huba, J. D., Joyce, G., and Fedder, J. A.: Sami2 is Another Model of the Ionosphere (SAMI2): A new low-latitude ionosphere model, *Journal of Geophysical Research: Space Physics*, 105, 23 035–23 053, <https://doi.org/10.1029/2000ja000035>, 2000.
- Huba, J. D., Joyce, G., and Krall, J.: Three-dimensional equatorial spread F modeling, *Geophysical Research Letters*, 35, <https://doi.org/10.1029/2008gl033509>, 2008.
- 1445 Inoue, Y. and Horowitz, S.: Numerical Solution of Full-Wave Equation With Mode Coupling, *Radio Science*, 1, 957–970, <https://doi.org/10.1002/rds196618957>, 1966.
- Kattawar, G. W., Plass, G. N., and Catchings, F. E.: Matrix Operator Theory of Radiative Transfer 2: Scattering from Maritime Haze, *Applied Optics*, 12, 1071, <https://doi.org/10.1364/ao.12.001071>, 1973.
- Klostermeyer, J.: Numerical calculation of gravity wave propagation in a realistic thermosphere, *Journal of Atmospheric and Terrestrial Physics*, 34, 765–774, [https://doi.org/10.1016/0021-9169\(72\)90109-2](https://doi.org/10.1016/0021-9169(72)90109-2), 1972.
- 1450 Klostermeyer, J.: Computation of acoustic-gravity waves, Kelvin-Helmholtz instabilities, and wave-induced eddy transport in realistic atmospheric models, *Journal of Geophysical Research: Oceans*, 85, 2829–2839, <https://doi.org/10.1029/jc085ic05p02829>, 1980.
- Knight, H., Broutman, D., Eckermann, S., and Doyle, J.: A single-mode approximation for gravity waves in the thermosphere, *Journal of Atmospheric and Solar-Terrestrial Physics*, 224, 105 749, <https://doi.org/10.1016/j.jastp.2021.105749>, 2021.
- 1455 Knight, H., Broutman, D., and Eckermann, S.: Full-wave anelastic and compressible Fourier methods for gravity waves in the thermosphere, *Wave Motion*, 110, 102 894, <https://doi.org/10.1016/j.wavemoti.2022.102894>, 2022.
- Knight, H., Broutman, D., and Eckermann, S.: Compressible and anelastic governing-equation solution methods for thermospheric gravity waves with realistic background parameters, *Theoretical and Computational Fluid Dynamics*, 38, 479–509, <https://doi.org/10.1007/s00162-024-00709-x>, 2024.
- 1460 Knight, H. K., Broutman, D., and Eckermann, S. D.: A causality-preserving Fourier method for gravity waves in a viscous, thermally diffusive, and vertically varying atmosphere, *Wave Motion*, 88, 226–256, <https://doi.org/10.1016/j.wavemoti.2019.06.001>, 2019.
- Knight, H. K., Richards, P. G., Martinis, C. R., and Goncharenko, L. P.: Modeling MSTIDs Produced by Gravity Waves With Parameters Obtained From All-Sky Imager Observations and Comparisons to Incoherent Scatter Radar Observations, *Journal of Geophysical Research: Space Physics*, 130, <https://doi.org/10.1029/2025ja033906>, 2025.
- 1465 Laundal, K. M., Skeidsvoll, A. S., Popescu Braileanu, B., Hatch, S. M., Olsen, N., and Vanhamäki, H.: Global inductive magnetosphere-ionosphere-thermosphere coupling, *Annales Geophysicae*, 43, 803–833, <https://doi.org/10.5194/angeo-43-803-2025>, 2025.

- Lindzen, R. S. and Kuo, H.-L.: A Reliable Method for the Numerical Integration of a Large Class of Ordinary and Partial Differential Equations, *Monthly Weather Review*, 97, 732–734, [https://doi.org/10.1175/1520-0493\(1969\)097<0732:armftn>2.3.co;2](https://doi.org/10.1175/1520-0493(1969)097<0732:armftn>2.3.co;2), 1969.
- Liu, X., Xu, J., Yue, J., and Vadas, S. L.: Numerical modeling study of the momentum deposition of small amplitude gravity waves in the thermosphere, *Annales Geophysicae*, 31, 1–14, <https://doi.org/10.5194/angeo-31-1-2013>, 2013.
- Maeda, S.: Numerical solutions of the coupled equations for acoustic-gravity waves in the upper thermosphere, *Journal of Atmospheric and Terrestrial Physics*, 47, 965–972, [https://doi.org/10.1016/0021-9169\(85\)90074-1](https://doi.org/10.1016/0021-9169(85)90074-1), 1985.
- Midgley, J. E. and Liemohn, H. B.: Gravity waves in a realistic atmosphere, *Journal of Geophysical Research*, 71, 3729–3748, <https://doi.org/10.1029/jz071i015p03729>, 1966.
- Nakajima, T. and Tanaka, M.: Matrix formulations for the transfer of solar radiation in a plane-parallel scattering atmosphere, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 35, 13–21, [https://doi.org/10.1016/0022-4073\(86\)90088-9](https://doi.org/10.1016/0022-4073(86)90088-9), 1986.
- Pfeffer, R. L. and Zarichny, J.: Acoustic-Gravity Wave Propagation from Nuclear Explosions in the Earth's Atmosphere, *Journal of the Atmospheric Sciences*, 19, 256–263, [https://doi.org/10.1175/1520-0469\(1962\)019<0256:agwpfn>2.0.co;2](https://doi.org/10.1175/1520-0469(1962)019<0256:agwpfn>2.0.co;2), 1962.
- Plass, G. N., Kattawar, G. W., and Catchings, F. E.: Matrix Operator Theory of Radiative Transfer I: Rayleigh Scattering, *Applied Optics*, 12, 314, <https://doi.org/10.1364/ao.12.000314>, 1973.
- Pütz, C., Schlutow, M., and Klein, R.: Initiation of ray tracing models: evolution of small-amplitude gravity wave packets in non-uniform background, *Theoretical and Computational Fluid Dynamics*, 33, 509–535, <https://doi.org/10.1007/s00162-019-00504-z>, 2019.
- Pérez-Álvarez, R. and García-Moliner, F.: Transfer Matrix, Green Function, And Related Techniques: Tools For The Study Of Multilayer Heterostructures, Universitat Jaume I, Castelló de la Plana, Spain, 2004.
- Richards, P. G. and Peterson, W. K.: Measured and modeled backscatter of ionospheric photoelectron fluxes, *Journal of Geophysical Research: Space Physics*, 113, <https://doi.org/10.1029/2008ja013092>, 2008.
- Shibata, T.: A numerical calculation of the ionospheric response to atmospheric gravity waves in the F-region, *Journal of Atmospheric and Terrestrial Physics*, 45, 797–809, [https://doi.org/10.1016/s0021-9169\(22\)00009-5](https://doi.org/10.1016/s0021-9169(22)00009-5), 1983.
- Stamnes, K.: The theory of multiple scattering of radiation in plane parallel atmospheres, *Reviews of Geophysics*, 24, 299–310, <https://doi.org/10.1029/rg024i002p00299>, 1986.
- Stamnes, K. and Swanson, R.: A New Look at the Discrete Ordinate Method for Radiative Transfer Calculations in Anisotropically Scattering Atmospheres, *J. Atmos. Sci.*, 38, 387–389, [https://doi.org/10.1175/1520-0469\(1981\)038<0387:ANLATD>2.0.CO](https://doi.org/10.1175/1520-0469(1981)038<0387:ANLATD>2.0.CO), 1981.
- Stubbe, P.: Frictional forces and collision frequencies between moving ion and neutral gases, *Journal of Atmospheric and Terrestrial Physics*, 30, 1965–1985, [https://doi.org/10.1016/0021-9169\(68\)90004-4](https://doi.org/10.1016/0021-9169(68)90004-4), 1968.
- Vadas, S. L. and Nicolls, M. J.: The phases and amplitudes of gravity waves propagating and dissipating in the thermosphere: Theory, *Journal of Geophysical Research: Space Physics*, 117, <https://doi.org/10.1029/2011ja017426>, 2012.
- van de Hulst, H.: A new look at multiple scattering, Tech. rep., NASA Inst. Space Studies, 1963.
- Volland, H.: Full wave calculations of gravity wave propagation through the thermosphere, *Journal of Geophysical Research*, 74, 1786–1795, <https://doi.org/10.1029/ja074i007p01786>, 1969a.
- Volland, H.: The upper atmosphere as a multiply refractive medium for neutral air motions, *Journal of Atmospheric and Terrestrial Physics*, 31, 491–514, [https://doi.org/10.1016/0021-9169\(69\)90002-6](https://doi.org/10.1016/0021-9169(69)90002-6), 1969b.
- Weimer, D. R.: Improved ionospheric electrodynamic models and application to calculating Joule heating rates, *Journal of Geophysical Research: Space Physics*, 110, <https://doi.org/10.1029/2004ja010884>, 2005.
- Wick, G. C.: Über ebene Diffusionsprobleme, *Zeitschrift für Physik*, 121, 702–718, <https://doi.org/10.1007/bf01339167>, 1943.

1505 Yeh, K. C. and Liu, C. H.: Acoustic-gravity waves in the upper atmosphere, *Reviews of Geophysics*, 12, 193–216,
<https://doi.org/10.1029/rg012i002p00193>, 1974.