

Importance of size representation and morphology in modelling optical properties of black carbon: comparison between laboratory measurements and model simulations

5 Baseerat Romshoo¹, Mira Pöhlker¹, Alfred Wiedensohler¹, Sascha Pfeifer¹, Jorge Saturno²,
Andreas Nowak², Krzysztof Ciupek³, Paul Quincey³, Konstantina Vasilatou⁴, Michaela N.
Ess⁴, Maria Gini⁵, Konstantinos Eleftheriadis⁵, Chris Robins³, François Gaie-Levrel⁶ and
Thomas Müller¹

10 ¹Leibniz Institute for Tropospheric Research, 04318, Leipzig, Germany

²Physikalisch-Technische Bundesanstalt (PTB), Braunschweig, 38116, Germany

³Atmospheric Environmental Science Department, National Physical Laboratory (NPL), Teddington, TW11
0LW, UK

⁴Federal Institute of Metrology METAS, Bern-Wabern, 3003, Switzerland

15 ⁵Environmental Radioactivity Laboratory, Institute of Nuclear & Radiological Sciences and Technology,
Energy & Safety (INRASTES), N.C.S.R. Demokritos, Attiki, 15310, Greece

⁶Laboratoire National de Métrologie et d'Essais (LNE), Paris, 75015, France

Correspondence to: Baseerat Romshoo (baseerat@tropos.de)

20 **Abstract**

Black carbon (BC) from incomplete combustion of biomass or fossil fuels is the strongest absorbing aerosol
component in the atmosphere. Optical properties of BC are essential in climate models for quantification of their
impact on radiative forcing. The global climate models, however, consider BC to be spherical particles which
causes uncertainties in their optical properties. Based on this, an increasing number of model-based studies
25 provide databases and parametrization schemes for the optical properties of BC using more realistic fractal
aggregate morphologies. In this study, the reliability of the different modelling techniques of BC were investigated
by comparing them to laboratory measurements. In the first step, the modelling techniques were examined for
bare BC particles, and in the second step, for BC particles with organic material. A total of six morphological
30 representations of BC particles were compared, three each for spherical and fractal aggregate morphologies. In
general, the aggregate representation performed well for modelling the particle light absorption coefficient σ_{abs} ,
single scattering albedo SSA, and mass absorption cross-section MAC_{BC} for laboratory generated BC particles
with volume mean mobility diameters $d_{p,v}$ larger than 100 nm. However, for modelling Ångström absorption
exponent AAE it was difficult to suggest a method due to size-dependence, although the spherical assumption
35 was in better agreement in some cases. The BC fractal aggregates are usually modelled using monodispersed
particles since their optical simulations are computationally expensive. In such studies, the modelled optical
properties showed a 25% uncertainty in using the monodisperse size method. It is shown that using the
polydisperse size distribution in combination with fractal aggregate morphology reduces the uncertainty in
measured σ_{abs} to 10%, for particles with $d_{p,v}$ between 60-160 nm.

40 Furthermore, the sensitivities of the BC optical properties to the various model input parameters such as the real
and imaginary parts of the refractive index (m_{re} and m_{im}), the fractal dimension (D_f), and the primary particle
radius (a_{pp}) of an aggregate were investigated. When the BC particle is small and rather fresh, the change in the
 D_f had relatively little effect on the optical properties. There was, however, a significant relationship between a_{pp}
and the particle light scattering, which increased by a factor of up to six with increasing total particle size. The
45 modelled optical properties of BC are well aligned with laboratory-measured values when the following
assumptions are used in the fractal aggregate representation: m_{re} between 1.6 to 2, m_{im} between 0.50 to 1, D_f from
1.7 to 1.9, and a_{pp} between 10 to 14 nm. Overall, this study provides experimental support for emphasizing the
importance of an appropriate size representation (polydisperse size method) and an appropriate morphological
50 representation for optical modelling and parametrization scheme development of BC.

50 **Introduction**

Soot particles are produced by incomplete combustion of carbonaceous materials such as fossil fuels, biomass,
and biofuels. Black carbon (BC), a major component of soot and also known as light-absorbing carbon, contributes
55 significantly to global warming along with CO₂, methane, and volatile organic compounds (VOCs) (IPCC, 2021).

On a regional scale, black carbon can significantly perturb the climate (Wang, 2004; Menon et al., 2002). In developing areas such as China, South Asia, and South East Asia, rapid urbanization has caused an alarming increase in the BC mass fraction of the total particle mass concentration (Wiedensohler et al., 2018b; Madueño et al., 2019). Moreover, increasing mass concentrations of BC are degrading air quality and causing adverse effects on human health (Pöschl., 2005; Janssen et al., 2011).

High-resolution transmission electron microscopy (TEM) analysis of BC samples from ambient and laboratory studies revealed that BC particles comprise agglomerates made from numerous graphitic spherules (Betrancourt et al., 2017; Gini et al., 2016). Over time, BC agglomerates undergo complex changes in their size, morphology, and composition, depending on post-emission atmospheric conditions (Fierce et al., 2015). TEM images from Shanghai's atmosphere presented by Fu et al. (2012) showed a variety of BC-containing particles at various stages of aging, of which some semi-aged particles retained fractal aggregate morphology. The BC particles are often found together with other combustion by-products such as organic matter, which enhance the particle light absorption through the lensing effect (Fuller et al., 1999). With increasing residence time of BC in the atmosphere, an aging process occurs, leading to a growth of BC agglomerates into much more compact structures. There are several reasons for this, including the formation of coatings and hygroscopic effects (Petzold et al., 2005; Bond et al., 2006; Abel et al., 2003). Cloud processing such as water condensation or evaporation also restructures the BC particles into more compact shapes (Bhandari et al., 2019).

The impact of BC particles on climate is studied by estimating their radiative forcing properties using global climate models (IPCC 2021; Krüger et al., 2022; Jacobson., 2001). In order to simulate the BC radiative forcing in global models, the estimates of various BC optical properties, such as particle light scattering, and mass absorption cross-sections, must be taken into account (Bond et al., 2013; Ciupek et al., 2021). The morphological structure of BC particle plays an important role in determining their light scattering and absorption coefficients (He et al., 2015). The Lorentz-Mie theory (Mie, 1908) is often used to calculate the optical properties of BC particles (Bohren and Huffman, 1998; Bond et al., 2013). This theory is preferred because of the computational simplicity and wide applicability. However, studies have shown large discrepancies in the results of Lorentz-Mie theory when compared with ambient measurements (Adachi et al., 2010; Wu et al., 2018). Moreover, given the complex aging process of BC agglomerates, it is unrealistic to assume BC particles as spherical particles.

Due to the limitations of the Lorentz-Mie theory, the number of studies on the computation of BC optical properties assuming a fractal aggregate morphology has increased (e.g., Berry and Percival, 1986; Kahnert and Kanngießer, 2020; Smith and Grainger, 2014; Liu et al., 2018). To model the optical properties of such fractal BC aggregates, the Rayleigh-Debye-Gans (RDG) approximation (Sorensen, 2011), the discrete dipole approximation DDA (Purcell and Pennypacker, 1973), and the T-matrix method (Mackowski and Mishchenko, 2011) have been used (Adaichi et al., 2010; Kahnert, 2010; Li et al., 2016; Scarnato et al., 2013). Parametrization schemes and databases for the optical properties of BC as fractal aggregates have been developed, and proposed for applications in climate models by Smith and Grainger (2014), Romshoo et al., (2021), Liu et al., (2019), and Luo et al., (2018a).

In addition to the various numerical studies conducted on the optical properties of BC aggregates, there is a scientific need to examine the reliability of the modelling techniques, and their comparability with actual measurements. Liu et al., 2018 provided a theoretical overview of how sensitive the radiative properties of black carbon is to their complex morphologies. The geometric-optics surface wave (GOS) approach was used to calculate the BC light scattering properties at different aging stages and compare them with the measured values (He et al., 2015). Forestieri et al. (2018) measured and modelled the mass absorption cross-sections (MAC_{BC}) for bare flame-generated black carbon. Due to the high computational time of optical simulations, most of the modelling studies are limited to monodisperse particles (Kahnert, 2010; Adaichi et al., 2010; Kahnert and Kanngießer, 2020; Smith and Grainger, 2014; Romshoo et al., 2021; Liu et al., 2019; Luo et al., 2018a). However, for atmospheric applications, ensemble-averaged optical properties for given particle number size distributions are needed (Bond et al., 2013). Therefore, it would be reasonable to investigate the performance of different modelling approaches for calculating the ensemble-averaged optical properties.

In order to model BC as an aggregate morphology, it is necessary to be aware that BC aggregates are composed of tiny spherules called 'primary particles' or 'monomers' (Tian et al., 2006; Betrancourt et al., 2017). TEM images show that these primary particles measure between 10 and 30 nm in diameter, depending on the source of combustion, and the interaction among the various mechanisms involved in black carbon formation (Kholghy et al. 2013; Park et al. 2005). The morphology of the BC aggregates is described by a parameter called fractal dimension D_f (Köylü et al., 1995). Depending on the dynamics of the collisions, and the restructuring and condensation of organic matter present in the atmosphere after emission, the D_f of black carbon can vary from 1.5 up to ~ 2.8 (Wentzel et al., 2003; Gwaze et al., 2006; Ghazi et al., 2013). The size of the BC primary particle and the fractal dimension are important parameters used in optical modelling studies. However, it is unclear to what extent the assumptions of these input parameters are important when compared to ambient or laboratory measurements.

In this work, we examine modelling methods of BC optical properties for both monodisperse as well as polydisperse aerosol particles. The novelty of this study is the improvement of the modelling techniques for optical

properties of BC in order to match their equivalent laboratory measurements. The study is structured as follows. An overview of the laboratory methods is given first, followed by the discussion of the various aspects of modelling the optical properties of BC, such as their representation, selection of the particle sizes, various model input parameters, and the optical model itself. Furthermore, the modelling techniques for two kinds of BC particles are investigated. We begin with modelling the first kind i.e., bare BC particles, evaluating the assumptions of various modelling parameters (for e.g., m_{re} , m_{im} , D_f , and a_{pp}) and comparing them to experimental results. The modelling techniques for the second kind i.e., BC particles containing organics is discussed next. Finally, a summary and recommendations for future modelling studies are provided.

2 Methods

2.1 Laboratory generated black carbon

The measurements reported in this study were from two laboratory campaigns for characterization of black carbon. Experiment E1 involved measurements of thermally denuded nascent black carbon particles conducted at the National Meteorology Institute of Germany (Physikalisch Technische Bundesanstalt, Braunschweig). In the second experiment (E2), measurements of untreated nascent black carbon particles were performed at the Leibniz Institute for Tropospheric Research.

2.1.1 Generation of black carbon particles

For this study, three different mini-CAST soot generators (Jing Ltd, Switzerland) were used, which can generate black carbon particles within a wide range of concentrations, sizes, and chemical compositions (Moore et al. 2014; Ess et al., 2019). Mini-CAST soot generators are diffusion-based or premixed flame-based, which generate black carbon particles after combustion with a mixture of fuel (propane) and air (Jing et.al, 2014). In the diffusion flame based mini-CAST, propane is mixed with oxidation air at the flame via diffusion, using nitrogen for quenching the flame. In the premixed version of mini-CAST propane and air are mixed before being injected into the flame which results in a premixed (or partially premixed) flame. Depending on the flame type, either of these mini-CASTs can control the black carbon characteristics by varying the flow rates of fuel, oxidation air, and nitrogen. A key parameter describing the operating conditions of mini-CAST is the overall fuel-to-air ratio, also called the flame equivalence ratio, ϕ . The generator can be operated in a fuel-rich condition when $\phi > 1$, whereas fuel-lean (or near-stoichiometric) condition is defined by $\phi < 1$. Moore et al., 2014 mapped the operation of the soot generator mini-CAST 4202 (Zollikofen BE, Switzerland; Jing 1999) for a wide range of operating conditions, providing an optimal guide for laboratory-based black carbon generation using a mini-CAST burner. In this study, a total of four mini-CASTs were used with different operating conditions during both laboratory campaigns. The mini-CASTs were operated at fuel-lean operating conditions with flame equivalence ratios ranging from 0.74 to 1.01, producing black carbon particles with volume mean mobility diameter ($d_{p,\bar{v}}$) between 53 and 182 nm. Table 1 provides an overview of the operating conditions of the mini-CASTs for both E1 and E2.

Table 1. Details of the different cases in experiments E1 and E2: the operating conditions and resulting properties of the particles such as the mobility diameters ($d_{p,\bar{n}}$ and $d_{p,\bar{v}}$), ratio of the elemental to total carbon (EC/TC), and single scattering albedo (SSA) at wavelength of 660 nm. All the mentioned properties will be defined in the next sections.

Experiment series	Case	Mini-CAST model	Propane (mlpm)	N2/ Mixing air* (lpm)	Oxidation air (lpm)	ϕ	$d_{p,\bar{n}}$	$d_{p,\bar{v}}$	EC/TC	SSA
E1	I	MC 5203C	140	0.61	3.30	1.01	38	60	-	0.014
E1	II	MC 5203C	140	0.56	3.60	0.93	71	106	-	0.024
E1	III	MC 5203C	140	0.33	3.30	1.01	105	160	-	0.074
E1	IV	MC 5203C	84	0.00	2.72	0.74	105	160	-	0.042
E2	V	MC 5201BC	60	0.42	1.10	0.94	56	83	0.35	0.011
E2	VI	MC 5201BC	60	0.39	1.10	0.96	89	126	0.69	0.053
E2	VII	MC 5201BC	60	0.23	1.30	0.94	129	181	0.68	0.062
E2	VIII	MC 5203C	140	0.56	3.60	0.93	48	86	0.35	0.054
E2	IX	MC 5203C	140	0.00	3.30	1.01	122	174	0.66	0.112
E2	X	MC 5303C	140	0.30	4.20	0.80	84	122	0.68	0.045
E2	XI	MC 5303C	140	0.00	4.20	0.80	122	181	0.62	0.083

*For mini-CAST 5201BC

160 2.1.2 Objectives of laboratory experiment E1 and E2

165 Experiment E1: The objective this experiment was to obtain the size, and the optical properties of black carbon particles after removal of the volatile organic content, which are expected to represent bare black carbon particles as closely as possible. Figure A1 shows a schematic of the experimental setup used in experiment E1. The black carbon particles were produced with a mini-CAST 5203 Type C. The mini-CAST 5203C consists of three diffusion flames, generating black carbon particles under fuel-lean operating conditions. The aerosols generated from mini-CAST 5203C were passed through a Catalytic Stripper (Catalytic Stripper Model CS015, Catalytic Instruments, Rosenheim, Germany) to remove the volatile contents, in this case, mainly organic carbon. For each case in E1 (Table. 1), the Catalytic Stripper was operated at unheated condition, at 150°C condition (BC particles pass through the Catalytic Stripper operated at 150°C), and at 350°C condition (BC particles pass through the Catalytic Stripper at 350°C). Particles coming out of the Catalytic Stripper are then passed through several instruments that measure particle number size distribution, particle light extinction, absorption, and scattering. Detailed information about these measurements is provided in Appendix A.

175 Experiment E2: In this experiment, the size, the composition, and the optical properties of untreated nascent black carbon particles produced by the different mini-CAST burners at different operating conditions were measured. The schematic diagram of the experimental setup used in E2 is shown in Figure A2. Three mini-CAST models were used in this experiment including a mini-CAST 5203 Type C, a mini-CAST 5201 Type BC, and a mini-CAST 5303 Type C were used. The mini-CAST 5201BC burner was operated in the partially premixed flame mode (Ess et al. 2019, Ess et al. 2021). The flow settings of propane, nitrogen or mixing air (mini-CAST 5201 BC), and oxidation air were adjusted in order to obtain black carbon particles of specific size, as shown in Table 1 by the corresponding number mean mobility diameter ($d_{p,\bar{N}}$), and the volume mean mobility diameter ($d_{p,\bar{V}}$). The details of the flow settings for the three mini-CAST models used are shown in Table 1. The particles generated from the black carbon generators are delivered to various instruments to measure their number size distributions, aerosol mass concentration, chemical composition, particle light extinction, absorption, and scattering coefficients. The details about the instrumentation used are shown in Appendix A.

2.2 Fundamentals of modelling optical properties of black carbon particles

190 2.2.1 Morphology of black carbon and representations for modelling

195 In order to model the optical properties of black carbon, it is important to choose the most appropriate morphological representation for black carbon particle. This step is considered particularly important because the modelled optical properties were further validated with the measurements from E1 and E2. TEM images were not available for this study, therefore, the morphological representations of black carbon were selected based on TEM images from a previous laboratory study using the mini-CAST generators (Ess et al., 2021; Ouf et al., 2016). In the mini-CAST generator, BC particles produced have fractal morphologies, with varying amounts of organics attached to the edges, without altering the inner structure of the core (Ouf et al., 2016). In addition to the TEM images from Ess et al. (2021), the operating conditions of the mini-CAST burners during experiments E1 and E2 (Table. 1), and the fraction of organic carbon of BC particles from E2 were also considered while selecting the morphological representations. A more detailed discussion of the TEM images of BC particles taken from mini-CAST and atmosphere can be found in the Supplementary material.

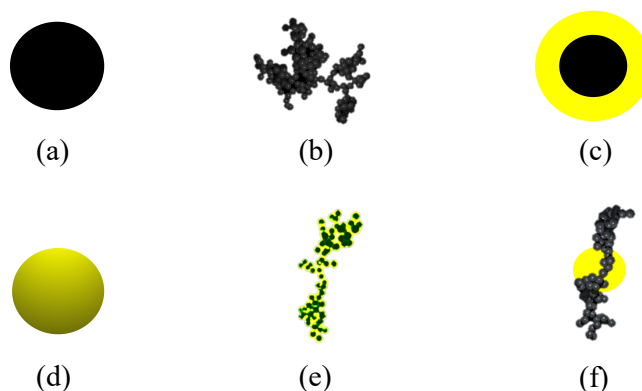


Figure 1. Morphological representations of black carbon used in this study: **(a) sphere, (b) aggregate, (c) coated sphere, (d) homogeneously mixed sphere, (e) coated aggregate, and (f) aggregate partly enclosed in sphere.**

For modelling the particles from the denuding experiment E1, the simulated particles are assumed to be bare black carbon, since a Catalytic Stripper was used to remove the volatile organic matter. Some residuals, however, are left behind by the Catalytic Strippers, depending on the volatility of the organic matter. Mamakos et al. (2013) reported that in the 21–250°C temperature range, the Catalytic Stripper is able to remove up to 96% of the more volatile fraction of organic matter. However, in the 250–500°C temperature range, the Catalytic Stripper removes 30–60% of the less volatile organic matter. This must be noted when comparing the modelled optical results with their equivalent laboratory measurements.

Two morphological representations of bare BC particles were used as shown in Figure 1(a, b). The first one is a sphere (Fig. 1a); the second one is a fractal aggregate (Fig. 1b). The ‘sphere’ representation is the most simplified representation used by fellow researchers (Bond et al., 2013). An ‘aggregate’ representation shows the realistic morphology of the BC aerosols when they are formed by combustion (Michelsen et al., 2017; Ess et al., 2021). The morphology of such fractal aggregates is mathematically described by Eggersdorfer et al., (2012):

$$N_{pp} = k_{fm} \left(\frac{D_p}{2a_{pp}} \right)^{D_{fm}}, \quad (1)$$

where, a_{pp} is the radius of primary particles, N_{pp} is the number of primary particles, D_{fm} is the mass-mobility exponent, D_p is the mobility diameter, and k_f is a dimensionless pre-factor.

In the experiment E2, additional information about the chemical composition of the black carbon particles were available from the EC/OC analysis conducted on the loaded quartz filters. Based on the EC/OC analysis results, the various morphological representations of BC particles containing organics are simulated. Four models for BC particles containing organics were used to represent the particles generated from E2. The four representations are shown in Figure 1 (c) to (f) for coated spheres, homogeneously mixed spheres, coated aggregates and aggregates partly enclosed in sphere. The ‘coated sphere’ comprised of an inner spherical BC core enclosed within a shell of organic carbon. In the ‘homogeneously mixed sphere’, BC and organic carbon were internally mixed following the volume mixing rule (Chylek et al., 1995) to form a homogenized mixture. The ‘coated sphere’ and ‘homogeneously mixed sphere’ are the simplified models to represent coated BC aerosols. The ‘coated aggregate’ is a realistic representation, morphologically similar to the ‘aggregate’ (Figure 1b), with the difference that each monomer is coated with a layer of organic carbon. Ouf et al. (2016) conducted NEXAFS analysis on BC produced from a diffusion flame-based mini-CAST burner and found that organics (by-products of the combustion) get attached to the edge of graphite crystallites without changing the inner structure of the core. This laboratory result can be simulated for coated BC in radiative modelling studies by assuming a spherical coating around each individual primary particle of a BC aggregate (Luo et al., 2018b). This method was used to simulated ‘coated aggregate’ representation in our study. BC particles that we modelled in our study have a fraction of organics (f_{oc}) up to 53%, therefore they are assumed to have a less compact and chain-like structure. In such cases, where the BC aggregate does not have a completely compact structure, the results using the ‘coated aggregate’ representation are expected to be reliable (Luo et al., 2018b). Moreover, Kahnert et al., 2017 compared the coating model (closed-cell model) used in this study to a realistic model, which showed good comparability. Finally, the ‘aggregates partly enclosed in sphere’ represented a model for aged black carbon, comprising of an ‘aggregate’ (Figure 1b) immersed in a sphere of organic carbon. Since this study simulates laboratory-produced black carbon, the particles are not likely to resemble those in the ‘aggregates partly enclosed in sphere’ representation. It was

nevertheless included in the study for the sake of comparison. Further details of how the six morphological representations shown in Fig. 1 were modelled will be explained in the following sections.

2.2.2 Construction rules for spherical particles

In the ‘sphere’ and ‘homogeneously mixed sphere’ representation, the diameters of the spheres were taken from the SMPS size distributions obtained from the laboratory experiments. The ‘coated sphere’ representation consisted of two spheres; the diameter of the outer sphere (D_o) was directly taken from the SMPS size distributions. The diameter of the inner sphere (D_i) was obtained by:

$$D_i^3 = (1 - f_{oc}) D_o^3, \quad (2)$$

where f_{oc} is the fraction of organic carbon obtained from the results of EC/OC analysis as:

$$f_{oc} = 1 - \frac{EC}{TC} = 1 - \frac{EC}{EC+OC} \quad (3)$$

where $\frac{EC}{TC}$ is the volume ratio of elemental carbon to the total carbon ($TC = OC + EC$). The volume ratio is derived from the EC/OC analysis after dividing the masses by their respective densities. In this study, it was assumed that elemental carbon corresponds to black carbon. The density of elemental carbon ρ_{EC} was taken as 1.8 g cm^{-3} (Park et al., 2004), and the density of organic carbon as 1.1 g cm^{-3} (Schkolnik et al., 2007).

2.2.3 Construction rules for aggregate particles

For simulating the ‘aggregate’, ‘coated aggregate’, and ‘aggregate and sphere’ representations, the number of primary particles N_{pp} per aggregate, and the radius of primary particle a_{pp} must be determined. In the previous studies about the comparison of modelled and measured optical properties of soot aggregates, the N_{pp} was determined by dividing the measured mass of total particle by the estimated mass of a spherule (Forestieri et al., 2018) or reconstructed using results from TEM analysis (He et al., 2015). In our study, we investigated the methods for estimating the N_{pp} in absence of mass or TEM results. Three different conversion methods for calculating the number of primary particles N_{pp} per aggregate were applied in this study. In the first method by Rissler et al. 2012, the particle mass estimated using the ρ_{eff} is divided by the estimated mass of a spherule. The second technique described by Sorensen. (2011) uses the mobility mass scaling exponent in conjunction with the concept that black carbon aggregates fall into the slip regime. The third method, developed by Schmidt-Ott. (1988) is based on a power law function. Further details of the three methods for calculation of N_{pp} are provided in Appendix B.

The radius of primary particle a_{pp} is used in all the three methods for calculating the number of primary particles N_{pp} per aggregate. Diffusion flame-based generators like the mini-CAST burners, produce BC aggregates with primary particle radius (a_{pp}) between 4 and 14 nm (Bourrous et al., 2018; Mamakos et al., 2013). Kahnert (2010) pointed out the insensitivity in the optical properties when the radii of the primary particle fall in the range of 10–25 nm. Due to absence of measurements for a_{pp} , and for the sake of simplicity, a constant average value of $a_{pp} = 14 \text{ nm}$ was used for the entire study, except for the part of sensitivity analysis discussed in the next section. In the ‘coated aggregate’ representation, a layer of organic carbon was present around each primary particle comprising the BC aggregate. Following equation (2), the relationship between the fraction of organic carbon (f_{oc}), the outer radius of the primary particle (a_o) and the inner radius of the primary particle (a_{in}) were determined. It must be noted that in the ‘coated aggregate’ representation, the primary particles of the aggregates generated from the Diffusion Limited Aggregation (DLA) software have a radius equal to a_o . In the next step, a smaller sphere with a radius of a_{in} is placed at the center of the primary particle representing the BC core. In the ‘aggregate partly enclosed in sphere’ representation, after generating an aggregate comprising of black carbon, a sphere of organic carbon was placed at the center of mass of the black carbon aggregate. The radius of the sphere of organic carbon (R_{so}) is obtained by:

$$R_{so}^3 = f_{oc}(a_{app}^3 \cdot N_{pp}), \quad (4)$$

When a sphere of organic carbon is placed around parts of BC aggregate in the ‘aggregate partly enclosed in sphere’ representation, the parts of black carbon aggregate inside the sphere reduces the volume of organic carbon. Iteratively increasing the radius of the sphere of organic carbon would replace this lost volume. In this study, since non-compact aggregates were used and the fraction of organics (f_{oc}) was up to 53%, only a small portion of BC aggregate was present inside the organic sphere. A sensitivity study was conducted to test how the absorption

cross-section changes when the radius of the sphere of organic carbon is iteratively increased. The results of this sensitivity analysis showed that the absorption cross-section varied by 2 to 3% after iteratively increasing the radius of the organic carbon sphere. Thus, for the sake of simplicity, the particles were left as they are. However, when modelling coated aggregates with more compact structures or high coating fractions, it is recommended to apply the iteration schemes to each particle.

2.2.4 Other parameters from literature

Simulation of optical quantities with scattering calculations requires a number of assumptions about the morphology of the particles and the refractive indices. In the first experiment, E1, the composition of the simulated morphological representations ‘sphere’, and ‘aggregate’ was assumed to be bare black carbon, i.e., elemental carbon in nature. The real and imaginary parts of the refractive index, m_{re} and m_{im} , respectively, were taken from a study by Kim et al., 2015. The values of m_{re} and m_{im} for EC at wavelengths of 467, 530, and 660 nm are summarized in Table A2. The refractive index of the OC in experiment E2 is also taken from Kim et al., 2015, for the representations of ‘coated sphere’, ‘coated aggregate’, and ‘aggregate partially enclosed in sphere’. However, for the ‘homogeneously mixed sphere’, the effective complex refractive index m was calculated from the volume-mixing rule (Chylek et al., 1995). The values of m_{re} and m_{im} for OC used in this study are summarized in Table A2.

In the ‘aggregate’, ‘coated aggregate’, and ‘aggregate partially enclosed in sphere’ representation, the morphology of the particle is described by the fractal dimension D_f . The representative values for D_f for freshly emitted BC particles near the combustion source ranges from 1.6 to 1.9 (Gwaze et al., 2006). Transmission electron microscopy (TEM) analysis of BC samples from different engines showed values for the fractal dimensions between 1.5 and 2.1 for diesel black carbon and 2.2 and 3.0 for spark-ignition engines (Wentzel et al., 2003). In this study, the value of D_f in all the aggregate representations was set to 1.7, except for the sensitivity analysis. The D_f of 1.7 is commonly representative of laboratory-generated fresh black carbon and was used after examining the TEM images from the mini-CAST generator provided in Ess et al. (2021).

A sensitivity analysis of various modelling parameters, like the refractive index, fractal dimension, and radius of the primary particle were conducted in this study to understand their relative importance towards the modelled optical properties. The results of the sensitivity study were focused on the bare particles from denuding experiment E1, excluding the impact of an organic coating. For studying the sensitivity of a_{pp} , the optical properties were modelled for a_{pp} ranging from 5 to 25 nm. In the sensitivity study of D_f , the optical properties are compared and validated for the ‘aggregate’ representation for D_f ranging from 1.5 - 2.8. The dependency of the modelled optical properties on the real and imaginary parts of refractive index was also studied. The optical properties were modelled using ‘aggregate’ and ‘sphere’ representations for the real part of the refractive index m_{re} ranging from 1.2 to 2, and the imaginary part of the refractive index m_{im} ranging from 0.2 to 1. For all the results of the sensitivity study, the modelled optical properties were compared with their laboratory equivalents for a better understanding of the subject.

2.3 Tools for modelling black carbon optical properties

Aggregation of black carbon agglomerates to form a larger fractal aggregate is described by the process of diffusion-limited cluster aggregation (Witten and Sander, 1983). Based on this principle, various Diffusion-limited algorithms (DLAs) have been developed. The tunable diffusion limited aggregation (DLA) software (Woźniak, 2012) was used in this study to simulate the ‘aggregate’, ‘coated aggregate’, and ‘aggregate and sphere’ BC representations. This algorithm preserves fractal characteristic of the aggregate, by iteratively adding each primary particle one by one.

The Multi-Sphere T-matrix Method (MSTM) code (Mackowski and Mishchenko, 2011) and the Lorentz-Mie theory (Hergert and Wriedt, 2012; Bohren and Huffman, 1998) were used to model the optical properties of simulated black carbon particles. The optical properties were calculated in the visible spectrum, for λ equal to 467, 530, and 660 nm. It must be noted that the range of λ was limited as only refractive index at the wavelengths 467, 530, and 660 nm were available (Kim et al., 2015).

For the ‘sphere’, the ‘homogeneously mixed sphere’ and the ‘coated sphere’ representations, the Python Mie Scattering package PyMieScatt (Sumlin et al., 2018) based on the Lorentz-Mie theory was used. The MSTM code was used for the ‘aggregate’, ‘coated aggregate’, and ‘aggregate and sphere’ representations. The MSTM code contains a FORTRAN based algorithm that calculates the optical properties of a set of arbitrary spheres (Mishchenko et al., 2004). The MSTM code is therefore appropriate for computing the radiative properties of aggregates. The MSTM code has found wider applications in the research field because of better accuracy and comparatively lower computational cost for fractal like particle compared to other methods like the Discrete Dipole Approximation DDA (Liu et al., 2017).

The MSTM manual notes a limitation that the nested spheres in the particle should not intersect each other. However, in the case of ‘aggregate and sphere’ representation (Fig. 1f) the monomers of the aggregate intersected with the sphere at few points. The application of the MSTM code over particles with few intersecting spheres were tested by comparing them to the results of the Geometric Optics Surface-wave (GOS) approach used in the study by He et al. (2015). The results for the absorption cross section from both the methods were in good agreement with each other, summarized in the supplementary information of this manuscript. Therefore, the MSTM code was used for the case of ‘aggregate and sphere’ representation where few intersecting spheres were present.

The MSTM code and the Lorenz-Mie theory were used to calculate the extinction efficiency Q_{ext} , absorption efficiency Q_{abs} , scattering efficiency Q_{sca} , and the asymmetry parameter g . The asymmetry parameter g is defined as the intensity-weighted average of the cosine of the scattering angle. The single scattering albedo (SSA) was further derived from the ratio of the scattering efficiency (Q_{sca}) to the extinction efficiency (Q_{ext}) as:

$$SSA = \frac{\sigma_{sca}}{\sigma_{ext}}. \quad (5)$$

The measured SSA was calculated using a combination of σ_{sca} measured from nephelometer and extinction coefficient σ_{ext} from the CAPS PM_{cx} 630. The mass absorption cross section of black carbon (MAC_{BC}) is calculated at a wavelength of 660 nm from the ratio of absorption cross section (C_{abs}) and BC mass (m_{BC}) as:

$$MAC_{BC} = \frac{C_{abs}}{m_{BC}} = \frac{C_{abs}}{\frac{1}{6}\pi d^3 \cdot \rho_{BC}}, \quad (6)$$

where ρ_{BC} is the density of black carbon and taken in this study to be 1.8 g cm⁻³ (Park et al., 2004).

The Ångström absorption exponent AAE describes the wavelength dependence of the aerosol light absorption. The AAE was calculated from the best fit of $\sigma_{abs}(\lambda)$ at the wavelengths λ of 470, 520, and 660 nm by:

$$\sigma_{abs}(\lambda = 467, 530, 660 \text{ nm}) = C_o \lambda^{-AAE}, \quad (7)$$

where C_o is a constant. It must be noted that the use of wavelengths λ of 467, 530, and 660 nm for calculations is a result of the availability of the refractive indices nm (Kim et al., 2015) at which the modelled optical properties are calculated.

The absorption coefficient σ_{abs} (unit: Mm⁻¹) is the sum of the absorption cross-section C_{abs_i} (unit: m²) calculated for each available size range:

$$\sigma_{abs} = \sum_{d_i=1}^{d_n} C_{abs}(d_i) \cdot n(d_i), \quad (8)$$

where n is the number concentration of the size range with diameter d_i . The absorption cross-section C_{abs} is calculated from the absorption efficiency Q_{abs} for each size range as:

$$C_{abs}(d_i) = Q_{abs}(d_i) \cdot \pi \frac{d_i^2}{4}. \quad (9)$$

Similarly, the scattering coefficient σ_{sca} and the extinction coefficient σ_{ext} are derived.


2.3.1 Size of the simulated black carbon particles

The optical properties were modelled for monodisperse and polydisperse number size distributions. The definitions for both the size distribution methods are given below:

- Monodisperse size distribution method: the optical properties were modelled for a single particle whose size was the mean diameter $d_{p,N}$ of the number size distribution or the volume mean diameter $d_{p,V}$ derived from the volume size distribution. The monodisperse size distribution method is commonly used in modelling studies of BC where the results are usually focused on single sized particles (e.g., Berry and Percival, 1986; Kahnert and Kanngießer, 2020; Smith and Grainger, 2014; Liu et al., 2018; Liu et al., 2019; Luo et al., 2018a).

- Polydisperse size distribution method: the modelled optical properties are integrated over size according to the particle number size distribution. This ensemble-averaged size method is more relevant to ambient or laboratory studies of BC, where the optical properties are measured for a broad size distribution.

425 From this point forward, monodisperse and polydisperse size distribution methods will be referred to simply as ‘monodisperse method and ‘polydisperse method’, respectively. Figure 2 provides an overview of Sec. 2, including the various experimental cases, morphological representations, and size distribution methods used to model the optical properties.

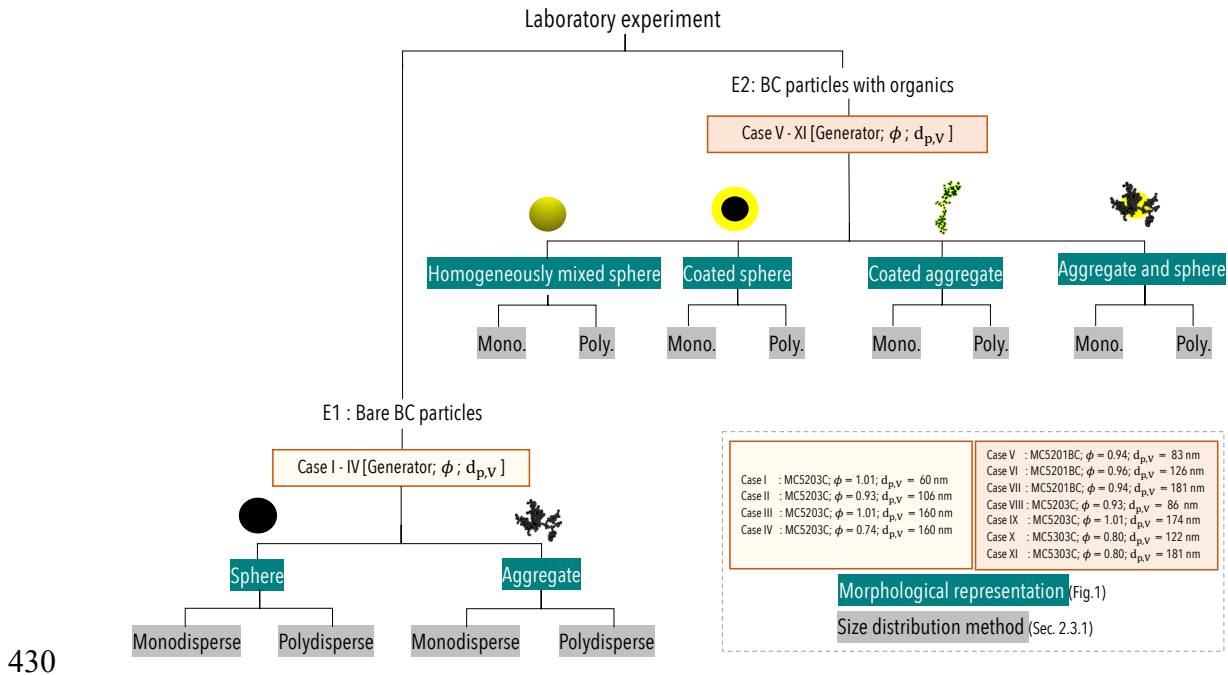


430 **Figure 2.** Schematic overview of the various experimental cases, morphological representations, and size distribution methods used to model the optical properties.

435 3 Results

3.1 Denuding experiment E1 - modelling techniques for bare BC


440 Figure 3 shows the single scattering albedo (SSA), and the Ångström absorption exponent (AAE) measured from denuding experiment E₁ at three heating conditions. All four cases showed that the SSA and AAE decreased as the particles were heated. It is expected that SSA and AAE will decrease as the volatile organic matter in the particles is removed during heating, leaving behind purer BC containing particles. However, in case IV ($d_{p,v} = 160$; $\phi = 0.74$), the heated particles showed relatively little change in their SSA, while almost negligible change in the AAE. It can be explained by the fact that the particles generated in case IV contain a lower amount of volatile organic matter (Mamakos et al., 2013) due to the fact that it was a fuel-lean condition where < 1 . Heating the particle under such fuel-lean conditions can result in relatively insignificant changes in the particle's SSA or AAE. Section 3.1 discusses the results of modelling techniques for pure BC. Because the particles are expected to have comparatively low organic carbon content, measurement results from the experiments with the catalytic stripper at 350 °C will be used for each case.

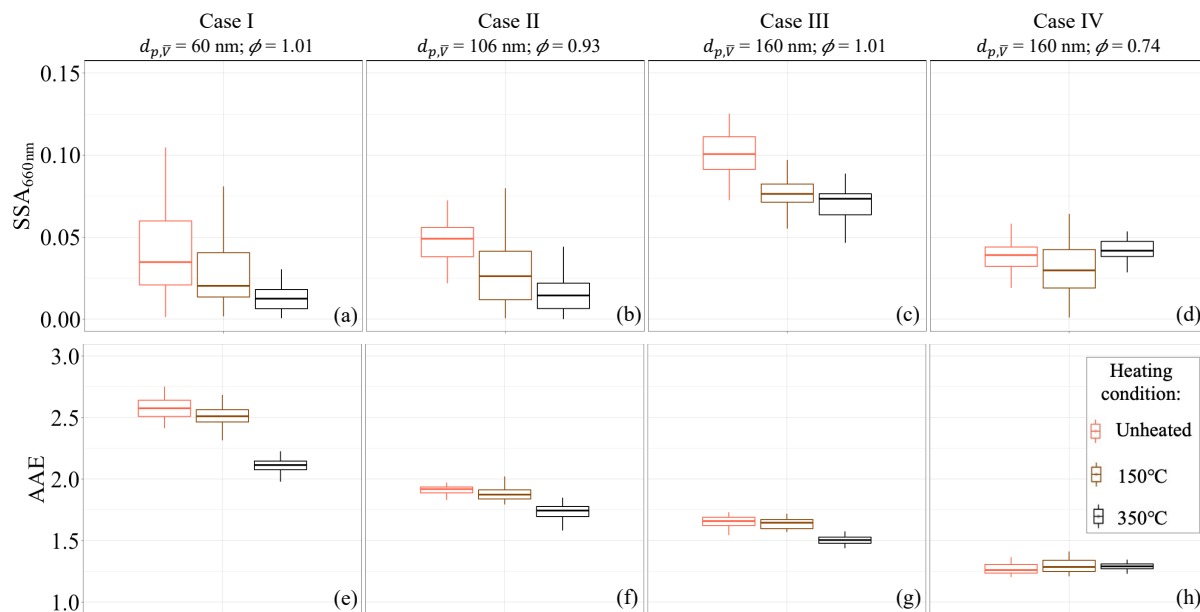

450 **Figure 3.** Measured optical properties for the four cases of experiment E1. Panels (a-d) show single scattering
 455 albedo (SSA), and (e-h) show Ångström absorption exponent (AAE). In each panel, the box-plots are arranged
 for three heating conditions where the BC particles bypass the Catalytic Stripper (unheated) or pass through the
 Catalytic Stripper operated at 150°C or 350°C, respectively. The operating condition is indicated in the legend on
 the top-right of the figure.

3.1.1 Comparison of optical properties of monodisperse bare aggregates with different methods of calculating the primary particle number

460 Figure 4 compares the SSA modelled using the three different methods available for estimating the number of
 primary particles (N_{pp}) in an aggregate. For each case of E1, the three methods were compared using both
 diameters $d_{p,\bar{N}}$ and $d_{p,\bar{V}}$. The modelled SSA from the three methods is compared with the experimentally
 465 measured SSA for each case. For the results of $d_{p,\bar{N}}$, the modelled SSA calculated using the three methods showed
 a variability of up to a factor of two with respect to each other. In comparison, the difference in the SSA increased
 to a factor of 2.8 for the results of $d_{p,\bar{V}}$. Based on the comparison of the modelling results with the measured SSA,
 it was evident that the performance of each method differs depending on particle characteristics (i.e., different for
 each case of E1). As a result, one single method could not be recommended. The method by Sorensen (2011),
 however, was used as the standard method since it involved the fewest assumptions.

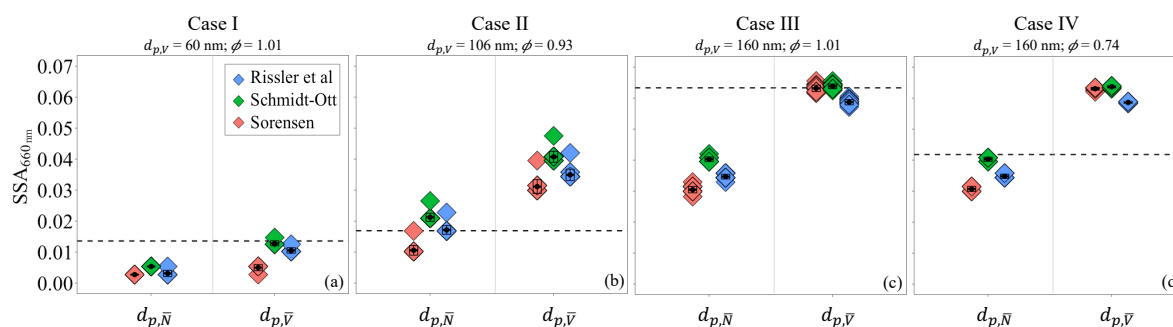

470 **Figure 4.** Modelled single scattering albedo (SSA) of bare BC aggregates using the three methods for calculation
 of the primary particle number (Rissler et al., 2012; Sorensen, 2011; and Schmidt-Ott, 1988). Panels (a-d) show
 the results for the four cases of E1. For each case, the three methods were applied to calculate the N_{pp} using both
 475 the $d_{p,\bar{N}}$ and $d_{p,\bar{V}}$ (x-axis). The mean of the modelled SSA for each method is shown by the black point. The dashed
 line in the panels represents the mean of the experimentally measured SSA.


3.1.2 Optical properties of spherical and fractal bare BC particles using the monodisperse method

480

Figure 5 shows the modelled optical properties for the four cases in experiment E1 using a monodisperse method. In each case, the optical properties of the laboratory-generated particles were modelled assuming both a spherical and an aggregate representation. The modelled SSA (Fig. 5a-d) was mostly in the range of the experimentally measured SSA when using an aggregate representation. When the particles ≤ 100 nm, as in case I or case II, the modelled SSA using the spherical representation also was found in the range of the measured values. However, when the particles are larger than 100 nm using spherical assumption overestimated the modelled SSA by up to a factor of 2 to 5. When using a spherical representation, the SSA may be overestimated due to the short residence time of the particle generated in the lab, where these particles are unlikely to be spherical or compact. Previous studies have also noted an increase in scattering as the particles becomes more compact in shape (Luo et al., 2018b; Yuan et al., 2020; Li et al., 2016).
 Ångström absorption exponent

485

490

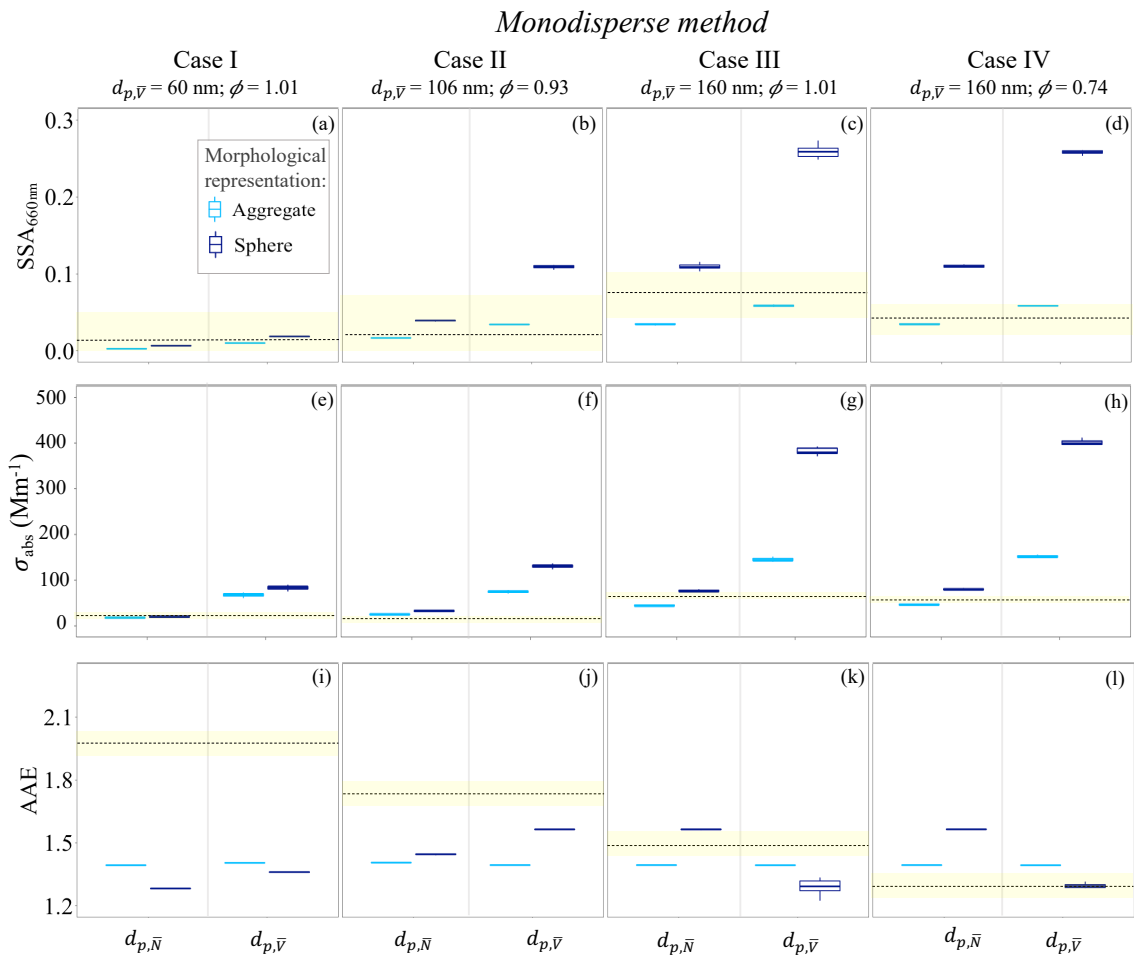

495

Figure 5. Optical properties of bare BC particles modelled using the monodisperse method compared to their measured values. Panels (a-d) show single scattering albedo (SSA), and (e-h) show Ångström absorption exponent (AAE) for the cases I – IV of E1. In each panel/case, the ‘sphere’ and ‘aggregate’ representation for bare BC particles was used as shown in the legend. The SSA and AAE is modelled using both $d_{p,\bar{N}}$ and $d_{p,\bar{V}}$ (X-axis). The shaded yellow area represents the experimentally measured values, with the dashed line being the mean of the measured SSA or AAE. The lower hinge and the upper hinge of the boxplot represent the 25% and 75% quantile of the observations, respectively. The lower whisker is equal to the smallest observation greater than or equal to lower hinge - 1.5*IQR. Similarly, the upper whisker is equal to the largest observation less than or equal to upper hinge + 1.5*IQR. The meaning of these terms is consistent for boxplots through this study.

500

505

The absorption coefficient (σ_{abs}) was modelled more accurately when using an aggregate representation and the mean diameter of the number size distribution $d_{p,\bar{N}}$ (Fig. 5e-h). Similar to the modelled SSA, for cases with smaller particles, there was a minimum difference between the aggregate and spherical representations in the

modelled σ_{abs} . In the case when the σ_{abs} is modelled using a monodisperse size distribution of particles with $d_{p,\bar{v}}$, the results are overestimated by up to a factor of four. It is apparent from this result that assuming the size distribution to be monodisperse may lead to an overestimation of the total light absorption. The assumption that the monodisperse population has a mean diameter of the number size distribution, however, is suggested for better results in the case of a modelled σ_{abs} . The mass absorption cross-section (MAC_{BC}) was calculated for the four cases of the experiment E1. Modelled values of MAC_{BC} ranged from 2.44 to 4.66 m^2/g when using pure BC. Because of the unavailability of an instrument directly measuring the mass in E1, the mass was calculated assuming a density of 1.8 $g\ cm^{-3}$ (Park et al., 2004). In smaller BC particles ($d_{p,\bar{v}}$ of 60 and 106 nm), the modelled MAC_{BC} is larger than the measured MAC_{BC} . This may be because of the reason that the smaller particles contain higher residual organic matter (Zhang et al., 2020), which results in an underestimation of the measured MAC_{BC} when a density of 1.8 $g\ cm^{-3}$ is used. The results for modelled MAC_{BC} is provided in the supplementary material of this manuscript.

The modelled AAE (Fig. 5i-l) was underestimated for particles $\lesssim 100$ nm in both cases I and II, for both spherical and aggregate representations. The results of Zhang et al., 2020, indicate that smaller particles contain a greater amount of organic carbon than larger particles, which makes the removal of all organic carbon with Catalytic Stripper more challenging. There may be residual nonvolatile organic matter in smaller particles, which results in a lower modelled AAE when such particles are assumed to be purely BC. The AAE could not be accurately modelled without information regarding the chemical composition of the BC particles, even if they have been denuded. Liu et al. (2018) found that the modelled AAE for bare BC particles was higher in the case of aggregate morphology than when a spherical structure was assumed. However, the results of the modelled AAE in this study showed a size dependency. It can be observed that the AAE values increase as the particle size increases from case I to case II. The AAE values, however, decrease when the particle size increases further in case IV. Similarly, the comparability of aggregate and spherical results was influenced by the particle size. An explanation of the size-dependence of the AAE is provided in Fig. 12 of Romshoo et al., 2021. It was difficult to suggest a single method of modelling AAE due to size-dependence and residual organics, however the spherical assumption was in better agreement in some cases.


modelling

3.1.3 Optical properties of spherical and fractal bare BC particles using the polydisperse method

Figure 6 shows the optical properties of the four cases in experiment E1 using a polydisperse method. Based on the measured polydisperse number size distribution, the optical properties were modelled using spherical and aggregate representations. For all the four cases of E1, the modelled SSA (Fig. 6a-d) matched more closely to the experimentally measured values when using the aggregate representation. In the polydisperse method, the modelled SSA was overestimated by nearly three times when using a spherical representation for particles larger than 100 nm. The explanation for the overestimation when using spherical assumption was explained in the section 3.1.2.

The modelled σ_{abs} is compared to the experimentally measured σ_{abs} from the AE33 instrument in Fig. 6e-h. It was observed that the modelled σ_{abs} using the aggregate representation was in good agreement with the measurements for all the four cases of the experiment. Comparatively, using the spherical assumption overestimated the modelled σ_{abs} by nearly 1.6 to 3, as a function of particle size. He et al. (2014) showed that the absorption modelled for monodisperse BC particles using an aggregate representation is still 25% less, when compared to measured values. In this study it was demonstrated that this discrepancy between modelled and measured absorption results can be reduced to 10%, when using the polydisperse method, in combination with an aggregate representation of black carbon.

Figure 6(i-l) compares the modelled AAE with the experimentally measured values. As discussed in the previous section, the results from the modelled AAE differ from the measurements as a function of size. With the polydisperse method, both spherical and aggregate representations underestimate the AAE in case I of smaller particles containing a higher level of residual organic matter. Contrary to this, in case IV, when there is anticipated to be less organic matter present, both aggregate and spherical representations model the AAE within the measurement range. For all the optical properties, in general, the discrepancies when using the monodisperse method was comparatively larger to when the polydisperse method was used. The optical properties were also modelled at other wavelengths in the visible range and compared to their respective measured values. The modelled values for other wavelengths also followed similar trends as those shown in Figure 6. The results are shown in the supplementary material to this manuscript.

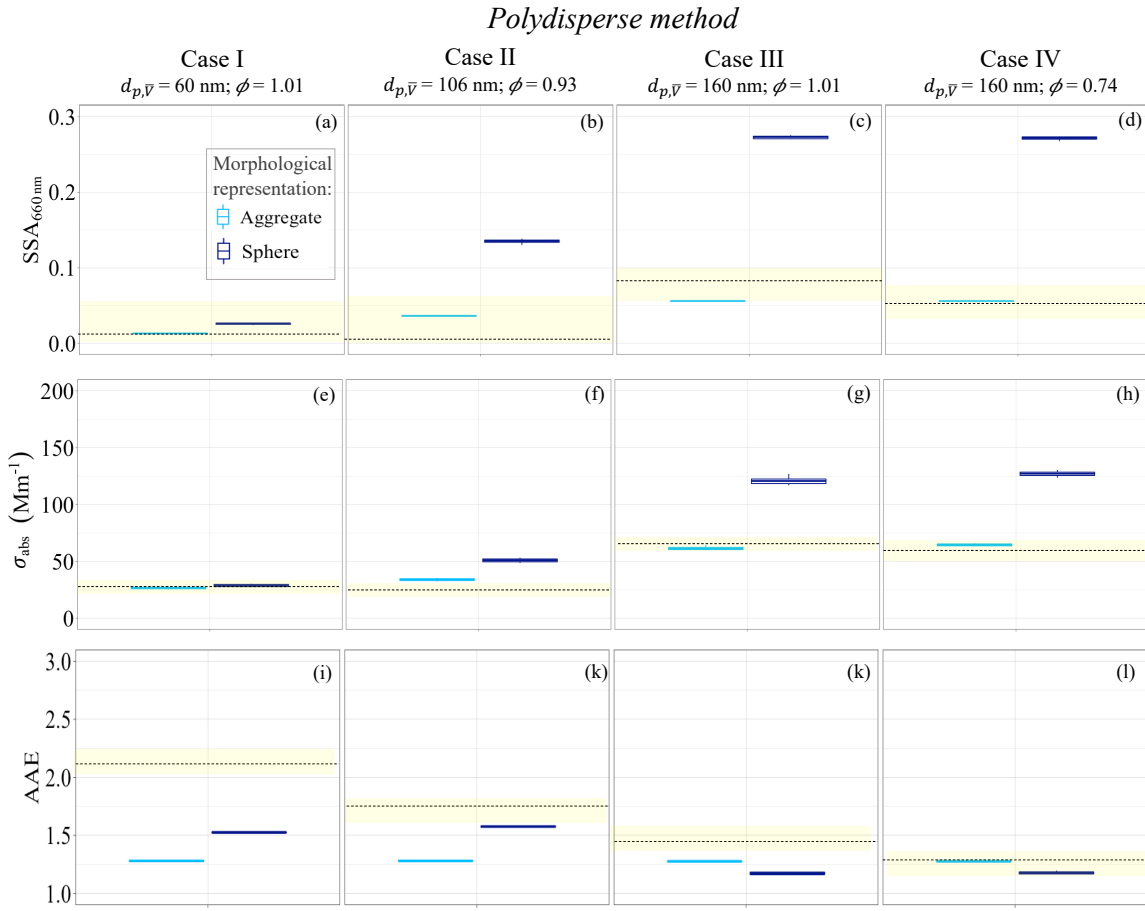

565

Figure 6. Optical properties of bare BC particles modelled using the polydisperse method compared to their measured values. Panels (a-d) show single scattering albedo (SSA), and (e-h) show absorption coefficient (σ_{abs}) for the cases I – IV of E1. In each panel/case, the ‘sphere’ and ‘aggregate’ representation for bare BC particles was used as shown in the legend. The shaded yellow area represents the experimentally measured values, with the dashed line being the mean of the measured SSA or σ_{abs} .

570

3.1 Modelling techniques for bare BC – sensitivity study

3.2.1 Refractive index

575

Figure 7 compares how the optical properties of bare BC particles vary with complex refractive index for two different morphologies. This sensitivity study was performed on case III ($d_{p,\nu} = 160$ nm), where Figures 7a and 7c show the modelled SSA and AAE when the real part of the complex refractive index (m_{re}) was varied between 1.2 to 2. Particle light absorption is generally associated with the imaginary part of the RI. However, our results showed that the absorption also depends on the real part of the RI, especially for spherical particles (Fig. 7c). SSA and AAE were both shown to be more sensitive to the real part of the RI for spherical morphology. As a result, with changes in the real part of the RI, the SSA and AAE of spherical morphology differed by factors of three and two, respectively. The SSA and AAE calculated using the aggregate morphology were less sensitive to changes in the real part of RI, and showed good agreement with the measured results when ranging between 1.6 and 2. Previously, Liu et al. (2018) also reported that the AAE of fresh BC aggregates depends very little on the complex refractive index, but when the aggregate particles are compact or coated, their sensitivity to the imaginary part of the RI increases.

580


585

Figures 7b and 7d show the dependence between optical properties of bare BC particles and the imaginary part of the RI (m_{im}) for different morphologies. For the imaginary part of the RI as well, the SSA and AAE spherical calculated with the spherical morphology were more sensitive. AAE varied by a factor of three with changes in the imaginary part of the RI, as is expected. There was an interesting observation that the SSA decreased as the imaginary part of the RI was increased up to 0.5, after which there was an increase in the SSA (Fig. 7b). This behavior was observed only in the case of spherical particles. In comparison, SSA calculated with an aggregate representation decreased with the imaginary part of the RI, and it was in good agreement with the measured results

590

595 when the imaginary part of the RI was between 0.3 and 1. He et al., 2015 also showed that the optical properties of BC aggregates can vary up to a factor of 1.6 due to changes in the refractive indices, which is in agreement with the results in this study. It is interesting to see that the dependency of the particle light absorption over the complex refractive index varies depending on whether spherical or aggregate representations are used.

600

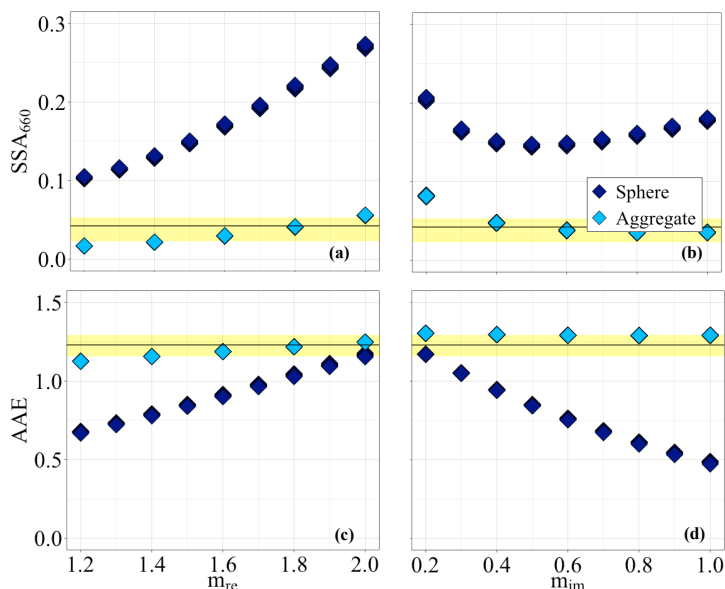

605 **Figure 7.** Optical properties of bare BC particles studied as a function of real part and imaginary part of the complex refractive index (m_{re} and m_{im}). The results are shown for SSA (a, b) and AAE (c, d) for the case III ($d_{p,VED} = 160$ nm) of E1 using both ‘sphere’ and ‘aggregate’ representation. The yellow area in the figure represents the experimentally measured values, and the dashed line is the mean measured value for each case. Panels (a, c) are defined by fixed imaginary parts, while panels (b, d) are defined by fixed real parts according to Table B1.


610

3.2.2 Fractal dimension

615 Figure 8 shows the dependency of the optical properties towards fractal dimension (D_f). As discussed in section 2.1, black carbon fractal aggregate can have a wide range of D_f depending on the source of combustion, chemistry during formation, and the atmospheric conditions. To determine how sensitive the SSA and AAE are, the fractal dimension was varied between 1.5 and 2.8 for four cases of experiment E1. In both of the first two cases, when the particle size does not exceed 100 nm, the modelled SSA is the least sensitive to changes in the D_f . When the BC particle is small and rather fresh, the change in the D_f has relatively less significance.

620 The results of previous studies also indicate that in particles with a mobility diameter less than 100 nm, the effect of fractal dimension on SSA is negligible (Fig. 6e from Romshoo et al., 2021). When particles were larger than 100 nm, the modelled SSA showed variability of up to 100% for the polydisperse method. Further, the sensitivity of the AAE (Fig 8e-h) towards the fractal dimension was very less, especially in smaller particles, for both monodisperse and polydisperse size method. The dependence of the AAE over the D_f as a function of particle size can be seen in detail in Figure 12 of Romshoo et al., 2021. For this study, it was found that the modelled SSA agreed well with the measured values when the fractal dimension ranges between 1.7 and 1.9, which are characteristic values for non-aged BC (Gwaze et al., 2006) and may be applicable to mini-CAST generators.

630

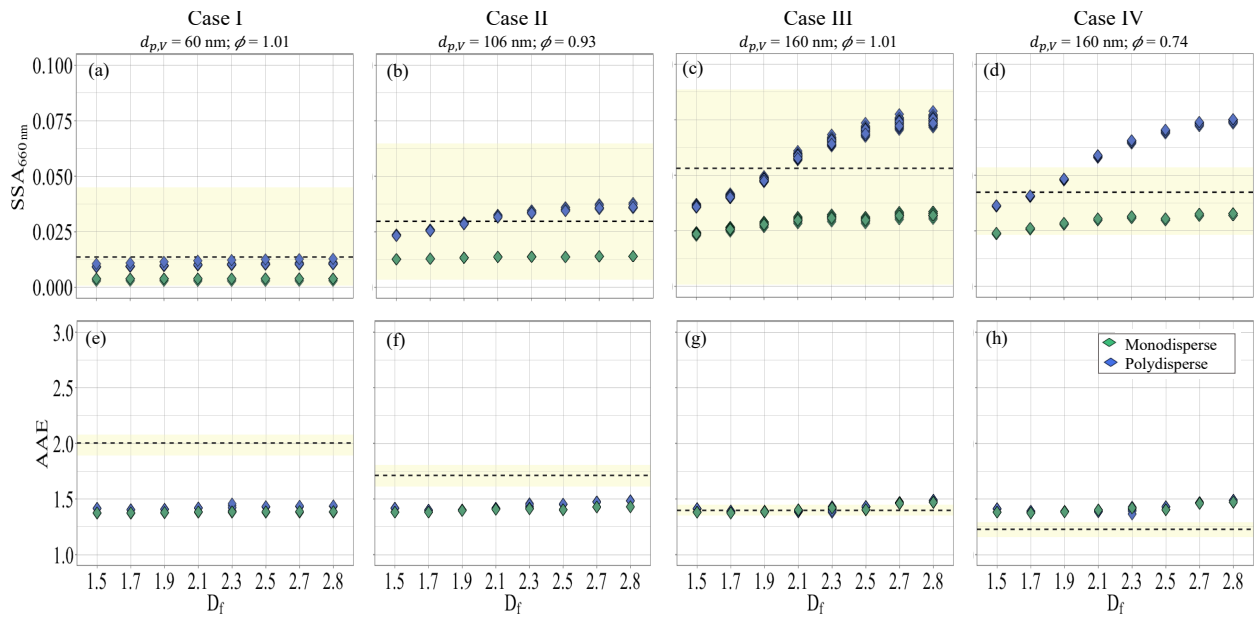


635 **Figure 8.** Sensitivity analysis of the modelled SSA and AEE using the ‘aggregate’ representation. The fractal dimension D_f was varied between 1.5 to 2.8 for cases I – IV of E1, modelling the SSA (a to d) and AEE (e to f). The experimentally measured values are highlighted by the yellow area in the figure, and the dashed line represents the mean measured SSA or AAE for each case.

640 3.2.3 Primary particle radius

Figure 9 shows the how sensitive the optical properties are towards the primary particle size (a_{pp}) for monodisperse and polydisperse size method. For each case of experiment E1, the a_{pp} was varied between the range of 5 to 28. Earlier studies have reported that the optical cross-sections are not sensitive towards the primary particle size (He et al., 2014). However, the particle light scattering showed a dependence on the a_{pp} , as the SSA varied by a factor of three as a function of the a_{pp} (Fig. 9 b-d). When the SSA is modelled using the polydisperse approach, the dependence is more pronounced and increases to a factor of six. It was shown that when the a_{pp} is between 10 and 14 nm, the modelled SSA is in good agreement with the measured SSA for all cases. It is therefore recommended that for future studies a_{pp} between the range of 10 and 15 nm be used . When compared the dependency of modelled AAE towards D_f (Fig. 8e-h), the modelled AAE was observed to be more sensitive to a_{pp} (Fig. 9e-h). In the case of AAE, the monodisperse and the polydisperse method showed similar dependency towards a_{pp} . With the exception of case III, where larger particles and low residual organics are present, the optical model was not able to reproduce the measured results of the AAE. A discussion of possible reasons for discrepancies in modelled AAE was provided in Section 3.1.2.

655

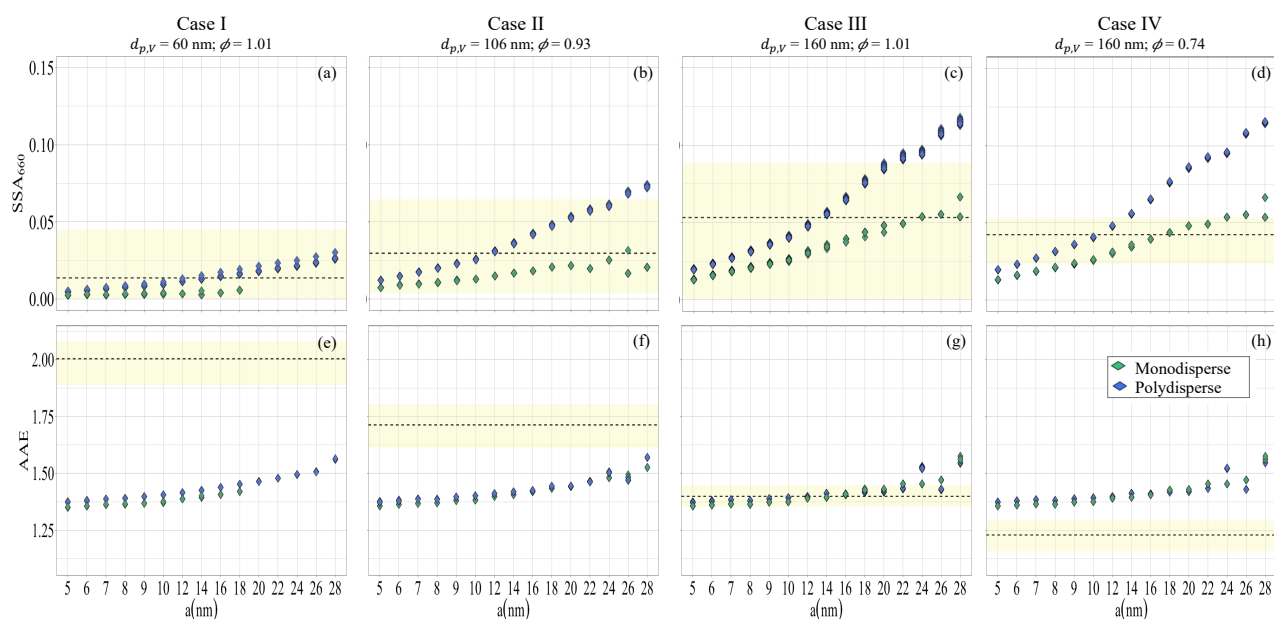

660 **Figure 9.** Sensitivity analysis of the modelled SSA and AEE using the ‘aggregate’ representation. The primary
 665 particle radius a_{pp} was varied between 5 to 28 nm for cases I – IV of E1, modelling the SSA (a to d) and AEE (e
 to f). The experimentally measured values are highlighted by the yellow area in the figure, and the dashed line
 represents the mean measured SSA or AEE for each case. There are missing points in (a) and (e) of the
 monodisperse method results, which indicates that the particles are too small to form an aggregate with $a_{pp} > 18$
 nm.

3.3 Experiment E2 - modelling techniques for BC with organics


670 This section discusses the modelled optical properties of BC particles containing organics (experiment E2),
 comparing various morphological representations and size methods used for modelling. Figure 10 shows the
 results of the modelled SSA for the different cases of the mini-CAST generators used in experiment E2 (Table 1).
 For each case of E2, the SSA was modelled using four representations of BC particles with organics: ‘coated
 sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. Further, the SSA is
 modelled for both polydisperse and monodisperse methods.

675 In the case of mini-CAST 5201BC and 5303C (Fig. 10a, 10d, 10c, and 10f), the SSA modelled using both the
 aggregate representations (‘coated aggregate’, ‘aggregate and sphere’) agreed well with the measurements for all
 the size methods. However, for one of the cases of mini-CAST 5203C (Fig. 12e), the results of the aggregate
 representations underestimated the SSA. It was noted that the sensitivity of the modelled SSA to the various
 morphological representations become comparatively less prominent in the case of smaller particle size (Fig. 10b,
 680 $d_{p,\bar{v}} = 86$ nm, for mini-CAST 5203C). This case is similar to the outcome of smaller pure BC particles in
 experiment E1, where the modelled SSA did not depend on the fractal dimension (Fig. 8a).

685 In all the cases of E2, using the monodisperse method (with $d_{p,\bar{v}}$) and polydisperse method for spherical
 representations (‘coated sphere’, ‘homogeneously mixed sphere’) overestimated the SSA by up to a factor of
 three. Overall, the SSA modelled using the ‘coated aggregate’ representation matched the measured values most
 closely, with a maximum deviation of 20% in certain cases. In the theoretical study by Liu et al. (2018), where
 absorption cross-section of coated BC was modelled, it was shown that the dependence on the morphology was
 size-dependent and wavelength-dependent. There was a similar size-dependence between the morphology and the
 modelled SSA, for e.g., for the two cases of mini-CAST 5203C (Fig. 10b, 10e). When the particle is smaller in
 690 size (86 nm), the SSA calculated for the ‘sphere and aggregate’ representation using the monodisperse method is
 higher than that for the polydisperse method (Fig. 10b). In contrast, when the particle is larger (174 nm), the SSA
 calculated from the polydisperse method is larger than the one calculated using the monodisperse method (Fig.
 10b).


695 Interestingly, the SSA calculated using the ‘aggregate and sphere’ representation showed comparable results to
 that calculated using the ‘coated aggregate’ representation. Although laboratory-generated black carbon is less
 likely to resemble the ‘aggregate and sphere’ depiction since the organic mass is evenly distributed throughout
 the BC aggregate. This representation usually depicts an aged black carbon particle where the BC aggregate is
 entirely encapsulated in a sphere of coating. Therefore, it is expected that using it for representing laboratory-
 generated black carbon would create a lensing effect, simulating higher absorption. However, because the coating

700 accounted for less than 55% of the total particle volume, in none of our cases the coating encapsulated the aggregate. When the volume of coating is larger in laboratory-generated black carbon, using the ‘aggregate and sphere’ representation may overestimate the absorption because of the lensing effect.

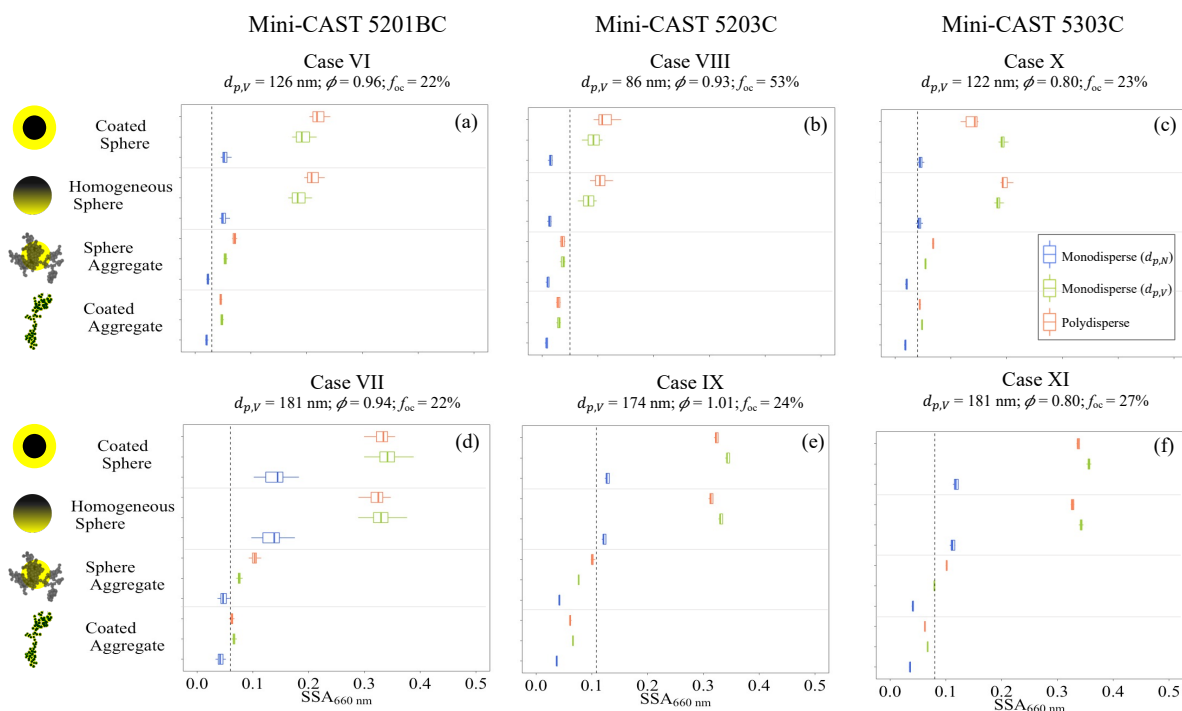


705 **Figure 10.** Modelled SSA at a wavelength of 660 nm from various cases of mini-CAST generators in E2 summarized in Table 1. The results are shown for: mini-CAST 5201BC $d_{p,\bar{v}} = 126$ nm (a); mini-CAST 5201BC $d_{p,\bar{v}} = 181$ nm (d); mini-CAST 5203C $d_{p,\bar{v}} = 86$ nm (b); mini-CAST 5203C $d_{p,\bar{v}} = 174$ nm (e); mini-CAST 5303C $d_{p,\bar{v}} = 122$ nm (c); mini-CAST 5303C $d_{p,\bar{v}} = 181$ nm (f). In each panel, the SSA is modelled using four coated BC representations ‘coated sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. Further, for each representation the SSA is modelled using monodisperse and polydisperse method. The mean of the experimentally measured SSA is shown by the black dashed line in each panel.

710 Figure 11 shows the modelled asymmetry parameter g for three cases of mini-CAST 5201BC. For each case, the g was modelled using the four representations of coated BC i.e., ‘coated sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. Further in each of the representation, the g was calculated for monodisperse method. It was observed that the value of g increased as the coated BC particle grow in size, indicating more forward scattering for larger BC particles (Fig. 11a to 11c). However, the rate of increase of forward scattering with growing BC particles was more evident in the aggregate representations. Due to lack of experimental measurement of g , the modelled results could not be validated with the measured findings. There have been previous studies estimating asymmetry parameter g from nephelometers, however, this calculation is very uncertain. For example, the simple parameterizations using the hemispheric backscatter fraction (Andrews et al., 2006) were derived for ambient and more spherical aerosol particles. It is not clear how this parameterization works for BC aerosols with low single scattering and fractal morphology. The limitations of the Aurora 4000 nephelometer (Müller et al., 2012) used in this study is that the polar function is measured in up to 18 angular sectors in forward scattering direction, whereas the real resolution is smaller, since the shutter function is not steep enough. Furthermore the hemispheric backscattering is just represented as one large sector (scattering angle 90 to 180°). There is still a need to examine Aurora4000 in more depth to determine an asymmetry parameter for fractal soot particles.

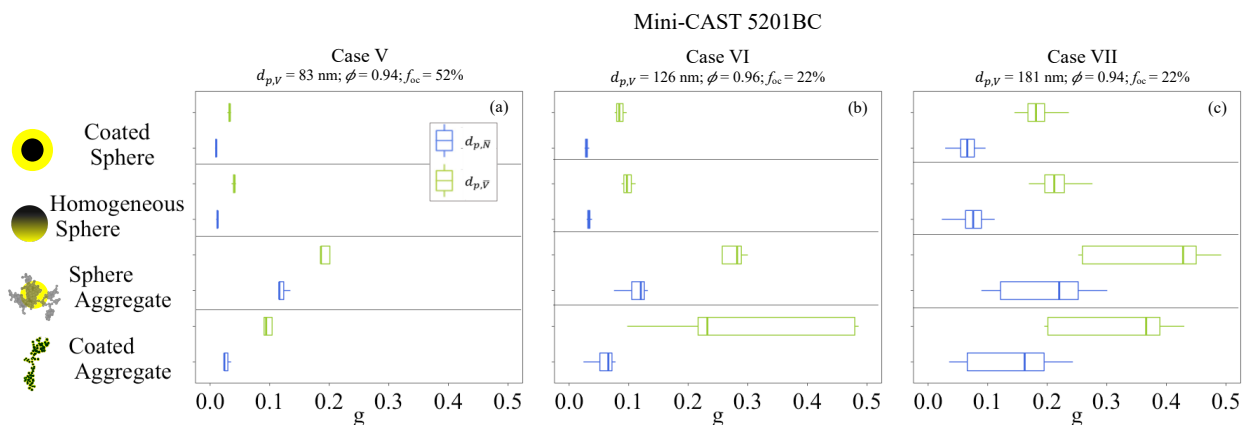

730 **Figure 11.** The asymmetry parameter g is modelled using the four representations of coated BC i.e., ‘coated sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. For each representation, the g is modelled using monodisperse particles (with $d_{p,\bar{N}}$ and $d_{p,\bar{V}}$). The results are shown for E2 cases V – VII: mini-CAST 5201BC $d_{p,\bar{V}} = 83$ nm (a); mini-CAST 5201BC $d_{p,\bar{V}} = 126$ nm (b); and mini-CAST 5201BC $d_{p,\bar{V}} = 181$ nm (c).

735 Figure 12 shows the BC mass absorption cross-sections (MAC_{BC}) modelled for three different cases of mini-CAST 5201BC ($d_{p,\bar{V}} = 83, 126,$ and 181 nm). In each case, MAC_{BC} is modelled using the four representations of coated BC i.e., ‘coated sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. Forestieri et al. (2018) found that the spherical assumption used in the Lorentz-Mie theory underestimates the modelled mass absorption cross-sections (MAC_{BC}) for bare flame-generated black carbon. Figure 12a ($d_{p,\bar{V}} = 83$ nm, and $f_{oc} = 64\%$) shows that the MAC_{BC} calculated using spherical and aggregate representations underestimated the MAC_{BC} , consistent with Forestieri et al. (2018). However, for larger $d_{p,\bar{V}}$, the spherical representations overestimated the MAC_{BC} (Fig. 14b and 14c). In general, for larger particles, the modelled MAC_{BC} and measured MAC_{BC} were in better agreement when using ‘coated aggregate’ representation.

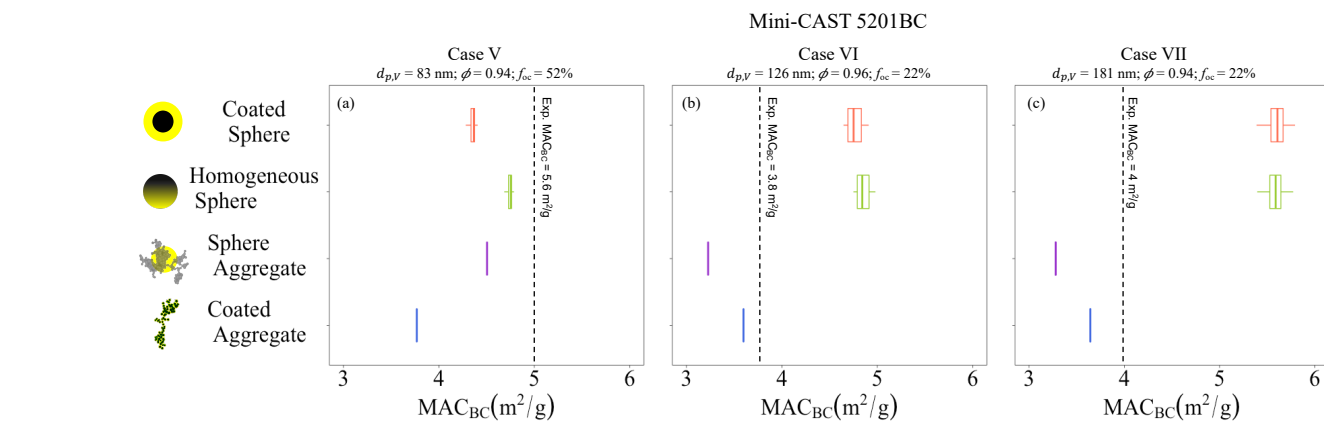

745 **Figure 12.** The BC mass absorption cross-section (MAC_{BC}) is modelled using the four representations of coated BC i.e., ‘coated sphere’, ‘homogeneously mixed sphere’, ‘coated aggregate’, and ‘aggregate and sphere’. The results are shown E2 cases V – VII: mini-CAST 5201BC $d_{p,\bar{V}} = 83$ nm (a); mini-CAST 5201BC $d_{p,\bar{V}} = 126$ nm (b); and mini-CAST 5203C $d_{p,\bar{V}} = 181$ nm (c).

4 Conclusions

750 This work investigates the various modelling techniques for the optical properties of black carbon; and based on the results, recommendations for representing the morphology and size of black carbon are provided to the scientific community. The main goal of this study is to validate the different modelling approaches; therefore, the modelled optical properties were compared to measurements from laboratory-generated black carbon. The study is divided into two parts: (1) modelling techniques for bare BC – experiment E1; and (2) modelling techniques for BC with organics – experiment E2.

755 The laboratory experiment E1 was designed in such a way as to provide us with data to study modelling approaches for bare BC particles. The aerosol generated with a Catalytic Stripper is operated at 350°C is expected

to have the lowest organic content. Therefore, this condition was considered most suitable for modelling the optical properties of bare BC. For modelling the optical properties of bare BC, the two morphological representations 'sphere' and 'aggregate' were compared. Further for each morphological representation of bare BC, the optical properties were modelled using two size methods: for monodisperse particles (monodisperse method), and for polydisperse particles (polydisperse method).

For both the size methods, the modelled SSA was mostly in the range of the experimentally measured SSA when using an aggregate representation. When the particles ≤ 100 nm, the modelled SSA using the spherical representation also was found in the range of the measured values. However, using a spherical assumption overestimated the modelled SSA by a factor of two to five when the particles are larger than 100 nm. Using a spherical assumption may result in an overestimation of the SSA since the particles are unlikely to be spherical or compact due to their short residence time in the lab. It has also been noted in previous studies that scattering increases as shape of particles becomes more compact (Luo et al., 2018b; Yuan et al., 2020; Li et al., 2016). It was observed that the modelled σ_{abs} calculated using the aggregate representation was also in good agreement with the measurements for all four cases of the experiment. On the contrary, using the spherical assumption overestimated the modelled σ_{abs} by nearly 1.6 to 3, as a function of particle size. Overall, in the case of polydisperse particles, the modelled σ_{abs} and SSA using the aggregate representation were in excellent agreement with the measured optical properties. Moreover, it was shown that the discrepancies between modelled and laboratory measured absorption can be reduced to 10%, when the combination of polydisperse method and an aggregate representation of BC is used. These results indicate that the mini-CAST generated black carbon particles are indeed fractal-like as also shown by TEM images (Ess et al., 2021; Mamakos et al., 2013) and aggregate representation of BC is recommended to be used when modelling their σ_{abs} and SSA.

However, it was difficult to suggest a single method for modelling AAE due to size-dependence and residual organics, although the spherical assumption was in better agreement in some cases. It was observed that the AAE values increased as the particle size increased till 100 nm. The AAE values, however, decreased as the particle size increased beyond 100 nm. The particle size also impacted the comparability of aggregates and spheres. In the case that the smaller particles were immature solid black carbon with embedded organic content, the assumption that they are bare may account for the underestimation of modelled AAE in comparison to measured values. For further studies it would be useful to have EC/TC measurements in such an experiment in order to determine the absolute uncertainty in terms of the residual organic matter when the Stripper is used with optical instruments.

After studying the various size and morphological representations for modelling bare BC particles, the assumptions of various modelling parameters (for e.g., m_{re} , m_{im} , D_f , and a_{pp}) were evaluated. The sensitivity of the modelled optical properties (SSA and AAE) to the real and the imaginary part of the complex refractive index (m_{re} and m_{im}) was studied. Light absorption by particles is commonly associated with the imaginary part of the RI, but in our study, we found that the absorption also depends on the real part of the RI. Both SSA and AAE showed a greater sensitivity to the real part of the RI for spherical morphology. Consequently, with changes in the real part of the RI, the SSA and AAE of spherical morphology differed by a factor of three and two, respectively. Depending on whether spherical representations or aggregate representations are used, we can observe different relationships between particle light absorption and complex refractive index. The modelled optical properties of BC were well aligned with measured values when using the aggregate morphological representation and assumptions of refractive indices as: (i) m_{re} between 1.6 to 2; and (ii) m_{imag} between 0.50 to 1.

In certain cases, using aggregate morphological representations of black carbon results in more accurate optical properties, so we investigated their sensitivity to two key aggregate parameters, the fractal dimension D_f and primary particle radius a_{pp} . It was found that the modelled SSA was least sensitive to changes in fractal dimension when particle size was below 100 nm. The changes in fractal dimension were also less dependent on particle scattering calculated using the monodisperse method. As a consequence, when the BC particle is small and rather fresh, the change in the fractal dimension is of relatively less significance. In contrast, SSA modelled using the polydisperse method showed variability of up to 100% for particles larger than 100 nm. For both monodisperse and polydisperse size methods, the AAE showed a low sensitivity to the fractal dimension, particularly for smaller particles. Previous studies have indicated that optical cross-sections are not affected by the size of the primary particle (He et al., 2014). There was, however, a significant relationship between particle light scattering and particle size, with the SSA increasing by a factor of three as the particle size increased. In the polydisperse method, the dependence of the SSA is more apparent and increases by a factor of six. It was found that the modelled and experimentally measured optical properties of BC agree well when: (i) D_f from 1.7 to 1.9, and (ii) a_{pp} between 10 to 14 nm.

In order to study the modelling approaches for BC particles containing organics, three kinds of mini-CAST black carbon generators were used to produce black carbon particles with organic carbon content between 35 - 65%. Four kinds of morphological representations for coated BC (two each for spherical and aggregate) were compared using both monodisperse and polydisperse particles. In the most of the results, the modelled SSA using the 'coated aggregate' and 'aggregate and sphere' representation was in good agreement with the measured SSA. Though it is less likely that laboratory-generated black carbon will resemble the 'aggregate and sphere'


representation, it can still be used when the coating only makes up a small part of the total particle volume. Therefore, our results show that for coated black carbon particles as well, the aggregate morphological representation gives more accurate modelled SSA. Furthermore, when the polydisperse method is used, accuracy can be increased by up to two times. Similar to results for pure black carbon, the modelled AAE showed larger discrepancies, but matched the measured house in some instances when it was modelled using a spherical assumption. For MAC_{BC} as well, both spherical and aggregate representation underestimated the MAC_{BC} for smaller particles, though, the homogenous sphere representation was comparatively closer to the measured MAC_{BC} . For particles larger than 100 nm, the MAC_{BC} was modelled more accurately when using the aggregate representation.

In general, the aggregate representation performed well for modelling the σ_{abs} , SSA, and MAC_{BC} for laboratory generated BC particles with f_{oc} less than 53% and $d_{p,V}$ larger than 100 nm. Whereas, the spherical representation performed well for modelling the AAE in larger particles ($d_{p,V} > 100$ nm). However, for smaller particles, using both aggregate or spherical representation results in a larger discrepancy when modelling the AAE or MAC_{BC} . The discrepancy was more pronounced in the cases of experiments E1, where the EC/TC analysis was not conducted. Therefore, the discrepancy could be a result of the presence of organic matter in smaller particles even after being heated by the Catalytic Stripper. The presence of larger percentage of organic matter in smaller particles is also observed from the results of the EC/TC analysis of experiment E2 where the largest f_{oc} was observed in case with the smallest $d_{p,V}$ of 86 nm ($d_{p,N} = 48$ nm). The smaller particles were also found to be less sensitive to input parameters such as fractal dimension and primary particle size, making identification of the source of the uncertainty more difficult. Together, these results emphasize the importance of morphology and size representation in accurately modelling the optical properties of BC particles, and the need for further investigation to achieve an accurate model.

This study provides experimental support for previous theoretical work based on BC as fractal aggregates (e.g., Kahnert, 2010; Aidaichi et al., 2010; Kahnert and Kanngießer, 2020; Smith and Grainger, 2014; Romshoo et al., 2021; Liu et al., 2019; Luo et al., 2018a). Analysis of various modelling methods for BC particles showed that the selection of an appropriate size representation (polydisperse size method) and an appropriate morphological representation (aggregate morphology) could result in a more realistic prediction of σ_{abs} , SSA, and MAC_{BC} . Although optical simulations are time-consuming, it is suggested to use polydisperse size method for future modelling studies of BC fractal aggregates. The findings of this study are a good example of how parallel measurements and modelling research can reduce the uncertainties in optical properties of BC. It is also important to note that aerosols in the atmosphere contain a mixture of fresh, semi-aged, and aged aerosols (Fu et al., 2012) that will have either fractal or non-fractal morphology, depending on various factors. This study investigated the optical properties of BC particles with coatings up to 53%. It is recommended that further investigations be conducted on ambient or laboratory BC particles with coatings that exceed 50% to determine how the aggregate representation performs when particles are more aged. The long-term goal should be to incorporate the findings of such studies for black carbon parametrization scheme development and application to global climate models.

Appendix A: Experimental setup and instrumentation

Figure A1 shows an overview of the experimental setup used in experiment E1: measurements of thermally denuded nascent black carbon particles. The pre-treated particles were divided into four aerosol flows (i.e. sampling lines) and delivered to the different instruments. One part of the aerosol flow passed through a Mobility Particle Size Spectrometer (MPSS, TROPOS design; sample flow rate of 1 lpm; Wiedensohler et al., 2012; 2018a) which measured the particle number size distribution of the black carbon particles. Another part of the aerosol flow was guided to a Cavity Attenuated Phase Shift Extinction monitor (CAPS PM_{ex} 630, Aerodyne Res. Inc., USA; flow rate of 1 lpm) which measured the light extinction coefficient, σ_{ext} at wavelength of 630 nm. The other part of the aerosol flow entered an aethalometer (AE33 Aethalometer, Magee Scientific, Berkeley, USA; flow rate of 5 lpm) which monitored the equivalent black carbon concentration at seven wavelengths between 370 and 950 nm. The equivalent black carbon concentration was converted into the aerosol light absorption coefficient (σ_{abs}), as described in Müller et al. (2011). A further part of the aerosols was passed through a nephelometer (Aurora 4000, Ecotech Pvt Ltd, Melbourne, Australia) and a multi-angle absorption photometer (MAAP, type 5012, Thermo Scientific, Franklin, MA) running in tandem configuration at a flow rate of 10 lpm that measured the particle light scattering coefficient, σ_{scat} , and the absorption coefficients, σ_{abs} , respectively. The σ_{abs} obtained from the AE33 was corrected by a factor of 0.95 to 1.3 to match the σ_{abs} from MAAP. The σ_{scat} measured from the nephelometer was also corrected for truncation errors due to the finite viewing angle of the detector, given in detail by Müller et al. (2009).

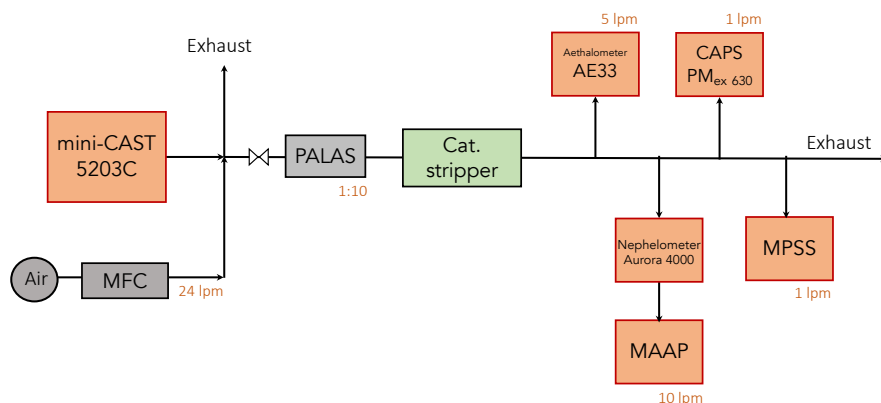

875

Figure A1. Experimental setup of E1: generation and measurements of denuded BC particles. The sootgenerator mini-CAST 5203C was used to generate the particles under different operating conditions given in Table 1. A mass flow controller (MFC) was used to mix the aerosols generated from mini-CAST 5203C with air, and then a Catalytic Stripper at 350°C was used to remove the volatile contents. The heated black carbon particles were divided into four aerosol flows and delivered to instruments. The different instruments measuring the physical and optical properties are Mobility Particle Size Spectrometer (MPSS), Cavity Attenuated Phase Shift Extinction monitor (CAPS PM_{ex 630}), aethalometer (AE33), nephelometer, and multi-angle absorption photometer (MAAP).

880


885

Figure A2 shows a schematic diagram of the experimental setup used in E2: measurements of untreated nascent black carbon particles. The aerosol from the mini-CAST using a dilution system (PALAS VKL 10, PALAS, Karlsruhe, Germany) was fed into the mixing chamber and delivered to various measurement systems through several sampling ports. The aerosol from the first sampling port flowed at 6 lpm into a nephelometer (Aurora 4000) and a multi-angle absorption photometer (MAAP, type 5012) arranged in tandem configuration. The aerosol from a second port was guided to an Aethalometer (AE33; flow rate of 8 lpm), and three Cavity Attenuated Phase Shift Extinction monitor: CAPS PM_{ex 450}, CAPS PM_{ex 530}, and CAPS PM_{ex 630} (flow rate of 8 lpm), which measured at wavelengths of 450, 530, and 630 nm, respectively. Subsequently, the aerosol flowed into the MPSS (TROPOS design; flow rate of 1 lpm) and the Cavity Attenuated Phase Shift single scatter albedo monitor (CAPS PM_{SSA 630}, Aerodyne Res. Inc., USA; flow rate of 1 lpm) from the third and fourth sampling port, respectively. The CAPS PM_{SSA 630} measured the scattering coefficient, σ_{sca} , and the extinction coefficient, σ_{ext} at a wavelength of 630 nm. Through the fourth port, the aerosol mass concentration was determined by using the Tapered Element Oscillating Microbalance (TEOM 1405, Thermo Scientific, Franklin, MA; flow rate of 3 lpm). The aerosol from the last port was sampled on quartz fibre filters at a flow rate of 2-3 lpm and subsequently analysed by a EC/OC analyser (Sunset Laboratory Inc., Hillsborough, USA). The loaded quartz fibre filters were analysed at different laboratories, including METAS (Switzerland) and NPL (UK). For a better overview, the details of the instrumentation used in E1 and E2 laboratory experiments are summarized in Table A1.

890

895

900

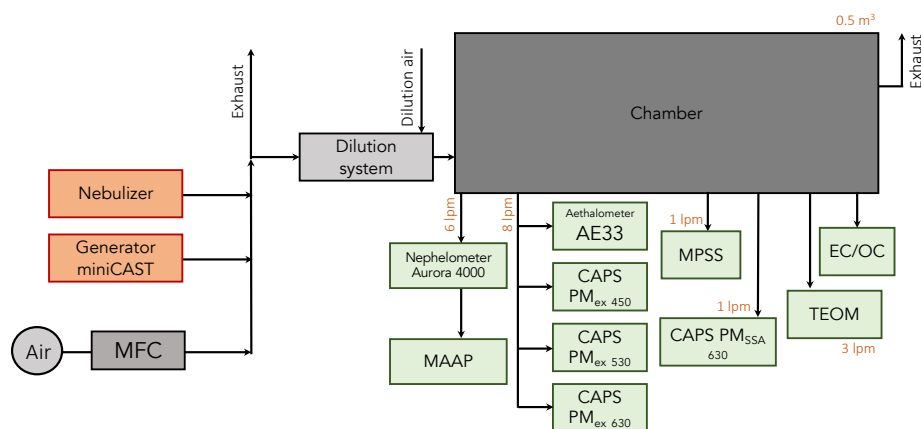

905

Figure A2. Experimental setup of E2: generation and measurements of BC particles with organics. The black carbon particles are generated using different mini-CAST generators operated under flow settings given in Table

1. Mini-CAST sootgenerators produce aerosols that are mixed with air from the mass flow controller (MFC). After passing through a dilution system, the aerosols enter the mixing chamber. The black carbon particles are delivered to various instruments measuring physical, optical, and chemical properties. The instruments used in this experiment are the aethalometer (AE33), nephelometer, multi-angle absorption photometer (MAAP), Cavity Attenuated Phase Shift Extinction monitor (CAPS PM_{ex 630}), a Cavity Attenuated Phase Shift Extinction monitor (CAPS PM_{ex 530}), Cavity Attenuated Phase Shift Extinction monitor (CAPS PM_{ex 450}), Cavity Attenuated Phase Shift single scatter albedo monitor (CAPS PM_{SSA 630}), Mobility Particle Size Spectrometer (MPSS), and Tapered Element Oscillating Microbalance (TEOM).

915 **Table A1.** Details of the instruments used in E1 and E2.

Instrument	Manufacturer	Function or measured variable	Experiment
mini-CAST 5203 Type C	Jing	Soot generator	E1, E2
mini-CAST 5201 Type BC	Jing	Soot generator	E2
mini-CAST 5303 Type C	Jing	Soot generator	E2
Mobility Particle Size Spectrometer (MPSS)	TROPOS	Particle number size distribution (Mobility diameter)	E1, E2
Cavity Attenuation Phase Shift Spectrometer (CAPS PM _{ex 630})	Aerodyne Research	Particle light extinction coefficients (σ_{ext}) in Mm ⁻¹ at $\lambda = 630$ nm	E1, E2
Cavity Attenuation Phase Shift Spectrometer (CAPS PM _{ex 530})	Aerodyne Research	Particle light extinction coefficients (σ_{ext}) in Mm ⁻¹ at $\lambda = 530$ nm	E2
Cavity Attenuation Phase Shift Spectrometer (CAPS PM _{ex 450})	Aerodyne Research	Particle light extinction coefficients (σ_{ext}) in Mm ⁻¹ at $\lambda = 450$ nm	E2
Cavity Attenuation Phase Shift Spectrometer (CAPS PM _{SSA 630})	Aerodyne Research	Particle light scattering and extinction coefficients at Mm ⁻¹ at $\lambda = 630$ nm	E2
Aethalometer AE33	Magee Scientific	Particle light absorption coefficients (σ_{abs}) in Mm ⁻¹ at seven wavelength, $\lambda = 370, 470, 520, 590, 660, 880,$ and 950 nm	E1, E2
Multi-angle absorption photometer (MAAP)	Thermo-Scientific	Particle light absorption coefficients (σ_{abs}) in Mm ⁻¹ at 637 nm	E1, E2
Tapered Element Oscillating Microbalance (TEOM)	Thermo-Scientific	Particle mass concentration	E2
Nephelometer	Aurora	Particle light scattering coefficients (σ_{scat}) in Mm ⁻¹ at 635 nm	E1, E2

920

Appendix B: Details about modelling

925 The first method for calculation of number of primary particles per aggregate (N_{pp}) from the $d_{p,\bar{N}}$ (Rissler et al. 2012; Bladh et al. 2001) is given as:

$$N_{pp}(d_{p,\bar{N}}) = \frac{m_{agg}(d_{p,\bar{N}})}{m_{pp}(d_{p,\bar{N}})} = \frac{\frac{d_{p,\bar{N}}^3}{2} \cdot \rho_{eff}}{R_{pp}^3 \cdot \rho_{pp}}, \quad (B1)$$

930 where the mass of the aggregate m_{agg} was assumed to have an effective density ρ_{eff} (g/cm³), and the mass of the primary particle is m_{pp} was assumed to have a density ρ_{pp} of 1.8 g/cm³ (Rissler et al. 2013). Following the study of Malik et al. 2011, the ρ_{eff} was assumed as 0.76 ± 0.04 g/cm³ for $d_{p,\bar{N}} < 50$ nm, and for $250 < d_{p,\bar{N}} < 50$ nm, the ρ_{eff} was 0.51 ± 0.04 g/cm³.

935 The second method developed by Sorensen (2011) is applicable to black carbon fractal aggregates since they are formed by the Diffusion Limited Aggregation DLA process and fall under the slip regime. Slip regime is a transition between the continuum and free molecular regime, where the Knudsen number Kn lies between 0.1 to 10 . The Knudsen number Kn is the ratio of the molecular free path to the aggregate mobility radius (Friedlander 1977). The conversion is given as:

$$d_{p,\bar{N}} = 2R_{pp} \cdot N_{pp}^{0.46} \quad N_{pp} < 100, \quad (B2)$$

$$d_{p,\bar{N}} = 2R_{pp} \cdot (10^{-2x+0.92}) \cdot N_{pp}^x \quad N_{pp} > 100, \quad (B3)$$

940

with a mobility mass scaling exponent of $x = 0.51Kn^{0.043}$ for $0.46 < x < 0.56$. In this study, the average value of the mobility mass scaling exponent $x = 0.51 \pm 0.02$ was assumed.

The third method, developed by Schmidt-Ott. (1988) follows a power law function, and is given as:

$$945 \quad N_{pp} = K \cdot \left(\frac{d_{p,\bar{N}}}{2R_{pp}}\right)^{D_{fm}}, \quad (B4)$$

where, K is a pre-factor, D_f is the fractal dimension, and D_{fm} is the mass mobility exponent. According to Park, Kittelson, & McMurry (2004) the relation between D_{fm} and D_f is $D_{fm} = 1.26 \cdot D_f$ for diesel soot, which was also used in this study. The value of D_f was taken from literature. For all the three conversion methods, the N_{pp} was estimated using both the number mean mobility diameter ($d_{p,\bar{N}}$), and the volume mean mobility diameter ($d_{p,\bar{V}}$).

950

Table B1. Values of m_{re} and m_{im} used in this study (Kim et al., 2015) for elemental carbon (EC) and organic carbon (OC).

955

Refractive index (m)	Wavelength (nm)		
	467	530	660
Elemental carbon (EC)			
m_{re}	1.92	1.96	2.0
m_{im}	0.67	0.65	0.63
Organic carbon (OC)			
m_{re}	1.59	1.47	1.47
m_{im}	0.11	0.04	0

Appendix C: Symbols and acronyms

Table C1. Symbols used.

960

Symbol	Meaning
σ_{ext}	Extinction coefficient
σ_{abs}	Absorption coefficient
σ_{sca}	Scattering coefficient
Q_{ext}	Extinction efficiency
Q_{abs}	Absorption efficiency
Q_{sca}	Scattering efficiency
g	Asymmetry parameter
m_{re}	Real part of refractive index
m_{im}	Imaginary part of refractive index
D_f	Fractal dimension
N_{pp}	Number of primary particles in aggregate
a_{pp}	Radius of a primary particle (no coating)
a_{in}	Inner radius of a primary particle (with coating)
a_o	Outer radius of a primary particle (with coating)
D_{in}	Inner diameter of volume equivalent sphere
D_o	Outer diameter of volume equivalent sphere
d_p	Mobility diameter
$d_{p,\bar{N}}$	Number mean mobility diameter
$d_{p,\bar{V}}$	Volume mean mobility diameter
ϕ	Flame equivalence ratio
f_{oc}	Fraction of organic carbon
D_i	Diameter of i^{th} SMPS size bin
n_i	Number concentration of i^{th} SMPS size bin
$Q_{abs,i}$	Absorption efficiency of i^{th} SMPS size bin

Table C2. Acronyms used.

Acronym	Meaning
BC	Black carbon
SSA	Single scattering albedo
MAC _{BC}	Mass absorption cross-section
AAE	Ångström absorption exponent

965 **Code availability**

The software used to generate the fractal aggregates is available at <https://sites.google.com/view/fabriceonofri/aggregates/fractal-like-aggregates-diffusion-model> (Wózniać and Onofri, 2022). The code used to model the optical properties of fractal aggregate, the multi-sphere T-matrix (MSTM) is publicly available at <https://eng.auburn.edu/users/dmckowski/scatcodes/> (Mackowski, 2022)

970

Data availability

The data obtained from this study are available upon request from the corresponding author (baseerat@tropos.de).

Author contributions

975 TM and BR designed the study, with assistance from MP and AW. The first laboratory experiments and analysis were conducted by JS and AN. The second laboratory experiment was conducted by TM, SP, JS, BR, AN, KV, MNE, KC, PQ, MG, KE, CR, and FGL. The modelling experiments were carried out by BR, with help from TM. The paper was written by BR and reviewed, commented on, and edited by TM, MP, KV, MNE, AW, JS, AN, MG, KE, KC and PQ. The analysis of the filter samples were conducted by KV, MNE, CR and KC. The TEM
980 images before and after the catalytic stripper were provided by KV and MNE.

Competing interests

The authors declare that they have no conflict of interest.

985 **Acknowledgement**

This work is supported by the 16ENV02 Black Carbon project of the European Union through the European Metrology Programme for Innovation and Research (EMPIR). We thank the editor, Pierre Herckes, as well as the two anonymous referees for their insightful suggestions, which enabled us to improve the paper.

990 **Financial support**

This research has been supported by the “Metrology for light absorption by atmospheric aerosols” project funded by the European Metrology Programme for Innovation and Research (EMPIR, grant no. 16ENV02 Black Carbon).

References

- 995 Abel, S. J., Haywood, J. M., Highwood, E. J., Li, J. and Buseck, P. R.: Evolution of biomass burning aerosol properties from an agricultural fire in southern Africa, *Geophysical Research Letters*, 30(15), doi:10.1029/2003GL017342, 2003.
- 1000 Adachi, K., Chung, S. H. and Buseck, P. R.: Shapes of soot aerosol particles and implications for their effects on climate, *Journal of Geophysical Research Atmospheres*, 115(15), doi:10.1029/2009JD012868, 2010.
- 1005 Andrews, E., Sheridan, P. J., Fiebig, M., McComiskey, A., Ogren, J. A., Arnott, P., Covert, D., Elleman, R., Gasparini, R., Collins, D., Jonsson, H., Schmid, B., and Wang, J.: Comparison of methods for deriving aerosol asymmetry parameter. *J. Geophys. Res.- Atmos.*, 111, D05S04, doi:10.1029/2004JD005734, 2006.
- Berry, M. V. and Percival, I. C.: Optics of fractal clusters such as smoke, *Optica Acta*, 33(5), 577–591, doi:10.1080/713821987, 1986.
- 1010 Betrancourt, C., Liu, F., Desgroux, P., Mercier, X., Faccineto, A., Salamanca, M., Ruwe, L., Kohse-Höinghaus, K., Emmrich, D., Beyer, A., Götzhäuser, A. and Tritscher, T.: Investigation of the size of the incandescent incipient soot particles in premixed sooting and nucleation flames of n-butane using LII, HIM, and 1 nm-SMPS, *Aerosol Science and Technology*, 51(8), 916–935, doi:10.1080/02786826.2017.1325440, 2017.

- 1015 Bhandari, J., China, S., Chandrakar, K. K., Kinney, G., Cantrell, W., Shaw, R. A., Mazzoleni, L. R., Giroto, G., Sharma, N., Gorkowski, K., Gilardoni, S., Decesari, S., Facchini, M. C., Zanca, N., Pavese, G., Esposito, F., Dubey, M. K., Aiken, A. C., Chakrabarty, R. K., Moosmüller, H., Onasch, T. B., Zaveri, R. A., Scarnato, B. V., Fialho, P. and Mazzoleni, C.: Extensive Soot Compaction by Cloud Processing from Laboratory and Field Observations, *Scientific Reports*, 9(1), 1–12, doi:10.1038/s41598-019-48143-y, 2019.
- 1020 Bladh, H., Johnsson, J., Rissler, J., Abdulhamid, H., Olofsson, N. E., Sanati, M., Pagels, J. and Bengtsson, P. E.: Influence of soot particle aggregation on time-resolved laser-induced incandescence signals, in *Applied Physics B: Lasers and Optics*, vol. 104, pp. 331–341., 2011.
- Bohren, C. F. and Huffman, D. R.: *Absorption and Scattering of Light by Small Particles.*, 1998.
- 1025 Bond, T. C. and Bergstrom, R. W.: Light absorption by carbonaceous particles: An investigative review, *Aerosol Science and Technology*, 40(1), 27–67, doi:10.1080/02786820500421521, 2006.
- 1030 Bond, T. C., Doherty, S. J., Fahey, D. W., Forster, P. M., Berntsen, T., Deangelo, B. J., Flanner, M. G., Ghan, S., Kärcher, B., Koch, D., Kinne, S., Kondo, Y., Quinn, P. K., Sarofim, M. C., Schultz, M. G., Schulz, M., Venkataraman, C., Zhang, H., Zhang, S., Bellouin, N., Guttikunda, S. K., Hopke, P. K., Jacobson, M. Z., Kaiser, J. W., Klimont, Z., Lohmann, U., Schwarz, J. P., Shindell, D., Storelvmo, T., Warren, S. G. and Zender, C. S.: Bounding the role of black carbon in the climate system: A scientific assessment, *Journal of Geophysical Research Atmospheres*, 118(11), 5380–5552, doi:10.1002/jgrd.50171, 2013.
- 1035 Bourrous, S., Ribeyre, Q., Lintis, L., Yon, J., Bau, S., Thomas, D., Vallières, C. and Ouf, F. X.: A semi-automatic analysis tool for the determination of primary particle size, overlap coefficient and specific surface area of nanoparticles aggregates, *Journal of Aerosol Science*, 126, 122–132, doi:10.1016/j.jaerosci.2018.09.001, 2018.
- 1040 Chylek, P. and Wong, J.: Effect of absorbing aerosols on global radiation budget, *Geophysical Research Letters*, 22(8), 929–931, doi:10.1029/95GL00800, 1995.
- 1045 Ciupek, K., Quincey, P., Green, D. C., Butterfield, D. and Fuller, G. W.: Challenges and policy implications of long-term changes in mass absorption cross-section derived from equivalent black carbon and elemental carbon measurements in London and south-east England in 2014–2019, *Environmental Science: Processes & Impacts*, 23(12), 1949–1960, doi:10.1039/d1em00200g, 2021.
- 1050 Eggersdorfer, M. L., Kadau, D., Herrmann, H. J. and Pratsinis, S. E.: Aggregate morphology evolution by sintering: Number and diameter of primary particles, *Journal of Aerosol Science*, 46, 7–19, doi:10.1016/j.jaerosci.2011.11.005, 2012.
- Ess, M. N. and Vasilatou, K.: Characterization of a new mini-CAST with diffusion flame and premixed flame options: Generation of particles with high EC content in the size range 30 nm to 200 nm, *Aerosol Science and Technology*, 53(1), 29–44, doi:10.1080/02786826.2018.1536818, 2019.
- 1055 Ess, M. N., Bertò, M., Irwin, M., Modini, R. L., Gysel-Beer, M. and Vasilatou, K.: Optical and morphological properties of soot particles generated by the mini-CAST 5201 BC generator, *Aerosol Science and Technology*, 55(7), 828–847, doi:10.1080/02786826.2021.1901847, 2021.
- 1060 Fierce, L., Riemer, N. and Bond, T. C.: Explaining variance in black carbon's aging timescale, *Atmospheric Chemistry and Physics*, 15(6), 3173–3191, doi:10.5194/acp-15-3173-2015, 2015.
- 1065 Forestieri, S. D., Helgestad, T. M., Lambe, A. T., Renbaum-Wolff, L., Lack, D. A., Massoli, P., Cross, E. S., Dubey, M. K., Mazzoleni, C., Olfert, J. S., Sedlacek, A. J., Freedman, A., Davidovits, P., Onasch, T. B. and Cappa, C. D.: Measurement and modeling of the multiwavelength optical properties of bare flame-generated soot, *Atmospheric Chemistry and Physics*, 18(16), 12141–12159, doi:10.5194/acp-18-12141-2018, 2018.
- Friedlander, S.: *Smoke, dust and haze. Fundamentals of aerosol behaviour.*, doi:10.1063/1.3037714, 1977.
- 1070 Fu, H., Zhang, M., Li, W., Chen, J., Wang, L., Quan, X., and Wang, W.: Morphology, composition and mixing state of individual carbonaceous aerosol in urban Shanghai, *Atmos. Chem. Phys.*, 12, 693–707, <https://doi.org/10.5194/acp-12-693-2012>, 2012.

- 1075 Fuller, K. A., Malm, W. C. and Kreidenweis, S. M.: Effects of mixing on extinction by carbonaceous particles, *Journal of Geophysical Research: Atmospheres*, 104(D13), 15941–15954, doi:10.1029/1998JD100069, 1999.
- 1080 Ghazi, R. and Olfert, J. S.: Coating mass dependence of soot aggregate restructuring due to coatings of oleic acid and dioctyl sebacate, *Aerosol Science and Technology*, 47(2), 192–200, doi:10.1080/02786826.2012.741273, 2013.
- 1085 Gini, M. I., Helmis, C., Melas, A. D., Papanastasiou, D., Orfanopoulos, G., Giannakopoulos, K. P., Drossinos, Y. and Eleftheriadis, K.: Characterization of carbon fractal-like aggregates by size distribution measurements and theoretical calculations, *Aerosol Science and Technology*, 50(2), 133–147, doi:10.1080/02786826.2015.1134763, 2016.
- 1090 Gwaze, P., Schmid, O., Annegarn, H. J., Andreae, M. O., Huth, J. and Helas, G.: Comparison of three methods of fractal analysis applied to soot aggregates from wood combustion, *Journal of Aerosol Science*, 37(7), 820–838, doi:10.1016/j.jaerosci.2005.06.007, 2006.
- 1095 He, C., Liou, K. N., Takano, Y., Zhang, R., Levy Zamora, M., Yang, P., Li, Q. and Leung, L. R.: Variation of the radiative properties during black carbon aging: Theoretical and experimental intercomparison, *Atmospheric Chemistry and Physics*, 15(20), 11967–11980, doi:10.5194/acp-15-11967-2015, 2015.
- 1100 Hergert, W. and Wriedt, T.: *The Mie Theory: Basics and Applications.*, 2012.
- 1105 IPCC, 2021: Summary for Policymakers. In: *Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change* [Masson-Delmotte, V., P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, and B. Zhou (eds.)]. In Press.
- 1110 Jacobson, M. Z.: Strong radiative heating due to the mixing state of black carbon in atmospheric aerosols, *Nature*, 409(6821), 695–697, doi:10.1038/35055518, 2001.
- 1115 Janssen, N. A. H., Hoek, G., Simic-Lawson, M., Fischer, P., van Bree, L., Brink, H. Ten, Keuken, M., Atkinson, R. W., Ross Anderson, H., Brunekreef, B. and Cassee, F. R.: Black carbon as an additional indicator of the adverse health effects of airborne particles compared with pm10 and pm2.5, *Environmental Health Perspectives*, 119(12), 1691–1699, doi:10.1289/ehp.1003369, 2011.
- 1120 Jing, L., 2014, *Instruction Manual of Real Soot Generator Model 5203 Type C mini-CAST*. Jing Ltd
- 1125 Kahnert, M. and Kanngießer, F.: Modelling optical properties of atmospheric black carbon aerosols, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 244, doi:10.1016/j.jqsrt.2020.106849, 2020.
- 1130 Kahnert, M.: Numerically exact computation of the optical properties of light absorbing carbon aggregates for wavelength of 200 nm–12.2 μm , *Atmospheric Chemistry and Physics*, 10(17), 8319–8329, doi:10.5194/acp-10-8319-2010, 2010.
- 1135 Kahnert, M.: Optical properties of black carbon aerosols encapsulated in a shell of sulfate: comparison of the closed cell model with a coated aggregate model, *Opt. Express*, 25, 24579–24593 <https://doi.org/10.1364/oe.25.024579>, 2017.
- 1140 Kholghy, M., Saffaripour, M., Yip, C. and Thomson, M. J.: The evolution of soot morphology in a laminar coflow diffusion flame of a surrogate for Jet A-1, *Combustion and Flame*, 160(10), 2119–2130, doi:10.1016/j.combustflame.2013.04.008, 2013.
- 1145 Kim, J., Bauer, H., Dobovičnik, T., Hitzengerger, R., Lottin, D., Ferry, D. and Petzold, A.: Assessing optical properties and refractive index of combustion aerosol particles through combined experimental and modeling studies, *Aerosol Science and Technology*, 49(5), 340–350, doi:10.1080/02786826.2015.1020996, 2015.
- 1150 Krüger, O. O., Holanda, B. A., Chowdhury, S., Pozzer, A., Walter, D., Pöhlker, C., Andrés Hernández, M. D., Burrows, J. P., Voigt, C., Lelieveld, J., Quaas, J., Pöschl, U., and Pöhlker, M. L.: Black carbon aerosol

- 1135 reductions during COVID-19 confinement quantified by aircraft measurements over Europe, *Atmos. Chem. Phys.*, 22, 8683–8699, <https://doi.org/10.5194/acp-22-8683-2022>, 2022.
- Li, J., Liu, C., Yin, Y. and Kumar, K. R.: Numerical investigation on the Ångström exponent of black carbon aerosol, *Journal of Geophysical Research*, 121(7), 3506–3518, doi:10.1002/2015JD024718, 2016.
- 1140 Liu, C., Chung, C. E., Yin, Y. and Schnaiter, M.: The absorption Ångström exponent Ångström absorption exponent of black carbon: From numerical aspects, *Atmospheric Chemistry and Physics*, 18(9), 6259–6273, doi:10.5194/acp-18-6259-2018, 2018.
- 1145 Liu, C., Li, J., Yin, Y., Zhu, B. and Feng, Q.: Optical properties of black carbon aggregates with non-absorptive coating, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 187, 443–452, doi:10.1016/j.jqsrt.2016.10.023, 2017.
- 1150 Liu, C., Xu, X., Yin, Y., Schnaiter, M. and Yung, Y. L.: Black carbon aggregates: A database for optical properties, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 222–223, 170–179, doi:10.1016/j.jqsrt.2018.10.021, 2019.
- 1155 Luo, J., Zhang, Y., Wang, F., Wang, J. and Zhang, Q.: Applying machine learning to estimate the optical properties of black carbon fractal aggregates, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 215, 1–8, doi:10.1016/j.jqsrt.2018.05.002, 2018a.
- Luo, J., Zhang, Y., Zhang, Q., Wang, F., Liu, J., and Wang, J.: Sensitivity analysis of morphology on optical properties of soot aerosols, *Opt. Express*, 26, A420–A432, <https://doi.org/10.1364/oe.26.00a420>, 2018b.
- 1160 Mackowski, D. W. and Mishchenko, M. I.: A multiple sphere T-matrix Fortran code for use on parallel computer clusters, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 112(13), 2182–2192, doi:10.1016/j.jqsrt.2011.02.019, 2011.
- 1165 Mackowski, D. W.: A multiple sphere T-matrix FORTRAN code for use on parallel computer clusters, Version 3.0, Department of Mechanical Engineering Auburn University [code], Auburn, USA, available at: <https://eng.auburn.edu/users/dmckwski/scatcodes/>, last access: 24 January 2022.
- 1170 Madueño, L., Kecorius, S., Birmili, W., Müller, T., Simpas, J., Vallar, E., Galvez, M. C., Cayetano, M. and Wiedensohler, A.: Aerosol particle and black carbon emission factors of vehicular fleet in Manila, Philippines, *Atmosphere*, 10(10), doi:10.3390/atmos10100603, 2019.
- 1175 Malik, A., Abdulhamid, H., Pagels, J., Rissler, J., Lindskog, M., Nilsson, P., Bjorklund, R., Jozsa, P., Visser, J., Spetz, A. and Sanati, M.: A potential soot mass determination method from resistivity measurement of thermophoretically deposited soot, *Aerosol Science and Technology*, 45(2), 284–294, doi:10.1080/02786826.2010.533214, 2011.
- 1180 Mamakos, A., Khalek, I., Giannelli, R. and Spears, M.: Characterization of combustion aerosol produced by a mini-CAST and treated in a catalytic stripper, *Aerosol Science and Technology*, 47(8), 927–936, doi:10.1080/02786826.2013.802762, 2013.
- 1185 Menon, S., Hansen, J., Nazarenko, L. and Luo, Y.: Climate effects of black carbon aerosols in China and India, *Science*, 297(5590), 2250–2253, doi:10.1126/science.1075159, 2002.
- 1185 Michelsen, H. A.: Probing soot formation, chemical and physical evolution, and oxidation: A review of in situ diagnostic techniques and needs, *Proceedings of the Combustion Institute*, 36(1), 717–735, doi:10.1016/j.proci.2016.08.027, 2017.
- 1190 Mie, G.: On the optics of turbid media, especially colloidal metal solutions, *Ann. Phys. Berlin*, 25(3), 377–445, 1908.
- 1190 Mishchenko, M. I., Liu, L., Travis, L. D. and Lacis, A. A.: Scattering and radiative properties of semi-external versus external mixtures of different aerosol types, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 88(1–3), 139–147, doi:10.1016/j.jqsrt.2003.12.032, 2004.

- 1195 Moore, R. H., Ziemba, L. D., Dutcher, D., Beyersdorf, A. J., Chan, K., Crumeyrolle, S., Raymond, T. M., Thornhill, K. L., Winstead, E. L. and Anderson, B. E.: Mapping the operation of the miniature combustion aerosol standard (Mini-CAST) soot generator, *Aerosol Science and Technology*, 48(5), 467–479, doi:10.1080/02786826.2014.890694, 2014.
- 1200 Müller, T., Henzing, J. S., De Leeuw, G., Wiedensohler, A., Alastuey, A., Angelov, H., Bizjak, M., Collaud Coen, M., Engström, J. E., Gruening, C., Hillamo, R., Hoffer, A., Imre, K., Ivanow, P., Jennings, G., Sun, J. Y., Kalivitis, N., Karlsson, H., Komppula, M., Laj, P., Li, S. M., Lunder, C., Marinoni, A., Martins Dos Santos, S., Moerman, M., Nowak, A., Ogren, J. A., Petzold, A., Pichon, J. M., Rodriguez, S., Sharma, S., Sheridan, P. J., Teinilä, K., Tuch, T., Viana, M., Virkkula, A., Weingartner, E., Wilhelm, R. and Wang, Y. Q.: Characterization and intercomparison of aerosol absorption photometers: Result of two intercomparison workshops, *Atmospheric Measurement Techniques*, 4(2), 245–268, doi:10.5194/amt-4-245-2011, 2011.
- 1205 Müller, T., Nowak, A., Wiedensohler, A., Sheridan, P., Laborde, M., Covert, D. S., Marinoni, A., Imre, K., Henzing, B., Roger, J. C., Dos Santos, S. M., Wilhelm, R., Wang, Y. Q. and De Leeuw, G.: Angular illumination and truncation of three different integrating nephelometers: Implications for empirical, size-based corrections, *Aerosol Science and Technology*, 43(6), 581–586, doi:10.1080/02786820902798484, 2009.
- 1210 Müller, T., Paixão, M., Pfeifer, S., and Wiedensohler, A.: Scattering Coefficients and Asymmetry Parameters derived from the Polar Nephelometer Aurora 4000, in: EEuropean Aerosol Conference EAC 2012, Granada, 2–7 September 2012, Zenodo [poster], <https://doi.org/10.5281/zenodo.5588445>, 2012
- 1215 Ouf, F. X., Parent, P., Laffon, C., Marhaba, I., Ferry, D., Marcillaud, B., Antonsson, E., Benkoula, S., Liu, X. J., Nicolas, C., Robert, E., Patanen, M., Barreda, F. A., Sublemontier, O., Coppalle, A., Yon, J., Miserque, F., Mostefaoui, T., Regier, T. Z., Mitchell, J. B. A. and Miron, C.: First in-flight synchrotron X-ray absorption and photoemission study of carbon soot nanoparticles, *Scientific Reports*, 6, doi:10.1038/srep36495, 2016.
- 1220 Park, K., Kittelson, D. B. and McMurry, P. H.: Structural properties of diesel exhaust particles measured by Transmission Electron Microscopy (TEM): Relationships to particle mass and mobility, *Aerosol Science and Technology*, 38(9), 881–889, doi:10.1080/027868290505189, 2004.
- 1225 Park, S. H., Rogak, S. N., Bushe, W. K., Wen, J. Z. and Thomson, M. J.: An aerosol model to predict size and structure of soot particles, *Combustion Theory and Modelling*, 9(3), 499–513, doi:10.1080/13647830500195005, 2005.
- 1230 Petzold, A., Gysel, M., Vancassel, X., Hitzenberger, R., Puxbaum, H., Vrochticky, S., Weingartner, E., Baltensperger, U. and Mirabel, P.: On the effects of organic matter and sulphur-containing compounds on the CCN activation of combustion particles, *Atmospheric Chemistry and Physics*, 5(12), 3187–3203, doi:10.5194/acp-5-3187-2005, 2005.
- 1235 Pöschl, U.: Atmospheric aerosols: Composition, transformation, climate and health effects, *Angewandte Chemie - International Edition*, 44(46), 7520–7540, doi:10.1002/anie.200501122, 2005.
- Purcell, E. M. and Pennypacker, C. R.: Scattering and Absorption of Light by Nonspherical Dielectric Grains, *The Astrophysical Journal*, 186, 705, doi:10.1086/152538, 1973.
- 1240 Rissler, J., Messing, M. E., Malik, A. I., Nilsson, P. T., Nordin, E. Z., Bohgard, M., Sanati, M. and Pagels, J. H.: Effective density characterization of soot agglomerates from various sources and comparison to aggregation theory, *Aerosol Science and Technology*, 47(7), 792–805, doi:10.1080/02786826.2013.791381, 2013.
- 1245 Rissler, J., Swietlicki, E., Bengtsson, A., Boman, C., Pagels, J., Sandström, T., Blomberg, A. and Löndahl, J.: Experimental determination of deposition of diesel exhaust particles in the human respiratory tract, *Journal of Aerosol Science*, 48, 18–33, doi:10.1016/j.jaerosci.2012.01.005, 2012.
- 1250 Romshoo, B., Müller, T., Pfeifer, S., Saturno, J., Nowak, A., Ciupek, K., Quincey, P. and Wiedensohler, A.: Optical properties of coated black carbon aggregates: Numerical simulations, radiative forcing estimates, and size-resolved parameterization scheme, *Atmospheric Chemistry and Physics*, 21(17), 12989–13010, doi:10.5194/acp-21-12989-2021, 2021.

- 1255 Scarnato, B. V.; Vahidinia, S.; Richard, D. T.; Kirchstetter, T. W., Effects of internal mixing and aggregate morphology on optical properties of black carbon using a discrete dipole approximation model. *Atmospheric Chemistry and Physics* 2013, 13, (10), 5089–5101.
- 1260 Schkolnik, G., Chand, D., Hoffer, A., Andreae, M. O., Erlick, C., Swietlicki, E. and Rudich, Y.: Constraining the density and complex refractive index of elemental and organic carbon in biomass burning aerosol using optical and chemical measurements, *Atmospheric Environment*, 41(5), 1107–1118, doi:10.1016/j.atmosenv.2006.09.035, 2007.
- Schmidt-Ott, A.: In situ measurement of the fractal dimensionality of ultrafine aerosol particles, *Applied Physics Letters*, 52(12), 954–956, doi:10.1063/1.99239, 1988.
- 1265 Smith, A. J. A. and Grainger, R. G.: Simplifying the calculation of light scattering properties for black carbon fractal aggregates, *Atmospheric Chemistry and Physics*, 14(15), 7825–7836, doi:10.5194/acp-14-7825-2014, 2014.
- 1270 Sorensen, C. M.: The mobility of fractal aggregates: A review, *Aerosol Science and Technology*, 45(7), 765–779, doi:10.1080/02786826.2011.560909, 2011.
- 1275 Sumlin BJ, Heinson WR, Chakrabarty RK. Retrieving the Aerosol Complex Refractive Index using PyMieScatt: A Mie Computational Package with Visualization Capabilities, *J. Quant. Spectros. Rad. Trans.*, 205, 127–134. DOI: 10.1016/j.jqsrt.2017.10.012, 2018.
- Tian, K., Thomson, K., Liu, F., Snelling, D., Smallwood, G., and Wang, D.: Determination of the morphology of soot aggregates using the relative optical density method for the analysis of tem images, *Combust. Flame*, 144, 782–791, doi:10.1016/j.combustflame.2005.06.017, 2006.
- 1280 Wentzel, M., Gorzawski, H., Naumann, K. H., Saathoff, H. and Weinbruch, S.: Transmission electron microscopical and aerosol dynamical characterization of soot aerosols, *Journal of Aerosol Science*, 34(10), 1347–1370, doi:10.1016/S0021-8502(03)00360-4, 2003.
- 1285 Wiedensohler, A., A. Wiesner, K. Weinhold, W. Birmili, M. Hermann, M. Merkel, T. Müller, S. Pfeifer, A. Schmidt, T. Tuch, F. Velarde, P. Quincey, S. Seeger and A. Nowak (2018a). Mobility Particle Size Spectrometers: Calibration Procedures and Measurement Uncertainties. *Aerosol Science & Technology* 52(2), 146–164.
- 1290 Wiedensohler, A., Andrade, M., Weinhold, K., Müller, T., Birmili, W., Velarde, F., Moreno, I., Forno, R., Sanchez, M. F., Laj, P., Ginot, P., Whiteman, D. N., Krejci, R., Sellegri, K. and Reichler, T.: Black carbon emission and transport mechanisms to the free troposphere at the La Paz/El Alto (Bolivia) metropolitan area based on the Day of Census (2012), *Atmospheric Environment*, 194, 158–169, doi:10.1016/j.atmosenv.2018.09.032, 2018b.
- 1295 Wiedensohler, A., Birmili, W., Nowak, A., Sonntag, A., Weinhold, K., Merkel, M., Wehner, B., Tuch, T., Pfeifer, S., Fiebig, M., Fjåraa, A. M., Asmi, E., Sellegri, K., Depuy, R., Venzac, H., Villani, P., Laj, P., Aalto, P., Ogren, J. A., Swietlicki, E., Williams, P., Roldin, P., Quincey, P., Hüglin, C., Fierz-Schmidhauser, R., Gysel, M., Weingartner, E., Riccobono, F., Santos, S., Gruning, C., Faloon, K., Beddows, D., Harrison, R., Monahan, C., Jennings, S. G., O’Dowd, C. D., Marinoni, A., Horn, H. G., Keck, L., Jiang, J., Scheckman, J., McMurry, P. H., Deng, Z., Zhao, C. S., Moerman, M., Henzing, B., De Leeuw, G., Löschau, G. and Bastian, S.: Mobility particle size spectrometers: Harmonization of technical standards and data structure to facilitate high quality long-term observations of atmospheric particle number size distributions, *Atmospheric Measurement Techniques*, 5(3), 657–685, doi:10.5194/amt-5-657-2012, 2012.
- 1300
- 1305 Witten, T. A. and Sander, L. M.: Diffusion-limited aggregation, *Physical Review B*, 27(9), 5686–5697, doi:10.1103/PhysRevB.27.5686, 1983.
- 1310 Wozniak, M., Onofri, F. R. A., Barbosa, S., Yon, J. and Mroccka, J.: Comparison of methods to derive morphological parameters of multi-fractal samples of particle aggregates from TEM images, *Journal of Aerosol Science*, 47, 12–26, doi:10.1016/j.jaerosci.2011.12.008, 2012.

Wu, Y., Cheng, T., Liu, D., Allan, J. D., Zheng, L. and Chen, H.: Light Absorption Enhancement of Black Carbon Aerosol Constrained by Particle Morphology, *Environmental Science and Technology*, 52(12), 6912–6919, doi:10.1021/acs.est.8b00636, 2018.

1315

Yuan, C., Zheng, J., Ma, Y., Jiang, Y., Li, Y. and Wang, Z.: Significant restructuring and light absorption enhancement of black carbon particles by ammonium nitrate coating, *Environmental Pollution*, 262, 114172, doi:10.1016/j.envpol.2020.114172, 2020.

1320

Zhang, F., Guo, H., Chen, Y., Matthias, V., Zhang, Y., Yang, X. and Chen, J.: Size-segregated characteristics of organic carbon (OC), elemental carbon (EC) and organic matter in particulate matter (PM) emitted from different types of ships in China, *Atmospheric Chemistry and Physics*, 20(3), 1549–1564, doi:10.5194/acp-20-1549-2020, 2020.

1325