

# Addressing Class Imbalance in Soil Movement Predictions

Praveen Kumar<sup>1</sup>, Priyanka Priyanka<sup>1</sup>, Kala Venkata Uday<sup>2</sup>, Varun Dutt<sup>1</sup>

<sup>1</sup>*Applied Cognitive Science Lab, Indian Institute of Technology Mandi, Himachal Pradesh, 175075, India*

<sup>2</sup>*Geotechnical Engineering Lab, Indian Institute of Technology Mandi, Himachal Pradesh, 175075, India*

*Correspondence to: Praveen Kumar (dr.praveenkumar.ml@gmail.com)*

---

## Abstract

Landslides threaten human life and infrastructure, resulting in fatalities and economic losses. Monitoring stations provide valuable data for predicting soil movement, which is crucial in mitigating this threat. Accurately predicting soil movement from monitoring data is challenging due to its complexity and inherent class imbalance. This study proposes developing machine learning (ML) models with oversampling techniques to address the class imbalance issue and develop a robust soil movement prediction system. The dataset, comprising two years (2019-2021) of monitoring data from a landslide in Uttarakhand, was split into a 70:30 ratio for training and testing. To tackle the class imbalance problem, various oversampling techniques, including Synthetic Minority Oversampling Technique (SMOTE), K-Means SMOTE, Borderline SMOTE, and Adaptive SMOTE (ADASYN), were applied to the training dataset. Several ML models, namely Random Forest (RF), Extreme Gradient Boosting (XGBoost), Light Gradient Boosting Machine (Light GBM), Adaptive Boosting (AdaBoost), Category Boosting (CatBoost), Long Short-Term Memory (LSTM), Multilayer Perceptron (MLP), and dynamic ensemble models, were trained and compared for soil movement prediction. A 5-fold cross-validation method was applied to optimize the ML models on the training data, and the models were tested on the testing set. Among these ML models, the dynamic ensemble model with K-Means SMOTE performed the best in testing, with an accuracy, precision, and recall rate of 0.995, 0.995, and 0.995, respectively, and an F1 score of 0.995. Additionally, models without oversampling exhibited poor performance in training and testing, highlighting the importance of incorporating oversampling techniques to enhance predictive capabilities.

*Keywords:* Soil Movement Prediction; Class Imbalance; Oversampling; Machine Learning; Landslide Prone Areas.

---

## 1. Introduction

Landslides pose a significant threat to infrastructure, resulting in numerous fatalities and substantial economic losses each year (Parkash, 2011). These destructive events occur globally, particularly in hilly and mountainous regions, driven by gravity and characterized by the movement of large rocks, debris, and soil (Crosta, 1998). Factors such as heavy rainfall, earthquakes, and the impacts of climate change contribute to the occurrence and severity of landslides (Crosta, 1998).

Monitoring, predicting, and warning people about slope movements in landslide-prone areas are crucial for mitigating landslide risks. Advanced technologies like Global Positioning System (GPS), Light Detection and Ranging (LiDAR), Geographic Information System (GIS), and remote sensing have proven effective for assessing and analyzing slope failure hazards (Ray et al., 2020). However, their high cost and the need for specialized expertise limit their accessibility, especially in developing countries where cost-effective IoT technologies are necessary (Pathania et al., 2020).

Machine learning (ML) models have been extensively studied for predicting soil movement in landslide-prone areas (Kumar et al., 2021a; Kumar et al., 2021b, Kumar et al., 2023). This prediction problem could be divided into classification and regression tasks. The classification task aims to predict the degree of soil movement using various ML models. On the other hand, the regression task involves estimating the acceleration or displacement of soil under observation.

One common challenge in landslide prediction is a class imbalance, where certain classes have significantly more data samples than others. This imbalance can adversely affect the performance of ML models. To address class imbalance issues, techniques such as Synthetic Minority Oversampling Technique (SMOTE), K-Means SMOTE, Borderline SMOTE, and Adaptive Synthetic Minority Oversampling Technique (ADASYN) are employed to balance the dataset (Chawla et al., 2002; Douzas et al., 2018; Han et al., 2005; He et al., 2008).

46 Several researchers have dedicated their efforts to addressing class imbalance problems in ML. Notably,  
47 Chawla et al. (2002) introduced the SMOTE, Douzas et al. (2018) devised the K-Means SMOTE, Han et al.  
48 (2005) proposed the Borderline SMOTE, and He et al. (2008) introduced the Adaptive Synthetic Minority  
49 Oversampling Technique (ADASYN). These techniques were developed to generate synthetic data and balance  
50 imbalanced datasets.

51 The field of soil movement prediction requires further investigation, particularly considering the complexities  
52 associated with a class imbalance in the datasets. Despite extensive research on ML models' predictive abilities  
53 for soil movement in landslides, there still needs to be more understanding regarding how class imbalance affects  
54 the models' performance and accuracy. This study aims to bridge this knowledge gap by examining different  
55 approaches to tackle class imbalance and exploring diverse ML models to improve the prediction of soil  
56 movement. Various multivariate classification models, including Random Forest (RF), Adaptive Boosting  
57 (AdaBoost), Extreme Gradient Boosting (XGBoost), Light Gradient Boosted Machine (Light GBM), Category  
58 Boosting (CatBoost), Long Short-Term Memory (LSTM), Multilayer Perceptron (MLP), and an ensemble of  
59 RF, AdaBoost, XGBoost, Light GBM, and CatBoost are developed to predict soil movement when coupled with  
60 class imbalance techniques (Kumar et al., 2019; Semwal et al., 2022; Wu et al., 2020; Pathania et al., 2021;  
61 Zhang et al., 2022; Sahin, 2022; Kumar et al., 2020; Kumar et al., 2023).

62 This study delves into the field of soil movement prediction, making significant advancements by developing  
63 specialized ML models and techniques tailored to this domain. A notable aspect that has received limited  
64 attention in the existing literature is the challenge of class imbalance in landslide datasets. While previous  
65 research has primarily focused on ML models for soil movement prediction, this work addresses the issue of  
66 imbalanced data head-on. Multiple variants of the SMOTE and other balancing strategies are introduced and  
67 implemented to enhance the efficacy and accuracy of the ML models.

68 Additionally, this research explores using cost-effective Internet of Things (IoT) technologies in developing  
69 regions to improve the investigation and assessment of landslide hazards. The dataset used in this study spans  
70 two years, from June 2019 to June 2021, and was collected by an inexpensive IoT monitoring station in  
71 Uttarakhand, India. This real-world dataset captures the distinctive characteristics and patterns of soil  
72 movements prevalent in the landslide-prone area. By employing a comprehensive methodology, this work  
73 advances soil movement prediction and effectively addresses the challenge of class imbalance. It commences  
74 with a thorough overview of the collected data, emphasizing the measured weather and soil-related factors.  
75 Various SMOTE variants and other balancing techniques are employed to rectify the class imbalance, resulting  
76 in the generation of synthetic samples and ensuring a balanced representation of soil movement classes. The  
77 intricate correlations and patterns in the soil movement data are captured using a variety of ML models,  
78 including RF, AdaBoost, XGBoost, Light GBM, CatBoost, MLP, LSTM, and a dynamic ensembling of RF,  
79 AdaBoost, XGBoost, and CatBoost. Overall, this study's findings show potential for accurately reducing  
80 landslide risks, increasing the accuracy of landslide prediction, and encouraging the use of cost-effective IoT  
81 technologies in landslide-prone locations.

## 82 **2. Background**

83 Several techniques have been proposed to address the challenge of learning from imbalanced datasets, where  
84 the classification categories are not evenly represented. For example, Chawla et al. (2002) proposed the SMOTE,  
85 which involves generating synthetic minority class examples to balance the dataset. SMOTE has been shown to  
86 improve model performance compared to only undersampling the majority class. Douzas et al. (2018)  
87 introduced K-Means SMOTE, a method that combines SMOTE with k-means clustering to effectively overcome  
88 imbalances between and within classes without generating unnecessary noise. Additionally, Han et al., (2005)  
89 developed a Borderline SMOTE method that focuses on oversampling only the minority examples near the class  
90 boundary. Experimental results indicate that Borderline SMOTE1 and Borderline SMOTE2 outperform  
91 SMOTE and random oversampling methods in terms of true positive rate and F-value. Lastly, He et al. (2008)  
92 developed the ADASYN, which addresses class imbalance by generating more synthetic data for minority class  
93 examples that are harder to learn. ADASYN reduces bias and adaptively shifts the classification decision

94 boundary toward challenging examples. Simulation analyses have demonstrated the effectiveness of ADASYN  
95 across various evaluation metrics. These techniques offer valuable approaches to mitigate the impact of  
96 imbalanced data in classification tasks. These class imbalance techniques have limited exploration and  
97 application for landslide datasets. Existing studies primarily focus on the general imbalanced dataset scenario  
98 but need to consider the unique characteristics and challenges associated with landslide datasets. Therefore,  
99 research is required for systematic studies that compare the performance and effectiveness of techniques such  
100 as SMOTE, K-Means SMOTE, Borderline SMOTE, and ADASYN in the specific context of soil movement  
101 prediction across various evaluation metrics. By bridging this literature gap, we can enhance the accuracy and  
102 reliability of models for predicting soil movement in landslide-prone areas and contribute to improved landslide  
103 risk mitigation strategies.

104 Several researchers developed various ML models to predict soil movement and prediction problems in other  
105 fields (Kumar et al., 2019; Semwal et al., 2022; Wu et al., 2020; Pathania et al., 2021; Zhang et al., 2022; Sahin,  
106 2022; Kumar et al., 2020). For example, Kumar et al. (2019) developed an ensemble of ML models (RF,  
107 Bagging, Stacking, and Voting) for predicting soil movement at the Tangni landslide in Uttarakhand, India.  
108 These models were compared with Sequential Minimal Optimization (SMO) and Autoregression (AR). The  
109 results indicate that the ensemble models outperformed the SMO and AR models in predicting soil movement.  
110 Furthermore, Semwal et al. (2022) developed the SMOreg, Instance-based Learning (IBk), RF, Linear  
111 Regression (LR), MLP, as well as ensemble ML models to predict root tensile strength for different vegetation  
112 species. The results show that the MLP performed better than the other models, providing more accurate  
113 predictions of root tensile strength. Next, Wu et al. (2020) developed the decision tree (DT) with AdaBoost and  
114 bagging ensembles for mapping the susceptibility of landslides in Longxian County, Shaanxi Province, China.  
115 Researcher developed the technique with ensemble of Alternating Decision Tree (ADTree) with Bagging and  
116 AdaBoost to map landslide susceptibility. The results revealed that ensemble of ADTree and AdaBoost model  
117 performed better than the individual ADTree model and ensemble of ADTree and Bagging model. Similarly,  
118 Pathania et al. (2021) developed a novel ensemble gradient boosting model, called SVM-XGBoost, for soil  
119 movements warning at Gharpa landslide, Mandi, India. They compared the performance of SVM-XGBoost with  
120 other models such as individual SVMs, DTs, RF, XGBoost, Naïve Bayes (NB), and different variants of  
121 XGBoost. The results showed that the SVM-XGBoost model performed better than other models in soil  
122 movement prediction. In their research, Kumar et al. (2021b) directed their attention toward predicting soil  
123 movement, specifically at the Tangni landslide site in India. To enhance the accuracy of their predictions, they  
124 explored various variants of Long Short-Term Memory (LSTM) models. They introduced a novel ensemble  
125 approach called BS-LSTM, which combined bidirectional and stacked LSTM models. The findings of their  
126 study indicated that the BS-LSTM model outperformed the other LSTM variants in accurately predicting soil  
127 movement. Similarly, Zhang et al. (2022) conducted a study to assess the susceptibility of landslides using  
128 gradient-boosting ML techniques coupled with class-balancing methods. Their investigation specifically  
129 focused on the aftermath of the 2018 Hokkaido earthquake and employed diverse datasets and methodologies  
130 to predict the susceptibility of specific areas prone to landslides. Compared to well-established models such as  
131 XGBoost and Light GBM, the proposed model showcased superior performance in accurately assessing  
132 landslide susceptibility. Furthermore, Sahin (2022) developed multiple ML models, including XGBoost,  
133 CatBoost, Gradient Boosting Machine (GBM), and Light GBM, to model the susceptibility of landslides. By  
134 leveraging a comprehensive landslide inventory map and relevant conditioning factors stored in a geodatabase,  
135 the study employed feature selection techniques and compared the predictive capabilities of ensemble methods  
136 with the widely used RF model. The results highlighted that CatBoost exhibited the highest predictive capability,  
137 followed by XGBoost, Light GBM, and GBM, while RF demonstrated comparatively lower predictive  
138 capability. The study used a geodatabase with a landslide inventory map and conditioning factors. Feature  
139 selection techniques were applied, and the performance of XGBoost, CatBoost, GBM, and Light GBM was  
140 compared to RF. The results revealed that CatBoost had the highest prediction capability, followed by XGBoost,  
141 Light GBM, and GBM. The literature gap in the context of soil movement prediction is the limited exploration  
142 and evaluation of ML models in combination with synthetic data generated by SMOTE techniques. While  
143 various ML models, such as ensemble models (e.g., RF), neural networks models (MLP and LSTM), and

gradient boosting ML models (e.g., AdaBoost, XGBoost, Light GBM, CatBoost), have been developed and applied for soil movement prediction, their utilization in conjunction with synthetic data generated by SMOTE techniques has received less attention in the literature. Incorporating SMOTE-generated synthetic data into the training process of these models can address the issue of class imbalance in landslide datasets and improve their performance in predicting soil movement. Therefore, further research is needed to investigate the effectiveness of these ML models when combined with SMOTE techniques in the context of soil movement prediction, thereby filling the existing literature gap.

The RF, AdaBoost, XGBoost, Light GBM, CatBoost, MLP, LSTM, and an ensemble of RF, AdaBoost, XGBoost, Light GBM, and CatBoost models were chosen to predict soil movement based on their proven effectiveness in previous research. RF is excellent at capturing complex relationships and has outperformed non-ensemble models in predicting debris flow and landslide susceptibility. AdaBoost has successfully predicted soil movement alerts ahead of time. At the same time, XGBoost and Light GBM have demonstrated their ability to achieve balanced and precise predictions, especially in earthquake-induced landslide susceptibility assessments. Among gradient-boosting models, CatBoost stands out for its superior prediction capability, making it a well-suited option for modelling landslide susceptibility. On the other hand, when it comes to predicting root tensile strength, MLP has demonstrated higher accuracy in its predictions. Additionally, LSTM, a robust recurrent neural network architecture, is particularly effective in capturing temporal dependencies and long-term patterns in sequential data. Collectively, these models offer a diverse set of capabilities that prove valuable in the prediction of soil movement.

### 3. Data Collection and Description

The dataset for predicting soil movement was collected from an actual landslide site in Uttarakhand, India. The monitored landslides are characterized as shallow landslides with debris flow, occurring at elevations ranging from 1450 m to 1920 m. The slopes in the landslide zones in the upper parts are made up of weathered limestone and dolomitic limestone, whereas the lower slopes exhibit black carbonaceous slate. The slates are highly weathered and leached, adorned with white and yellow encrustation. These are covered with a thin veneer of debris, mainly consisting of pebble- and cobble-sized limestone, sandstone, and slate embedded in a sand-silt-clay matrix. Additional context includes an annual rainfall of 4190 mm in the area, as reported by Gupta et al. (2015). Spanning a duration of two years, from June 2019 to June 2021, this dataset holds valuable insights into the behaviour of soil in response to various environmental factors. To gather this data, a cost-effective landslide monitoring station (LMS) was carefully deployed at the landslide. Equipped with a range of sensors, the LMS diligently recorded critical weather and soil-related parameters. Weather-wise, it diligently captured temperature readings in degrees Celsius, humidity levels as a percentage, rainfall measurements in inches per hour (in/hr), atmospheric pressure in millibars (mb), and even sunlight intensity in lux. These meticulous recordings shed light on the prevailing weather conditions experienced at the precise location of the landslide. The LMS relied on an accelerometer sensor to monitor the soil conditions with utmost precision. An advanced sensor was utilized to measure the acceleration of the soil in three directions:  $A_x$ ,  $A_y$ , and  $A_z$  (in  $m/s^2$ ). This provided valuable insights into the soil's movement and stability. Additionally, a gyroscope sensor was employed to capture the angular rotation of the soil along the  $W_x$ ,  $W_y$ , and  $W_z$  axes (in degrees per second). This sensor enhanced the understanding of the soil's behaviour by accurately detecting its angular movements. Furthermore, the LMS was equipped with a capacitive soil moisture sensor, enabling it to measure the volumetric moisture content of the soil in percentage. The LMS transmitted all these twelve attributes, including weather parameters, soil g-force, angular rotation, and soil moisture content, to the cloud every ten minutes. The dataset obtained from the LMS consisted of approximately thirty-nine thousand data points, covering a wide range of environmental and soil-related attributes. Table 1 showcases the statistics for the recorded soil movement prediction parameters. For each attribute, the table provides the mean value, representing the average measurement, along with the standard deviation (stdev), indicating the variability of the data. The minimum and maximum values highlight the range of measurements observed, offering insights into the extreme values and overall data distribution.

**Table 1.** Summary statistics of recorded parameters for soil movement prediction dataset.

Parameter	Mean	stdev	Min	Max
Temperature ( $^{\circ}C$ )	16.18	10.48	0.00	39.00
Humidity (%)	66.69	35.46	0.00	99.00
Rain (in/hr)	0.00	5.60	0.00	15.00
Pressure (mb)	1040.96	27.96	921.61	1065.41
Light (lux)	5025.35	10154.75	0.00	54612.00
Ax ( $m/s^2$ )	0.02	1.23	-28.02	40.25
Ay ( $m/s^2$ )	0.00	1.37	-100.08	100.08
Az ( $m/s^2$ )	0.00	2.28	-149.61	315.61
Wx ( $^{\circ}/s$ )	0.00	15.86	-1994.51	1997.24
Wy ( $^{\circ}/s$ )	0.00	15.85	-1998.05	1998.73
Wz ( $^{\circ}/s$ )	0.00	6.95	-932.00	932.00
Moisture (%)	80.00	20.30	40.00	100.00

## 4. Methodology

### 4.1. Data Pre-processing

The sensors installed at the landslide locations experienced malfunctions, resulting in multiple missing values within the collected data. To address this issue, we employed a method to fill these gaps by replacing the missing values with the average values recorded at the corresponding timestamps during the previous week. By calculating the average values for parameters such as light intensity, humidity, temperature, and pressure from the same time periods in the preceding week, we obtained estimates to replace the skewed or missing data points.

### 4.2. Class Labeling

The dataset contained values for acceleration and angular rotation in three directions: x, y, and z. The changes in acceleration and angular rotation were calculated by subtracting the current values from the past values, allowing for the assessment of movement. Four categories were defined to classify the movement data: no movement, low movement, moderate movement, and high movement. These categories were determined based on standard deviation thresholds derived from the acceleration and angular rotation values. Specifically, values within  $\pm 1$  standard deviation from the mean were categorized as no movement,  $\pm 2$  standard deviations as low movement,  $\pm 3$  standard deviations as moderate movement, and values exceeding  $\pm 3$  standard deviations as high movement. This classification approach considered the variability in acceleration and angular rotation changes to determine the intensity of movement.

During the analysis, each timestamp was assigned to a movement class based on the class associated with the highest standard deviation observed in any acceleration or angular rotation element. If an individual element had the highest standard deviation at a specific timestamp, that timestamp was assigned to the corresponding movement class with the maximum standard deviation.

Table 2 presents the distribution of movement intensity within the dataset, which consisted of 38,900 data points. The table shows the percentage distribution of movement categories: high, moderate, low, and no movement. The majority of the dataset (97.8%) falls under the "No Movement" category, indicating a lack of significant movement. On the other hand, the high movement category represents only a small fraction (1.1%) of the dataset. Additionally, the moderate movement category comprises 0.7% of the samples, while the low movement category accounts for 0.4% of the dataset. This distribution highlights the class imbalance issue present in the dataset, which needs to be taken into account when developing a classification model for predicting soil movement.

**Table 2.** Class distribution of soil movement data points.

Movement Class	Number of Data Points	Percentage
High Movement	423	1.1%
Moderate Movement	146	0.7%
Low Movement	268	0.4%
No Movement	38063	97.8%

### 4.3. Sliding Window Packets

The sliding window packets technique involves dividing a given dataset into fixed-length subsequences or packets and their corresponding labels. To achieve this, a sequence length parameter is used to determine the length of each subsequence. The sliding window approach is then employed, where a window starts at the beginning of the dataset and moves through the data with a step size of 1. A subsequence of the specified length is extracted from the dataset at each window position. The label for prediction is taken from the next position after the window.

The sliding window packets technique aims to predict future values or events based on preceding subsequences. For instance, if the sequence length is set to five, the sliding window will select five consecutive values from the dataset as a subsequence at each step. The label for prediction will be the value at the sixth position. This process continues until the end of the dataset is reached, resulting in multiple subsequences and their respective labels. Once the packets are created, they are flattened to form a single feature vector. For instance, if the sequence length is five and the dataset has twelve features, each packet will contain sixty elements (5x12). This transformation allows the packets to be treated as individual samples with multiple features suitable for ML models. The primary purpose of creating these packets is to address prediction tasks involving sequences where the input data's order and dependencies are crucial. The model can effectively capture and learn patterns and relationships within the sequential data by utilizing the sliding window packets. The flattened packets generated using the sliding window technique are inputs in oversampling techniques.

### 4.4. Oversampling

In our analysis, we encountered a significant class imbalance issue in the labeled data. The "No Movement" class, which represents the majority of the data, had a large number of data points. All other classes, including "High Movement," "Moderate Movement," and "Low Movement," represent minority classes, each constituting only 1%, 0.7%, and 0.4% of the total data, respectively. This class imbalance posed a challenge for building an effective classification model, as the skewed data distribution made it difficult to classify the minority class accurately.

To overcome the class imbalance challenge, we implemented several oversampling techniques, with a particular focus on SMOTE and its extensions (Chawla et al., 2002; Douzas et al., 2018; Han et al., 2005; He et al., 2008). SMOTE, which stands for Synthetic Minority Oversampling Technique, addresses the imbalance by generating synthetic data points for the minority class (Chawla et al., 2002). By utilizing the characteristics of existing samples from the minority classes, we created new data points, thereby increasing the representation of the "High Movement," "Moderate Movement," and "Low Movement" classes. In addition to the standard SMOTE, we also explored other variations such as K-Means SMOTE (Douzas et al., 2018), and Borderline SMOTE (Han et al., 2005) to further enhance the balance of class distribution.

Furthermore, we utilized the ADASYN, an extension of SMOTE that explicitly addresses the classification boundary of the minority class (He et al., 2008). ADASYN assigns higher weights to the minority examples that are more challenging to classify, leading to the generation of additional artificial data points for these instances. By incorporating ADASYN into our oversampling strategy, we enhanced the balance of the class distribution further and improved the classification accuracy for all classes.

261 Figure 1 illustrates the application of the K-Mean SMOTE technique for addressing the class imbalance. The  
 262 Fig. 1 depicts a scatter plot where the red crosses represent the minority class samples, while the black dots  
 263 represent the majority class samples. The green crosses indicate the newly generated synthetic samples by the  
 264 K-Mean SMOTE algorithm. The dashed line represents the decision boundary separating the two classes. K-  
 265 Mean SMOTE operates by following two simple steps iteratively (Douzas et al., 2018). Firstly, it assigns each  
 266 observation to the nearest cluster centroid among the  $k$  available. Secondly, it updates the position of the  
 267 centroids so that they are positioned at the centre between the assigned observations. The imbalance ratio (IR)  
 268 shown in Fig. 1 helps K-Means SMOTE determine the appropriate amount of oversampling for the minority  
 269 class, ensuring a balanced representation of the classes in synthetic samples. The parameter ' $k$ ' in all SMOTE  
 270 techniques was varied from 2 to 5 in this experiment to observe how different numbers of nearest neighbors  
 271 impact the diversity and quality of synthetic samples created, thereby affecting the performance of the model  
 272 on imbalanced data.

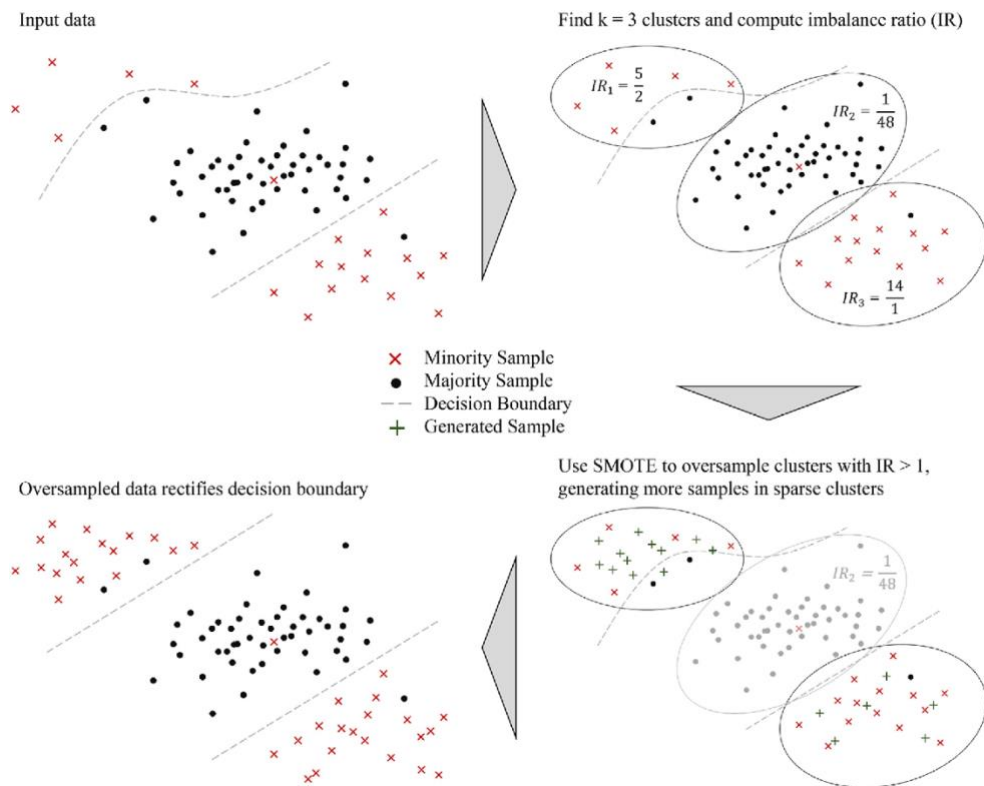


Figure 1: K-Means SMOTE effectively addresses within-class imbalance by oversampling safe areas (Douzas et al., 2018).

#### 273 4.5. Machine Learning Models

274 Various models were employed to classify the soil movement. The specific models will be discussed in the  
 275 following subsection. To evaluate the accuracy of these models, the dataset was divided into two groups: training  
 276 data (70%) and testing data (30%). Random sampling was used to select 70% of the data points for training the  
 277 classification models mentioned below, while the remaining 30% of the dataset was reserved for model  
 278 evaluation.

#### 279 **4.5.1. AdaBoost**

280 AdaBoost enhances ML model performance by combining results from multiple weak learners, techniques  
281 slightly better than random guessing (Wu et al., 2020). In the AdaBoost model, the number of trees sets the  
282 maximum weak models, impacting performance and overfitting. The learning rate influences each model's  
283 contribution, with a higher rate giving more weight. The maximum depth parameter prevents weak models from  
284 becoming too complex. Table 3 details the AdaBoost model's parameter range.

#### 285 **4.5.2. XGBoost**

286 XGBoost, a gradient-boosting ensemble ML model with decision trees (Chen and Guestrin, 2016), excels in  
287 structured data handling. The number of trees in XGBoost determines boosting rounds, impacting performance  
288 with a computational complexity trade-off. The learning rate influences convergence speed and generalization  
289 ability, and the maximum depth parameter prevents overfitting for enhanced interpretability. See Table 3 for the  
290 XGBoost model's parameter range.

#### 291 **4.5.3. Light GBM**

292 Light GBM, a gradient-boosting framework for tasks like ranking and classification (Ke et al., 2017), stands out  
293 with its leaf-wise approach, reducing loss, improving accuracy, and ensuring efficient learning. The number of  
294 trees in the model influences boosting rounds for potential performance enhancement. The learning rate  
295 parameter balances convergence speed and accuracy, while the maximum depth parameter controls complexity  
296 and prevents overfitting. See Table 3 for the Light GBM model's parameter range.

#### 297 **4.5.4. CatBoost**

298 CatBoost, short for Category Boosting, is an ML model developed by Yandex and released as an open-source  
299 tool (Prokhorenkova et al., 2018). In the CatBoost model, the choice of the loss function significantly impacts  
300 performance. Loss functions like log, entropy, or hinge are tailored for specific classification problems,  
301 influencing results. Table 3 outlines the range of parameters for the CatBoost model for fine-tuning and  
302 optimizing CatBoost's performance on a given dataset.

#### 303 **4.5.5. Random Forest**

304 RF, an ensemble learning method combining predictions from multiple decision trees (Breiman, 2001),  
305 constructs regression or classification models. Known for handling relationships and non-linearities without  
306 requiring variable independence assumptions, RF excels in various industries, including landslide prediction  
307 and site recognition. Optimizing RF performance involves adjusting parameters like the number of trees (DTs),  
308 splitting criteria (Gini or Entropy), and maximum tree depth, controlling robustness, accuracy, and complexity.  
309 Table 3 details parameter ranges for the RF model.

#### 310 **4.5.6. Multilayer Perceptron**

311 The MLP, a neural network architecture introduced by Rosenblatt in 1961, features interconnected layers: input,  
312 hidden, and output (Rosenblatt et al., 1961). Neurons calculate weighted sums, passing through activation  
313 functions to capture intricate relationships. Dropout layers prevent overfitting by deactivating neurons randomly  
314 during training, enhancing generalization. Versatile for classification, the MLP's look-back period influences  
315 temporal dependency capture, while the number of layers and nodes per layer governs complexity. Table 3  
316 outlines parameter ranges for the MLP model.



317 **4.5.7. LSTM**

318 The LSTM is a recurrent neural network that captures long-term dependencies in sequential data (Hochreiter  
 319 and Schmidhuber, 1997). It excels in various applications, including natural language processing and time series  
 320 forecasting. In our LSTM model, experiments explored different parameters: LSTM unit sizes (32, 64, 128,  
 321 256), activation functions (sigmoid, tanh, ReLU), and a look-back period ranging from 3 to 10. We chose the  
 322 categorical cross-entropy loss function for multi-class classification. Table 3 details the parameter range for the  
 323 LSTM model.

324 **4.5.8. Dynamic Ensembling**

325 Dynamic ensembling is a highly effective technique in ML that takes advantage of the adaptability and ongoing  
 326 improvement of predictive models (Ko et al., 2008). It involves creating a versatile and continuously evolving  
 327 ensemble by harnessing the strengths of multiple models, including RF, CatBoost, XGBoost, Light GBM, and  
 328 AdaBoost. Traditionally, ensembling methods like bagging and boosting have focused on fixed ensembles.  
 329 However, dynamic ensembling goes beyond this by introducing the ability to add or remove models based on  
 330 their performance dynamically. In the case of dynamic ensembling with the models, as mentioned earlier, the  
 331 monitoring criterion used is accuracy. Accuracy as the monitoring criterion ensures that the dynamic ensemble  
 332 maintains a high level of accuracy in its predictions. If a model falls below a predefined accuracy threshold, it  
 333 is considered underperforming and may be replaced to enhance the ensemble's overall performance.

334 Dynamic ensembling offers numerous advantages, including handling concept drift, where the underlying  
 335 data distribution changes over time. By incorporating new models that capture updated patterns and relationships  
 336 in the data, the dynamic ensemble can effectively adapt to concept drift and maintain accurate predictions.

337 The dynamic ensembling model utilized base models such as RF, CatBoost, XGBoost, Light GBM, and  
 338 AdaBoost. Each base model was trained individually with the same default parameter settings as their standalone  
 339 counterparts. The range of parameters for the dynamic ensemble model is mentioned in Table 3.

340 **Table 3.** The range of parameters varied in the models.

Model	Parameter	Range of Parameter
AdaBoost	Number of Trees	[10, 100] in steps of 5
	Learning Rate	[0.1, 2] in steps of 0.1
XGBoost	Number of Trees	[10, 100] in steps of 5
	Learning Rate	[0.05, 0.55] in steps of 0.05
	Maximum Depth	[5, 50] in steps of 5
Light GBM	Number of Trees	[10, 100] in steps of 5
	Learning Rate	[0.05, 0.55] in steps of 0.05
	Maximum Depth	[5, 50] in steps of 5
CatBoost	Loss Function	Log, Entropy, Hinge
	Learning Rate	[0.1, 2] in steps of 0.1
	Maximum Depth	[3, 33] in steps of 3
RF	Number of Trees	[10, 100] in steps of 5
	Criteria	Gini, Entropy
	Maximum Depth	[5, 50] in steps of 5
MLP	Look-back Period	3 to 10
	Layers	[1, 3]
	Nodes Per Layer	[50, 250] in steps of 50

	Learning Rate	[0.1, 0.9] in step of 0.1
LSTM	Look-back Period	3 to 10
	LSTM Units	32, 64, 128, 256
	Activation Function	Sigmoid, tanh, ReLU
	Learning Rate	[0.1, 0.9] in step of 0.1

## 341 5. Model Execution, Minimization, and Handling Class Imbalance

342 A rigorous process was followed to develop an effective model for predicting the intensity of soil movement.  
 343 The dataset was partitioned into a 70:30 ratio, with 70% allocated for training and 30% for testing. To tackle  
 344 the class imbalance issue in the training data, oversampling techniques were applied exclusively to the training  
 345 set, ensuring a balanced representation of all three classes. The oversampling methods were not extended to the  
 346 testing data, preserving its original distribution. In this study, we developed two methods, referred to as method  
 347 5 Training Datasets (5-TD) and method 5-fold cross-validation (5-CV). Method 5-TD was employed for  
 348 parameter variation analysis across different datasets. On the other hand, method 5-CV was utilized for  
 349 conducting 5-fold cross-validation to analyze the performance of the ML models.

### 350 5.1. Method 5-TD

351 For method 5-TD, the training dataset was split into five training datasets, each utilized for parameter variation  
 352 analysis. This involved training and optimizing the ML model on each dataset independently using the grid  
 353 search method. Since each dataset possessed different optimal parameters, we calculated the mean and stdev of  
 354 the ML-optimized parameter values across all datasets to assess parameter variability. This enabled us to observe  
 355 parameter variations across the ML models, providing insights into the sensitivity of the models to different  
 356 dataset characteristics and parameter configurations. A lower stdev implied that the model maintained  
 357 consistency across each dataset and demonstrated robust generalization capabilities. Conversely, a higher stdev  
 358 suggested that the model encountered difficulties maintaining consistency across datasets, potentially hindering  
 359 its ability to learn general patterns effectively. The evaluation primarily focused on F1 score metrics to determine  
 360 how effectively the models predicted the intensity of soil movements in each of the 5 datasets.

### 361 5.2. Method 5-CV

362 For method 5-CV, a suite of ML models underwent training using a 5-fold cross-validation approach (Kumar et  
 363 al., 2023). In the 5-CV method, the training data was split into 5 datasets, where each dataset was alternately  
 364 used for validation while the others were used for training. The models were optimized by employing grid search  
 365 methodology and optimized based on performance on the 5 validation sets, and a single set of best-performing  
 366 parameters was selected for each model. Subsequently, the models with the best parameters found during  
 367 training were tested on the independent testing data, and their performance metrics were reported as indicative  
 368 of their predictive capabilities. The evaluation primarily focused on F1 score metrics to determine how  
 369 effectively the models predicted the intensity of soil movement across the 5 validation sets and the test set.

## 370 6. Results

### 371 6.1. Parameter Analysis Result

372 Upon scrutinizing the parameter analysis presented in Table 4 from method 5-TD, a discernible trend emerged:  
 373 models trained with oversampling techniques exhibit notably smaller stdevs than their counterparts trained  
 374 without oversampling. For instance, when examining the AdaBoost model, we observe that the stdev of the

number of trees parameter was 0 for the oversampling case. In contrast, it stood at 16.43 for the dataset without oversampling. This phenomenon underscores the stabilizing effect of oversampling on parameter estimates, mitigating the variability that may arise from imbalanced datasets.

Similarly, in the case of the RF model, the stdev of the number of trees parameter was 0 with oversampling, indicating consistent parameter values across folds. Conversely, for the dataset without oversampling, the stdev increased to 21.21, suggesting greater variability in parameter estimates. This trend persisted across various models and parameters, highlighting the robustness imparted by oversampling techniques in stabilizing model performance.

Overall, these examples underscore the importance of oversampling in reducing parameter variability and ensuring consistent model behaviour, particularly in scenarios involving imbalanced datasets.

**Table 4.** The result of parameter variation analysis across five datasets from method 5-TD.

Model	Parameter	With Oversampling		Without Oversampling	
		Mean	stdev	Mean	stdev
AdaBoost	Number of Trees	80	0	62	16.43
	Learning Rate	0.66	0.22	0.9	0
XGBoost	Number of Trees	50	0	50	0
	Maximum Depth	20	0	10	0
	Learning Rate	0.5	0	0.68	0.16
Light GBM	Number of Trees	50	0	50	0
	Maximum Depth	20	0	20	0
	Learning Rate	0.5	0	0.6	0.12
CatBoost	Number of Trees	50	0	50	0
	Maximum Depth	20	0	20	0
	Learning Rate	0.8	0	0.66	0.13
RF	Number of Trees	80	0	50	21.21
	Maximum Depth	20	0	20	0
MLP	Look-back Period	2.8	0.44	3.6	1.34
	Layers	2	0	2	0
	Nodes in First Layer	130	67.08	130	67.08
	Nodes in Second Layer	200	0	60	54.77
	Learning Rate	0.78	0.16	0.64	0.28
LSTM	Look-back Period	4.6	0.89	4	1.41
	Layers	2	0	2	0
	Nodes in First Layer	90	22.36	70	27.39
	Nodes in Second Layer	160	54.77	100	61.24
	Learning Rate	0.84	0.08	0.86	0.05

## 6.2. Optimized Parameters

In method 5-CV, we optimized the parameters separately for the ML models using a 5-fold cross-validation process on the full training dataset. In analyzing various SMOTE techniques, the parameter 'k', representing the count of nearest neighbors for synthesizing new samples, was consistently optimized at a value of four. Table 5 presents each model's optimized parameter values obtained through the grid search in 5-CV on the training dataset. These parameters were carefully fine-tuned to ensure the best fit for the given data. In the case of

AdaBoost, the optimized values included 80 trees and a learning rate of 0.6. The optimized values for the XGBoost model consisted of 50 trees, a learning rate of 0.3, and a maximum depth of 10. These settings were determined to enhance the model's performance in terms of both speed and accuracy.

Similarly, the Light GBM model underwent parameter optimization, selecting 50 trees, a learning rate of 0.5, and a maximum depth of 20. Next, the CatBoost model was also optimized, leading to entropy selection as the loss function, a learning rate of 0.8, 50 trees, and a maximum depth of 20. In the RF model, the optimized values were 80 for the number of trees and 20 for the maximum depth, and the evaluation criteria were set to "Gini." Likewise, the MLP model optimized its parameters with a look-back period of 3, 2 layers, and 200 nodes per layer. Similarly, the LSTM model consists of two layers with 100 and 200 nodes in the first and second layers and utilizes a ReLU activation function. Lastly, the dynamic ensemble model in this study incorporated the optimized RF, CatBoost, XGBoost, Light GBM, and AdaBoost models to improve the accuracy of landslide analysis predictions. By leveraging the strengths of these individually optimized models, as mentioned above, the dynamic ensembling model aimed to improve the accuracy and reliability of landslide analysis predictions.

**Table 5.** The best value of the parameters was calibrated from the training data using method 5-CV.

Model	Parameter	Best Value of Parameter
AdaBoost	Number of Trees	80
	Learning Rate	0.6
XGBoost	Number of Trees	50
	Learning Rate	0.3
	Maximum Depth	10
Light GBM	Number of Trees	50
	Learning Rate	0.5
	Maximum Depth	20
CatBoost	Loss Function	Entropy
	Learning Rate	0.8
	Number of Trees	50
	Maximum Depth	20
RF	Number of Trees	80
	Criteria	Gini
	Maximum Depth	20
MLP	Look-back Period	3
	Layers	2
	Nodes Per Layer	200 in both layers
	Learning Rate	0.6
LSTM	Look-back Period	5
	LSTM Units	100 in first and 200 in second layer
	Activation Function	ReLU
	Learning Rate	0.9

### 6.2.1. Train-Test Results

Table 6 presents the training results of different classification models evaluated using 5-fold cross-validation on the training dataset and various oversampling techniques for landslide prediction, utilizing method 5-CV. In

Table 6, C0, C1, C2, and C3 represent no movement, low movement, moderate movement, and high movement classes' accuracies, respectively. These results provide valuable insights into the performance of each model when trained on the training dataset with and without oversampling. The XGBoost model with K-Mean SMOTE emerged as the best model in training, achieving outstanding accuracy, precision, recall, and F1 scores of 0.999, 0.999, 0.999, and 0.999, respectively. The dynamic ensemble model with K-Mean SMOTE and Borderline SMOTE techniques also performed similarly with 0.998 F1 scores. It demonstrates remarkable predictive capability by achieving perfect accuracy in oversampling scenarios. When the XGBoost model was trained without oversampling, its accuracy, precision, recall, and F1 score were notably lower, with values of 0.999, 0.999, 0.971, and 0.985, respectively.

Table 7 presents the test results of various classification models combined with different oversampling techniques for landslide prediction (here models were trained using the method 5-CV). In Table 7, C0, C1, C2, and C3 represent no movement, low movement, moderate movement, and high movement classes' accuracies, respectively. Among them, the dynamic ensemble model utilizing the K-Mean SMOTE technique demonstrated exceptional performance in accurately predicting landslides on unseen data. It achieves impressive accuracy, precision, and recall rates of 0.995, 0.995, and 0.995, respectively, along with an F1 score of 0.995. These outstanding results confirm the effectiveness of the dynamic ensemble approach when combined with K-Mean SMOTE for accurate soil movement prediction. Similarly, the Borderline SMOTE technique also showed similar performance with accuracy, precision, recall, and an F1 score of 0.995 for all. When the model is tested without oversampling, its accuracy, precision, recall, and F1 score are notably lower, with values of 0.981, 0.646, 0.397, and 0.462, respectively. The best-performing model is highlighted in bold in Table 6 and Table 7.

Moreover, it is noteworthy that K-Means SMOTE consistently outperformed other oversampling techniques across all models during the test performance evaluations, establishing itself as the optimal technique. Notably, it is crucial to highlight the impact of oversampling on the performance of the dynamic ensemble model. This underscores the discernible effectiveness of K-Means SMOTE in generating oversampling for the soil movement dataset. The success of K-Means SMOTE can be attributed to its ability to identify clusters within the minority class and select similar features for oversampling. The IR employed by K-Means SMOTE aids in determining the appropriate degree of oversampling for the minority class, ensuring a balanced representation of classes in synthetic samples.

Moreover, the absence of oversampling techniques negatively impacted the models' performance in both training and testing. Without oversampling, the models exhibited lower accuracy, precision, recall, and F1 scores during training and testing, emphasizing the challenges posed by class imbalance. In the absence of balanced representation through oversampling, the models struggled to effectively learn and generalize from the imbalanced dataset. Consequently, this underscores the pivotal role of oversampling in mitigating class imbalance issues, leading to substantial enhancements in predictive accuracy and overall model robustness during training and testing evaluations.

Models trained with oversampling techniques consistently demonstrate comparable performance across both training and testing datasets, indicating a lack of overfitting. Conversely, models trained without oversampling, notably RF, MLP, LSTM, and Dynamic Ensemble, exhibit signs of overfitting, as evidenced by significantly higher performance metrics on the training dataset relative to the testing dataset. This observation underscores the effectiveness of oversampling techniques in mitigating overfitting by enhancing the model's ability to generalize to unseen data.

Comparing the dynamic ensemble model with other classification models, it becomes evident that the dynamic ensemble model with K-Mean SMOTE consistently outperformed the rest, highlighting their effectiveness in accurately predicting landslides.

These findings underscore the importance of carefully selecting appropriate ML models and employing suitable oversampling techniques to address the class imbalance challenge in soil movement prediction. They provide valuable insights into the performance and suitability of these models and techniques for enhancing landslide prediction accuracy, ultimately enabling proactive measures to mitigate landslide risks.

In Fig. 2, we juxtaposed the performance metrics obtained using K-Means SMOTE against those obtained without oversampling across various machine learning models. In Fig. 2, the blue bars represent the F1 score

achieved with K-Means SMOTE (oversampling), while the orange bars represent the F1 score without oversampling. Notably, when comparing the performance in the test dataset using the F1 score metric, the oversampling dataset generated with K-Means SMOTE consistently yielded superior results compared to the without oversampling approach. For instance, in the case of the AdaBoost model, K-Means SMOTE resulted in an F1 score of 0.412 for the without oversampling technique, whereas it achieved an F1 score of 0.445 for K-Means SMOTE. Similarly, in the XGBoost model, the F1 score improved from 0.447 without oversampling to 0.842 with K-Means SMOTE. This trend persisted across various other models such as Light GBM, CatBoost, RF, MLP, LSTM, and Dynamic Ensemble, where K-Means SMOTE consistently demonstrated superior performance in terms of F1 score compared to without oversampling. These results underscore the effectiveness of K-Means SMOTE in enhancing the predictive performance of ML models for soil movement prediction tasks.

Figure 3 illustrates the confusion matrix depicting the performance of the Dynamic Ensemble model on both the training and testing datasets, utilizing the K-Mean SMOTE oversampling technique. The confusion matrix provides a comprehensive overview of the model's classification accuracy by presenting the true and predicted labels across different classes. The Dynamic Ensemble model demonstrates robust performance in the training dataset, as evidenced by the high counts along the diagonal, indicating a substantial number of correct predictions across all classes. Similarly, in the testing dataset, the model maintains its efficacy, with the majority of samples correctly classified across various classes.

**Table 6.** Results of ML models obtained from the training dataset using 5-fold cross-validation in method 5-CV.

Model	Oversampling Technique	Accuracy					Precision	Recall	F1 Score
		C0	C1	C2	C3	Overall			
AdaBoost	SMOTE	0.942	0.562	0.640	0.817	0.747	0.748	0.747	0.747
	K-Means SMOTE	0.948	0.760	0.675	0.855	0.807	0.809	0.807	0.806
	Borderline SMOTE	0.919	0.565	0.667	0.815	0.740	0.741	0.740	0.740
	ADASYN	0.934	0.552	0.649	0.798	0.740	0.741	0.740	0.740
	Without Oversampling	0.995	0.250	0.243	0.341	0.980	0.575	0.465	0.506
XGBoost	SMOTE	0.995	0.999	0.999	0.997	0.998	0.998	0.998	0.998
	<b>K-Means SMOTE</b>	<b>0.997</b>	<b>0.999</b>	<b>0.999</b>	<b>0.998</b>	<b>0.999</b>	<b>0.999</b>	<b>0.999</b>	<b>0.999</b>
	Borderline SMOTE	0.996	0.999	0.999	0.998	0.998	0.998	0.998	0.998
	ADASYN	0.994	0.999	0.999	0.997	0.998	0.998	0.998	0.998
	Without Oversampling	1.000	0.995	0.953	0.906	0.999	0.999	0.971	0.985
Light GBM	SMOTE	0.984	0.994	0.999	0.988	0.991	0.991	0.991	0.991
	K-Means SMOTE	0.991	0.998	0.998	0.996	0.996	0.996	0.996	0.996
	Borderline SMOTE	0.985	0.999	0.999	0.995	0.995	0.995	0.995	0.995
	ADASYN	0.983	0.994	0.998	0.987	0.991	0.991	0.991	0.991
	Without Oversampling	1.000	1.000	1.000	0.976	0.994	0.999	0.999	0.996
CatBoost	SMOTE	0.990	0.999	0.999	0.997	0.997	0.997	0.997	0.997
	K-Means SMOTE	0.991	0.999	0.999	0.997	0.997	0.997	0.997	0.997
	Borderline SMOTE	0.992	0.999	0.999	0.997	0.997	0.997	0.997	0.997



	Borderline SMOTE	0.994	0.905	0.769	0.733	0.990	0.803	0.850	0.823
	ADASYN	0.990	0.988	0.974	0.830	0.988	0.761	0.946	0.837
	Without Oversampling	0.996	0.250	0.026	0.333	0.980	0.553	0.401	0.447
Light GBM	SMOTE	0.983	0.905	0.974	0.748	0.980	0.656	0.903	0.750
	K-Means SMOTE	0.984	0.917	0.872	0.704	0.980	0.654	0.869	0.737
	Borderline SMOTE	0.990	0.738	0.667	0.637	0.983	0.695	0.758	0.720
	ADASYN	0.981	0.917	0.974	0.741	0.978	0.638	0.903	0.735
	Without Oversampling	0.996	0.214	0.205	0.326	0.980	0.547	0.435	0.472
CatBoost	SMOTE	0.986	0.964	0.974	0.852	0.984	0.705	0.944	0.799
	K-Means SMOTE	0.988	0.952	0.974	0.815	0.986	0.726	0.932	0.810
	Borderline SMOTE	0.990	0.798	0.641	0.689	0.984	0.720	0.779	0.743
	ADASYN	0.987	0.988	0.974	0.859	0.985	0.722	0.952	0.814
	Without Oversampling	0.997	0.226	0.179	0.311	0.981	0.611	0.428	0.487
RF	SMOTE	0.988	0.988	0.974	0.970	0.988	0.763	0.980	0.851
	K-Means SMOTE	0.995	0.917	0.821	0.867	0.993	0.885	0.900	0.889
	Borderline SMOTE	0.991	0.976	0.974	0.956	0.991	0.801	0.974	0.875
	ADASYN	0.989	0.988	0.974	0.978	0.988	0.757	0.982	0.848
	Without Oversampling	0.998	0.190	0.051	0.289	0.980	0.676	0.382	0.440
MLP	SMOTE	0.958	1.000	1.000	0.948	0.958	0.554	0.977	0.671
	K-Means SMOTE	0.965	0.988	0.974	0.830	0.964	0.578	0.939	0.689
	Borderline SMOTE	0.937	0.750	0.641	0.659	0.932	0.444	0.747	0.518
	ADASYN	0.927	1.000	0.974	0.963	0.928	0.554	0.966	0.652
	Without Oversampling	0.995	0.012	0.026	0.015	0.974	0.380	0.262	0.270
LSTM	SMOTE	0.878	0.774	0.897	0.815	0.877	0.451	0.841	0.522
	K-Means SMOTE	0.981	0.869	0.923	0.763	0.977	0.693	0.884	0.766
	Borderline SMOTE	0.948	0.917	1.000	0.919	0.948	0.527	0.946	0.636
	ADASYN	0.953	0.952	1.000	0.911	0.953	0.552	0.954	0.661
	Without Oversampling	0.996	0.488	0.667	0.415	0.985	0.804	0.642	0.704
Dynamic Ensemble	SMOTE	0.978	0.999	0.999	0.997	0.994	0.994	0.994	0.994
	<b>K-Means SMOTE</b>	<b>0.999</b>	<b>1.000</b>	<b>0.979</b>	<b>1.000</b>	<b>0.995</b>	<b>0.995</b>	<b>0.995</b>	<b>0.995</b>
	Borderline SMOTE	0.982	0.999	0.999	0.997	0.995	0.995	0.995	0.995
	ADASYN	0.979	0.999	0.999	0.997	0.994	0.994	0.994	0.994
	Without Oversampling	0.998	0.167	0.128	0.296	0.981	0.646	0.397	0.462



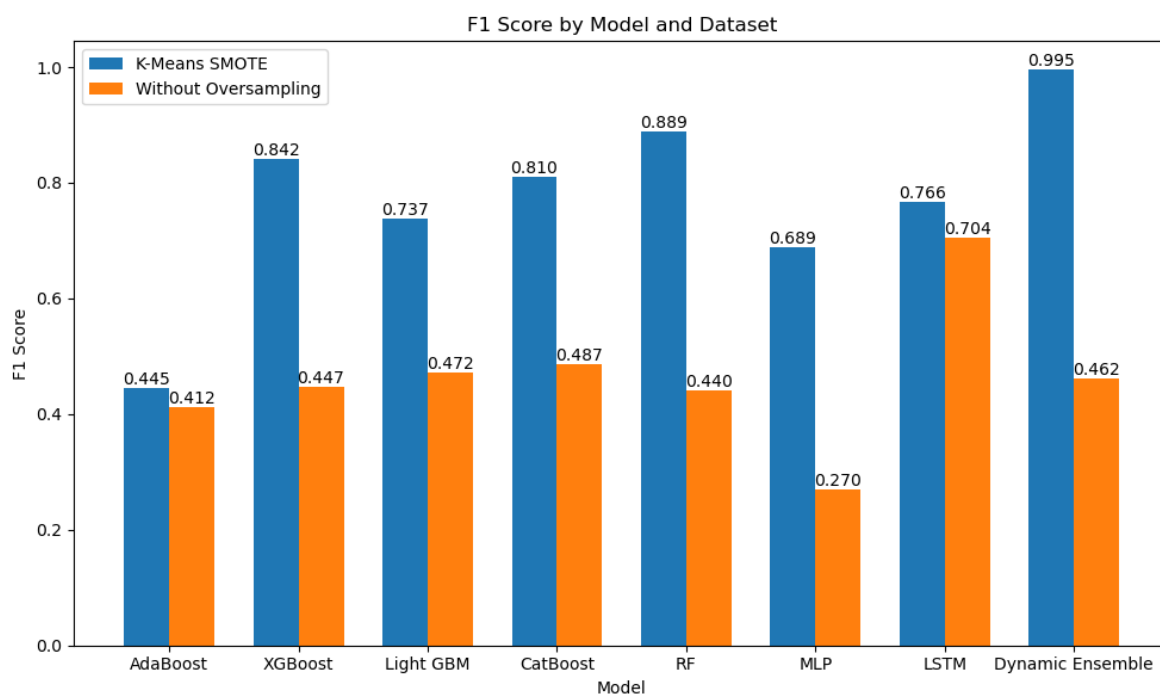


Figure 2: Comparison of F1 Score performance between K-Means SMOTE and without oversampling techniques across various ML models for soil movement prediction in testing. Blue bars represent F1 scores achieved with K-Means SMOTE, while orange bars represent F1 scores obtained without oversampling.

479

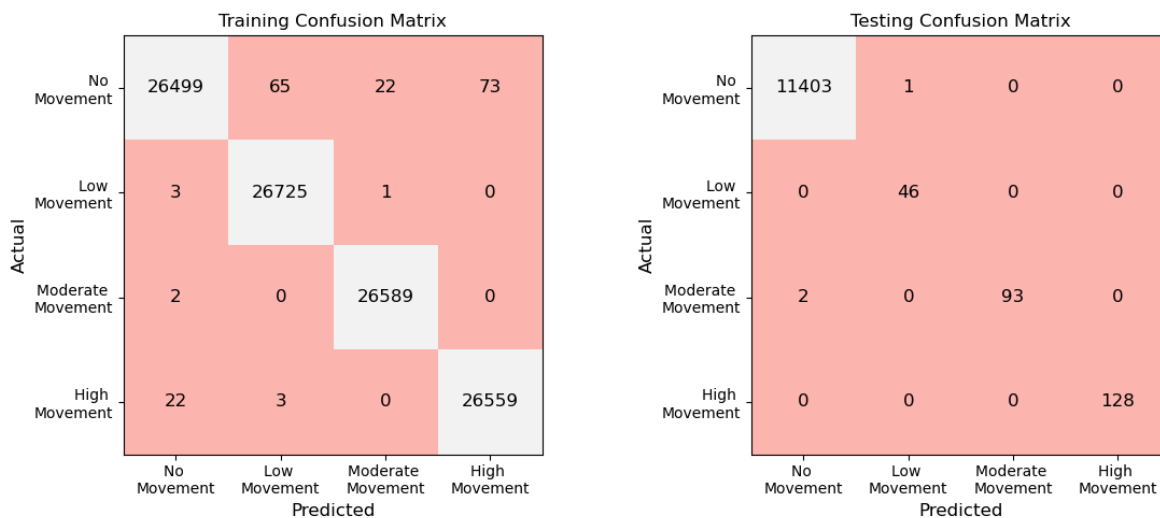


Figure 3: Confusion matrix depicting the performance of the Dynamic Ensemble model on the training and testing datasets using K-Means SMOTE oversampling technique.

480

## 7. Discussion and Conclusions

In summary, the threat posed by landslides requires the development of effective prediction frameworks, although modelling the chaotic nature of natural data remains challenging. The analyzed dataset exhibited a significant class imbalance, with the majority class dominating the samples. This distribution imbalance necessitated careful consideration and appropriate techniques to address the issue.

Various oversampling techniques were employed to tackle the class imbalance, including SMOTE and its extensions (K-Means SMOTE, Borderline SMOTE, and ADASYN). ADASYN, which focuses on the minority class boundary, effectively generated synthetic data points and improved the class distribution balance.

Multiple classification models, such as ADABOOST, XGBOOST, Light GBM, CatBoost, RF, MLP, LSTM, and a dynamic ensemble, were evaluated to predict soil movement. The grid search approach and 5-CV were employed to optimize the parameters of each model. Within the 5-CV framework, the parameter analysis was conducted on each fold treated as an independent dataset, allowing for a comprehensive assessment of parameter variability across different dataset splits. This approach facilitated the identification of optimal parameter configurations that yielded consistent performance across diverse dataset distributions. By treating each fold as an independent dataset, the parameter analysis provided insights into the variability of parameter values, thereby enhancing our understanding of how the models generalize to unseen data.

The ML models' training results highlight oversampling's significant impact on model performance. The dynamic ensemble model, particularly when coupled with K-Means SMOTE, emerges as the standout performer in the training phase. This model demonstrates superior predictive capabilities by achieving remarkable accuracy, precision, recall, and F1 scores of 0.998, 0.998, 0.998, and 0.998, respectively.

Furthermore, these models were tested to assess their ability to generalize well to unseen data. The testing results showcased the dynamic ensemble model with K-Means SMOTE as the top performer, achieving an outstanding accuracy of 0.995, precision of 0.995, recall of 0.995, and an F1 score of 0.995. This confirms that the exceptional performance observed in training extends to the testing phase, emphasizing the robustness and reliability of the dynamic ensemble approach with K-Means SMOTE. Moreover, the dynamic ensemble model incorporating Borderline SMOTE emerges as the second-best model in the test phase, showcasing high accuracy, precision, and recall rates of 0.995, 0.995, and 0.995, respectively, along with an F1 score of 0.995. This result reinforces the reliability and robustness of the model in tackling landslide prediction tasks.

The superior performance of the K-Means SMOTE technique can be attributed to its ability to identify clusters within the minority class and generate synthetic samples that maintain the underlying structure of the data. By considering the IR, K-Means SMOTE ensures a balanced representation of classes in the synthetic samples, contributing to improved model generalization and predictive accuracy. Furthermore, the lack of oversampling adversely affected both training and testing performances. The models faced challenges in learning and generalizing from the imbalanced dataset without a balanced representation.

On the other hand, the success of the dynamic ensemble model, comprising AdaBoost, XGBoost, Light GBM, CatBoost, and RF, can be attributed to the complementary strengths of these diverse algorithms. Ensemble methods leverage the collective decision-making power of multiple models, each capturing different aspects of the underlying data patterns. The combination of boosting algorithms like AdaBoost, gradient boosting methods like XGBoost, tree-based models like Light GBM and CatBoost, and the robustness of RF creates a robust and versatile ensemble that excels in handling various aspects of the dataset, contributing to its overall superior performance.

In summary, the findings underscore the critical role of oversampling techniques, especially K-Means SMOTE, in enhancing the predictive performance of landslide prediction models. The success of the dynamic ensemble model further highlights the importance of ensemble techniques in aggregating diverse model predictions for improved accuracy.

The superior performance demonstrated by oversampling techniques compared to without oversampling can be attributed to several factors. Firstly, oversampling techniques address class imbalance by generating synthetic samples for minority classes, thus providing the model with more representative training data. This allows the ML model to learn the underlying patterns of the minority class more effectively, leading to improved

530 classification performance. Additionally, oversampling techniques help reduce the risk of overfitting by  
531 providing a more balanced representation of the dataset, enhancing the model's ability to generalize to unseen  
532 data. Moreover, by increasing the diversity of the training data, oversampling techniques enable the model to  
533 capture a wider range of variation within the dataset, resulting in better generalization performance. Overall,  
534 using oversampling techniques ensures that the ML model is better equipped to handle imbalanced datasets,  
535 leading to enhanced predictive performance in soil movement prediction tasks.

536 Furthermore, the parameter analysis reveals that oversampling techniques add generalized information to the  
537 dataset, making it more consistent across different datasets. This reduced variability in the dataset allows ML  
538 models to learn these generalized patterns more effectively. As evident in the parameter analysis results,  
539 oversampling techniques lead to smaller stdev in parameter values across different models, indicating improved  
540 consistency and generalization. This further supports the notion that oversampling techniques help mitigate  
541 overfitting and enhance the overall performance of ML models in soil movement prediction tasks.

542 Despite these achievements, it is crucial to acknowledge the study's limitations. The generalizability of the  
543 findings to different geological conditions or regions may be restricted due to the specificity of the dataset.  
544 While effective, the synthetic data points generated through oversampling may only capture part of the  
545 complexity inherent in real-world landslide occurrences. The choice of classification models and parameter  
546 settings introduces a level of bias, with alternative configurations potentially yielding different results.  
547 Additionally, relying on historical data may limit the model's ability to account for future changes or unforeseen  
548 events, such as changes in rainfall intensity, seismic activity, or human influences.

549 In future work, the exploration of encoder-decoder or transformer models on the class-imbalanced movement  
550 dataset is planned. These models, known for their success in sequence-to-sequence tasks, may improve  
551 classification accuracy and address class imbalance challenges. This avenue of experimentation aims to provide  
552 valuable insights into the suitability of advanced models for analyzing and modelling imbalanced movement  
553 data.

554 To sum up, the study contributes to understanding landslide risks and supports the development of effective  
555 preventive measures. The combination of robust oversampling techniques, ensemble modelling, and a  
556 systematic approach to parameter tuning yields a promising framework for accurate landslide prediction. The  
557 work presented lays the groundwork for future research to refine models and address the inherent challenges in  
558 landslide prediction tasks.

## 559 **Author contribution**

560 The manuscript benefited from the collaborative efforts of each author. Praveen Kumar played a central role in  
561 conceptualizing the research, drafting the original manuscript, and conducting experiments. Priyanka Priyanka  
562 contributed significantly to the project by curating data, developing methodologies, and ensuring  
563 methodological accuracy. Kala Venkata Uday provided valuable insights and contributed to the project by  
564 validating the data. Varun Dutt supervised the experiment, ensuring adherence to best practices and providing  
565 guidance throughout the research process. Together, the collective contributions of all authors have enriched the  
566 manuscript, resulting in a comprehensive and robust study.

## 567 **Competing interests**

568 The authors declare that they have no conflict of interest.

## 569 Acknowledgements

570 We want to acknowledge and express our sincere gratitude to the DST, India, and the DDMA Kangra  
 571 (IITM/DDMA-Kan/KVU/357), Kinnaur (IITM/DDMA-Kinn/VD/345), and Mandi (IITM/DDMA-M/VD/325  
 572 and IITM/DDMA-M/VD/358) for their invaluable financial support towards this research project. We are also  
 573 immensely grateful to the IIT Mandi for generously facilitating us with the necessary infrastructure, including  
 574 research facilities and computational resources, that have been instrumental in the successful execution of this  
 575 study.

## 576 References

- 577 Breiman, L.: Random forests. *Machine learning*, 45, 5-32, 2001.
- 578 Chawla, N. V., Bowyer, K. W., Hall, L. O., & Kegelmeyer, W. P.: SMOTE: synthetic minority over-sampling  
 579 technique. *Journal of artificial intelligence research*, 16, 321-357, 2002.
- 580 Chen, T., & Guestrin, C.: Xgboost: A scalable tree boosting system. In Proceedings of the 22nd acm sigkdd international  
 581 conference on knowledge discovery and data mining, pp. 785-794, 2016.
- 582 Crosta, G.: Regionalization of rainfall thresholds: an aid to landslide hazard evaluation. *Environmental Geology*, 35(2), 131-  
 583 145, 1998.
- 584 Douzas, G., Bacao, F., & Last, F.: Improving imbalanced learning through a heuristic oversampling method based on k-  
 585 means and SMOTE. *Information Sciences*, 465, 1-20, 2018.
- 586 Gupta, V., Bhasin, R. K., Kaynia, A. M., Tandon, R. S., & Venkateshwarlu, B.: Landslide hazard in the Nainital township,  
 587 Kumaun Himalaya, India: the case of September 2014 Balia Nala landslide. *Natural Hazards*, 80, 863-877, 2016
- 588 Han, H., Wang, W. Y., & Mao, B. H.: Borderline-SMOTE: a new over-sampling method in imbalanced data sets learning.  
 589 In Advances in Intelligent Computing: International Conference on Intelligent Computing, ICIC 2005, Hefei, China,  
 590 August 23-26, 2005, Proceedings, Part I 1, pp. 878-887, 2005.
- 591 He, H., Bai, Y., Garcia, E. A., & Li, S.: ADASYN: Adaptive synthetic sampling approach for imbalanced learning. In 2008  
 592 *IEEE international joint conference on neural networks (IEEE world congress on computational intelligence)*, pp.  
 593 1322-1328, 2008.
- 594 Hochreiter, S., & Schmidhuber, J.: Long short-term memory. *Neural computation*, 9(8), 1735-1780, 1997.
- 595 Ke, G., Meng, Q., Finley, T., Wang, T., Chen, W., Ma, W., ... & Liu, T. Y.: Lightgbm: A highly efficient gradient boosting  
 596 decision tree. *Advances in neural information processing systems*, 30, 2017.
- 597 Ko, A. H., Sabourin, R., & Britto Jr, A. S.: From dynamic classifier selection to dynamic ensemble selection. *Pattern  
 598 recognition*, 41(5), 1718-1731, 2008.
- 599 Kumar, P., Sihag, P., Sharma, A., Pathania, A., Singh, R., Chaturvedi, P., & Dutt, V.: Prediction of Real-World Slope  
 600 Movements via Recurrent and Non-recurrent Neural Network Algorithms: A Case Study of the Tangni  
 601 Landslide. *Indian Geotechnical Journal*, 51(4), 788-810 (2021a).
- 602 Kumar, P., Sihag, P., Chaturvedi, P., Uday, K. V., & Dutt, V.: BS-LSTM: an ensemble recurrent approach to forecasting soil  
 603 movements in the real world. *Frontiers in Earth Science*, 9, 696-792 (2021b).
- 604 Kumar, P., Sihag, P., Pathania, A., Agarwal, S., Mali, N. C. P., Singh, R., ... & Dutt, V.: Landslide debris-flow prediction  
 605 using ensemble and non-ensemble machine-learning methods. In *International Conference on Time Series and  
 606 Forecasting* (Vol. 1), 2019.
- 607 Kumar, P., Priyanka, Pathania, A., Agarwal, S., Mali, N., Singh, R., ... & Dutt, V.: Predictions of weekly slope movements  
 608 using moving-average and neural network methods: a case study in Chamoli, India. In *Soft Computing for Problem  
 609 Solving 2019: Proceedings of SocProS 2019, Volume 2*, pp. 67-81, 2020.
- 610 Kumar, P., Priyanka, P., Dhanya, J., Uday, K. V., & Dutt, V.: Analyzing the Performance of Univariate and Multivariate  
 611 Machine Learning Models in Soil Movement Prediction: A Comparative Study. *IEEE Access*, 11, 62368–62381, 2023
- 612 Parkash, S.: Historical records of socio-economically significant landslides in India. *Journal of South Asia Disaster Studies*,  
 613 4(2), 177-204, 2011.

- 614 Pathania, A., Kumar, P., Priyanka, P., Maurya, A., Uday, K. V., & Dutt, V.: Development of an Ensemble Gradient Boosting  
615 Algorithm for Generating Alerts About Impending Soil Movements. In *Machine Learning, Deep Learning and*  
616 *Computational Intelligence for Wireless Communication: Proceedings of MDCWC 2020*, pp. 365-379, 2021.
- 617 Pathania, A., Kumar, P., Sihag, P., Chaturvedi, P., Singh, R., Uday, K. V., & Dutt, V.: A low-cost, sub-surface IoT framework  
618 for landslide monitoring, warning, and prediction. In *Proceedings of 2020 International conference on advances in*  
619 *computing, communication, embedded and secure systems*, 2020.
- 620 Prokhorenkova, L., Gusev, G., Vorobev, A., Dorogush, A. V., & Gulin, A.: CatBoost: unbiased boosting with categorical  
621 features. *Advances in neural information processing systems*, 31, 2018.
- 622 Ray, R. L., Lazzari, M., & Olutimehin, T.: Remote sensing approaches and related techniques to map and study  
623 landslides. *Landslides Investig. Monit.*, 2020.
- 624 Rosenblatt, F.: Principles of neurodynamics. perceptrons and the theory of brain mechanisms. *Cornell Aeronautical Lab Inc*  
625 *Buffalo NY*, 1961.
- 626 Sahin, E. K.: Comparative analysis of gradient boosting algorithms for landslide susceptibility mapping. *Geocarto*  
627 *International*, 37(9), 2441-2465, 2022.
- 628 Semwal, T., Priyanka, P., Kumar, P., Dutt, V., & Uday, K. V.: Predictions of Root Tensile Strength for Different Vegetation  
629 Species Using Individual and Ensemble Machine Learning Models. In *Trends on Construction in the Digital Era:*  
630 *Proceedings of ISIC 2022*, pp. 87-100, 2022.
- 631 Wu, Y., Ke, Y., Chen, Z., Liang, S., Zhao, H., & Hong, H.: Application of alternating decision tree with AdaBoost and  
632 bagging ensembles for landslide susceptibility mapping. *Catena*, 187, 104396, 2020.
- 633 Zhang, S., Wang, Y., & Wu, G.: Earthquake-Induced Landslide Susceptibility Assessment Using a Novel Model Based on  
634 Gradient Boosting Machine Learning and Class Balancing Methods. *Remote Sensing*, 14(23), 5945, 2022.