

A physics-based model for fluvial valley width

Jens M. Turowski¹, Aaron Bufe^{1,2}, Stefanie Tofelde^{3,4}

¹ Helmholtz Zentrum Potsdam, GeoForschungsZentrum (GFZ) Potsdam, Potsdam, Germany

² Department of Earth and Environmental Sciences, Ludwig-Maximilians-Universität München, Munich, Germany

5 ³ Institute of Geosciences, University of Potsdam, Potsdam, Germany

⁴ Now at: Institute of Geological Sciences, Freie Universität Berlin, Berlin, Germany

Correspondence to: Jens M. Turowski (jens.turowski@gfz-potsdam.de)

Abstract. The width of fluvial valley-floors is a key parameter to quantifying the morphology of mountain regions. Valley-
10 floor width is relevant to diverse fields including sedimentology, fluvial geomorphology, and archaeology. The width of
valleys has been argued to depend on climatic and tectonic conditions, on the hydraulics and hydrology of the river channel
that forms the valley, and on sediment supply from valley walls. Here, we derive a physically-based model that can be used to
predict valley width and test it against three different datasets. The model applies to valleys that are carved by a river migrating
laterally across the valley floor. We conceptualize river migration as a Poisson process, in which the river changes its direction
15 stochastically, at a mean rate determined by hydraulic boundary conditions. This approach yields a characteristic timescale for
the river to ~~one~~-cross the valley floor from one wall to the other. The valley width can then be determined by integrating the
speed of migration over this timescale. For a laterally unconfined river that is not uplifting, the model predicts that the channel-
belt width scales with river-flow depth. Channel-belt width corresponds to the maximum width of a fluvial valley. We expand
the model to include the effects of uplift and lateral sediment supply from valley walls. Both of these effects lead to a decrease
20 in valley width in comparison to the maximum width. We identify a dimensionless number, termed the mobility-uplift number,
which is the ratio between the lateral mobility of the river channel and uplift rate. The model predicts two limits: At high values
of the mobility-uplift number, the valley evolves to the channel-belt width, whereas it corresponds to the channel width at low
values. Between these limits, valley width is linked to the mobility-uplift number by a logarithmic function. As a consequence
of the model, valley width increases with increasing drainage area, with a scaling exponent that typically has a value between
25 0.4 and 0.5, but can also be lower or higher. We compare the model to three independent data sets of valleys in experimental
and natural uplifting landscapes and show that it closely predicts the first-order relationship between valley width and the
mobility-uplift number.

Plain language summary. Fluvial valleys are ubiquitous landforms, and understanding their formation and evolution affects
30 a wide range of disciplines, from archaeology over geology to fish biology. Here, we develop a model to predict the width of
fluvial valleys for a wide range of geographic conditions. In the model, fluvial valley width is controlled by the two competing
factors of lateral channel mobility and uplift. The model complies with available data and yields a broad range of quantitative
predictions.

35 **1 Introduction**

Many ancient civilizations developed in river valleys (Macklin et al., 2015). There, fertile soil was readily available, and the river provided water, fish, and a transport route. It is a common observation that large rivers often feature broad valley floors with valley floodplains that are several times wider than the river itself (Fig. 1a). Valley-floor width (valley width hereafter) is the width of the valley from foot to foot of the enclosing valley walls, and hence the sum of river width and floodplain width.

40 In fluvial valleys, valley width usually corresponds to the part of the valley in which the river is active on timescales encompassing multiple floods, and, thus, is intimately related to the width of the channel belt in an unconfined setting without valley walls (Fig. 1b) (e.g., Limaye, 2020; Tofelde et al., 2022). The nearly planar valley floors do not only provide space for settlements and farming ~~grounds~~, but also accommodate alluvial sediments supplied from upstream mountain regions, and often host unique ecological communities. As such, valley width has been recognized as an important parameter in the

45 development of human settlements (e.g., Hillier et al., 2007; Macklin et al., 2015; Rigsby et al., 2003), the evolution of orogenic landscapes (e.g., Hancock & Anderson, 2002; Langston & Tucker, 2018), the distribution and cycling of sediments and nutrients in the landscape (e.g., Blöthe et al., 2014; Blum & Törnqvist, 2000; Jonell et al., 2018; Repasch et al., 2021), the development of river patterns and fluvial landforms (e.g., Fotherby, 2009; Grant & Swanson, 1995; Schumm & Lichty, 1963), hydrology and flood dynamics (e.g., Appledorn et al., 2019; Miller, 1995), floodplain ecology (e.g., Baker & Wiley, 2009;

50 Hupp, 1982; Naiman et al., 2010), speciation and biodiversity (e.g., Perrigo et al., 2020; Steinbauer et al., 2016), and the establishment of fisheries (e.g., Maasri et al., 2021; May et al., 2013).

Multiple parameters have been suggested to control valley width. It has been observed that valley width is correlated to water discharge, stream length, or drainage area, as well as upstream sediment supply in natural river valleys (e.g., Constantine et al., 2014; Dunne et al., 2010; Salisbury, 1980; Salisbury et al., 1968; Tomkin et al., 2003; Zavala et al., 2021) and analogue

55 experiments (e.g., Bufe et al., 2016a; Martin et al., 2011). Valley width typically scales with discharge or drainage area according to a power law, with scaling exponents that vary between about 0.1 and 1.2 (e.g., Beeson et al., 2018; Brocard & van der Beek, 2006; Langston & Temme, 2019; Snyder et al., 2003; Som et al., 2009; Tomkin et al., 2003). It has also been observed that valley width is inversely correlated to uplift rate (e.g., Bufe et al., 2016a, Clubb et al., 2023a), and, in the special case of paired alluvial river terrace sequences, inversely correlated to valley-wall height (Tofelde et al., 2022). In addition, for

60 comparable discharge conditions, valleys seem sometimes to be wider in softer lithologies compared to harder lithologies (e.g., Brocard & van der Beek, 2006; Bursztyn et al., 2015; Keen-Zebert et al., 2017; Langston & Temme, 2019; Moore, 1926; Schanz & Montgomery, 2016), and widening rates have been suggested to depend on rock type and weathering (e.g., Johnson & Finnegan, 2015; Limaye and Lamb, 2014; Marcotte et al., 2021; Montgomery, 2014; Snyder & Kammer, 2008; Suzuki, 1982). Lifton et al. (2009) found a negative correlation between local valley width and the rock strength on the weaker side of

65 the valley. In contrast, in a regional study of the Himalaya, Clubb et al. (2023a) reported that valley width is independent of lithology, and concluded that uplift provides the dominant control.

Multiple authors have suggested that valley widening occurs during times when the river aggrades or moves laterally through a thick sediment fill without major incision (e.g., Maddy et al., 2001; Hancock & Anderson, 2002). Further, it has been argued

that river valleys widen by lateral erosion of streams and by fluvial undercutting of valley-wall hillslopes and their subsequent collapse (Brocard & van der Beek, 2006; Hancock & Anderson, 2002; Martin et al., 2011; Malatesta et al., 2017; Suzuki, 1982). In this case, widening rates decrease with increasing valley width, because the river spends a decreasing fraction of time in contact with the valley walls (Hancock & Anderson, 2002; Tofelde et al., 2022). However, a steady state is never reached and the valley widens indefinitely. As a result, valley width would be determined by the time since the onset of lateral migration and erosion, and the widening rate. Some river valleys show paired terrace sequences, which have frequently been suggested to form in response to cyclic climate change (e.g., Bridgland & Westaway, 2008; Maddy et al., 2001; Schanz et al., 2018). Their presence implies that valleys can evolve to different widths under similar climatic conditions. To explain the occurrence of paired terraces, Tofelde et al. (2022) argued that a parameter independent of river dynamics is also important in controlling the width to which valleys evolve. They suggested that a steady-state valley width is achieved when lateral sediment supply from hillslopes is balanced with the ability of the river to remove this sediment. Their model can explain the existence of paired terrace sequences and predicts the observed inverse-linear scaling between width and total height of enclosing valley walls. Yet, the model does not predict how valley width is modulated by uplift, and it can only predict valley width in relation to a maximum valley width that is an input parameter in the equations. Tofelde et al. (2022) suggested that this maximum valley width corresponds to channel-belt width in an unconfined setting. Limaye (2020) postulated that channel-belt width scales with the channel width of the forming river, which still lacks a mechanistic explanation.

It seems clear that hydraulics and river processes (e.g., Martin et al., 2011; Suzuki, 1982) as well as tectonics (e.g., Bufe et al., 2016a; Clubb et al., 2023a) influence the width of fluvial valleys, while the role of lithology is unclear (cf. Clubb et al., 2023a; Langston & Temme, 2019; [Lifton et al., 2009](#)). Yet, a full understanding of the controls and a model that allows predicting valley width from known boundary conditions is currently missing. In particular, it is not understood how the observed scaling relationships between valley width, drainage area, and uplift rate arise (e.g., Beeson et al., 2003; Bufe et al., 2016a; Clubb et al., 2023a; Langston & Temme, 2019). Here, we build on previous work of Bufe et al. (2019) and Tofelde et al. (2022), and develop a physics-based model for the steady-state width of channel belts and fluvial valleys. The model predicts the width of channel belts in laterally unconfined settings, and how this width is reduced in laterally confined valleys and in uplifting regions. We compare the model to three complementary datasets, of rivers crossing uplifting folds in an experiment (Bufe et al., 2016a) and the Tian Shan mountain range, and to a valley-width compilation with more than 1.6 million datapoints from the Himalaya (Clubb et al., 2023a,b).

2 Model development

2.1 Conceptual framework of model

We start by considering the width W [L] of a valley containing an alluvial river (Fig. 1c). We will proceed with the derivation and make a connection to bedrock river valleys in the discussion. We assume that depositional systems do not naturally lead to incised valleys. We will thus consider graded or incising channels, and assume that they move laterally by bank erosion, rather than avulsion. We postulate that the walls of fluvial valleys are pushed back by fluvial undercutting that drives wall collapse, and subsequent evacuation of the resulting sediment when the river is located at the valley wall and moves into it (cf.

Hancock & Anderson, 2002; Martin et al., 2011; Malatesta et al., 2017). We assume that processes acting in the long-channel direction are negligible to first order, and that each point of the river can be treated as independent of events upstream and downstream. Thus, we consider a valley cross-section, in which a stream migrates back and forth ~~and back~~ across the valley floor with lateral speed V [$L T^{-1}$] (Fig. 1). For a given set of climatic, tectonic and sedimentological boundary conditions, we conceptualize the lateral motion of the channel as a stochastic process, in which switches in the direction of motion are considered as identically distributed and independent stochastic events occurring at a constant mean rate. As such, the likelihood of the switches in direction have no history dependence. The stated conditions mean that the switching of directions is described by a Poisson process with rate parameter λ [T^{-1}] that quantifies the mean number of switch events per unit time. At the valley walls, the need to erode and transport sediments supplied from valley-wall hillslopes may slow down the lateral speed of the channel to a value $v < V$ (Tofelde et al., 2022). The valley width is then determined by (i) the speed of lateral migration of the river across the floodplain, (ii) the length of time the river moves on average in the same direction, and (iii) the amount of laterally supplied sediment from hillslopes (cf. Tofelde et al., 2022). For negligible lateral sediment supply, the width W of the valley can be obtained by integrating over the product of the lateral speed of motion V and a characteristic timescale Δt [T].

$$W = \int_0^{\Delta t} V dt + W_C. \quad (1)$$

The width of the river, W_C [L], needs to be added, as it presents the starting condition before any bevelling takes place. Thus, channel width W_C provides a minimum width for the valley. Equation (1) is a general formulation for valley formation by fluvial bevelling, which allows, for example, for variable V . For constant V , $W = V\Delta t + W_C$. Under the assumption that the channel switches direction of migration according to a Poisson process, the timescale Δt is related to the mean waiting time between switch events. In a Poisson process with rate constant λ , the waiting times are exponentially distributed with a mean of $1/\lambda$. Because the process is stochastic, there is a non-negligible probability that the waiting time is larger than the average. As such, the valley sets its width to some effective lateral migration time that ~~sets valley width~~ can be expected to ~~be slightly larger than~~ scale with the mean waiting time, but is not necessarily exactly equal to it. Therefore, Δt is inversely related to λ by

$$\Delta t = \frac{c}{\lambda}, \quad (2)$$

where c [-] is a dimensionless constant of order one. We proceed by considering the average behaviour of the channel belt, essentially making the assumption that the channel switches direction of migration at regular intervals Δt . Then, the equations yield a well-defined steady state and spatially stable channel belt. In a fully stochastic model, the channel belt would drift laterally once it reaches the steady state width.

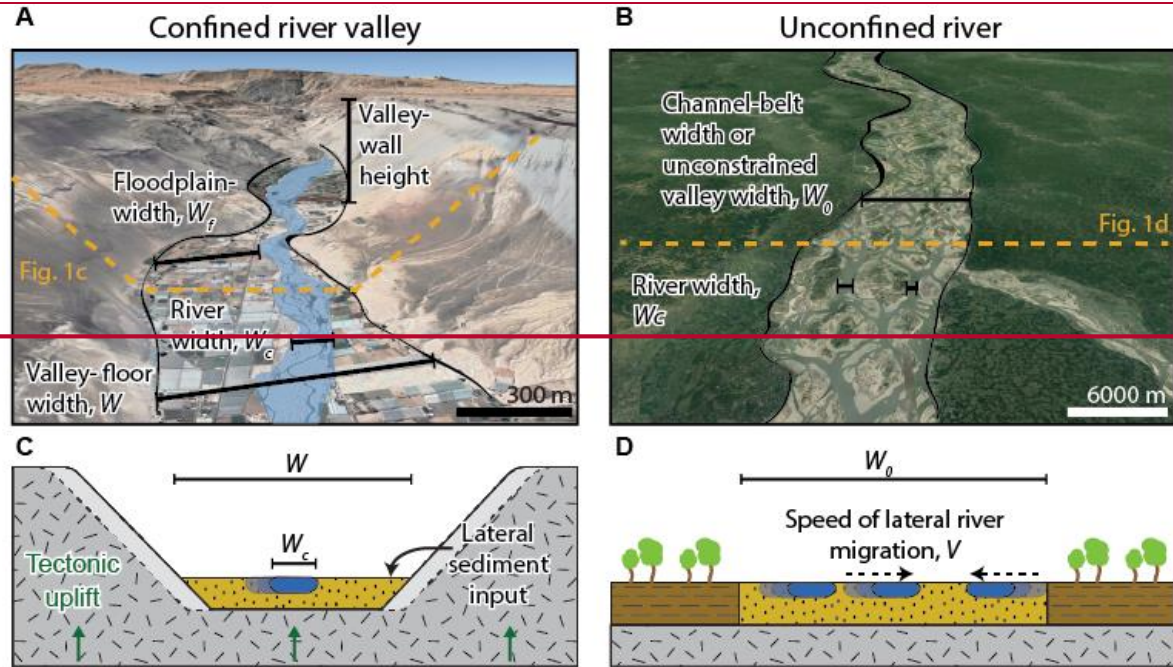
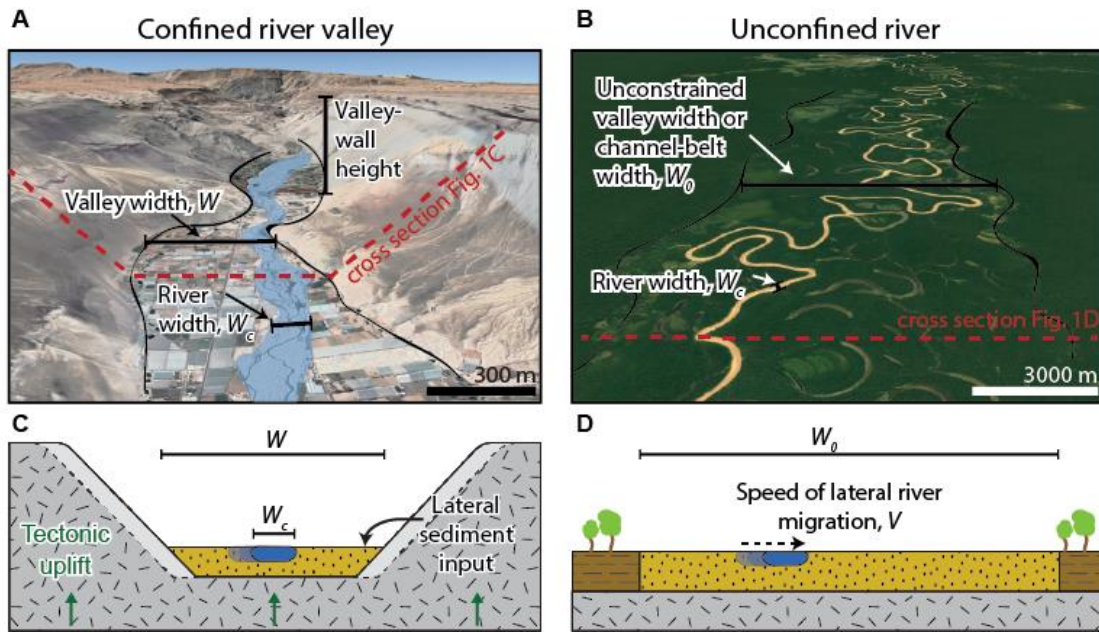


Fig. 1: Examples and concepts for confined river valleys and unconfined rivers. (A) Oblique view from © Google Earth of the San Jose River, Chile (18.58°S, 69.97°W), showing a confined valley. Debris cones on the valley flanks are signs for substantial sediment input from valley walls into the river valley. The scalebars refer to the foreground. (B) Oblique view from © Google Earth of the Juruá River, Brazil (6.75°S, 70.30°W)Brahmaputra river, Bangladesh (25.3°N, 89.7°E), that is laterally unconfined. (C) Conceptual sketch of the dynamics in a confined river valley. (D) Conceptual sketch for the dynamics in an unconfined channel belt.

135

140

2.2 Model derivation

2.2.1 Unconfined river: Channel-belt width

To complete the model, we need to provide equations for the channel's lateral speed of migration V and the rate parameter λ , which we will treat in turn. For the former, we use the concept of Bufe et al. (2019) that states that, for a given discharge, sediment supply and grain size, the amount of sediment that the channel can move by lateral erosion per unit channel length per unit time is constant and can be expressed by a lateral-transport capacity q_L [$L^2 T^{-1}$] (Fig. 2). The lateral migration speed, V , is then equal to the ratio of q_L and the height of the river bank in the direction of motion, H_+ [L] (Bufe et al., 2019):

$$V = \frac{q_L}{H_+}. \quad (3)$$

150

Both V and q_L are determined by hydraulic and sedimentological boundary conditions. The precise controls have not yet been completely resolved (e.g., Bufe et al., 2019; Constantine et al., 2014; Ielpi & Lapôtre, 2019; Wickert et al., 2013), but are not directly relevant for the remainder of the derivation. For constant boundary conditions without uplift, H_+ can be considered as

155

a constant H_0 [L], which should be equal to flow depth h [L], because during migration, the channel cannot deposit sediment at elevations higher than its flow depth. Then, eq. (1) can be solved and the width of the channel belt in an unconfined plain, W_0 , is given by


$$W_0 = \int_0^{\Delta t} V dt + W_c = V \Delta t + W_c = \frac{q_L}{H_0} \Delta t + W_c = \frac{c q_L}{\lambda h} + W_c. \quad (4)$$

160

To quantify the rate parameter λ , we postulate that the channel switches direction when its cross section is overwhelmed by sediment derived from erosion of the bank in the migration direction, leading to water overflow of the bank opposite of the motion direction (Fig. 2). We did not find documented observations of this notion, and a thorough investigation will need to be done in the future. Yet, it is commonly observed that lateral sediment input by landslides or tributaries pushes rivers towards the opposite bank (e.g., Cruden et al., 1997; [Grant & Swanson, 1995](#); McClain et al., 2020; Savi et al., 2020). As such, the likelihood of channel switching, λ , is proportional to the ratio of the average sediment input rate due to lateral migration, q_L (yellow shaded area in Fig. 2), and the dimensions of the channel given by the product of channel width and flow depth, $W_c h$ (blue shaded area in Fig. 2). Thus, we suggest that λ scales as:

165

$$\lambda \propto \frac{q_L}{W_c h}. \quad (5)$$

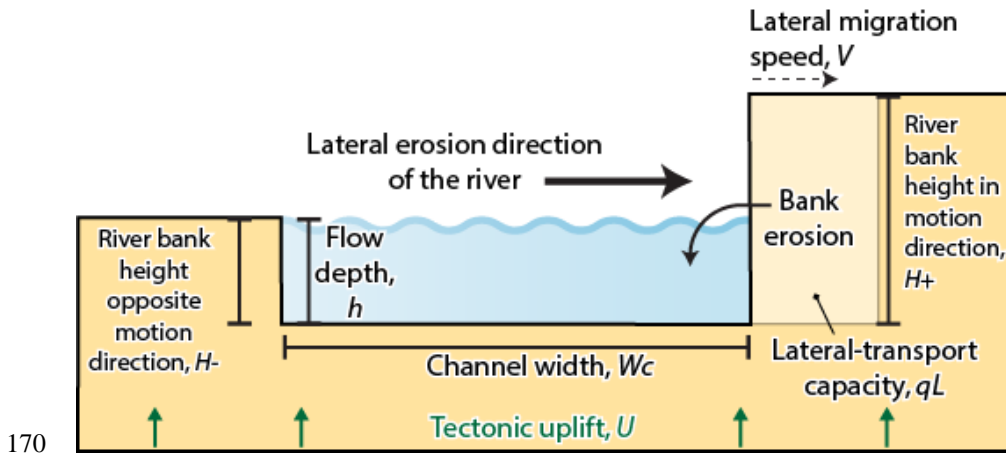

170 Fig. 2: Schematic cross section of a migrating channel, with definition of parameters.

175 However, eq. (5) is not a complete description of the scaling. We expect that λ depends not only on the sediment input rate relative to the channel cross-sectional area, but also on the aspect ratio of the channel. In particular, we suggest that deep and narrow channels are less likely to switch directions than wide and shallow channels for otherwise similar conditions. Wide and shallow channels have a lower bank relative to the channel dimensions and lateral-transport capacity, which should make switching directions more likely. Therefore, we expect that lambda scales with the aspect ratio as

$$\lambda \propto \frac{W_C}{h}. \quad (6)$$

180 ~~Combining-Multiplying~~ eqs. (5) and (6) gives the final relation for the rate parameter λ :

$$\lambda = k \frac{q_L}{h^2}. \quad (7)$$

Here, k [-] is a dimensionless constant. Substituting eq. (7) into eq. (4) yields the channel-belt width in unconfined settings

$$W_0 = \frac{k_0}{H_0} h^2 + W_C = k_0 h + W_C. \quad (8)$$

185

Here, $k_0 = c/k$ [-] is a dimensionless constant, and we assumed $H_0 = h$ in the latter identity. The channel-belt width W_0 predicted by eq. (8) at the same time gives the maximum valley width in the absence of uplift and lateral hillslope sediment supply.

2.2.2 Confined valleys in uplifted regions

190

Here, we consider a river incising at a constant rate. The incision may be driven by relative uplift, a change in water and sediment discharge, or autogenic variations in river dynamics. We proceed with the derivation considering the case of uniform uplift, noting that the results should be equivalent for any other process driving river incision.

In an uplifted region, the river adjusts to a state in which the incision rate equals the uplift rate (e.g., Howard, 1994; Turowski, 2020). Yet, the parts of the valley floor where the channel is not currently located rise in elevation at the uplift rate U [$L T^{-1}$].
 195 As the river migrates laterally, it therefore needs to remove the additional sediment material provided due to uplift. The amount of this sediment at a particular location scales with the product of the uplift rate and the time since the last visit of the river at that location. We can model this as an increase in the bank height H_+ encountered by the river, which is given by

$$\frac{dH_+}{dt} = U. \quad (9)$$

200 Within the integral (eq. 1), we thus need to treat H_+ as a time-dependent parameter. The integral can be solved by a substitution of variables to yield valley width W :

$$W = \int_0^{\Delta t} \frac{q_L}{H_+(t)} dt + W_C = \int_{H_0}^{H_0+2U\Delta t} \frac{q_L}{UH_+} dH_+ + W_C = \frac{q_L}{U} \ln \left\{ 1 + \frac{2U\Delta t}{H_0} \right\} + W_C \quad (10)$$

Here, $\ln\{x\}$ denotes the natural logarithm of x . The factor of two in the upper limit of the integral arises because the river needs
 205 to switch direction and traverse the valley twice before arriving at the same position again. Therefore, the time elapsed between revisiting a valley margin is $2\Delta t$. Assuming that the river-cross-sectional shape is unaffected by uplift, the timescale Δt is the same as in the unconfined case (cf. eqs. 2&7). As noted above, for consistency, we need to substitute $2\Delta t$. Then, using eqs. (7) and (8), W is given by

$$W = \frac{q_L}{U} \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} + W_C. \quad (11)$$

210

For $U = 0$, eq. (11) reduces to $W = W_0$, as required, and for large U , $W = W_C$, as can be expected for entrenched rivers in rapidly uplifting landscapes.

2.2.3 Sediment supply from valley walls

215 To explain the geometry of paired river terraces, Tofelde et al. (2022) suggested that lateral sediment supply from hillslope erosion or back-weathering processes leads to valley narrowing, because a river can only widen the valley further once this additional material deposited in sediment cones at the wall toe is evacuated. Tofelde et al. (2022) proposed that valleys reach a steady state width, at which lateral sediment removal by the river equals lateral sediment input from hillslopes. This lateral mass balance can be written as

220

$$Pq_L = q_H. \quad (12)$$

Here, P [-] is a dimensionless parameter denoting the fraction of time that the river spends at the valley walls with a direction of motion into them, and q_H [$L^2 T^{-1}$] is the rate of sediment supply from the valley walls per unit channel length. In their

225 proposed valley-width model, Tofelde et al. (2022) derived P under the assumption that the channel width is much smaller than the valley width and can therefore be neglected. Including channel width in the derivation of P yields (compare to eqs. 10 to 14 of Tofelde et al., 2022)

$$P = \frac{W_0 - W}{W_0 - W_C}. \quad (13)$$

After substituting eq. (13) into eq. (12) and solving for W , valley width is given by

$$230 \quad W = W_0 - \frac{q_H}{q_L}(W_0 - W_C). \quad (14)$$

Note that this equation is defined only as long as $q_H < q_L$. If lateral sediment supply exceeds the capacity of the river to transport the sediment, the river will either aggrade and steepen to increase q_L , or will change course and abandon the valley (Humphrey & Konrad, 2000). Equation (14) updates the model of Tofelde et al. (2022) to include a finite channel width, but 235 excludes uplift. In an uplifting region, W_0 in eq. (14) can be identified with the width of an uplifting valley, and after substituting eq. (11), we obtain an equation for valley width including both uplift and lateral sediment supply:

$$W = \left(\frac{q_L - q_H}{U} \right) \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} + W_C. \quad (15)$$

For $U = 0$, eq. (15) reduces to eq. (14), and for large U , $W_0 = W_C$.

240 We can formulate a non-dimensional version of eq. (15), including four non-dimensional parameters: a valley width normalized to the unconfined channel-belt width $W' = W/W_0$, a channel width normalized to the unconfined channel-belt width $W_C' = W_C/W_0$, a hillslope sediment supply normalized by the lateral-transport capacity $q_H' = q_H/q_L$, and a mobility-uplift number that describes the lateral transport capacity of the river relative to the uplift flux across the valley $M_U = q_L/UW_0$:

$$245 \quad W' = \frac{W}{W_0} = (1 - q_H') \ln \left\{ 1 + \frac{1 - W_C'}{M_U} \right\} M_U + W_C'. \quad (16)$$

Our model provides the first physics-based analytical model for channel-belt width in unconfined settings (eq. 8), and valley widths impacted by rock uplift and subject to lateral sediment input from hillslope processes (eqs. 15 and 16).

3 Model tests

250 We test the model predictions with three data sets of valleys forming in uplifting landscapes across different scales and under different boundary conditions (Fig. 3). First, we use existing experimental data of valleys across a single uplifting fold (Bufe et al., 2016a) (Fig. 3a). These experiments isolate the role of uplift on valley formation under controlled boundary conditions. Second, we collected a dataset of valleys formed across uplifting folds in the foreland of the Tian Shan (NW China) to complement the experimental dataset (Fig. 3b,c). Third, we use a recent compilation of more than 1.6 million valley widths


from the Himalaya (Clubb et al., 2023b) (Fig. 3d). None of the datasets contain direct measurements for all model parameters, and each dataset needs a unique approach to defining the necessary proxies. To test our new model, we start with eq. (15) and write it as

$$W = am \ln \left\{ 1 + \frac{\overline{W}_0 - \overline{W}_C}{am} \right\} + \overline{W}_C. \quad (17)$$

Here, m is a proxy that scales with the ratio of lateral transport-capacity to uplift q_L/U and that can differ between the data sets. The factor a is a scaling parameter linking the proxy data to that ratio. \overline{W}_0 and \overline{W}_C are the average unconfined channel-belt width and the channel width, respectively. In each model test, we treat m as the independent variable, W as the dependent variable and a , \overline{W}_0 and \overline{W}_C as free fit-parameters. For individual data points within one data set, W_0 and W_C likely vary. However, in the limits of low and high uplift rate, the model equation (eq. 15) converges to W_0 and W_C , respectively. These limits insure that the effective fitted values for \overline{W}_0 and \overline{W}_C converge to the true means of valley and channel width, respectively. Note that we do not treat the hillslope sediment supply q_H as a separate fit parameter, because it would largely affect the effective value of \overline{W}_0 (compare to eq. 16).

3.1 Test 1: Experiments on channels crossing a fold

One of the simplest systems to isolate the control of uplift on valley width is to study the narrowing of valleys across single well-defined zones of uplift. Bufe et al. (2016a) carried out six experiments of braided alluvial channels crossing a single uplifting fold (Fig. 3a). These experiments were conducted in a stream-basin with dimensions of 4.8×3.0×0.6 m (Fig. 3a). The basin was filled with well-sorted silica sand ($D_{50} = 0.52$ mm). A flexing metal sheet underneath the basin allowed the uplift of a ~0.5 m-wide zone across the entire basin, forcing the river to cross the uplifting zone. At the start of the experiments, the river system built a braided channel network and aggraded rapidly. Once the average rate of aggradation across the basin dropped to <10-20% of the input sediment discharge, the fold was uplifted in increments of ~4 mm. Across the six experiments, uplift rates varied by two orders of magnitude. In turn, water and sediment discharges were kept constant with the exception of one experiment with lower sediment discharge (Table 1).

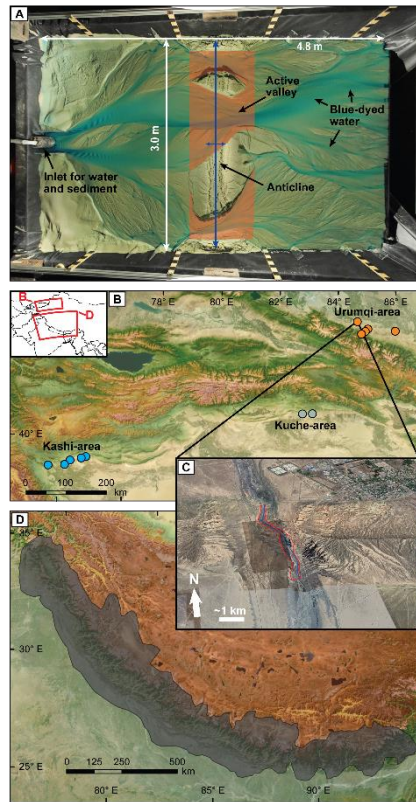

280 **Fig. 3: Overview of the datasets used for model testing. (A) Overhead picture from an analogue experiment of braided rivers that**
cross an active uplift. The red shaded area marks the area of the uplift eroded by streams that is divided by the length of the area in
the downstream direction to obtain a characteristic width. Where the stream splits, the entire valley area is summed. Figure adapted
from Bufe et al. (2016a). (B) Locations of folds in the foreland of the Tian Shan for which we assembled uplift rates from the literature
and mapped valley widths on Google Earth. Basemap sourced from Esri and hillshade created from an SRTM digital elevation
model. (C) Oblique © Google Earth View of the Dushanzi anticline (location in B) and the mapped area (red) and stream length
285 **(blue) across the valley. (D) Overview of the Himalaya and the area covered by the width dataset of Clubb et al. (2023b). Basemap**
sourced from Esri and hillshade created from an SRTM digital elevation model.

Testing the model provided in eq. (15) requires the quantification of valley width, W , and the ratio of q_L/U or its proxy m from
the experimental data. Mean valley width was calculated from the bevelled area of the fold divided by the length of the uplifted
290 area of 0.5 m (Table 1). As U was set as a boundary condition for each run, only the lateral-transport capacity, q_L , needs to be
estimated from other measured experimental parameters. Because many channel parameters, such as channel width and depth,
are ill-defined in the quickly evolving braided river system of the experiment, we need to define effective parameters such as
representative means for a comparison with eq. (15). Bufe et al. (2016a) measured the area that was actively reworked by
channels prior to uplift, A_f [L^2], and they determined a timescale over which this active area was reworked, T_f [T]. As such,
295 A_f is equivalent to the area covered by the channel belt (Fig. 1b). Bufe et al. (2019) measured the bank height prior to uplift,
 H_0 , on the scale of the experiment. The volume of sediment that is reworked laterally then scales with the ratio of the actively
reworked area times the channel-bank height in the part of the experiment without uplift, and the channel mobility timescale

($A_f H_0 / T_f$). When normalized by the length of the channel system for which these parameters are constrained, $L = 0.88$ m, we obtain a proxy for the amount of sediment that the channel can move laterally per unit channel length per unit time, q_L . Finally, we need to divide by uplift rate U to obtain m as

$$\frac{q_L}{U} \propto m = \frac{A_f H_0}{L T_f U}$$

(18).

In all experiments, the average valley width across the fold was estimated as the total eroded area (red-shaded area in Fig. 3a) divided by the length of the fold in the downstream direction (see Bufe et al., 2016a for details), which is equivalent to summing the width across all individual valleys.

Table 1: Experimental data used for Test 1 (Bufe et al. 2016).

Run	Uplift rate $U / 10^{-6} \text{m/s}$	Sediment supply / ml/h	Water input / ml/h	T_f / h	A_f / m^2	H_0 / mm	$m / 10^3 \text{ m}$	W / m
1	40.0	15.8	790	0.2	2.3	4.3	1.40	1.22
2	8.00	15.8	790	0.5	2.3	4.8	2.75	1.73
3	4.00	15.8	790	0.3	2.3	4.5	8.10	1.92
4	0.40	15.8	790	0.4	2.1	4.5	63.9	2.59
5	4.00	2.4	790	0.8	1.8	7.9	3.92	1.51
6	4.00	15.8	790	1.3	0.5	10.0	1.53	0.92

3.2 Test 2: Channels crossing folds in the Tian Shan foreland

To complement the experimental dataset, we extracted widths of valleys crossing single uplifting folds in the desert foreland of the Tian Shan, NW China (Fig. 3b-c). The Tian Shan is a major intracontinental mountain range that features uplift rates of ~20-25 mm/yr and accommodates an equivalent of 40-60% of the total convergence between the Indian and Eurasian plates (Abdakhmatov et al., 1996; Zubovich et al., 2010, 2016). Along the southern and northern foreland, a series of detachment-, fault-bend and fault-propagation folds have uplifted the Cenozoic clastic basin fill of the Tarim and Junggar basins and are incised by antecedent streams that drain the Tian Shan (Avouac et al., 1993; Bufe et al., 2017a, 2017b, Chen et al., 2007; Heermance et al., 2007, 2008; Hubert-Ferrari et al., 2007; Li et al., 2012, 2013, 2015, Scharer et al., 2004; Tapponier & Molnar, 1979; Thompson Jobe et al., 2017). Along both the southern and northern Tian Shan, we selected 12 channels crossing active folds for which kiloyear uplift rates have been estimated by a combination of optically-stimulated luminescence dating and cosmogenic nuclide dating of deformed terraces (Table 2) (Bufe et al., 2017b; Gong et al., 2014; Li et al., 2015; Lu et al.,

2017; Malatesta et al., 2018; Thompson, 2013). Rivers in the Kashi area (Fig. 3b), the Kezile River on the eastern Quilitage, and the Kuitun River crossing the Dushanzi anticline (Table 1), incise weakly-consolidated late Miocene to Pleistocene sand-, silt-, and mudstones (Chen et al., 2007; Heermance et al., 2007, 2008; Scharer et al., 2004). In turn, the other valleys include deeper, older, and more indurated clastic sediments that include conglomerates. Precipitation rates are poorly constrained in the Tian Shan, but folds in the Kuche and Urumqi areas are crossed by streams that generally receive more precipitation than streams north of Kachi (Fan et al., 2020). Across all structures, we mapped the valley floor and centerlines by hand on Google Earth imagery and obtained an estimate of a characteristic valley width from the ratio of valley-floor area to the length of the valley center line. In the case of the Boguzihe River crossing the central Atushi fold, the width of the valleys across both tributaries that cross the fold were summed. This measurement is equivalent to the method of estimating valley width from the experimental data (Bufe et al., 2016a).

To compare these measurements with the model equation, we assumed that the lateral transport capacity per unit channel length scales with drainage area, A [L^2]. This assumption is consistent with experimental observations of a near linear scaling of lateral transport capacity and water discharge (Bufe et al., 2019; Wickert et al., 2013). As such, the proxy parameter can be calculated as

$$\frac{q_L}{U} \sim m = \frac{A}{U}.$$

(19)

Table 2: Data for the Tian Shan channels, used for Test 2

River	Area	Group	Fold	Latitude	Longitude	Drainage area / km ²	Uplift rate / mm/yr	Mean valley width / m	Reference
Unnamed	Kachi	South	Mutule	39.910742	76.547338	60	1.9±0.5	75.7	Bufe et al. (2017b)
Boguzihe	Kachi	South	Atushi Central	39.725553	76.119586	4280	1.0±0.3	663.7	Bufe et al. (2017b)
Baishikeremu he	Kachi	South	Kashi	39.593351	75.969232	3400	2.7±0.7	493.8	Bufe et al. (2017b)
Kalanggouluk ehe	Kachi	South	Mingyaole	39.511221	75.443420	1910	2.7±1.6	276.6	Li et al. (2015), Thompson (2013)
Unnamed	Kachi	South	Atushi East	39.845321	76.451615	80	1.0±0.3*	78.7	Bufe et al. (2017b)
Bositankelake	Kuche	North	East Qiulitage	41.87154	83.33694	654	0.80±0.04	414	Zhang et al., 2021
Kezile	Kuche	North	East Qiulitage	41.90745	83.66205	321	1.6±0.3	334	Zhang et al., 2021
Manas	Urumqi	North	Mana	44.18788	86.12354	5541	13.5±0.6	411	Gong et al., 2014
Kuitun	Urumqi	North	Dushanzi	44.32030	84.78589	2016	10.7±1.3	333	Malatesta et al., 2018
Anjihai	Urumqi	North	Nananjihai	44.10282	85.10027	1173	47±16	253	Malatesta et al., 2018
Anjihai	Urumqi	North	Huerguos & Nananjihai	44.16894	85.17422	1466	47±56	335	Lu et al., 2017
Anjihai	Urumqi	North	Nananjihai south	44.02634	84.97666	1063	44.4±0.6	240	Lu et al., 2017

* In the absence of kiloyear uplift rates, these rates are assumed to be equal to those of Atushi Central

340

3.3 Test 3: Valley width data set from the Himalaya

Clubb et al. (2023a,b) measured valley width at more than 1.6 million locations in the Himalaya (Fig. 3d) using the method of Clubb et al. (2022), together with some auxiliary data that can be derived from topography. These include drainage area A , channel bed slope S , and the normalized steepness index k_{sn} , which is a measure of the slope of the channel normalized by the drainage area (e.g., Kirby & Whipple, 2001; Wobus et al., 2006). Clubb et al. (2023a,b) used SRTM data with a pixel size of 30 m, and can therefore only measure valley width with a minimum width of approximately two pixels or 60 m.

Similar to the Tian Shan data (section 3.2), we assume that q_L scales with drainage area. Uplift rates are not available. However, it has been shown that the normalized steepness index broadly scales with measured erosion rates in the Himalaya and in other mountain ranges (e.g., Kirby & Whipple, 2012; Lague, 2014; Wobus et al., 2006). In turn, erosion rates are a first order proxy for uplift in the Himalaya (e.g., Hodges et al., 2004; Lenard et al., 2020; Scherler et al., 2014). Here, we assume that the relationship between uplift rate and normalized steepness index k_{sn} [$L^{0.9}$] is linear. Even though relationships between k_{sn} and erosion rate are commonly fit with non-linear power laws, the scatter in most data sets make a linear fit equally appropriate.

both in general (e.g., Kirby & Whipple, 2012; Lague, 2014) and for the Himalaya specifically (e.g., Lague, 2014; Scherler et al., 2014). We note that A and k_{sn} do not correlate in the dataset (Kendall tau rank correlation coefficient = -0.036), so that the parameters can be assumed to be independent. Due to the large number of data points, we binned the data into 150 logarithmically distributed bins according to the ratio of A and k_{sn} . Before binning, we removed all data points with a steepness index smaller than $1 \text{ m}^{0.9+8}$. This threshold steepness corresponds to a channel slope of 0.2% at a drainage area of 1 km^2 , which we consider as unrealistic for an active mountain belt. We calculated the mean and standard error of valley width and the ratio of A to k_{sn} for each bin. Our proxy parameter is therefore given by


$$\frac{q_L}{U} \sim m = \left(\frac{\overline{A}}{k_{sn}} \right). \quad (20)$$

Here, the overbar denotes the mean.

4 Results

4.1 Model predictions

The model predicts that valley width evolves logarithmically between two limits (eq. 16, Fig. 4). ~~For zero hillslope sediment supply q_H . At large values of the mobility-uplift parameter M_U , corresponding to large values of the lateral transport capacity q_L or small values of uplift rate U , the model predicts an asymptotic approach to the unconfined channel-belt width W_0 for zero hillslope sediment supply q_H for large values of the mobility-uplift parameter M_U , which corresponds to large values of the lateral transport capacity q_L or small values of uplift rate U (eq. 16). Conversely, w~~When uplift rate is high or lateral transport capacity is low (small values of M_U), the equation levels off at the channel width W_C . For intermediate M_U , valley width increases logarithmically as the lateral-transport capacity increases or uplift decreases. For finite hillslope sediment supply q_H , the unconfined valley width reached at large M_U is correspondingly reduced (Fig. 4, dotted line). As M_U increases, the effect of a lateral sediment supply in narrowing the valley increases. However, the relative reduction of the excess width ($W-W_C$) by a lateral sediment supply relative to a case with $q_H = 0$ is constant, independent of M_U .

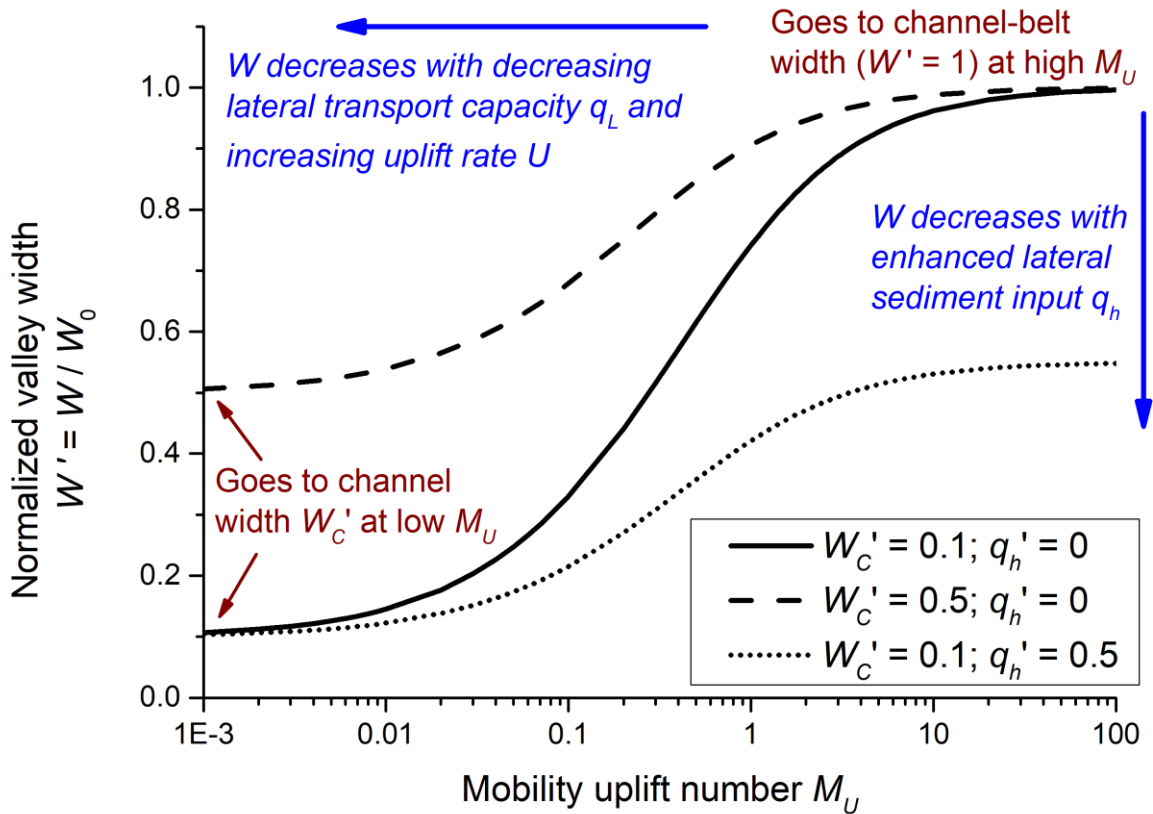

375

Fig. 4: Evolution of dimensionless valley width as function of the mobility-uplift number M_U , predicted by eq. (16). An increase in M_U corresponds either to an increase in lateral transport capacity, q_L , or a decrease in uplift rate U . A change in the relative channel width W_C' affects the left-hand limit (solid and dashed lines), while a change in the relative hillslope supply q_h' affects the right-hand limit (solid and dotted lines).

380


4.2 Comparison to data

Our valley width model can closely trace the relationship between valley width and m in the experimental, the Tian Shan, and the Himalaya data sets (Fig. 5, Table 3). For the experimental data set we obtained an effective unconfined valley width $W_0 = 2.7$ m, and a channel width $W_C = 0.29$ m, with an R^2 of 0.90 (Fig. 5A). The value of $W_0 = 2.7$ m corresponds to the total width of the basin available for bevelling (Fig. 3 in Bufe et al., 2016a) and is about 22% higher than the inferred actively bevelled width (median $Af/L = 2.22$ m). The channel width varies in the experiments and often there are multiple channels. The fitted value is thus an effective value. It is around half of the minimal observed channel width of 0.50-0.56 m when flow concentrates into a single channel.

385

For the Tian Shan data set, we fitted data from the north and south separately. For the north, we obtained an unconfined valley width $W_0 = 495$ m, and a channel width $W_C = 243$ m, with an R^2 of 0.80 (Fig 5B). For the south, we obtained an unconfined valley width $W_0 = 971$ m, and a channel width $W_C = 22$ m, with an R^2 of 0.97 (Fig 5B). Note that fitted unconfined valley and channel widths represent averages for streams with very different drainage areas (cf. Table 2).

The data from the Himalaya (Clubb et al., 2023b) shows considerable scatter, and we performed two fits to binned means of the datapoints, rather than to all of the data (Fig. 5C). The first fit includes all data, and yielded an unconfined valley width $W_0 = 266$ m, a channel width $W_C = 63$ m, with an R^2 of 0.63. For the second fit, we excluded all bins with a mean valley width above 300 m. These high valley width appear as outliers at in the data (Fig. 5C), and we suggest that the widest valleys were dominantly formed or modified by processes other than the fluvial bevelling assumed in the model, for example, glacial erosion, alluvial valley infilling, or large-scale landsliding (e.g., Harbor, 1992; Montgomery, 2002; Stolle et al., 2017; Zakrzewska, 1971). For this fit, we obtained an unconfined valley width $W_0 = 236$ m, a channel width $W_C = 51$ m, with an R^2 of 0.91 (Fig. 5C). The estimate of channel width is likely affected by the 30-m resolution of the digital elevation model that underlies the dataset, which hampers the identification of valley that are narrower than about 60 m.

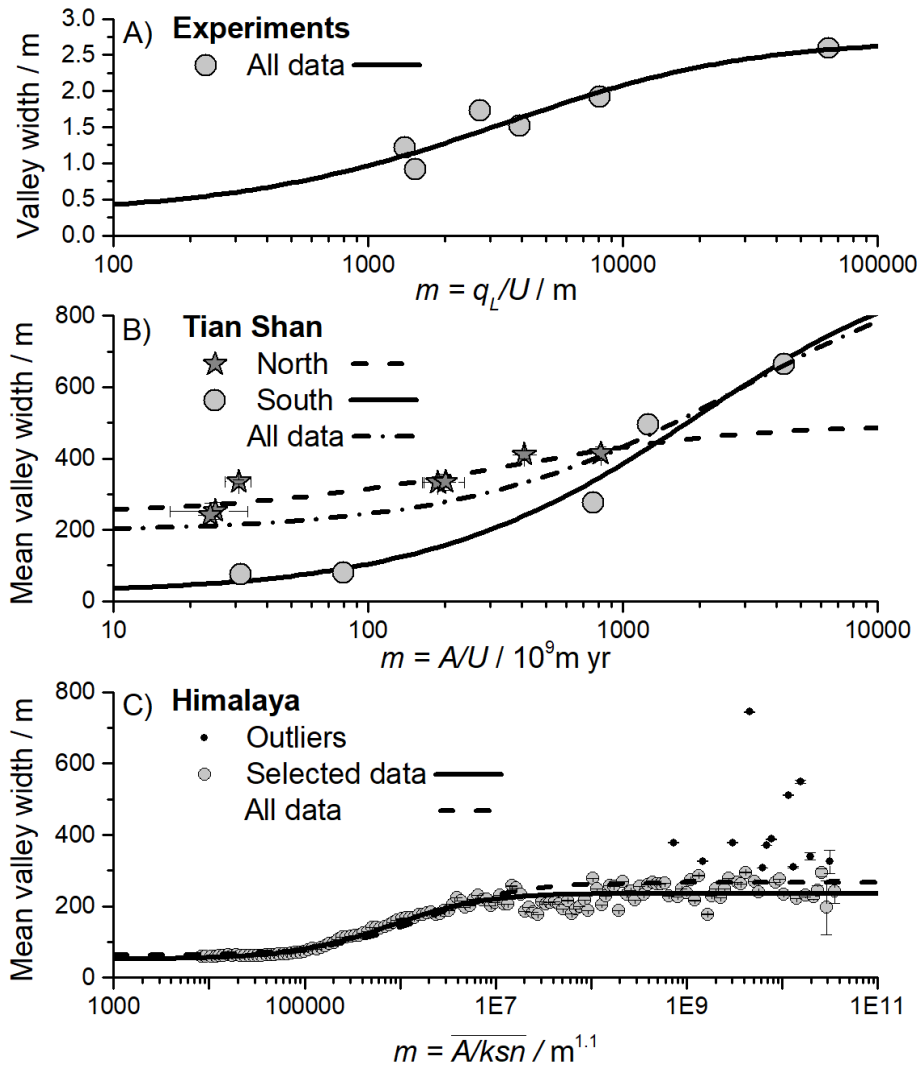

405 Fig. 5: Valley width as a function of the proxy m for the ratio of lateral transport capacity and uplift. Lines give fits according to eq. (17); all fit parameters are listed in Table 3. (A) Data from the analogue experiments by Bufe et al. (2016a). Mean valley width is calculated from the bevelled area of the fold divided by the length of the uplifted area of 0.5 m (Table 1). The proxy for the ratio of lateral transport capacity, q_L and uplift rate U is given in eq. (18). (B) Valley width in the Tian Shan (Table 2) as a function of the ratio of drainage area, used as a proxy for q_L , and uplift rate (eq. 19). Values for the north (dark stars, dashed line) and south (grey dots, solid line) are treated separately. The dash-dotted line shows a fit to all data. (C) Mean valley width shown as a function of the ratio of drainage area A and the steepness index k_{sn} , with the latter assumed to linearly scale with uplift rate (eq. 20). Error bars show the standard error of the mean for all values within a bin. We assumed that values of $k_{sn} < 1$ are unrealistic. If all remaining data points are included, the fit yields $R^2 = 0.63$ (dashed line). However, assuming that valleys with a mean width above 300 m are dominantly formed by processes other than fluvial beveling, some of the data points can be treated as outliers (black circles). The remaining data points yield $R^2 = 0.91$ (grey circles, solid line). Note that the inferred channel widths W_c are likely affected by 30-m resolution of the digital elevation model that underlies the dataset.

410

415

Table 3: Fit values for the data tests.

Dataset	Group	\overline{W}_0 / m	\overline{W}_C / m	a	R^2
Experiments	All	2.7	0.29	2.13×10^{-4}	0.90
Tian Shan	North	495	243	$0.34 \times 10^{-9} \text{ yr}^{-1}$	0.80
	South	971	22	$0.21 \times 10^{-9} \text{ yr}^{-1}$	0.97
	All	961	196	$0.12 \times 10^{-9} \text{ yr}^{-1}$	0.70
Himalaya	All	266	63	$4.66 \times 10^{-5} \text{ m}^{-0.1}$	0.63
	Reduced	236	51	$9.85 \times 10^{-5} \text{ m}^{-0.1}$	0.91

420 4.3 Downstream variation of valley width

Our model was derived by considering valley formation in a cross section. However, the model can also yield predictions on how valley width develops with changing drainage area along a channel, because channel width, W_C , unconfined channel-belt width, W_0 , and lateral transport capacity, q_L , all depend on water discharge. We can compare the predictions for the scaling between valley width and drainage area from our model with existing data. Based on empirical observations, multiple authors
 425 (e.g., Beeson et al., 2018; Brocard & van der Beek, 2006; Clubb et al., 2022; Langston & Temme, 2019; May et al., 2013; Snyder et al., 2003; Tomkin et al., 2003) have suggested that valley width scales with drainage area according to a power law of the form

$$W = k_W A^\omega. \quad (21)$$

430 Here, we compiled information on the scaling exponent from various studies (Table 4) and compare them with predictions from our model.

Table 4: Scaling of valley width and drainage area


River or stratigraphic unit	Prefactor k_W / $\text{km}^{(1-2\omega)}$	Scaling exponent ω	R^2	Reference
Sweden Creek	1.25	0.37	0.36	Beeson et al., 2018
Rock Creek	1.31	0.77	0.79	Beeson et al., 2018
Herb Creek	1.04	0.62	0.39	Beeson et al., 2018
Scare Creek	1.11	0.3	0.13	Beeson et al., 2018
Charlotte Creek	0.97	0.62	0.51	Beeson et al., 2018
Halfway Creek	0.94	0.6	0.41	Beeson et al., 2018
Dean Creek	0.74	1.05	0.74	Beeson et al., 2018
Big Sand Creek	0.97	0.93	0.69	Beeson et al., 2018

c3 sandy limestone	47	0.34	0.22	Brocard & van der Beek, 2006
n6 marls	457	0.11	0.07	Brocard & van der Beek, 2006
n5 massive limestone	41	0.18	0.11	Brocard & van der Beek, 2006
n4 well-bedded limestone	47	0.21	0.14	Brocard & van der Beek, 2006
n3 marly limestone	28	0.41	0.61	Brocard & van der Beek, 2006
n2 marls	63	0.29	0.29	Brocard & van der Beek, 2006
n1 well-bedded limestone	21	0.40	0.42	Brocard & van der Beek, 2006
j6 limestone	41	0.18	0.08	Brocard & van der Beek, 2006
j5 limestone	54	0.18	0.12	Brocard & van der Beek, 2006
j2-j4 black shales	111	0.31	0.46	Brocard & van der Beek, 2006
Crane Creek	2.09	0.24	0.71	Clubb et al., 2022
Bullskin Creek	1.34	0.3	0.55	Clubb et al., 2022
Sugar Creek	0.25	0.36	0.26	Clubb et al., 2022
Gilbert's Big Creek	0.04	0.49	0.62	Clubb et al., 2022
Elisha Creek	2.31	0.2	0.32	Clubb et al., 2022
Flat Creek	0.01	0.56	0.78	Clubb et al., 2022
Hell for Certain Creek	5.68	0.14	0.39	Clubb et al., 2022
Rockhouse Creek	1.77	0.23	0.38	Clubb et al., 2022
Short Creek	192.87	-0.09	0.08	Clubb et al., 2022
Stinnett Creek	305.51	-0.13	0.20	Clubb et al., 2022
Cumberland River	0.08	0.37	0.46	Clubb et al., 2022
Kentucky River	0.14	0.33	0.37	Clubb et al., 2022
Licking River	2.71	0.22	0.19	Clubb et al., 2022
Guyandotte River	0.69	0.26	0.34	Clubb et al., 2022
Little Kanawha River	0.16	0.34	0.51	Clubb et al., 2022
1 (undisturbed)	0.027	0.41	0.64	Harel et al., 2022
2 (undisturbed)	0.18	0.54	0.93	Harel et al., 2022
3 (undisturbed)	0.19	0.54	0.94	Harel et al., 2022
4 (undisturbed)	2.43×10^{-3}	0.26	0.45	Harel et al., 2022
5 (beheaded)	3.33×10^{-3}	0.23	0.42	Harel et al., 2022
6 (beheaded)	1.33×10^{-3}	0.15	0.37	Harel et al., 2022
7 (beheaded)	1.48×10^{-3}	0.18	0.73	Harel et al., 2022
8 (reversed)	4.76×10^{-9}	-0.74	0.37	Harel et al., 2022
9 (reversed)	1.38×10^{-9}	-1.00	0.23	Harel et al., 2022
10 (reversed)	3.67×10^{-6}	-0.24	0.69	Harel et al., 2022
11 (reversed)	3.58×10^{-6}	-0.18	0.26	Harel et al., 2022

12 (reversed)	1.05×10^{-8}	-0.56	0.64	Harel et al., 2022
Elk Creek		0.6		May et al., 2013
Harvey Creek		0.6		May et al., 2013
Sedimentary	61.1	0.34	0.45	Schanz & Montgomery, 2016
Basalt	28.4	0.22	0.40	Schanz & Montgomery, 2016
Oat	0.028	0.41	0.51	Snyder et al., 2003
Kinsey	0.0072	0.50	0.62	Snyder et al., 2003
Shipman	0.0066	0.50	0.15	Snyder et al., 2003
Gitchell	0.118	0.32	0.34	Snyder et al., 2003
Horse Mtn.	0.026	0.42	0.50	Snyder et al., 2003
Hardy	0.181	0.29	0.36	Snyder et al., 2003
Juan	0.012	0.46	0.69	Snyder et al., 2003
Clearwater River	2.8	0.76		Tomkin et al., 2003

435 In the limits of the model for small and large M_U , we expect that valley width approaches respectively the channel width W_C
or the unconfined valley width W_0 . Therefore, at these limits, the scaling between valley width and drainage area should follow
the scaling between drainage area and respectively W_C and W_0 . Because the latter parameter scales with flow depth (eq. 8), we
need to consider the drainage area scaling for channel width, and flow depth. Channel width W_c and flow depth h also
commonly scale with drainage area (e.g., Ferguson, 1986; Gleason, 2015; Leopold & Maddock, 1953; Park, 1977; Rhodes,
440 1978). The W_c - A scaling exponent typically varies between about 0.3 and 0.6, with a most commonly cited value of 0.5 (e.g.,
Ferguson, 1986; Gleason, 2015; Leopold & Maddock, 1953). In turn, the h - A scaling exponent typically varies between 0.2
and 0.5, with a most-commonly cited value of 0.4 (e.g., Ferguson, 1986; Gleason, 2015; Leopold & Maddock, 1953). However,
for both exponents, values that are higher or lower than the stated range are not uncommon. For example, Park (1977) gives a
range between 0.09 and 0.70 for the h - A scaling exponent, and 0.03 and 0.89 for the W_c - A scaling exponent from a global data
445 compilation. Rhodes (1978) gives a similar range between 0.01 and 0.84 for the h - A scaling exponent, and 0 and 0.84 for the
 W_c - A scaling exponent. As a result, based on eqs. (8) and (15), our model predicts that valley width W should increase with
drainage area A according to a power law with an exponent between 0.03 and 0.9, and the most likely value of 0.4 - 0.5 (Park,
1977; Rhodes, 1978). The range of the W - A scaling exponents ω compiled from the literature (Table 4) corresponds well to
these expected ranges (Fig. 6).

450 The scaling factor k_0 between channel-belt width and flow depth (eq. 8) cannot be accurately constrained with the presently
available data. For the experimental dataset, Bufe et al. (2016a) estimated the flow depth at 7.5 mm, which implies $k_0 = 321$
(Table 3). A value of k_0 of the order a few hundred seems also to be reasonable when considering the field data (cf. Table 3).

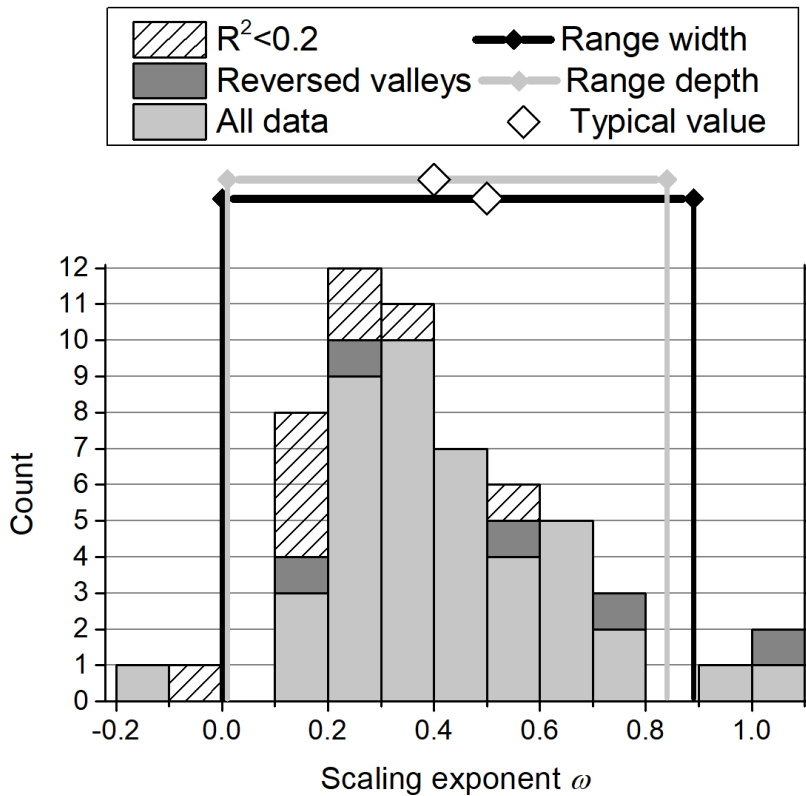

455 **Fig. 6: Histogram of 57 valley width to drainage area scaling exponents ω (eq. 21), compiled from the literature (Table 4). Light grey blocks give all data from regular valleys with a correlation coefficient R^2 between valley width and drainage area exceeding 0.2, striped blocks give data with $R^2 < 0.2$, and dark grey blocks correspond to reversed valleys reported by Harel et al. (2022), where tilting reversed the flow direction of the river. The range of scaling exponent values for flow depth (grey; 0.01-0.84) and channel width (black; 0-0.89) reported by Park (1977) and Rhodes (1978) are also indicated (cf. eq. 8).**

5 Discussion

460 5.1 Model concept

Our model predicts the scaling of valley or channel-belt width with flow depth, bank height and channel width (eq. 8), and how this valley width is modulated by uplift and lateral hillslope sediment supply (eq. 15). It is, essentially, a deterministic steady-state model for valley width, building on the stochastic concept of a river channel migrating across an alluviated floodplain and switching direction according to a Poisson process. The model reproduces the relationships between valley width and the ratio of lateral channel mobility and uplift in three separate data sets (Fig. 5). In addition, it predicts a range of scaling exponents between valley width and drainage area that is consistent with those observed in natural settings (Fig. 6). As such, it has quantitative explanatory power that expands previous efforts focusing on the transient widening phase (Martin et al., 2011, Hancock & Anderson, 2002), on non-uplifting valleys (Tofelde et al., 2022), or empirical (e.g., Langston & Temme, 2019; Brocard & van der Beek, 2006; Beeson et al., 2019), numerical (Langston & Tucker, 2018), and qualitative (Clubb et

470 al., 2023a) descriptions of valley formation. In addition, the model, in principle, encompasses all currently known controls on steady state valley width (cf. Martin et al., 2011; Tofelde et al., 2022), and yields a wealth of testable predictions. For example, it yields an equation for channel-belt width (eq. 8), and predicts that valley width is controlled by four dimensionless numbers (eq. 15). Our model predicts that fluvial-valley width is controlled by both climatic and tectonic conditions, but is explicitly independent of lithology at steady state. While tectonics come into the model via the uplift rate, climate appears indirectly, 475 either as a control on unconfined channel-belt width in the limit of low uplift rate, or as a control on channel width in the high uplift rate limit. Likewise, lithology exerts an implicit, indirect control by changing channel width (see Section 5.3).

The good fit of our model to multiple datasets ranging from rivers crossing a single fold to an entire orogen suggest that many valleys, especially at small drainage areas and / or high uplift rates, are formed to first order by laterally migrating rivers. We note that the Himalayan data are characterized by large scatter that can arise from multiple factors, such as variations in 480 sediment grain size and lithology, unequal distributions of rainfall, non-steady state valleys, response to transient, non-uniform uplift, or the dominance of other processes than fluvial bevelling in setting valley width. Yet, our model provides an excellent fit to the binned means of the data ($R^2 = 0.91$), especially when bins with mean valley width exceeding about 300 m are excluded (Fig. 5C). Hence, we suggest that the model can be applied to a wide variety of physiographic settings. The two field data sets that we used for our tests originate from active mountain belts, the Tian Shan (Section 3.2) and the Himalaya (Section 485 3.3). As such, these channels are likely controlled by bedrock and probably cannot be considered as fully alluvial rivers. We suggest that in bedrock rivers, valley widening occurs dominantly during times when there is no active bedrock incision, and the bedrock floor of the valley is covered by sediment, such that the river behaves like an alluvial river (cf. Shepherd, 1972; Turowski et al., 2013). This notion is in line with recent experiments of Langston & Robertson (2023), who found that high sediment supply, sediment cover on the bed, and laterally mobile channels in the alluvium are needed for the formation of 490 wide bedrock valleys. This means that the fill needs a depth equal to or exceeding the flow depth. As the river sweeps laterally through the sediment fill, it occasionally erodes the walls and removes the sediment that is provided from the walls by hillslope erosion (Tofelde et al., 2022) until a steady state valley width is achieved. As such, the composition and erodibility of the valley walls should affect the speed of widening during the transient phase, but not the steady state valley width.

Many mountain rivers split into multiple channels, at least during low flow periods. The question of whether multiple channels 495 for the same water and sediment supply lead to different valley width cannot be fully answered at the moment, but we can make a few generic and observational statements. First, multiple channels add a considerable complexity. For example, there is no requirement that all channels at all times migrate into the same direction, implying that the channels interact and their number, size, etc. evolves over time. Incorporating this complexity into the model would require a number of additional assumption (on channel merging, splitting, migration...), and a scheme of keeping track of their motion within the cross section 500 to map their individual contributions to valley widening. Such a scheme is beyond our first simplified attempt to address the problem, but yields interesting questions for future research. Second, Bufe et al.'s (2016) experiments, which we compared to the model (section 3.1), frequently featured multiple channels. Still, the model provides a reasonable explanation of the data (Fig. 5A), potentially indicating that migration of multiple channels produces an average rate and pattern of lateral sediment

reworking that scales similarly to those of a single migrating channel. Third, we do not fully understand the controls on lateral transport capacity q_L . In braided experiments that all featured multiple channels, Bufe et al. (2019) found that q_L depended, among others, on water discharge, sediment supply and grain size. Importantly, Bufe et al.'s (2019) analysis suggests that q_L scales approximately linearly with water discharges in these braided systems. Such linear scaling implies that valley widths could be independent of the detailed distribution of water between single or multiple channels, as long as all channels contribute to lateral-sediment reworking and valley-wall erosion according to their individual water discharge. The crucial question for the effect of multiple channels on valley width seems to lie in the way the different channels interact by merging, splitting, crossing, as well as affecting each other's speed and the rate of changing the direction of lateral migration.

5.2 Valley width scaling with drainage area

Our model predicts that valley width is equal to channel-belt width W_0 in the limit of low uplift rates, and to channel width W_c in the limit of high uplift rates (eq. 15). These two limits are important to consider, because they potentially apply to a large proportion of data in natural settings. In all datasets, as well as in the model, the logarithmic dependence of valley width on lateral transport capacity and uplift rate exists across 2-3 orders of magnitude of the q_L/U ratio (m) (Fig. 5). In natural settings, this ratio can span up to eight orders of magnitude (Fig. 5C), so that most natural valleys sit at either the W_c or W_0 limit. Using these two limits, we will in the following discuss the scaling relationship between valley width and drainage area.

In our model, channel-belt width is proportional to the square of flow depth h divided by bank height H_0 (eq. 8). In a situation without uplift, it seems reasonable to assume that bank height, on average, corresponds to flow depth. After all, the river cannot deposit sediment at heights above its flow surface, and if the bank were lower, the channel overtops, widens, and becomes shallower or finds a different course. Yet, there may be some variability in the bank heights due to autogenic changes between incision and deposition phases in and along the river channel (Mizutani, 1998; Bufe et al., 2019). Such changes lead to variations in channel width and depth, which can lead to variations in bank height encountered by the river throughout the floodplain, in turn affecting the W - A area scaling exponent. Further, along-stream variations in uplift or lateral channel mobility q_L – which is affected, for example, by grain size – may affect the scaling exponent. Overall, the range of observed valleys of the scaling exponent (Table 3) matches the expected range from hydraulic geometry quite well (Fig. 6). High values may arise from specific local conditions, other active processes, or along-stream gradients in the control variables such as uplift rate. These would need to be investigated locally in specific case studies.

In model construction, we have not explicitly considered the response of channel geometry to uplift. It is widely accepted that incising channels are narrower and deeper than non-incising or depositing channels at the same water discharge and sediment supply (e.g., Lavé & Avouac, 2001; Turowski, 2018; Yanites et al., 2010). Channel-belt width W_0 dominantly depends on flow depth (eq. 8), and valley width is close to channel-belt width for low uplift rates. When the mobility-uplift number M_U is large, an increase in uplift rate may thus indirectly lead to an increase in valley width, because the river responds to the increase in uplift with a decrease in flow width and an increase in flow depth. We expect that this counter-intuitive result is applicable

only in rare circumstances, when a change in uplift rate is large enough to cause an observable change in valley width due to the change in flow depth, but not so large such that the direct control of uplift rate on valley width dominates.

540 **5.3 Lithological controls on steady state valley width**

Multiple observations point to a lithological control on valley width and indicate that valleys carved into more erodible rock tend to be wider than valleys carved into less erodible lithologies (e.g., Bursztyn et al., 2015; Keen-Zebert et al., 2017; Moore, 1926; Schanz & Montgomery, 2016). For example, Lifton et al. (2009) found a negative correlation between local valley width and rock strength measured with the Schmidt hammer rebound value. Brocard & van der Beek (2006) and Langston & Temme (2019) observed higher scaling exponents in the relationship of valley width and drainage area in softer rocks compared to harder rocks. These observations contrast with the absence of a correlation of valley width with lithological units in the Himalaya, as reported by Clubb et al. (2023a). Our findings from the Himalaya suggest that a majority of valleys may be close to one of the valley-width limits, where valley width approaches either the channel width W_C or the channel belt width W_0 (Fig. 5C). It is likely that lithology influences the former limit, because ~~as~~ the width of bedrock channels in mountain regions increases with increasing erodibility (e.g., Turowski, 2018). Further, our model suggests that the channel width – and therefore any lithologic control on channel width – affects the shape of the model curve beyond the limit of small mobility-uplift numbers (cf. the solid and dashed lines in Fig. 4). From field observations, we expect that channel width varies by a factor below ten for various lithologies (e.g., Ehlen and Wohl, 2002; Spotila et al., 2015). For example, Montgomery & Gran (2001) reported a halving of channel width of a river crossing from a limestone into a granite reach, and Spotila et al. (2015) observed a maximum factor of five for different lithologies for channel width after normalizing for drainage area. As such, the observed lithological dependence of valley width (e.g., Brocard & van der Beek, 2006; Langston & Temme, 2019; Schanz & Montgomery, 2016) is consistent with our model. In addition to the channel width, lithology may also influence the balance between hillslope sediment supply and removal. ~~In summary, w~~We posit that the scaling relationship between valley width and drainage area is implicitly dependent on lithology in our model, chiefly via the dependence of channel width on lithology. This dependence can be expected to emerge when scaling relationships in individual valleys or local controls are studied (as done, for example, by Brocard & van der Beek, 2006, ~~and~~ Langston & Temme, 2019, and Lifton et al., 2009), but should disappear when data from many different valleys are averaged within a regional perspective (as done by Clubb et al., 2023a).

565 **5.4 Comparison to previous models**

Our model concept both contrasts with and builds on previous models of fluvial valley formation (Fig. 7; cf. Clubb et al., 2023a; Hancock & Anderson, 2001; Martin et al., 2011; Tofelde et al., 2022). We classify existing models using two criteria (Fig. 7). First, we distinguish transient from steady state models. Second, we distinguish models that emphasize vertical from those that emphasize lateral processes. This latter distinction essentially corresponds to the alluvial and bedrock categories proposed by Clubb et al. (2023a), in which the alluvial model emphasizes vertical processes and the bedrock model lateral processes.

In the *alluvial model* (Fig. 7A), valley width is set by depositing sediment into a pre-existing V-shaped valley, created during an earlier incision phase. Because the channel bed is located on the surface of the sediment fill, valley width is set passively to the width determined by the slanting valley walls at the height of the sediment fill. Valley width is thus set by the angle of repose and the amount of sediment delivered from upstream. The alluvial model includes both transient and steady state elements.


The *eternal widening* (EW) model (Fig. 7B) is a transient model emphasizing lateral processes. It assumes that the valley floor grows by fluvial undercutting of the valley walls and subsequent wall collapse (e.g., Hancock & Anderson, 2002; Malatesta et al., 2017; Martin et al., 2011; Langston & Tucker, 2018). It exists in several variants that differ in the precise formulation of the erosion model and the description of channel dynamics. In the EW model, valley width is a function of the widening or wall-erosion rate integrated across the duration of widening (Hancock and Anderson, 2002; Suzuki, 1982). Although the widening rate decreases as valleys grow wider through time – because the fraction of time the river spends cutting into the walls declines (Hancock & Anderson, 2002) – the valley never reaches a steady state width. Valley width thus depends on the widening rate and the time since the last incision event. Tofelde et al. (2022) added the notion of channel-independent hillslope sediment delivery to the EW model (Fig. 7C). In the case of this *lateral-flux steady state model*, valleys can achieve a steady state width when sediment supply from hillslopes and evacuation by the river are balanced (cf. eq. 12).

Within the present contribution, we add the concept that rivers randomly change the direction of migration, according to a Poisson process (Fig. 7D). This yields an average switching timescale for channel migration, setting an average bevelled width. Assuming that steady state width corresponds to the mean behaviour of the stochastic model, channel belts reach a steady state width even without confinement. This steady state channel-belt width gives a maximum width for fluvial valleys, which can be reduced due to uplift or lateral hillslope sediment input (Fig. 4). This model can be termed a *deterministic version of the Poisson model*.

A fully *stochastic Poisson model* has not been treated within the present contribution, but is implicit in the assumptions underlying the derivation (Fig. 7E). Due to the random motion during the Poisson process, the channel can venture beyond the steady state width predicted by the deterministic Poisson model. Essentially, once the steady state width has been reached, the channel may push beyond the valley boundaries on either side of the valley. This increases the width on one side, but leads to less frequent visits of the flood plain on the other side. Thereby, these parts of the valleys are abandoned. We expect that this effect results in a slow lateral drift of the areas frequently revisited by the river after the steady state channel belt has been established. In an uplifting area, the valley floor would thus shift laterally over time, without changing its width. Valleys in an area without uplift will widen indefinitely at an ever-slowng pace. This prediction is analogous to the eternal widening model and yields a similar outcome with a different mechanism.

Finally, we note that valley width could be set or modified by processes other than lateral erosion of the valley walls by the river, or deposition and evacuation of sediment. These could be, for example, back-weathering of the walls (e.g., Krautblatter & Moore, 2014; Moore et al., 2009; Tofelde et al., 2022), downstream-sweep erosion of the river controlled by upstream conditions (Cook et al., 2014), large-scale landsliding (e.g., Beeson et al., 2018; Stolle et al., 2017), or glacial processes (e.g.,

605 Montgomery, 2002; Zakrzewska, 1971). These processes likely contribute to the scatter observed in the data and may explain some of the observed outliers (Fig. 5C).

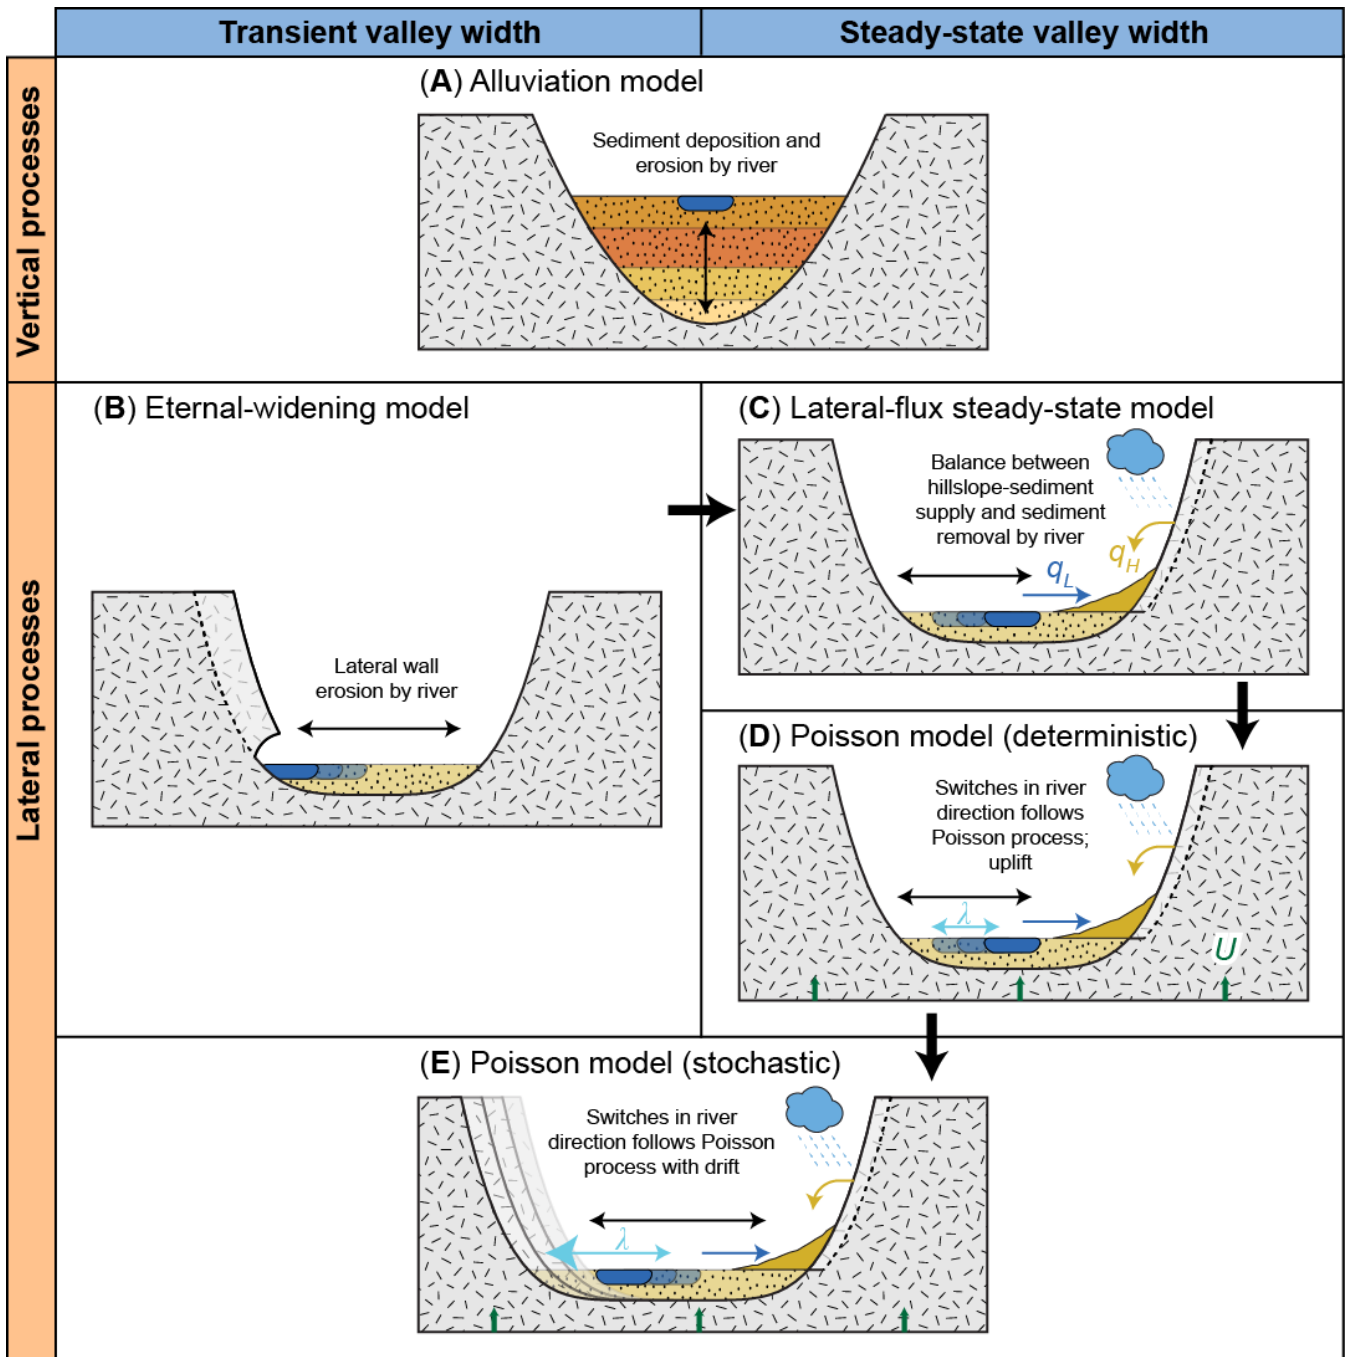

610 **Figure 7: Overview of the existing models, organised into groups according on whether they emphasize vertical or lateral processes (vertical axis), and whether they yield a transient or steady state valley width (horizontal axis). See text for model descriptions.**

It is beyond the scope of this paper to comprehensively test the models against each other and against data. Instead, we want to briefly outline the boundary conditions that are necessary for the different models to apply. Clubb et al. (2023a) found a strong inverse correlation of valley width with the channel steepness index k_{sn} in their data (Fig. 4C), but no correlation with
615 lithological units. They argued that this observation rules out the dominance of lateral processes (Fig. 7B), and instead suggested that the alluvial model (Fig. 7A) prevails, where valley width is mainly set by sediment deposition and evacuation in a previously existing V-shaped valley. Clubb et al. (2023a) suggested that high uplift rates lead to elevated channel bed slopes, and that the river responds by deposition to build these slopes in a pre-existing valley. However, substantial deposition of sediment following the incision of a valley can only occur (i) if there is a substantial increase in the ratio of upstream
620 sediment supply to water discharge, (ii) if the relative base level rises, or (iii) if the stream is disconnected from the original base level, which is possible for example when the channel is blocked by a massive landslide (e.g., Korup, 2006). Thus, we expect that, in an uplifting landscape, filled valleys generally present transient features. Case (i) can occur if either climatic conditions change (affecting both sediment supply and discharge), or if upstream uplift rates increase (affecting downstream sediment supply). A comparison of different valleys is then only meaningful if a similar change occurs in all basins at the same
625 time. This seems unlikely given the wide range of climatic and tectonic conditions within the Himalaya. Case (ii) can occur if the relative base level uplift rate increases ~~or if the uplift rate throughout the catchment decreases. Because an entire region is considered, at least some of the catchments would necessarily see opposite effects. Further studies are necessary to investigate whether the spatial or temporal variations in uplift rate for catchments in the Himalaya are consistent enough to cause major base-level changes and sediment aggradation of V-shaped valleys that are correlated across the range.~~ Further, a comparison
630 of different catchments would only be meaningful if the change in uplift occurs at the same time. In case (iii), the river disconnects from the downstream base level, and as a result, the channel is insensitive to the uplift. Assuming the upstream regions keep eroding at the same rate as prior to the disconnection, the amount of deposited sediment – and therefore valley width – should scale positively with uplift rather than negatively, contradicting the observation from the data from the Himalaya.

635 In contrast, our model implies that the role of uplift is to increase the thickness of alluvium that the river has to move through when migrating laterally – thereby slowing the lateral back-and-forth movement of the river and narrowing the valley. This uplift effect does not consider changes in sediment supply that could be driven by increased landscape-scale erosion rates. Such an effect can be modelled in the form of modulating lateral transport capacity q_L . As argued in Section 5.3, our model is consistent both with an absence of lithological control on the regionally averaged steady state valley width (Clubb et al.,
640 2023a), and with emerging lithological controls in the scaling relationships of individual valleys (Brocard & van der Beek, 2006; Langston & Tucker, 2019). As explained above, we propose that the erosion rate of valley walls by the river modulates the transient rate of widening up to the steady state. In turn, at steady state the river does not actively erode valley walls, but

the steady state valley width is limited either by the rate of lateral sediment input from hillslope erosion processes (Tofelde et al., 2022) or the likelihood of channel switching within the valley. Of course, in an uplifting setting, the river has to incise bedrock. In our concept, incisional and widening phases of the river are separated, as has been suggested previously (e.g., Martin et al., 2013; Hancock & Anderson, 2001), but it is not necessary that the incisional phases at all times carve deep V-shaped valleys that are subsequently filled up. Many mountain rivers feature a closed sediment cover during low and intermediate flows (e.g., Tinkler and Wohl, 1998; Turowski et al., 2013), with a thickness of a few meters – enough for a river to sweep back and forth across the valley within the alluvium. In turn, vertical incision dominantly occurs during large floods (e.g., Cook et al., 2018; Lamb and Fonstad, 2008). Turowski et al. (2013) suggested that rivers alternate between the deposition and evacuation of sediment during floods and intermediate flow, because transport capacity and sediment supply both depend on, but scale differently with discharge. Whether a particular river is ‘flood-cleaning’, i.e., it evacuates sediment during big events, or ‘flood-depositing’, i.e., it deposits sediment during big events, depends on site-specific conditions relating to hydrology, substrate, climate and channel morphology.

In cases where valleys are deeply infilled (Blöthe et al., 2014; Wang et al., 2014), the river moves laterally through the fill and widens the valley when encountering the bedrock walls. If the valley width imposed by the fill – as in the alluvial model (Fig. 7A) – exceeds the steady state width, infilled valleys may be wider than predicted by equation (15). This can potentially explain some of the observed outliers (Fig. 5C).

6 Conclusion

Within this contribution, we have derived a physics-based steady-state model for the width of channel belts and river valleys. In agreement with previous suggestions, we assume that valleys widen by river undercutting of valley walls. We add the notion of random changes in the river’s direction of motion, which can be described by a Poisson process. We link the probability of switches per unit to the river’s lateral mobility (Bufe et al., 2019), and channel depth and width. We derive a deterministic steady state model for fluvial valley width that can account of all currently known controls, including channel lateral mobility (Bufe et al., 2019), discharge and sediment supply (e.g., Beeson et al., 2018; Tomkin et al., 2003), lateral hillslope sediment supply (Tofelde et al., 2022), uplift or incision rate (Bufe et al., 2016a; Clubb et al., 2023a), the absence of a correlation with lithology in a regional perspective (Clubb et al., 2023a), and lithological controls on scaling relationships of individual valleys (Brocard & van der Beek, 2006; Langston & Tucker, 2019). The model predicts that for low uplift rates, valley width is equal to channel-belt width, and for high uplift rates, it is equal to channel width. A logarithmic function connects these two limits for intermediate uplift rates (Fig. 4, eq. 15). The model corresponds well to field and experimental data of valleys in uplifting settings (Fig. 5).

The model yields a wealth of quantitative predictions that can, in principle, be tested against experimental and field data. Its analytical equation can be used to track valley width in models of river corridors (e.g., Heimann et al., 2015; Wickert &

Schildgen, 2019) or entire landscapes (e.g., Barnhart et al., 2020; Gailleton et al., 2023). It thus may allow for more
675 comprehensive descriptions of mountain landscapes or the interaction of rivers with their floodplains.

Symbols & Notation

λ	Rate parameter of Poisson processes describing the switch in the direction of river motion [T^{-1}]
a	Scaling parameter (varying units)
A	Drainage area [L^2]
A_f	Area actively reworked by channel prior to uplift in experiments [L^2]
c	dimensionless constant of order 1 [-]
h	Flow depth [L]
H_+	Height of the river bank in the direction of river motion [L]
H_-	Height of the river bank opposite the direction of river motion [L]
H_0	Constant bank height in conditions without tectonic uplift [L]
k	Dimensionless constant [-]
k_0	Dimensionless constant, defined by c/k [-]
k_{sn}	Normalized steepness index [$m^{0.9}$]
k_w	Pre-factor in the power law scaling between valley width and drainage area [$L^{1-\omega}$]
m	Proxy that scales with q_L/U (varying units)
M_U	Mobility-uplift number, $M_U = q_L/UW_0$ [-]
q_H	Rate of lateral sediment supply from hillslopes or valley walls per channel length [$L^2 T^{-1}$]
q_H'	Normalized hillslope sediment supply, $q_H' = q_H/q_L$ [-]
q_L	Lateral-transport capacity, i.e. the amount of sediment that the channel can move by lateral erosion per unit channel length per unit time [$L^2 T^{-1}$]
P	Fraction of time that a river spends at any of its channel walls or valley margins [-]
Δt	The characteristic length of time the river moves on average in the same direction [T]
T_f	Timescale over which A_f was reworked [T]
U	Uplift rate [$L T^{-1}$]
v	Lateral speed of the river as it reaches valley-floor margins, i.e. wall toes [$L T^{-1}$]
V	Lateral migration speed, i.e. the speed of river migrating back and forth across the valley floor [$L T^{-1}$]
W	Valley-floor width [L]
W'	Normalized valley width, $W' = W/W_0$ [-]

W_c	Width of the river channel [L]
W_c'	Normalized channel width, $W_c' = W_c/W_0$ [-]
$\overline{W_c}$	Average channel width [L]
W_0	Channel-belt width or unconfined valley width [L]
$\overline{W_0}$	Average channel-belt width [L]
ω	Scaling exponent in the power law scaling between valley width and drainage area [-]

Data availability

680 Raw data for the experimental datasets are stored on the SEAD repository of Bufe et al. (2016b) with the identifier
<http://dx.doi.org/10.5967/M0CF9N3H>. Derived quantities have been compiled from Bufe et al. (2016a,b) and Bufe et al.
(2019). All data necessary for reproducing the results are also given in Table 1. The mapped channel widths and auxiliary data
from the Tian Shan are given in Table 2. The valley width data from the Himalaya were extracted by Clubb et al. (2023a) and
auxiliary data can be found on the repository of Clubb et al. (2023b) with the identifier <https://doi.org/10.15128/r2z890rt27d>.

685

Competing interests

At least one of the (co-)authors is a member of the editorial board of Earth Surface Dynamics.

Author contributions

690 All authors have contributed to the conceptualization of the study, model development, data analysis, and writing.

Acknowledgments

Fiona Clubb and her co-authors graciously shared their data from the Himalaya prior to publication. We thank Fergus McNab
for discussions and feedback on the manuscript. Sophie Katzung mapped valley width in the northern Tian Shan. We thank
695 [AE Simon Mudd](#), Sarah Schanz and Sébastien Carretier for constructive comments on [a](#)-previous versions of this paper.

References

- Abdrakhmatov, K. Y., Aldazhanov, S. A., Hager, B. H., Hamburger, M. W., Herring, T. A., Kalabaev, K. B., Makarov, V. I.,
700 Molnar, P., Panasyuk, S. V., Prilepin, M. T., Reilinger, R. E., Sadybakasov, I. S., Souter, B. J., Trapeznikov, Y. A., Tsurkov,
V. Y., & Zubovich, A. V.: Relatively recent construction of the Tian Shan inferred from GPS measurements of present-
day crustal deformation rates, *Nature*, 384(6608), 450-453, <https://doi.org/10.1038/384450a0>, 1996.
- [Appledorn, M. v., Baker, M. E., Miller, A. J.: River-valley morphology, basin size, and flow-event magnitude interact to produce wide variation in flooding dynamics, *Ecosphere*, 10\(1\), e02546, <https://doi.org/10.1002/ecs2.2546>, 2019.](#)

- 705 Avouac, J. P., Tapponnier, P., Bai, P., You, M., & Wang G.: Active thrusting and folding along the northern Tien Shan and Late Cenozoic rotation of the Tarim relative to Dzungaria and Kazakhstan, *Journal of Geophysical Research: Solid Earth*, 4(3), 11791-11808, <https://doi.org/10.1029/92JB01963>, 1993.
- [Baker, M. E., & Wiley, M. J.: Multiscale control of flooding and riparian-forest composition in Lower Michigan, USA. *Ecology*, 90, 145–159, <https://doi.org/10.1890/07-1242.1>, 2009.](#)
- 710 Barnhart, K. R., Hutton, E. W. H., Tucker, G. E., Gasparini, N. M., Istanbuluoglu, E., Hobley, D. E. J., Lyons, N. J., Mouchene, M., Nudurupati, S. S., Adams, J. M., & Bandaragoda, C.: Short communication: Landlab v2.0: A software package for Earth surface dynamics, *Earth Surf. Dynam.*, 8(2), p 379-397, doi:10.5194/esurf-8-379-2020, 2020.
- Beeson, H. W., Flitcroft, R. L, Fonstad, M. A., & Roering J. J.: Deep-seated landslides drive variability in valley width and increase connectivity of salmon habitat in the Oregon Coast Range, *American Water Resources Association*, 54, 1325–
- 715 1340. <https://doi.org/10.1111/1752-1688.12693>, 2018.
- Blöthe, J. H., Munack, H., Korup, O., Fülling, A., Garzanti, E., Resentini, A., & Kubik, P. W.: Late quaternary valley infill and dissection in the Indus River, western Tibetan, Plateau margin, *Quaternary Science Reviews*, 94, 102-119, <http://dx.doi.org/10.1016/j.quascirev.2014.04.011>, 2014.
- Blum, M. D., & Törnqvist, T. E.: Fluvial responses to climate and sea-level change: A review and look forward, *Sedimentology*, 47, 2-48, <https://doi.org/10.1046/j.1365-3091.2000.00008.x>, 2000.
- 720 Bridgland, D., & Westaway, R.: Climatically controlled river terrace staircases: A worldwide Quaternary phenomenon. *Geomorphology*, 98(3–4), 285–315. <https://doi.org/10.1016/j.geomorph.2006.12.032>, 2008.
- Brocard, G. Y., & Van der Beek, P. A.: Influence of incision rate, rock strength, and bedload supply on bedrock river gradients and valley-flat widths: Field-based evidence and calibrations from western Alpine rivers (southeast France). In S. D.
- 725 Willett, N. Hovius, M. T. Brandon, & D. M. Fisher (Eds.), *Tectonics, Climate, and Landscape Evolution* (Vol. 398, pp. 101–126). Special Papers, Geological Society of America, [https://doi.org/10.1130/2006.2398\(07\)](https://doi.org/10.1130/2006.2398(07)), 2006.
- Bufe, A., Bekaert, D. P. S., Hussain, E., Bookhagen, B., Burbank, D. W., Thompson Jobe, J. A., Chen, J., Li, T., Liu, L., & Gan, W.: Temporal changes in rock uplift rates of folds in the foreland of the Tian Shan and the Pamir from geodetic and geologic data, *Geophysical Research Letters*, 44(21), 10,977-10,987, <https://doi.org/10.1002/2017GL073627>, 2017a.
- 730 Bufe, A., Burbank, D. W., & Paola, C.: Fold erosion by an antecedent river, University of Michigan ARC Repository, <http://dx.doi.org/10.5967/M0CF9N3H>, 2016b.
- Bufe, A., Burbank, D. W., Liu, L., Bookhagen, B., Qin, J., Chen, J., Li, T., Thompson Jobe, J. A., & Yang, H.: Variations of Lateral Bedrock Erosion Rates Control Planation of Uplifting Folds in the Foreland of the Tian Shan, NW China, *Journal of Geophysical Research: Earth Surface*, 122(12), 2431-2467, <https://doi.org/10.1002/2016JF004099>, 2017b.
- 735 Bufe, A., Paola, C., & Burbank, D. W.: Fluvial bevelling of topography controlled by lateral channel mobility and uplift rate, *Nature Geoscience*, 9(9), 706-710, <https://doi.org/10.1038/ngeo2773>, 2016a.

- Bufe, A., Turowski, J. M., Burbank, D. W., Paola, C., Wickert, A. D., & Tofelde, S.: Controls on the lateral channel-migration rate of braided channel systems in coarse non-cohesive sediment: *Earth Surface Processes and Landforms*, 44(14), 2823-2836, <https://doi.org/10.1002/esp.4710>, 2019.
- 740 Bursztyn, N., Pederson, J. L., Tressler, C., Mackley, R. D., Mitchell, K. J.: rock strength along a fluvial transect of the Colorado Plateau – quantifying a fundamental control on geomorphology, *Earth and Planetary Science Letters*, 429, 90-100, <http://dx.doi.org/10.1016/j.epsl.2015.07.042>, 2015.
- Chen, J., Heermance, R., Burbank, D. W., Scharer, K. M., Miao, J., & Wang, C.: Quantification of growth and lateral propagation of the Kashi anticline, southwest Chinese Tian Shan, *Journal of Geophysical Research: Solid Earth*, 112(B3),
745 B03S16, <https://doi.org/10.1029/2006JB004345>, 2007.
- Clubb, F., Weir, E. F., & Mudd, S.: Continuous measurements of valley floor width in mountainous landscapes. *Earth Surface Dynamics*, 10, 437-456, <https://doi.org/10.5194/esurf-10-437-2022>, 2022.
- Clubb, F., Mudd, S., Schildgen, T., van der Beek, P., Devrani, R., & Sinclair, H.: Himalayan valley-floor widths controlled by tectonically driven exhumation, *Nature Geoscience*, 16, 739–746, <https://doi.org/10.1038/s41561-023-01238-8>, 2023a.
- 750 Clubb, F., Mudd, S., Schildgen, T., van der Beek, P., Devrani, R., & Sinclair, H.: Valley-floor widths across the Himalayan orogen [dataset], <https://doi.org/10.15128/r2z890rt27d>, 2023b.
- Constantine, J. A., Dunne, T., Ahmed, J., Legleiter, C., & Lazarus, E. D.: Sediment supply as a driver of river meandering and floodplain evolution in the Amazon Basin. *Nature Geoscience*, 7(12), 899–903. <https://doi.org/10.1038/ngeo2282>, 2014.
- Cook, K. L., Turowski, J. M., & Hovius, N.: River gorge eradication by downstream sweep erosion, *Nature Geoscience*, 7,
755 682–686, <https://doi.org/10.1038/ngeo2224>, 2014.
- Cook, K. L., Andermann, C., Gimbert, F., Adhikari, B. R., & Hovius, N.: Glacial lake outburst floods as drivers of fluvial erosion in the Himalaya. *Science*, 362(6410), 53–57. <https://doi.org/10.1126/science.aat4981>, 2018.
- Cruden, D. M. Lu, Z.-Y., Thomson, S.: The 1939 Montagneuse River landslide, Alberta, *Canadian Geotechnical Journal*, 34, 799-810, <https://doi.org/10.1139/t97-035>, 1997.
- 760 Dunne, T., Constantine, J. A., & Singer, M.: The role of sediment transport and sediment supply in the evolution of river channel and floodplain complexity. *Transactions - Japanese Geomorphological Union*, 31(2), 155–170.
- Ehlen, J., and Wohl, E.: Joints and landform evolution in bedrock canyons, *Transactions, Japanese Geomorphological Union*, 23, 237-255, 2002.
- Fan, M., Xu, J., Chen, Y., & Li, W.: Simulating the precipitation in the data-scarce Tianshan Mountains, Northwest China based on the Earth system data products, *Arabian Journal of Geosciences*, 13, <https://doi.org/10.1007/s12517-020-05509-1>, 2020.
- 765 Ferguson, R.I.: Hydraulics and hydraulic geometry, *Progress in Physical Geography* 10, 1–31, <https://doi.org/10.1177/030913338601000101>, 1986.
- Fotherby, L. M.: Valley confinement as a factor of braided river pattern for the Platte River, *Geomorphology*, 103, 562-576,
770 <https://doi.org/10.1016/j.geomorph.2008.08.001>, 2009.

- Gaillaton, B., Malatesta, L., Cordonnier, G., and Braun, J.: CHONK 1.0: landscape evolution framework: cellular automata meets graph theory, *EGUsphere* [preprint], <https://doi.org/10.5194/egusphere-2022-1394>, 2023.
- Gasparini, N. M., Whipple, K. X., & Bras, R. L.: Predictions of steady state and transient landscape morphology using sediment-flux-dependent river incision models. *Journal of Geophysical Research*, 112, F03S09. <https://doi.org/10.1029/2006JF000567>, 2007.
- 775 Gleason, C.J.: Hydraulic geometry of natural rivers: A review and future directions. *Progress in Physical Geography*, 39, 337-360, <https://doi.org/10.1177/0309133314567584>, 2015.
- Gong, Z., Li, S.-H., & Li, B.: The evolution of a terrace sequence along the Manas River in the northern foreland basin of Tian Shan, China, as inferred from optical dating, *Geomorphology*, 213, 201-212, <http://dx.doi.org/10.1016/j.geomorph.2014.01.009>, 2014.
- 780 [Grant, G. E., & Swanson, F. J.: Morphology and processes of valley floors in mountain streams, western Cascades, Oregon. In: Costa, J. E., Miller, A. J., Potter, K. W., Wilcock, P. R. \(Eds.\), Natural and Anthropomorphic Influences in Fluvial Geomorphology. Geophysical Monograph, 89. American Geophysical Union, Washington, DC, 83-101, https://doi.org/10.1029/GM089p0083, 1995.](https://doi.org/10.1029/GM089p0083)
- 785 Hancock, G. S., & Anderson, R. S.: Numerical modeling of fluvial strath-terrace formation in response to oscillating climate. *Bulletin of the Geological Society of America*, 114(9), 1131–1142. [https://doi.org/10.1130/0016-7606\(2002\)114<1131:NMOFST>2.0.CO;2](https://doi.org/10.1130/0016-7606(2002)114<1131:NMOFST>2.0.CO;2), 2002.
- Harbor, J. M.: Numerical modeling of the development of U-shaped valleys by glacial erosion. *Geological Society of America Bulletin*, 104(10), 1364–1375, [https://doi.org/10.1130/0016-7606\(1992\)104<1364:NMOTDO>2.3.CO;2](https://doi.org/10.1130/0016-7606(1992)104<1364:NMOTDO>2.3.CO;2), 1992.
- 790 Harel, E., Goren, L., Crouvi, O., Ginat, H., & Shelef, E.: Drainage reorganization induces deviations in the scaling between valley width and drainage area, *Earth Surf. Dynam.*, 10, 875-894, <https://doi.org/10.5194/esurf-10-875-2022>, 2022.
- Heermance, R. V., Chen, J., Burbank, D. W., & Miao, J.: Temporal constraints and pulsed Late Cenozoic deformation during the structural disruption of the active Kashi foreland, northwest China, *Tectonics*, 27(6), TC6012, <https://doi.org/10.1029/2007TC002226>, 2008.
- 795 Heermance, R. V., Chen, J., Burbank, D. W., & Wang, C.: Chronology and tectonic controls of Late Tertiary deposition in the southwestern Tian Shan foreland, NW China, *Basin Research*, 19(4), 599-632, <https://doi.org/10.1111/j.1365-2117.2007.00339.x>, 2007.
- Heimann, F. U. M., Rickenmann, D., Turowski, J. M., & Kirchner, J. W.: sedFlow – a tool for simulating fractional transport and longitudinal profile evolution in mountain streams, *Earth Surface Dynamics*, 3, 15-34, <https://doi.org/10.5194/esurf-3-15-2015>, 2015.
- 800 Hillier, J. K., Bunbury, J. M., & Graham, A.: Monuments on a migrating Nile, *Journal of Archaeological Science*, 34, 1011-1015, <https://doi.org/10.1016/j.jas.2006.09.011>, 2007.

- 805 Hodges, K. V., Wbous, C., Ruhl, K., Schildgen, T., Whipple, K.: Quaternary deformation, river steepening, and heavy precipitation at the front of the Higher Himalayan ranges, *Earth and Planetary Science Letters*, 220, 379-389, [https://doi.org/10.1016/S0012-821X\(04\)00063-9](https://doi.org/10.1016/S0012-821X(04)00063-9), 2004.
- Howard, A. D.: A detachment-limited model of drainage basin evolution, *Water Resour. Res.*, 30, 2261–2285, <https://doi.org/10.1029/94WR00757>, 1994.
- Hubert-Ferrari, A., Suppe, J., Gonzalez-Mieres, R., & Wang, X.: Mechanisms of active folding of the landscape (southern Tian Shan, China), *J. Geophys. Res.*, 112, <https://doi.org/10.1029/2006JB004362>, 2007.
- 810 Humphrey, N. F. & Konrad, S. K.: River incision or diversion in response to bedrock uplift, *Geology*, 28, 43-46, [https://dx.doi.org/10.1130/0091-7613\(2000\)28<43:RIODIR>2.0.CO;2](https://dx.doi.org/10.1130/0091-7613(2000)28<43:RIODIR>2.0.CO;2), 2000.
- [Hupp, C. R.: Stream-grade variation and riparian-forest ecology along Passage Creek, Virginia. Bulletin of the Torrey Botanical Club, 109, 488-499, https://doi.org/10.2307/2996489, 1982.](#)
- [Ielpi, A., & Lapôtre, M. G. A.: A tenfold slowdown in river meander migration driven by plant life, Nature Geoscience, 13, 82-86, https://doi.org/10.1038/s41561-019-0491-7, 2019.](#)
- 815 Johnson, K. N. & Finnegan, N. J.: A lithologic control on active meandering in bedrock channels, *Geol. Soc. Am. Bull.*, 127, 1766–1776, <https://doi.org/10.1130/B31184.1>, 2015.
- Jonell, T. N., Owen, L. A., Carter, A., Schwenniger, J.-L., & Clift, P. D.: Quantifying episodic erosion and transient storage on the western margin of the Tibetan Plateau, upper Indus River. *Quaternary Research*, 89, 281-306, <https://dx.doi.org/10.1017/qua.2017.92>, 2018.
- 820 Keen-Zebert, A., Hudson, M. R., Shepherd, S. L., and Thaler, E. A.: The effect of lithology on valley width, terrace distribution, and bedload provenance in a tectonically stable catchment with flat-lying stratigraphy, *Earth Surface Processes and Landforms*, 42, 1573-1587, <https://dx.doi.org/10.1002/esp.4116>, 2017.
- Kirby, E. & Whipple, K.: Quantifying differential rock-uplift rates via stream profile analysis, *Geology*, 29, 415–418, 2001.
- 825 Kirby, E. & Whipple, K.: Expression of active tectonics in erosional landscapes, *Journal of Structural Geology*, 44, 54-75, <https://dx.doi.org/10.1016/j.jsg.2012.07.009>, 2012.
- Korup, O., Rock-slope failure and the river long profile, *Geology*, 34, 45-48, <https://doi.org/10.1130/G21959.1>, 2006.
- Krautblatter M, & Moore JR: Rock slope instability and erosion: toward improved process understanding. *Earth Surf. Process. Landforms*, 39, 1273-1278, doi: 10.1002/esp.3578, 2014.
- 830 Lague, D.: The stream power river incision model: evidence, theory and beyond, *Earth Surf. Proc. Land.*, 39, 38–61, <https://doi.org/10.1002/esp.3462>, 2014.
- Lamb, M. P., & Fonstad, M. A.: Rapid formation of a modern bedrock canyon by a single flood event, *Nat. Geosci.*, 3, 477–481, <https://doi.org/10.1038/ngeo894>, 2010.
- Langston, A. L., & Temme, A. J. A. M.: Impacts of lithologically controlled mechanisms on downstream bedrock valley
835 widening. *Geophysical Research Letters*, 46(21), 12056–12064. <https://doi.org/10.1029/2019GL085164>, 2019.

- Langston, A. L., & Tucker, G. E.: Developing and exploring a theory for the lateral erosion of bedrock channels for use in landscape evolution models. *Earth Surface Dynamics*, 6(1), 1–27. <https://doi.org/10.5194/esurf-6-1-2018>, 2018.
- Langston, A. L., & Robertson, C. H.: Wide bedrock valley development and sensitivity to environmental perturbations: Insights from flume experiments in erodible bedrock, *Earth Surf. Process. Landforms*, in press, 840 <https://doi.org/10.1002/esp.5680>, 2023.
- Lavé, J., & Avouac, J. P.: Fluvial incision and tectonic uplift across the Himalayas of central Nepal, *J. Geophys. Res.-Sol. Ea.*, 106, 26526–26591, <https://doi.org/10.1029/2001JB000359>, 2001.
- Lenard, J. P. S., Lavé, J., France-Lanord, C., Aumaître G., Bourlès, & Keddadouche, K.: Steady erosion rates in the Himalayas through late Cenozoic climatic changes, *Nature Geoscience*, 13, 448-452, <https://doi.org/10.1038/s41561-020-0585-2>, 845 2020.
- Leopold, L. B., & Maddock, T.: The hydraulic geometry of stream channels and some physiographic implications, USGS Professional Paper 252, 1953.
- Li, T., Chen, J., Thompson, J. A., Burbank, D. W., & Xiao, W.: Equivalency of geologic and geodetic rates in contractional orogens: New insights from the Pamir Frontal Thrust, *Geophysical Research Letters*, 39(15), L15305, 850 <https://doi.org/10.1029/2012GL051782>, 2012.
- Li, T., Chen, J., Thompson, J. A., Burbank, D. W., & Yang, H.: Hinge-migrated fold-scarp model based on an analysis of bed geometry: A study from the Mingyaole anticline, southern foreland of Chinese Tian Shan, *Journal of Geophysical Research: Solid Earth*, 120(9), 6592-6613, <https://doi.org/10.1002/2015JB012102>, 2015.
- Li, T., Chen, J., Thompson, J. A., Burbank, D. W., & Yang, X.: Quantification of three-dimensional folding using fluvial 855 terraces: A case study from the Mushi anticline, northern margin of the Chinese Pamir, *Journal of Geophysical Research: Solid Earth*, 118(8), 4628-4647, <https://doi.org/10.1002/jgrb.50316>, 2013.
- [Lifton, Z. M., Thackray, G. D., Van Kirk, R., & Glenn, N. F.: Influence of rock strength on the valley morphometry of Big Creek, central Idaho, USA, *Geomorphology*, 111, 173-181, https://doi.org/10.1016/j.geomorph.2009.04.014, 2009.](https://doi.org/10.1016/j.geomorph.2009.04.014)
- Limaye, A. B. S.: How do braided rivers grow channel belts? *Journal of Geophysical Research: Earth Surface*, 125, 1–24. 860 <https://doi.org/10.1029/2020JF005570>, 2020.
- Limaye, A. B. S., & Lamb, M. P.: Numerical simulations of bedrock valley evolution by meandering rivers with variable bank material. *Journal of Geophysical Research: Earth Surface*, 119, 927–950. <https://doi.org/10.1002/2013JF002871>.Received, 2014.
- Lu, H., Wu., D., Cheng, L., Zhang, T., Xiong, J., Zheng, X., & Li, Y.: Late Quaternary drainage evolution in response to fold 865 growth in the northern Chinese Tian Shan foreland, *Geomorphology*, 299, 12-23, <https://doi.org/10.1016/j.geomorph.2017.09.037>, 2017.
- [Maasri, A., Pyron, M., Arsenault, E. R., Thorp, J. H., Mendsaikhan, B., Tromboni, F., Minder, M., Kenner, S. J., Costello, J., Chandra, S., Otganganbat, A., & Boldgiv, B.: Valley-scale hydrogeomorphology drives river fish assemblage variation in Mongolia, *Ecology and Evolution*, 11, 6527-6535, https://doi.org/10.1002/ece3.7505, 2021.](https://doi.org/10.1002/ece3.7505)

- 870 Macklin, M. G., & Lewin, J.: The rivers of civilization. *Quaternary Science Reviews*, 114, 228–244.
<https://doi.org/10.1016/j.quascirev.2015.02.004>, 2015.
- Maddy, D., Bridgland, D., & Westaway, R.: Uplift-driven valley incision and climate-controlled river terrace development in the Thames Valley, UK. *Quaternary International*, 79(1), 23–36. [https://doi.org/10.1016/s1040-6182\(00\)00120-8](https://doi.org/10.1016/s1040-6182(00)00120-8), 2001.
- Malatesta, L. C., Prancevic, J. P., & Avouac, J. P.: Autogenic entrenchment patterns and terraces due to coupling with lateral
875 erosion in incising alluvial channels. *Journal of Geophysical Research: Earth Surface*, 122, 335–355.
<https://doi.org/10.1002/2015JF003797>, 2017.
- Malatesta, L. C., Avouac, J. P., Brown, N. D., Breitenbach, S. F. M., Pan, J., Chevalier, M.-L., Rhodes, E., Saint-Carlier, D., & Zhang, W.: Lag and mixing during sediment transfer across the Tian Shan piedmont caused by climate-driven aggradation–incision cycles, *Basin Res.*, 30(4), 613–635, <https://doi.org/10.1111/bre.12267>, 2018.
- 880 Marcotte, A. L., Neudorf, C. M., & Langston, A. L.: Lateral bedrock erosion and valley formation in a heterogeneously layered landscape, Northeast Kansas. *Earth Surface Processes and Landforms*, 46(11), 2248–2263.
<https://doi.org/10.1002/esp.5172>, 2021.
- Martin, J., Cantelli, A., Paola, C., Blum, M., & Wolinsky, M.: Quantitative modeling of the evolution and geometry of incised valleys. *Journal of Sedimentary Research*, 81(1), 64–79. <https://doi.org/10.2110/jsr.2011.5>, 2011.
- 885 May, C., Roering, J., Eaton, L. S., & Burnett, K. M.: Controls on valley width in mountainous landscapes: The role of landsliding and implications for salmonid habitat. *Geology*, 41(4), 503–506. <https://doi.org/10.1130/G33979.1>, 2013.
- McClain, K. P., Yildirim, C., Ciner, A., Sarikaya, M. A., Özcan, O., Görüm, T., Köse, O., Sahin, S., Kiyak, N. G., & Öztürk, T.: River, alluvial fan and landslide interactions in a tributary junction setting: Implications for tectonic controls on Quaternary fluvial landscape development (Central Anatolian Plateau northern margin, Turkey), *Geomorphology*, 376, 107567, <https://doi.org/10.1016/j.geomorph.2020.107567>, 2020.
- 890 Miller, A. J.: Valley morphology and boundary conditions influencing spatial patterns of flood flow. In: Costa, J. E., Miller, A. J., Potter, K. W., Wilcock, P. R. (Eds.), *Natural and Anthropomorphic Influences in Fluvial Geomorphology. Geophysical Monograph*, 89. American Geophysical Union, Washington, DC, 57–81, <https://doi.org/10.1029/GM089p0057>, 1995.
- 895 Mizutani, T.: Laboratory experiment and digital simulation of multiple fill-cut terrace formation. *Geomorphology*, 24(4), 353–361, [https://doi.org/10.1016/S0169-555X\(98\)00027-0](https://doi.org/10.1016/S0169-555X(98)00027-0), 1998.
- Montgomery, D. R.: Valley formation by fluvial and glacial erosion, *Geology*, 30, 1047–1050, [https://doi.org/10.1130/0091-7613\(2002\)030<1047:VFBFAG>2.0.CO;2](https://doi.org/10.1130/0091-7613(2002)030<1047:VFBFAG>2.0.CO;2), 2002.
- Montgomery, D. R.: Observations on the role of lithology in strath terrace formation and bedrock channel width, *Am. J. Sci.*,
900 304(5), 454–476, <https://doi.org/10.2475/ajs.304.5.454>, 2004.
- Montgomery, D. R., & Gran, K. B.: Downstream variations in the width of bedrock channels, *Water Resources Research*, 37, 1841–1846, <https://doi.org/10.1029/2000WR900393>, 2001.

- Moore, J. R., Sanders, J. W., Dietrich, W. E., & Glaser, S. D.: Influence of rock mass strength on the erosion rate of alpine cliffs. *Earth Surf. Process. Landforms*, 34, 1339-1352, <https://doi.org/10.1002/esp.1821>, 2009.
- 905 Moore, R. C.: Origin of inclosed meanders in the physiographic history of the Colorado Plateau country, *J. Geol.*, 34, 29–57, 1926.
- Naiman, R. J., Bechtold, J. S., Beechie, T. J., Latterell, J. J., & Van Pelt, R.: A process-based view of floodplain forest patterns in coastal river valleys of the Pacific Northwest, *Ecosystems*, 13, 1-31, <https://doi.org/10.1007/s10021-009-9298-5>, 2010.
- Park, C. C.: World-wide variations in hydraulic geometry exponents of stream channels: An analysis and some observations, 910 *J. Hydrol.*, 33, 133-146, [https://doi.org/10.1016/0022-1694\(77\)90103-2](https://doi.org/10.1016/0022-1694(77)90103-2), 1977.
- Perrigo, A., Hoorn, C., & Antonelli, A.: Why mountains matter for biodiversity. *J Biogeogr.* 47, 315-325, <https://doi.org/10.1111/jbi.13731>, 2020.
- Repasch, M., Scheingross, J. S., Hovius, N., Lupker, M., Wittmann, H., Haghypour, N., Gröcke, D. R., Eglinton T. I., Sachse, D.: Fluvial organic carbon cycling regulated by sediment transit time and mineral protection. *Nature Geoscience*, 14, 842–
- 915 848, <https://doi.org/10.1038/s41561-021-00845-7>, 2021.
- Rhodes, D. D.: World-wide variations in hydraulic geometry exponents of stream channels: An analysis and some observation – Comments. *Journal of Hydrology*, 39, 193-197, [https://doi.org/10.1016/0022-1694\(78\)90123-3](https://doi.org/10.1016/0022-1694(78)90123-3), 1978.
- Rigsby, C. A., Baker, P. A., & Aldenderfer, M. S.: Fluvial history of the Rio Ilave valley, Peru, and its relationship to climate and human history. *Palaeogeography, Palaeoclimatology, Palaeoecology*, 194(1–3), 165–185.
- 920 [https://doi.org/10.1016/S0031-0182\(03\)00276-1](https://doi.org/10.1016/S0031-0182(03)00276-1), 2003.
- Salisbury, N. E.: Thresholds and valley widths in the South River Basin, Iowa. Chapter 6 in: Coates, D. R., & Vitek, J. D.: *Thresholds in Geomorphology*, George Allan & Unwin, 103-129, 1980.
- Salisbury, N. E., Knox, J. C., & Stephensen, R. A.: *The Valleys of Iowa I: Valley Width and Stream Discharge Relationships in the Major Streams*, Iowa Studies in Geography, No. 5, Univ. of Iowa, Iowa City, 1968.
- 925 Savi, S., Tofelde, S., Wickert, A. D., Bufe, A., Schildgen, T. F., ~~and~~ & Strecker, M. R.: Interactions between main channels and tributary alluvial fans: channel adjustments and sediment-signal propagation, *Earth Surf. Dynam.*, 8, 303–322, <https://doi.org/10.5194/esurf-8-303-2020>, 2020.
- Schanz, S. A., & Montgomery, D. R.: Lithologic controls on valley width and strath terrace formation. *Geomorphology*, 258, 58–68. <https://doi.org/10.1016/j.geomorph.2016.01.015>, 2016.
- 930 Schanz, S. A., Montgomery, D. R., Collins, B. D., & Duvall, A. R.: Multiple paths to straths: A review and reassessment of terrace genesis. *Geomorphology*, 312, 12–23. <https://doi.org/10.1016/j.geomorph.2018.03.028>, 2018.
- Scharer, K. M., Burbank, D. W., Chen, J., Weldon, R. J., Rubin, C., Zhao, R., & Shen, J.: Detachment folding in the Southwestern Tian Shan–Tarim foreland, China: shortening estimates and rates, *Journal of Structural Geology*, 26(11), 2119-2137, <https://doi.org/10.1016/j.jsg.2004.02.016>, 2004.
- 935 Scherler, D., Bookhagen, B., & Strecker, M. R.: Tectonic control on ¹⁰Be-derived erosion rates in the Garhwal Himalaya, India, *J. Geophys. Res.* 119, 83-105, <https://doi.org/10.1002/2013JF002955>, 2014.

- Schumm, S. A., & Lichty, R. W.: Flood-plain construction along Cimarron River, in southwestern Kansas, Geol. Surv. Prof. Pap. 352-DUS Gov. Printing Office, Washington, 1963.
- 940 Shepherd, R. G.: Incised river meanders: Evolution in simulated bedrock, *Science*, 178, 409–411, <https://doi.org/10.1126/science.178.4059.409>, 1972.
- Snyder, N. P., & Kammer, L. L.: Dynamic adjustments in channel width in response to a forced diversion: Gower Gulch, Death Valley National Park, California, *Geology*, 36(2), 187-190, <https://doi.org/10.1130/G24217A.1>, 2008.
- Snyder, N. P., Whipple, K. X., Tucker, G. E., & Merritts, D. J.: Channel response to tectonic forcing: field analysis of stream morphology and hydrology in the Mendocino triple junction region, northern California, *Geomorphology*, 53, 97–127, 945 [https://doi.org/10.1016/S0169-555X\(02\)00349-5](https://doi.org/10.1016/S0169-555X(02)00349-5), 2003.
- Spotila, J. A., Moskey, K. A., and Prince, P. S.: Geologic controls on bedrock channel width in large, slowly-eroding catchments: Case study of the New River in eastern North America, *Geomorphology*, 230, 51-63, <http://dx.doi.org/10.1016/j.geomorph.2014.11.004>, 2015.
- Som, S. M., Montgomery, D. R., & Greenberg, H. M.: Scaling relations for large Martian valleys, *J. Geophys. Res.*, 114, 950 E02005, <https://doi.org/10.1029/2008JE003132>, 2009.
- Steinbauer, M. J., Field, R., Grytnes, J. A., Trigas, P., Ah-Peng, C., Attorre, F., Birks, J. B., Borges, P. A. V., Cardoso, P., Chou, C.-H., De Sanctis, M., de Sequeira, M. M., Duarte, M. C., Elias, R. B., Fernández-Palacios, J. M., Gabriel, R., Gereau, R. E., Gillespie, R. G., Greimler, J., harter, D. E. V., Huang, T.-H., Irl, S. D. H., Jeanmonod, D., Jentsch, A., Jump, A. S., Kueffer, C., Nogué, S., Otto, R., Price, J., Romeiras, M. M., Strasberg, D., Stuessy, T., Svenning, J.-C., Vetaas, O. 955 R., & Beierkuhnlein, C.: Topography-driven isolation, speciation and a global increase of endemism with elevation. *Global Ecology and Biogeography*, 25(9), 1097-1107, <https://doi.org/10.1111/geb.12469>, 2016.
- Stolle, A., Bernhardt, A., Schwanghart, W., Hoelzmann, P., Adhikari, B. R., Fort, M., & Korup, O.: Catastrophic valley fills record large Himalayan earthquakes, Pokhara, Nepal, *Quaternary Science Reviews*, 177, 88-103, <https://doi.org/10.1016/j.quascirev.2017.10.015>, 2017.
- 960 Suzuki, T.: Rate of lateral planation by Iwaki River, Japan. *Transactions - Japanese Geomorphological Union*, 3(1), 1–24, 1982.
- Tapponnier, P., & Molnar, P.: Active faulting and cenozoic tectonics of the Tien Shan, Mongolia, and Baykal Regions, *J. Geophys. Res.*, 84, 3425-3459, <https://doi.org/10.1029/JB084iB07p03425>, 1979.
- Thompson, J. A.: Neogene tectonic evolution of the NE Pamir Margin, NW China: University of California, Santa Barbara, 965 2013.
- Thompson Jobe, J. A., Li, T., Chen, J., Burbank, D. W., & Bufe, A.: Quaternary tectonic evolution of the Pamir-Tian Shan convergence zone, Northwest China: *Tectonics*, 36(12), 1944-9194, <https://doi.org/10.1002/2017TC004541>, 2017.
- Tinkler, K. J., & Wohl, E. E.: A primer on bedrock channels. In *Rivers Over Rock: Fluvial Processes in Bedrock Channels*, Tinkler, K. J., & Wohl, E. E. (eds), Geophysical Monograph Series 107. American Geophysical Union: Washington, DC; 970 1–18, 1998.

- Tofelde, S., Bufe, A., & Turowski, J. M.: Hillslope sediment supply limits alluvial valley width, *AGU Advances*, 3, e2021AV000641. <https://doi.org/10.1029/2021AV000641>, 2021.
- Tomkin, J. H., Brandon, M. T., Pazzaglia, F. J., Barbour, J. R., & Willett, S. D.: Quantitative testing of bedrock incision models for the Clearwater River, NW Washington State. *Journal of Geophysical Research*, 108(B6), 2308. <https://doi.org/10.1029/2001JB000862>, 2003.
- 975 Turowski, J. M.: Alluvial cover controlling the width, slope and sinuosity of bedrock channels, *Earth Surf. Dynam.*, 6, 29–48, <https://doi.org/10.5194/esurf-6-29-2018>, 2018.
- Turowski, J. M.: Mass balance, grade, and adjustment timescales in bedrock channels, *Earth Surface Dynamics*, 8, 103-122, <https://doi.org/10.5194/esurf-8-103-2020>. 2020.
- 980 Turowski, J. M., Badoux, A., Leuzinger, J., & Hegglin, R.: Large floods, alluvial overprint, and bedrock erosion. *Earth Surface Processes and Landforms*, 38, 947–958. <https://doi.org/10.1002/esp.3341>, 2013.
- Wang, P., Scherler, D., Jing L.-Z., Mey, J., Avouac, J.-P., Zhang, Y., Shi, D.: Tectonic control of Yarlung Tsangpo Gorge revealed by a buried canyon in Southern Tibet, *Science*, 346(6212), 978-981, <https://doi.org/10.1126/science.1259041>, 2014.
- 985 Whipple, K. X., & G. E. Tucker: Dynamics of the stream-power river incision model: Implications for height limits of mountain ranges, landscape response timescales, and research needs, *J. Geophys. Res.*, 104, 17,661– 17,674, 1999.
- Wickert, A. D., Martin, J. M., Tal, M., Kim, W., Sheets, B., & Paola, C.: River channel lateral mobility: Metrics, time scales, and controls. *Journal of Geophysical Research: Earth Surface*, 118, 396–412. <https://doi.org/10.1029/2012JF002386>, 2013.
- Wickert, A. D. & Schildgen, T. E.: Long-profile evolution of transport-limited gravel-bed rivers, *Earth Surf. Dynam.*, 7, 17–
990 43, <https://doi.org/10.5194/esurf-7-17-2019>, 2019.
- Wobus, C., Whipple, K. X., Kirby, E., Snyder, N., Johnson, J., Spyropolou, K., Crosby, B., & Sheehan, D.: Tectonics from topography: procedures, promise, and pitfalls, in: *Tectonics, Climate, and Landscape Evolution*, edited by: Willett, S. D., Hovius, N., Brandon, M. T., & Fisher, D., Geological Society of America Special Paper 398, Geological Society of America: Washington, DC, 55–74, [https://doi.org/10.1130/2006.2398\(04\)](https://doi.org/10.1130/2006.2398(04)), 2006.
- 995 Yanites, B. J., Tucker, G. E., Mueller, K. J., Chen, Y. G., Wilcox, T., Huang, S. Y., & Shi, K. W.: Incision and channel morphology across active structures along the Peikang River, central Taiwan: implications for the importance of channel width, *Geol. Soc. Am. Bull.*, 122, 1192–1208, <https://doi.org/10.1130/B30035.1>, 2010.
- Zakrzewska, B.: Valleys of driftless areas, *Annals of the Association of American Geographers*, 61(3), 441-459, <https://www.jstor.org/stable/2569224>, 1971.
- 1000 Zavala, V., Carretier, S., Regard, V., Bonnet, S., Riquelme, R., & Choy, S.: Along-stream variations in valley flank Erosion rates measured using ¹⁰Be concentrations in colluvial deposits from Canyons in the Atacama Desert. *Geophysical Research Letters*, 48(5), 1–11. <https://doi.org/10.1029/2020GL089961>, 2021.
- Zhang, L., Yang, X., Huang, W., Yang, H., & Li, S.: Fold segment linkage and lateral propagation along the Qiulitage anticline, South Tianshan, NW China, *Geomorphology*, 381, 107662, <https://doi.org/10.1016/j.geomorph.2021.107662>, 2021.

- 1005 Zubovich, A. V., Schöne, T., Metzger, S., Mosienko, O., Mukhamediev, S., Sharshebaev, A., & Zech, C.: Tectonic interaction between the Pamir and Tian Shan observed by GPS, *Tectonics*, 32(2), 283–292, <https://doi.org/10.1002/2015TC004055>, 2016.
- Zubovich, A. V., Wang, X.-Q., Scherba, Y. G., Schelochkov, G. G., Reilinger, R., Reigber, C., Mosienko, O. I., Molnar, P., Michajljow, W., Makarov, V. I., Li, J., Kuzikov, S. I., Herring, T. A., Hamburger, M. W., Hager, B. H., Dang, Y.-M.,
1010 Bragin, V. D., & Beisenbaev, R. T.: GPS velocity field for the Tian Shan and surrounding regions, *Tectonics*, 29(6), TC6014, <https://doi.org/10.1029/2010TC002772>, 2010.