

~~Coupling~~ Two-way coupling between ice flow and channelized subglacial ~~hydrology~~ drainage enhances modeled marine ice-sheet retreat

George Lu and Jonathan Kingslake

Lamont-Doherty Earth Observatory of Columbia University, Palisades, NY, USA

Correspondence: George Lu (george.lu@columbia.edu)

Abstract. Ice-sheet models used to predict sea-level rise often neglect subglacial hydrology. However, theory and observations suggest that ice flow and subglacial water flow are bidirectionally coupled: ice ~~flow and~~ geometry affects hydraulic potential, hydraulic potential modulates basal shear stress via the basal water pressure, and ice flow advects the subglacial drainage system. This coupling could impact rates of ice mass change, but remains poorly understood. We ~~combine a~~ develop a
5 coupled ice-subglacial-hydrology model to investigate the effects of coupling on the long-term evolution of marine-terminating ice sheets. We combine a one-dimensional channelized subglacial hydrology model with a depth-integrated marine-ice-sheet model, incorporating each component of the coupling listed above, ~~which yields~~ yielding a set of differential equations that we solve using a finite-difference, implicit time-stepping approach. We conduct a series of experiments with this model, using either bidirectional or unidirectional coupling. These experiments generate ~~steady-state~~ profiles of channel cross-sectional area,
10 channel flow rate, channel effective pressure, ice thickness, and ice velocity. We discuss how the ~~steady-state~~ profiles shape one another, resulting in the effective pressure reaching a local maximum in a region near the grounding line. We also describe the impact of bidirectional coupling on the transient retreat of ice sheets through a comparison of our coupled model with ice-flow models that have imposed static basal conditions. We find that including coupled subglacial hydrology leads to grounding-line retreat that is virtually absent when static basal conditions are assumed. This work highlights the role time-evolving subglacial
15 drainage may have in ice-sheet change and informs efforts to include it in ice-sheet models. This work also supplies a physical basis for a commonly used parameterization which assumes that the subglacial water pressure is set by the bed's depth beneath the sea surface.

1 Introduction

The Ice-Sheet Model Intercomparison Project for CMIP6 (ISMIP6) predicts between 7.8 and 30.0 cm of sea-level-equivalent
20 ice-mass loss from Antarctica by 2100 under the Representative Concentration Pathway 8.5 scenario (Seroussi et al., 2020). This wide range of predictions for the same forcing scenario is associated with various uncertainties within and differences between the ice-sheet models. A significant source of uncertainty is a limited understanding of how evolving subglacial hydrology could influence ice-sheet mass loss (~~Seroussi et al., 2020; De Fleurian et al., 2018; Flowers, 2015~~) (De Fleurian et al., 2018; Flowers, 2015). A common approach to capturing the effect of hydrology on ice dynamics in ice-sheet models is to use measured surface veloc-

ities to invert for a spatially varying basal friction parameter (Arthern and Gudmundsson, 2010; Morlighem et al., 2013; Arthern et al., 2015; Lipscomb et al., 2021). This parameter encompasses all bed properties relevant for basal shear stress, including subglacial hydrology. ~~Usually~~ Often, this parameter remains static in time during simulations and does not evolve with changes in hydrology or basal water pressure (e.g., Lipscomb et al., 2021; Gudmundsson et al., 2019; Arthern and Williams, 2017). However, subglacial hydrology does evolve, and variations in basal water pressure have been linked to changes in ice dynamics (~~Fountain and Walder, 1998; Bartholomew et al., 2010; Clarke, 2005; Bindshadler, 1983~~) (Bindshadler, 1983; Alley et al., 1994; Fountain and Walder, 1998; Bartholomew et al., 2010; Clarke, 2005; Bindshadler, 1983).

Another way to represent subglacial hydrology in ice-sheet models is with simple parameterizations or with simple models (Kazmierczak et al., 2022; McArthur et al., 2023). These relate basal water pressure to the depth of the bed below sea level (e.g., Tsai et al., 2015) or the hydrological connectivity to the ocean (e.g., Leguy et al., 2014), or use simple hydrology models to estimate the depth of subglacial water (e.g., Le Brocq et al., 2009) or the till pressure (e.g., Bueler and Brown, 2009). However, ice-sheet sensitivity to subglacial hydrology varies ~~greatly~~ based on the parameterization or ~~simple model used~~ model used (e.g., Kazmierczak et al., 2022; Drew and Tarasov, 2023). Kazmierczak et al. (2022) showed that the range of sea-level-rise (SLR) predictions associated with these different parameterizations in a single ice-sheet model is similar in magnitude to the difference in SLR predictions between models used in ISMIP6 (Seroussi et al., 2020). Additionally, some of these simple parameterizations are likely not representative of the entire ice-sheet bed, and ~~are only~~ may only be valid near the grounding line (~~Kazmierczak et al., 2022; Leguy et al., 2014~~) (Leguy et al., 2014; Tsai et al., 2015; Kazmierczak et al., 2022).

~~Given that parameterizations of time-varying subglacial hydrology are often highly simplified, while basal friction parameters determined through inversion techniques do not evolve in time, we explore an alternative approach to examine the effect of evolving hydrology on ice-sheet retreat.~~ We couple a physics-based subglacial hydrology model with an ice-sheet model, using a simple, one-dimensional approach. Our model avoids some of the common simple parameterizations for subglacial hydrology and allows the hydrology and the ice sheet to evolve ~~dynamically~~ in a coupled way. We use this model to examine how the coupling operates and investigate the assumption of holding basal friction parameters static in transient simulations.

Our work differs from previous coupled models of ice flow and hydrology by considering a marine-terminating setting, using higher-order ~~ice flow~~ ice-flow physics than some models, and using a simpler hydrology model. For example, Kingslake and Ng (2013) and Arnold and Sharp (2002) coupled multi-element subglacial hydrology models, including channels and distributed linked cavities, to simplified ice-flow models, using an ice slab and the shallow ice approximation, respectively. In contrast, we use a higher-order ice-flow model including longitudinal stresses. Several other models (Pimentel and Flowers, 2010; Hewitt, 2013; Hoffman and Price, 2014; Gagliardini and Werder, 2018) couple similar multi-element hydrology systems to higher-order ice flow models to study land-terminating glaciers. In contrast, we model marine-terminating glaciers and ice sheets. Finally, rather than using the multi-element hydrology models considered in other studies, we model a single, one-dimensional channel.

~~Application to marine-terminating glaciers necessitates a set of three couplings. Our experiments include up to three points of coupling~~ between the ice and hydrology models. ~~The first is:~~ [1] a sliding law that depends on effective pressure. ~~This is motivated by the idea that the water pressure underneath the ice sheet can modulate the basal shear stress (Iken and Bindshadler, 1986)~~

60 ~~The second is allowing the ice geometry to modulate the~~ (which is the ice overburden pressure minus the basal water pressure) (Iken and Bindshadler, 1986). [2] a basal hydraulic gradient (Fowler, 1999). ~~The third is allowing the velocity of the ice to~~ ~~advect the drainage system that depends on ice-sheet geometry~~ (Fowler, 1999), and [3] a simple description of how the drainage system is advected with the ice sheet as it flows (Drews et al., 2017). These points of coupling are illustrated by the solid lines in Fig. 1.

65 We consider marine-terminating ice due to its importance for future ice-sheet mass balance, and a channelized drainage system because observations and modeling suggest that there exist large, persistent channels underneath portions of the Antarctic Ice Sheet (Le Brocq et al., 2013; Drews et al., 2017; Dow et al., 2022). ~~This motivates our choice to represent the hydrology system as a subglacial channel.~~ For simplicity, we do not model an adjacent distributed drainage system, which would provide meltwater to the channel and influence basal sliding. This approach aids in interpretation of the physics of coupling and is supported by previous modelling suggesting that the pressures in channels and adjacent distributed cavities are closely coupled (Dow et al., 2022; Kingslake and Ng, 2013).

70 Section 2 describes our model and a set of steady-state and transient numerical experiments. Section 3 presents the results of these experiments. A key result is that the coupling between water and ice flow generates a region of relatively high effective pressure upstream of the grounding line in steady-state experiments. The transient experiments show the consequences of this region of high effective pressure ~~region~~ for simulated retreat. Section 4 discusses and explains these results with the aid of a reduced version of the hydrology model and Section 5 draws conclusions about how these findings may apply to real systems.

2 Methods

Here, we describe the models of ice flow, basal sliding, and subglacial hydrology included in our coupled model. We also describe our numerical experiments. We first conduct a suite of steady-state experiments to understand the effects of parameter choices. We then examine a simulation in more detail to investigate the resulting effective pressure profiles. Next, we illustrate the importance of coupling for ~~ice sheet~~ ~~ice-sheet~~ retreat through a set of transient experiments.

2.1 Ice dynamics

The ice-flow component of our model describes a two-dimensional, symmetric, shallow, marine ice sheet. The model uses an approximation usually referred to as the Shallow Shelf or Shelfy-Stream Approximation (SSA) (e.g., Schoof, 2007; Muszynski and Birchfield, 1987; MacAyeal, 1989). It is depth-integrated and assumes rapid sliding, and its full derivation is described by Muszynski and Birchfield (1987). We use this model because it is one of the simplest models that accounts for longitudinal stresses, which are important near the grounding line. Mass and momentum balance are described by

$$\frac{\partial h}{\partial t} + \frac{\partial(hu)}{\partial x} = a, \quad (1)$$

$$\frac{\partial}{\partial x} \left[2A^{-1/n} h \left| \frac{\partial u}{\partial x} \right|^{1/n-1} \frac{\partial u}{\partial x} \right] - \tau_b - \rho_i g h \frac{\partial(h-b)}{\partial x} = 0, \quad (2)$$

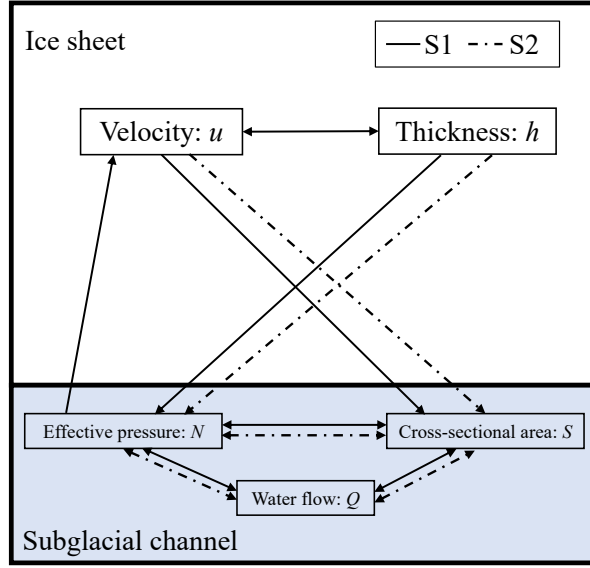


Figure 1. Points of coupling illustrated for our full coupled model (solid lines; S1), and a model with imposed ice geometry and velocity (dash-dot lines; S2).

90 where h is the ice thickness, u is the vertically uniform horizontal ice velocity, x is distance from the ice divide, t is time, a is the ice-equivalent accumulation rate, τ_b is the basal shear stress, ρ_i is the density of ice, g is the acceleration due to gravity, n is the Glen's law exponent, and A is a depth-averaged Glen's law coefficient, and b is the bed depth below the sea surface (Schoof, 2007). For b we use either a linear prograde slope or an overdeepened bed (Section 2.5). We use boundary conditions described by Schoof (2007). At the divide ($x = 0$) we impose symmetry, $\frac{\partial(h-b)}{\partial x} = 0$ and $u = 0$, and at the grounding line

95 ($x = x_g$) we impose flotation $\rho_i h = \rho_w b$ and a stress balance based on coupling to a downstream ice shelf,

$$22A^{-1/n} h \left| \frac{\partial u}{\partial x} \right|^{1/n-1} \frac{\partial u}{\partial x} = \frac{1}{2} B \rho_i \left(1 - \frac{\rho_i}{\rho_w} \right) g h^2, \quad (3)$$

where ρ_w is the density of water. This and B is a nondimensional factor that represents the amount of ice-shelf buttressing being exerted on the grounded ice at the grounding line. This is used in transient experiments to perturb the system, following Brondex et al. (2017) and Drouet et al. (2013). This boundary stress condition accounts for flotation and the lack of basal shear stress at x_g , which is consistent with the assumption described later that effective pressure is zero at the grounding line. The mass balance (Eq. 1) dictates that thickness changes in the ice are due to the imbalance between the accumulation rate a and the flux divergence. The momentum balance (Eq. 2) describes the balance between the longitudinal stress (first term), vertical shear stress (second term), and driving stress (third term). The hydrology influences the ice dynamics by modulating the basal shear stress (coupling point [1] from Section 1), which is represented by an effective-pressure-dependent sliding law.

100

Different choices of sliding law for representing the basal shear stress τ_b yield different behaviors in ice-sheet models, especially near the grounding line (e.g., Brondex et al., 2017; Tsai et al., 2015; Barnes and Gudmundsson, 2022). Classically, models use a power law (also known as a Weertman law) to describe the relationship between τ_b and the sliding velocity (Weertman, 1957):

$$110 \quad \tau_b = C_W u^m, \quad (4)$$

where m is usually related to the exponent in Glen’s flow law, n (Paterson, 1994), and C_W is a basal friction parameter that describes the bed properties. Typically, $m = \frac{1}{n} = \frac{1}{3}$ (e.g., Weertman, 1974; Schoof, 2007). Equation (4) does not explicitly consider the dependence that τ_b can have on the effective pressure, N , defined as the ice overburden pressure minus the subglacial water pressure.

115 The first N -dependent sliding law we adopt is an adjusted power law proposed by Budd et al. (1979):

$$\tau_b = C_B N^q u^m, \quad (5)$$

where C_B is another friction parameter with the subscript used to distinguish it from C_W , and q is a positive constant. Present models with this style of sliding law (which we refer to as a Budd sliding law) typically use a value of $q = 1$ (Brondex et al., 2017) (e.g., Brondex et al., 2017). One drawback associated with of this sliding law is that the inclusion of N can result in large, nonphysical stresses (Brondex et al., 2017) it allows for arbitrarily high shear stresses, which is unphysical (Schoof, 2005; Brondex et al., 2017).

The second N -dependent sliding law we adopt is a regularized-Coulomb law (Helanow et al., 2021; Schoof, 2005):

$$\tau_b = C_C N \left(\frac{u}{u + A_s C_C^n N^n} \right)^{1/n}, \quad (6)$$

where A_s and C_C are parameters describing the bed that Helanow et al. (2021) use as fitting parameters two additional parameters describing bed properties Helanow et al. (2021). Sliding laws in this form have been used to represent sliding with cavitation on hard beds and sliding over deformable glacial till (e.g., Schoof, 2005; Zoet and Iverson, 2020; Helanow et al., 2021). In the limit of high N , this law behaves like a power law, Eq. (4). In the limit of low N (typical near the grounding line), Eq. (6) reduces to a Coulomb plastic sliding law, $\tau_b \approx C_C N$, and does not have a strong dependence on ice velocity. Neither N -dependent sliding laws apply in the case when $N = 0$, so we avoid that scenario in simulations.

130 Our one-dimensional ice model can be considered to represent a narrow region of an ice sheet, narrow enough that ice stresses and the effective pressure at the ice-bed interface do not vary in the across-flow direction. Furthermore, we assume that a subglacial channel carved into the ice base exists at the ice-bed interface, is aligned with ice flow, and extends in the along-flow direction from the ice divide to the grounding line. We also assume that the basal effective pressure in this narrow region is equal to the effective pressure in the channel.

Our hydrology model describes the evolution of a the subglacial channel and the balances of mass, momentum, and energy in the channel, respectively, as follows:

$$\frac{\partial S}{\partial t_h} = \frac{m}{\rho_i} - K_0 S N^3 - u \frac{\partial S}{\partial x}, \quad (7)$$

$$\frac{\partial S}{\partial t_h} + \frac{\partial Q}{\partial x} = \frac{m}{\rho_w} + M, \quad (8)$$

$$140 \quad \psi + \frac{\partial N}{\partial x} = f \rho_w g \frac{Q|Q|}{S^{8/3}}, \quad (9)$$

$$mL = Q \left(\psi + \frac{\partial N}{\partial x} \right). \quad (10)$$

S is the channel cross-sectional area, N is the effective pressure, Q is the channel discharge, M is a constant and uniform supply term, m is the melt rate, t_h is the time for the hydrology system (which we distinguish from t for convenience when nondimensionalizing later), f is a hydraulic friction factor, K_0 is an ice flow parameter, and ψ is the basic hydraulic gradient.

145 The closure term in Eq. (7) ($\frac{m}{\rho_i} - K_0 S N^3$) assumes a circular channel geometry. We assume that M comes directly from the subglacial environment rather than from the ice surface.

The basic hydraulic gradient ψ represents coupling point [2] (Section 1). It is the hydraulic gradient that would exist if the water pressure in the channel were equal to the ice overburden pressure p_i , which is approximated as $\rho_i g h$:

$$\psi = \rho_w g \frac{\partial b}{\partial x} - \rho_i g \frac{\partial h}{\partial x}. \quad (11)$$

150 We impose $N = 0$ at the grounding line because the water pressure under the ice is expected to approximately equal the ice overburden pressure in this location. We also force a channel discharge boundary condition at the divide, where we maintain a constant small influx Q_{in} (effectively a Neumann boundary condition on N). We assume that the channel extends to the divide. To avoid this simplification causing the channel to become unrealistically large near the divide, we impose a very small Q_{in} . The boundary condition on S at the divide is $\frac{\partial S}{\partial x} = 0$.

155 ~~This formulation~~ Our hydrology model is based on the modification by Fowler (1999) of the model for a one-dimensional subglacial channel from Nye (1976), with the addition of an ice advection term $u \frac{\partial S}{\partial x}$ in Eq. (7), following Drews et al. (2017). Equation (7) shows how the channel cross-sectional-area ~~evolution~~ $\frac{\partial S}{\partial t} S$ grows with melt $\frac{m}{\rho_i}$ and closes with ice creep $K_0 S N^3$. The advection term in Eq. (7) ~~captures how ice sliding~~ represents coupling point [3] (Section 1). It captures how the sliding of basal ice over the bed moves the roof of the channel ~~over a given point on the channel floor. This is necessary. This term~~ is required for a steady state to be reached, as we will explain in our results. Equation (8) balances the flux associated with evolution of the channel cross-sectional area, flux divergence along the channel, and water gained through ~~either melt or melt~~ and additional water sources represented by M . Equation (9) uses Manning's equation (e.g., Chow, 1959; Röthlisberger, 1972) to describe the pressure gradient necessary to drive a flux Q through a channel with a cross-sectional area S . Equation (10) details the assumption that all the energy dissipated by the turbulently flowing water is used locally to melt the channel walls.

160

165 The hydrology depends on the ice geometry and dynamics as the hydraulic gradient depends on the ice overburden pressure, which in turn depends on the ice thickness h , while the velocity of the ice u advects the subglacial channel, as described in Eq. (7). The hydrology in turn determines the effective pressure N , which enters the sliding laws used in Eq. (2) and affects the flow of the ice sheet.

2.4 Nondimensionalization and Numerics

170 To aid in numerically solving these equations and to understand the scales of each term, we nondimensionalize them (see Appendix A for the full procedure). There are six unknowns (Q , N , S , h , u , m) and six equations, but for simplicity we eliminate m between Eq. (7), (8) and (10), reducing this to five unknowns and five equations. The dimensionless forms of the model equations are:

$$\frac{\partial S'}{\partial t'_h} = \frac{|Q'|^3}{S'^{8/3}} - S'N'^3 - \beta u' \frac{\partial S'}{\partial x'}, \quad (12)$$

$$175 \quad \frac{\partial Q'}{\partial x'} = \epsilon(r-1) \frac{|Q'|^3}{S'^{8/3}} + \epsilon \left(S'N'^3 + \beta u' \frac{\partial S'}{\partial x'} \right) + M', \quad (13)$$

$$\frac{\partial N'}{\partial x'} = \frac{1}{\delta} \left(\frac{Q'|Q'|}{S'^{8/3}} - \psi' \right), \quad (14)$$

$$\frac{\partial h'}{\partial t'} + \frac{\partial(h'u')}{\partial x'} = a', \quad (15)$$

$$\alpha \frac{\partial}{\partial x'} \left[h' \left| \frac{\partial u'}{\partial x'} \right|^{1/n-1} \frac{\partial u'}{\partial x'} \right] - \tau'_b - h' \frac{\partial(h' - b')}{\partial x'} = 0, \quad (16)$$

and the associated parameters are: $\beta \equiv \frac{t_{h0}}{t_0}$, $\epsilon \equiv \frac{x_0 m_0}{Q_0 \rho_i}$, $r \equiv \rho_i / \rho_w$, $\delta \equiv \frac{N_0}{x_0 \psi_0}$, and $\alpha \equiv \frac{2u_0^{1/2}}{\rho_i g A^{1/n} h_{g0} x_0^{1/n}}$.

180 τ'_b depends on the sliding law choice. Nondimensionalizing Eq. (5) gives

$$\tau'_b = N' u'^{1/n}, \quad (17)$$

while nondimensionalizing Eq. (6) gives

$$\tau'_b = \gamma N' \left(\frac{u'}{u' + N'^n} \right)^{1/n}, \quad (18)$$

with $\gamma \equiv \frac{CN_0 x_0}{\rho_i g h_{g0}^2}$. Dashes Primes indicate dimensionless variables which can be returned to their dimensional forms by multiplying with their scale (e.g., $x = x_0 x'$). For clarity, we drop dashes the primes for the remainder of the analysis; unless otherwise stated, all variables referred to are their dimensionless forms. Constants for the experiments detailed in the subsequent sections are found in Table 2, while the resulting parameter and scale values are found in Table 3.

Regardless of the sliding law used we find that $\beta \ll 1$ (Table 3), because the time scale for the hydrology, t_{h0} , is about four orders of magnitude smaller than the time scale for the ice sheet, t_0 ; t_{h0} is on the order of months while t_0 is on the order of
190 millennia. We interpret this as the hydrology being in a “quasi-steadypseudo-steady” state, meaning that it quickly reaches a steady state for whatever conditions the ice imposes as the ice evolves. We exploit this to simplify the numerical solution (see

below) of the hydrology equation, by setting the time derivative in Eq. (12) to zero. $\beta \ll 1$ also implies that the ice advection term in Eq. (12) has minimal effect. Regardless, we retain that term in anticipation of it becoming important in cases when $\frac{\partial S}{\partial x}$ is large. Another insight stemming from these parameter values is that $\alpha \ll \gamma$ and $\alpha \ll 1$, which implies, for the regularized
195 Coulomb and Budd cases, ~~respectively,~~ that the basal shear stress has a much larger impact on the ice-sheet force balance than the longitudinal stresses in Eq. (16). Regardless, to better represent the dynamics near the grounding line where the basal shear stress vanishes, we retain the longitudinal stress term.

To solve these equations, we apply the finite-difference approximation following Schoof (2007). The model domain and variables are discretized into one-dimensional grids. The ice velocity and thickness grids are staggered and split into two
200 segments, one with coarse resolution and another with fine resolution near the ~~terminus~~grounding line. This split-grid approach is to preserve computational efficiency while properly resolving the stresses near the grounding line. The different grids used in our experiments are described in Table 1. To account for a moving grounding line, we apply a coordinate transformation (~~detailed in Appendix A~~Appendix B) that allows for the “stretching” of the grids ~~, also following Schoof (2007)~~(Schoof, 2007). The grounding-line position is implicitly determined at each time step ~~through enforcing continuity of thickness at the junction~~
205 ~~between the two segments of each grid and by~~ imposing the flotation condition. For the hydrology equations, we use a uniform grid at an intermediate resolution. The hydrology equations also undergo the same coordinate stretching as the ice equations. In each iterative step, the effective pressure is linearly interpolated onto the velocity grid while both the velocity and ice thickness are linearly interpolated onto the hydrology grid. ~~The spatial~~ Spatial derivatives are approximated with centered differences, unless they are at the boundary and not addressed by a boundary condition, in which case we use one-sided differences.
210 ~~The time~~ Time derivatives are solved with a backwards Euler method. The system of nonlinear discrete equations is solved iteratively with MATLAB’s *fsolve* function. This solution method is based on code from Robel (2021), which ~~he was~~ used to solve the model described by Schoof (2007).

2.5 Experimental design

Table 1 summarizes our suite of experiments. ~~We~~ As detailed below, we conduct a series of steady-state simulations, followed
215 by a series of transient simulations ~~. In the sections below, we describe the detailed setup of these experiments in which the ice evolves transiently and the drainage system evolves, but is assumed to be in a pseudo-steady-state.~~

2.5.1 Steady-state experiments

We run a suite of steady-state ~~simulations by setting the time derivatives in the model equations to zero and solving the resulting system of equations. First, to test model sensitivity, we vary the following constants across 100 uniformly spaced values~~
220 ~~over ranges noted in the square brackets, while fixing the others: the depth-averaged flow law constant $A \in [0.1, 10] \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$, the accumulation rate $a \in [0.1, 10] \text{ m yr}^{-1}$, the additional water source term $M \in [0, 10] \times 10^{-4} \text{ m}^2 \text{ s}^{-1}$, experiments~~ across a range of parameters to examine model sensitivity. We conduct a separate sensitivity analysis using each of our two sliding laws. We vary four parameters while using the regularized Coulomb law: the accumulation rate a , the meltwater supply M , the ice stiffness A , and the sliding law coefficient C_C . For experiments with the Budd law, we vary three parameters: a , M ,

Table 1. Experiments

name	constant ice shape/velocity (Y/N)	constant hydrology (Y/N)	ice grid points	hydrology grid points	transience (Y/N)
sensitivity	N	N	coarse (95 <u>85</u> %): 100 fine (5 <u>15</u> %): 200 <u>600</u>	500 <u>1000</u>	N
S1	N	N	3000	3000	N
S2	Y	N	3000	3000	N
T1	N	N	coarse (85 %): 100 fine (15 %): 600	1000	Y
T2	N	Y	coarse (85 <u>85</u> %): 100 fine (15 %): 600	1000	Y

225 and A . We use four different values for each parameter. We limited the sensitivity analysis to these parameters and the water
 flux at the divide $Q_{in} \in [0.001, 10] \text{ m}^3 \text{ s}^{-1}$. Additionally, we examine the sensitivity to the sliding-law parameters $C_C \in [0.1, 1]$
 and $A_s \in [0.01, 100] \times 10^{-21} \text{ m s}^{-1} \text{ Pa}^{-3}$ for the version of the model using a regularized Coulomb law, four different values
 per parameter to reduce computational time and to aid in visualization of the results. We selected the parameters that alter α and
 $C_B \in [3, 15] \text{ m}^{-1/3} \text{ s}^{1/3}$ for the version using a Budd sliding law. γ in different ways. For example, raising C_B and raising A
 230 both reduce α , so we only examine sensitivity to A for simplicity. The sampled values for these parameters are found in Table
 2. The range in a encompasses realistic accumulation rates (Kaspari et al., 2004; Bodart et al., 2023). The range in M was
 derived from estimating the amount of additional meltwater needed to obtain realistic water fluxes at the grounding line given
 a 100-km-long channel (Dow et al., 2022; Hager et al., 2022). The ranges in A and C_C were selected to encompass values
 used in previous studies (Schoof, 2007; Pimentel et al., 2010; Helanow et al., 2021). In this suite of experiments (referred to as
 235 “sensitivity” in Table 1), we use a linear bed with a slope of 0.001, which slopes downwards in the direction of ice flow from
 a depth of 100 m below sea level at the divide ($x = 0$). We model an unbuttressed ice sheet, meaning that $B = 1$ for all our
 steady-state experiments. We impose $Q_0 = 1 \text{ m}^3 \text{ s}^{-1}$, $h_0 = 1000 \text{ m}$, and $x_0 = 100 \text{ km}$, and all other scales are derived from
 these values. When held fixed, the constants follow the values in Table 2. For the ice grid, we use 100 points along ~~95~~85 % of
 the domain (the coarse grid) and resolve the remaining ~~5% with 200 points~~ 15% with 600 points (the fine grid). The hydrology
 240 grid has a uniform spacing with ~~300~~1000 points. These grids were chosen to properly resolve the region near the grounding
 line while preserving computational efficiency.

Outside of this suite of steady-state, sensitivity experiments, we also run a set of experiments at a higher, uniform spatial
 resolution with a specific single parameter combination to examine the model behavior and the nature of the coupling in more
 detail. These specific runs experiments are referred to as S1 and S2 (Table 1), and are represented by the lines in Fig. 1. The
 245 relevant parameter values, constants, and scales used. We use the median values from our sensitivity test parameter space, and
 the resulting parameter and scale values are detailed in Tables 2 and 3. We maintain the same bed slope described

above. ~~For these experiments, we use uniform grids at a high resolution.~~ We use 3000 grid points for the thickness, velocity, and hydrology grids. We use this finer grid to validate our grid spacing choices from the larger suite of steady state experiments experiments.

250 S1 consists of two steady-state experiments solving the full coupled model. S1.~~B~~Budd (S1.B) uses a Budd sliding law (Eq. 5), while S1.~~C~~Coulomb (S1.C) uses a regularized Coulomb sliding law (Eq. 6). We follow this nomenclature for the remaining experiments that use different sliding laws in our full coupled model. Note that although different sliding laws are used, the ~~same points of coupling are preserved, hence the collective usage of~~ subglacial drainage system and the ice-flow components of the model are coupled in the same way in S1²².B and S1.C.

255 S2 describes a simplified scenario with an imposed ice geometry and velocity. We impose an ice sheet with a quadratic shape, with its thickness described by

$$h = \underline{10^3 1400} \times \left(\sqrt{\frac{\underline{2.5 \times 10^5} - x}{\underline{2.5 \times 10^5}}} \sqrt{\frac{\underline{2 \times 10^5} - x}{\underline{2 \times 10^5}}} + \underline{0.3838 0.3363} \right) \text{ m}, \quad (19)$$

where ~~$x \in [0, 2.5 \times 10^5]$~~ $x \in [0, 2 \times 10^5]$ m. The grounding line is defined to be ~~250 200~~ km away from the divide, as that is ~~approximately its location in~~ within the range of our S1.B and S1.C results. The ~~0.3838 0.3363~~ factor is to make sure that the
260 ice thickness at the grounding line equals the flotation thickness. This scenario also imposes a uniform velocity of about ~~91.6~~ 31.5 m yr⁻¹, which is ~~the scale u_0 near the mean velocities~~ from Experiments S1. These velocity and thickness values were selected to be the same order of magnitude as the results from the coupled experiments. We hold these velocity and thickness values constant and use them to solve only the hydrology equations for a steady state. Employing this one-directional ~~coupling forcing~~ in this experiment will help us understand how ice geometry drives the hydrology. As illustrated in Fig. 1, imposing
265 this ice geometry and velocity removes the point of coupling where the effective pressure modulates the basal shear stress.

2.5.2 Transient experiments

We also perform two suites of of transient experiments with the ~~full~~-coupled model, which we call T1 and T2. Like the experiments in S1, this set of experiments uses both a Budd sliding law (T1.B, T2.B) and a regularized Coulomb sliding law (T1.C, T2.C).

270 ~~For all transient experiments, we run the model to a steady state, then perturb the ice flow constant A .~~ These experiments can be considered an extension of those by Brondex et al. (2017), who run a series of transient experiments using an SSA model with varying sliding law choices. Like Brondex et al. (2017), we introduce a nondimensional buttressing factor in Eq. (2). ~~To instigate ice-sheet thinning and grounding-line retreat, we instantaneously increase A from $0.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$ to $2.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$. This approach follows Schoof (2007) and is equivalent to reducing the stiffness of the ice by, for~~
275 ~~example, increasing its temperature. Also following Schoof (2007), we impose a 3) and set it to a value of 0.4 to determine an initial steady state for the ice sheet, before perturbing the model by increasing this factor, simulating a reduction in ice-shelf buttressing.~~

Table 2. Constants used in model experiments S1, S2, T1, and T2

constant	description	value default value	sensitivity range
A	depth-averaged Glen’s law coefficient*	2.9×10^{-25} $1.38 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$	$[3.9, 8.6, 19, 42] \times 10^{-26} \text{ s}^{-1} \text{ Pa}^{-3}$
A_s	Coulomb law ice rheology and bed morphology coefficient	$2.26 \times 10^{-21} \text{ m s}^{-1} \text{ Pa}^{-3}$	
a	accumulation rate	1 0.3 m yr^{-1}	$[0.1, 0.23, 0.37, 0.5] \text{ m yr}^{-1}$
C_C	Coulomb law fitting coefficient*	0.2 0.3	$[0.1, 0.23, 0.37, 0.5]$
C_B	Budd law coefficient	$7.624 \text{ m}^{-1/3} \text{ s}^{1/3}$	
f	channel friction factor	$0.07 \text{ m}^{-2/3} \text{ s}^2$	
g	gravitational acceleration	9.81 m s^{-2}	
K_0	flow parameter for inward ice deformation	$1 \times 10^{-24} \text{ s}^{-1} \text{ Pa}^{-3}$	
L	latent heat of fusion of water	$3.3 \times 10^5 \text{ J kg}^{-1}$	
M	additional water supply along channel <u>channel*</u>	1×10^{-5} $1.31 \times 10^{-4} \text{ m}^2 \text{ s}^{-1}$	$[1, 4.64, 21.5, 100] \times 10^{-5} \text{ m}^2 \text{ s}^{-1}$
n	Glen’s law exponent	3	
Q_{in}	influx at divide	0.01 $0.001 \text{ m}^3 \text{ s}^{-1}$	
ρ_i	density of ice	917 kg m^{-3}	
ρ_w	density of water	1028 kg m^{-3}	

*Note that for the transient experiments, we use $A = 1.5 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$, $C_C = 0.2$, and $M = 1 \times 10^{-5} \text{ m}^2 \text{ s}^{-1}$.

For all transient experiments, we run the model to a steady state on a bed topography with an idealized sill and overdeepening from (Schoof, 2007):

$$b = - \left[729 - 2184.8 \times \left(\frac{x}{750 \text{ km}} \right)^2 + 1031.72 \times \left(\frac{x}{750 \text{ km}} \right)^4 - 151.72 \times \left(\frac{x}{750 \text{ km}} \right)^6 \right] \text{ m.} \quad (20)$$

~~Some constants and parameters are adjusted from Parameter values used in the steady-state experiments~~ transient experiments were selected to generate an initial steady-state grounding-line position that is downstream of the over-deepening. Specifically, we use ~~$M = 1 \times 10^{-6} \text{ m}^2$~~ $A = 1.5 \times 10^{-25} \text{ s}^{-1}$ ~~and $Q_{\text{in}} = 0.01 \text{ m}^3 \text{ Pa}^{-3}$~~ $C_C = 0.2$, and ~~$M = 1 \times 10^{-5} \text{ m}^2 \text{ s}^{-1}$~~ for all transient experiments. We also use $C_C = 0.5$ for T1, C and T2.C. We run these experiments for 5000 years with 100 time steps. To examine the early stages of the evolution, immediately after the perturbation in A , we also run a version of these experiments at a higher temporal resolution for 10 years with 200 time steps. All transient experiments use a spatial grid of 100 grid points across 85% of the ice domain and 600 grid points for the remaining domain to resolve the boundary layer. The hydrology grid is evenly spaced across 1000 grid points. These adjusted grid resolutions are described in Table 1, and the adjusted constants and parameters are described in Table 2 (Table 2). After a steady state is found, to perturb the model, we

reduce ice-shelf buttressing effects by increasing the nondimensional buttressing factor (B in Eq. 3) from 0.4 to 1 (meaning fully unbuttressed) linearly over the first 10 years of the simulation. This gradual reduction in B ensures numerical stability and on the timescale of our experiments, does not effect our results significantly. These experiments run for 5000 years with yearly time steps and use the same grids used in the sensitivity experiments (Table 1).

Table 3. Scales and parameter values computed using the constants in Table 2

scale/parameter	expression	using Budd Law	using Coulomb Law
Q_0	imposed channel discharge scale		
h_0	imposed ice thickness scale		
x_0	imposed glacier length scale		
ψ_0	$\psi_0 = \rho_w g \frac{h_0}{x_0}$		
S_0	$S_0 = \left(f x_0 \frac{Q_0^2}{h_0} \right)^{3/8}$		
m_0	$m_0 = \frac{\rho_w g}{L} \frac{Q_0 h_0}{x_0}$		
t_{h0}	$t_{h0} = \frac{\rho_i L f^{3/8}}{\rho_w g} \left(\frac{x_0}{h_0} \right)^{11/8} Q_0^{-1/4}$		
M_0	$\frac{Q_0}{x_0}$		
N_0	$N_0 = \left(\frac{\rho_w g}{K_0 \rho_i L f^{3/8}} \right)^{1/3} \left(\frac{h_0}{x_0} \right)^{11/24} Q_0^{1/12}$		
u_0	$u_0 = \frac{\rho_w g A_s C_C^3}{K_0 \rho_i L f^{3/8}} \left(\frac{h_0}{x_0} \right)^{11/8} Q_0^{1/4}$	$u_0 = \left(\frac{\rho_i g h_0^2}{(C_B N_0 x_0)} \right)^n u_0 = \frac{\rho_i^4 g^2 K_0 L f^{3/8}}{\rho_w C_B^3} \left(\frac{h_0^{37}}{x_0^{13} Q_0^2} \right)^{1/8}$	$2.90 \times 10^{-6} - 9.80 \times 10^{-6}$
t_0	$t_0 = \frac{K_0 \rho_i L f^{3/8}}{\rho_w g A_s C_C^3} \frac{x_0^{19/8}}{h_0^{11/8} Q_0^{1/4}}$	$3.44 \times 10^{10} t_0 = \frac{\rho_w C_B^3}{\rho_i^4 g^2 K_0 L f^{3/8}} \frac{x_0^{21/8} Q_0^{1/4}}{h_0^{37/8}}$	$1.02 \times 10^6 - 1.02 \times 10^6$
a_0	$a_0 = \frac{\rho_w g A_s C_C^3}{K_0 \rho_i L f^{3/8}} \left(\frac{h_0}{x_0} \right)^{19/8} Q_0^{1/4}$	$2.90 \times 10^{-8} a_0 = \frac{\rho_i^4 g^2 K_0 L f^{3/8}}{\rho_w C_B^3} \frac{h_0^{45/8}}{x_0^{21/8} Q_0^{1/4}}$	$9.80 \times 10^{-8} - 9.80 \times 10^{-8}$
β	$\beta \equiv \frac{A_s C_C^3}{K_0 x_0}$	$1.81 \times 10^{-4} \beta \equiv \frac{\rho_i^5 K_0 L^2 f^{3/4} g}{\rho_w C_B^3} \frac{h_0^{13/4}}{x_0^{5/4} Q_0^{1/2}}$	$6.10 \times 10^{-4} - 6.10 \times 10^{-4}$
ϵ	$\epsilon \equiv \frac{\rho_w g h_0}{\rho_i L}$		
r	$r \equiv \rho_i / \rho_w$		
δ	$\delta \equiv \left(K_0 \rho_i L f^{3/8} \rho_w^2 g^2 \right)^{-1/3} \frac{Q_0^{1/12}}{x_0^{11/24} h_0^{13/24}}$		
α	$\alpha \equiv \frac{2 A_s^{1/3} C_C \rho_w^{1/3}}{(K_0 L A \rho_i^2 g^2)^{1/3}} \frac{Q_0^{1/12}}{x_0^{19/24} h_0^{13/24}}$	$0.010 \alpha \equiv \frac{2 f^{1/8}}{C_B} \left(\frac{\rho_i K_0 L}{g A \rho_w} \right)^{1/3} \frac{h_0^{13/24}}{x_0^{7/8} Q_0^{1/12}}$	$0.016 - 0.016$
γ	$\gamma \equiv \frac{C N_0 x_0}{\rho_i g h_0^2} \gamma \equiv C_C \left(\frac{\rho_w}{K_0 \rho_i^4 g^2 L f^{3/8}} \right)^{1/3} \frac{x_0^{13/24} Q_0^{1/12}}{h_0^{37/24}}$	N/A	$1.21 \times 10^{-4} - 1.21 \times 10^{-4}$

In T1, we preserve all points of coupling in our model and observe the modelled grounding-line retreat after perturbing ~~Athe~~
295 ~~buttressing factor~~. In T2, we examine the impact of assuming static (unvarying in time) basal conditions on modelled grounding
line retreat. To do this, we eliminate the hydrology equations from the model and represent the static basal hydrology properties
with an unchanging effective pressure profile that is used in the basal shear stress term in Eq. (2). To define N , we use values
from the initial steady-state solutions of the coupled models in T1. This means that the initial ice-sheet profiles in T1 and T2 are
identical. However, unlike experiments in T1, which allow the hydrology to evolve actively with the ice after ~~a-perturbation to~~
300 ~~Athe perturbation~~, experiments in T2 hold the effective pressure profile static in time. This emulates the approach, common in
ice-sheet modelling, of deriving bed parameters with inverse methods and keeping them constant in time. Note that we still use
Eq. (3) as a boundary condition on u , so the assumption of $N = 0$ inherent in that expression remains.

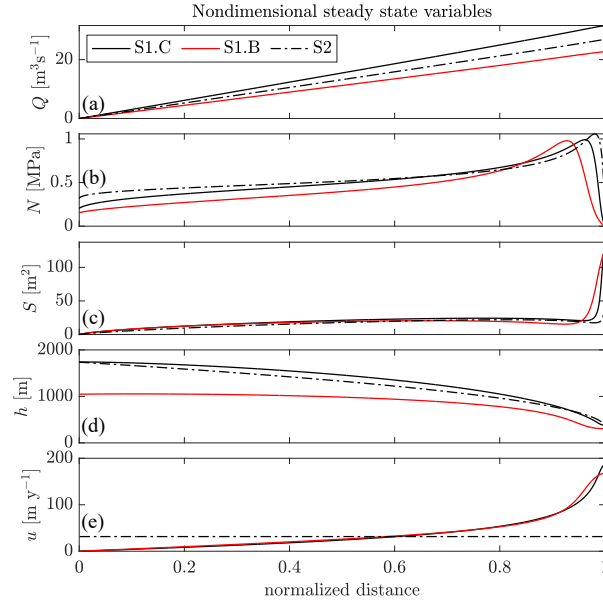


Figure 2. The steady-state profiles for: (a) channel discharge, (b) effective pressure, (c) channel cross-sectional area, (d) ice thickness, and (e) ice velocity. The results of the coupled simulations with the regularized Coulomb law (S1.C) are in black, the results from simulations using the Budd law (S1.B) are in red, and the results from the one-way coupled model with imposed thickness and velocity (S2) are in black dash-dotted curves.

3 Results

3.1 Steady-state experiments

Figure ?? shows steady-state grounding line positions, ice thickness profiles, and effective pressure profiles computed with the coupled model with the regularized Coulomb law, for many values of A , a , M , Q , and the friction-law-specific parameters A_s and C_C . In all cases, the grounding line reaches a stable position and the ice thickness decreases monotonically from the divide to the grounding line (note that Fig. ?? only shows the downstream half of the domain). The effective pressure profiles are more complex. A ubiquitous feature in the effective pressure profiles is a maximum that forms relatively close to the grounding line. The positions and magnitudes of the effective-pressure maxima, the grounding line positions, and the ice thickness profiles depend to varying degrees on the five model parameters varied between simulations.

Increasing the ice flow parameter, A , moves the steady-state grounding line position upstream (corresponding to thinner ice at the grounding line), reduces the ice surface slope, and causes a higher peak in effective pressure. Increasing a moves the grounding line downstream (corresponding to thicker ice at the grounding line), and reduces the maximum effective pressure. Increasing the channel source term M or the influx of water at the divide Q_{in} results in slightly thicker ice, significantly larger effective pressures, and minimal ($< 8.4\%$, $< 1\%$, for M , Q_{in} , respectively) changes in grounding-line position. For the

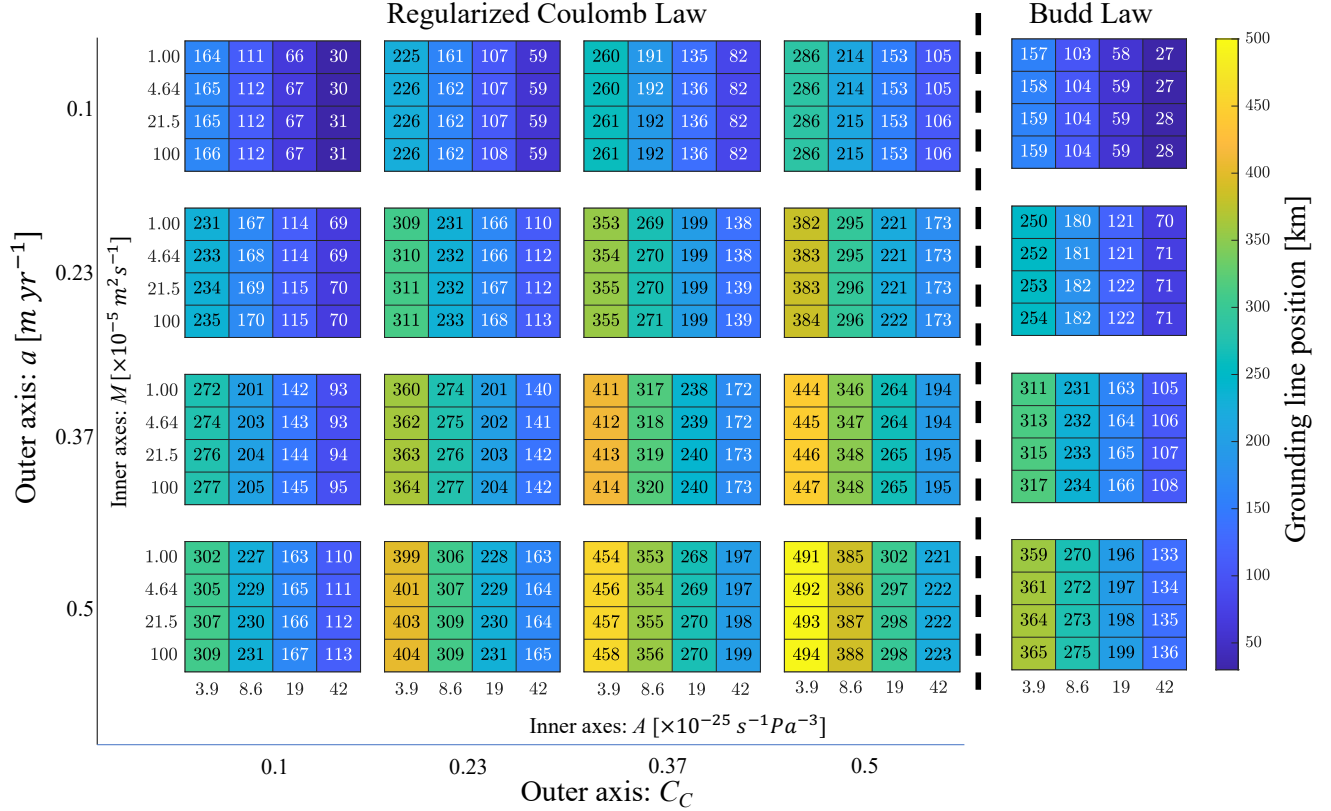


Figure 3. The sensitivity of the coupled model steady-state with a regularized Coulomb law's steady-state grounding line position to (each column, from left to right) the depth-averaged flow law constant A (inner x-axis), the accumulation rate a , the additional water source term M (inner y-axis), the water flux at the divide Q_m , and the sliding-law-specific constants A_s and C_C . The top row accumulation rate a (a-fouter y-axis) shows. Each column of plots corresponds to a different value of C_C for the steady-state grounding line position, the middle row model using a regularized Coulomb law (g-louter x-axis) shows the ice thickness h , while except for the bottom row (m-r) shows the effective pressure N . The parameter values held constant in the other rightmost column which contains results from experiments are marked by the dashed black lines that used a Budd law.

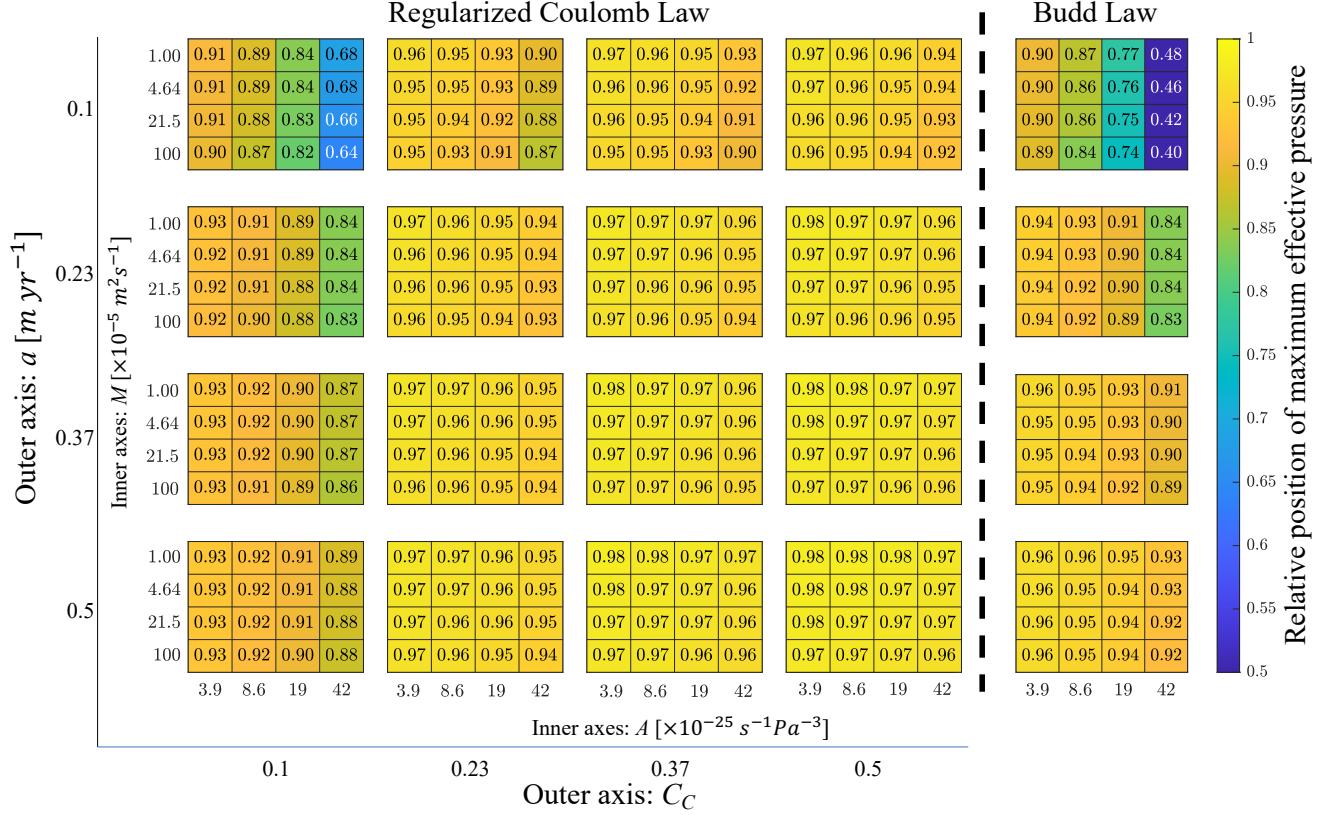


Figure 4. The sensitivity of the coupled model steady-state with a Budd law to a 's relative location (each column 0 is the divide, from left to right 1 is the grounding line) of peak effective pressure to the depth-averaged flow law constant A (inner x-axis), the accumulation rate α , the additional water source term M (inner y-axis), and the water flux at the divide Q_m , and the sliding-law-specific constant C_B . The top row accumulation rate a (a-e outer y-axis). Each column of plots corresponds to a different value of C_C for the steady-state grounding line position, the middle row model using a regularized Coulomb law (f-j outer x-axis) plots the ice thickness h , while except for the bottom row (k-o) plots the effective pressure N . The parameter values held constant in the other rightmost column which contains results from experiments are marked by the dashed black lines that used a Budd law.

regularized Coulomb law parameters, increasing A_s results in thinner ice with a lower maximum effective pressure, and does not impact the grounding line position substantially ($< 3.5\%$). Increasing C_C moves the grounding line downstream, results in thicker ice, and, when $C_C \gtrsim 0.4$, decreases the maximum effective pressure. When $C_C \lesssim 0.4$, decreasing C_C also decreases the maximum effective pressure and the gradient in effective pressure adjacent to the grounding line.

Figure ?? displays the parameter sensitivities of the model while using a Budd sliding law. Changes to A and a result in similar changes to x_g , h , and N as described above for the model with the Coulomb sliding law. Increasing the Budd sliding law parameter C_B causes the grounding line to move downstream, an increase in ice thickness, and an increase in effective pressure. While our focus is not the intercomparison of models with different sliding laws (e.g., Brondex et al., 2017), we note that sliding law choice does not change the general trends in model sensitivity to A , a , M , or Q . Regardless of the sliding law or parameter values, the effective pressure profile peaks near the grounding line, and has a steep drop to zero at the grounding line. This steep gradient in N plays an important role in our transient experiments, so we turn to Experiments S1 and S2 to examine this feature further.

The nondimensional steady-state profiles for: (a) channel discharge, (b) effective pressure, (c) channel cross-sectional area, (d) ice thickness, and (e) ice velocity. The results of the coupled simulations with the regularized Coulomb law (S1.C) are in black, the results from simulations using the Budd law (S1.B) are in red, and the results from the one-way coupled model with imposed thickness and velocity (S2) are in black dash-dotted curves. The location of this simulation in parameter space is indicated by the vertical dashed lines in Fig. ??.

Results from S1.C and S1.B exhibit near overlap in (a):

Figure 2 shows the five key nondimensional steady-state model variables from S1.B and S1.C, which use the Coulomb and Budd sliding laws respectively, and our one-way forcing experiment S2, which use an imposed ice thickness h and flow speed u . We note that the grounding line position results on the high-resolution grid differ from those on the low-resolution split grid used in the sensitivity experiments by $< 0.5\%$ for both S1.B and S1.C.

Examining first the results from experiments S1.B and S1.C, Q increases downstream (from left to right in Fig. 2a). The effective pressure N gradually increases downstream before peaking near $x = 0.93$ for S1.B, $x = 0.96$ for S1.C, then steeply decreasing towards the imposed $N = 0$ boundary condition at x_g . Between the peak in N and x_g , N passes an inflection point near $x = 0.98$, where its curvature changes sign from negative upstream to positive downstream, and exhibits a slight taper. This means that the most negative effective pressure gradient is located upstream of the grounding line. The channel cross-sectional area S gradually increases downstream from the divide before reaching a maximum, then decreasing downstream and reaching a minimum near $x = 0.96$ the effective pressure peak, and finally steeply increasing towards x_g . We also see that S also exhibits an inflection point approaching very close to x_g near $x = 0.99$, where its curvature changes sign from positive upstream to negative downstream ($x = 0.985$ in S1.B and $x = 0.995$ in S1.C), then tapers towards x_g . The ice thickness h decreases monotonically with x , while its gradient increases in magnitude for most of the domain until near the grounding line, where it passes an inflection point near $x = 0.96$ (near $x = 0.93$ for S1.B, $x = 0.98$ for S1.C) and the gradient begins to decrease in magnitude, approaching zero at x_g . The ice velocity u has an inverse relationship with h , increasing increases downstream. Like the gradient in h , the gradient in u increases in magnitude before reaching an inflection point near $x = 0.96$ the thickness inflection points, then approaching zero at x_g . In Figure 2, these points of inflection are clearer in the S1.B profile.

The results from S2, with the imposed quadratic ice geometry, follow similar trends to S1: Q increases monotonically, S decreases-increases gradually with x then-increases in the region $x < 0.5$, then decreases slightly before increasing steeply towards x_g , and N increases downstream from the divide before peaking then decreasing rapidly to zero at x_g . The main difference is that these variables do not have points-of-inflection-around $x = 0.96$ a point of inflection immediately upstream of the grounding line as seen in the results from the coupled model (S1). This highlights how the ice surface topography controls the hydrology: the ice geometry in the coupled experiments exhibits an inflection point and this is reflected in the hydrology profiles, whereas the quadratic ice geometry (Eq. 19) does not, and hence when this is used to drive the hydrological part of the model, the results also lack these inflection points.

Figure 3 shows the sensitivity of steady-state grounding line positions with respect to variations in A , a , M , and (for models using a Coulomb law only) C_C for our coupled models. Grounding line position increases as A decreases, or as a , M , or C_C increase. The variations in A , a , and C_C all result in sizeable differences in grounding-line position, whereas variations in M have minimal effect. We note that the grounding-line position simulated using the low-resolution split grid in the sensitivity experiments differs from those simulated using the high-resolution grid by $< 0.7\%$ for both S1.B and S1.C.

In our steady-state experiments we noted a peak in effective pressure near the grounding line (c.f. Figure 2b). As we will discuss in the next section, this peak in effective pressure plays a role in our transient experiments, so we are interested if this feature is persistent across parameter variations. Figure 4 shows the sensitivity of the location of maximum effective pressure with respect to the same parameter variations explored in Figure 3. The peak moves further from the grounding line as A or M increases, or as a or C_C decrease. A and a more significantly impact the location of the peak in effective pressure. We also see that the peak in effective pressure is consistently near the grounding line, with the exception of in the cases of low accumulation, high A , and low C_C , where the peak is further upstream. Comparing these positions with their respective grounding-line locations shows that these are instances where the ice sheet is very small, and likely exhibiting plug flow.

While our focus is not the intercomparison of models with different sliding laws (e.g., Brondex et al., 2017), we note that sliding law choice does not change the general trends in model sensitivity to A , a , or M . Regardless of the sliding law or parameter values, the effective pressure tends to peak near the grounding line, which implies a steep drop to zero at the grounding line. This steep negative gradient in N plays an important role in our transient experiments, so we return to Experiments S1 and S2 to examine this feature further.

For each of the three experiments (S1.B, S1.C and S2), Fig. 5 shows the nondimensional values of each term in Eqs. (12, 14, 16) to further illustrate how the ice and the hydrology influence one another. In the first column, we see the small but important effect of ice flow advecting the subglacial channel. We anticipated this term to be small, as $\beta \ll 1$. However, across the three experiments, as N approaches zero at the grounding line, creep closure (SN^3 in Eq. 12) also approaches zero, as illustrated by the red dashed curves in Fig. 5. In the absence of advection, this would need to be accommodated by a reduction in the melt term $\frac{|Q|^3}{S^{8/3}}$. Given that $Q > 0$, this would require S to grow to infinity. We see from the steady-state profile in Fig. 2c that S grows large, but does not grow to infinity, and that is due to the advection term growing near the boundary, contributing to channel closure (because $\frac{\partial S}{\partial x} > 0$), and therefore helping to balance the non-zero melt (insets, Fig. 5).

Comparing steady state terms in key model equations

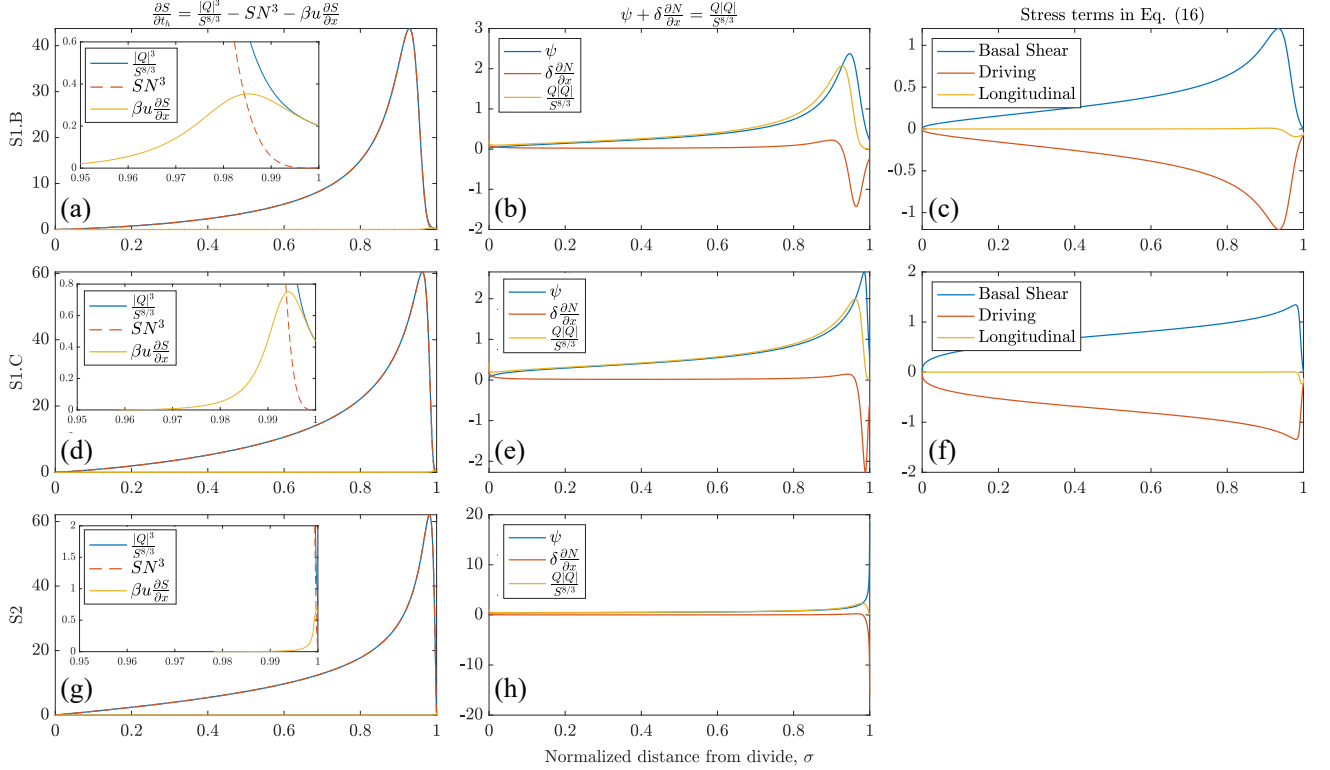


Figure 5. Term-by-term plots of the steady-state solution to the coupled model (S1). The terms in the **nondimensional steady-state** equation for channel evolution (left column: a, d, g), in the equation for **channel**-conservation of momentum in the channel (middle column: b, e, h), and in the equation for **ice**-conservation of momentum in the ice (right column: c, f) for the steady-state coupled model solution using a Budd sliding law (top row: a-c), the solution using a regularized Coulomb law (middle row: d-f), and the one-way **coupled-forced** solution using an imposed quadratic ice geometry (bottom row: g, h).

The middle column of Fig. 5 explains the relationship between effective pressure and ice geometry. This is most clearly seen in the one-way experiment (S2; Fig. 5h). Consistent with $\delta \ll 1$, for most of the domain $\frac{Q|Q|}{S^{8/3}}$ follows ψ , which is set by the ice geometry and bed topography. However, as we approach x_g , $\frac{Q|Q|}{S^{8/3}}$ and ψ diverge; as we approach the $N = 0$ boundary condition, S grows large and $\frac{Q|Q|}{S^{8/3}}$ approaches zero. In contrast, h growing steeper near the grounding line causes ψ to grow large. To balance this mismatch between the gradient required to drive flow ($\frac{Q|Q|}{S^{8/3}}$) and the hydraulic gradient supplied by the ice geometry (ψ), $\delta \frac{\partial N}{\partial x}$ grows large and negative. This explains the steep decrease in N just upstream of the grounding line (Fig. 5h).

The same relationships hold for the results from the coupled experiments (S1), with some modification related to the inflection points induced by the ice geometry, discussed above. In both S1 experiments, the $\frac{Q|Q|}{S^{8/3}}$ drops below ψ near the grounding line, and the difference is made up by a negative $\delta \frac{\partial N}{\partial x}$ (just as in S2). In contrast to the results from S2, an inflection point

in the ice thickness influences the hydrology; ψ no longer grows to a maximum at x_g , as it does with the imposed quadratic geometry. Instead, ψ reaches a maximum upstream of the grounding line, causing the effective pressure gradient to reach a minimum slightly upstream of the grounding line (c.f. the red curves in the middle column of Fig. 5). This minimum shows up as a point of inflection in the N profiles for the S1 results that is not seen in the S2 results.

400 Regardless of the whether the ice and hydrology are ~~fully-coupled~~ (S1) or ~~one-way-coupled~~ if the hydrology is forced by an imposed ice thickness and velocity (S2), $\delta \frac{\partial N}{\partial x}$ is negative near the grounding line in response to high ψ in this region. This results in N growing large as you move upstream from the grounding line.

Figures 5c and 5f show the steady-state stress balance from S1.B and S1.C. The basal shear stress profiles illustrate the effect the hydrology has on ice flow, as they mimic the N profiles, particularly near the grounding line. For example, the basal shear stress is highest where the effective pressure is highest and both drop to zero at x_g . As anticipated (due to $\alpha \ll 1$), the longitudinal stresses are small for the majority of the ice sheet. However, they increase ~~and have more effect~~ near the grounding line where the basal shear stress drops to zero. ~~The basal shear stress profiles also illustrate the effect the hydrology has on ice flow, as they mimic the N profiles, particularly near the grounding line.~~

In summary, regardless of variation in parameters (Figs. ~~?? and ??~~ 3 and 4), as long as the gradient in ice thickness grows in the downstream direction, the effective pressure grows to a maximum before dropping to zero at the grounding line. This steep negative gradient in N means that regions of ~~much higher~~ high effective pressure exist just upstream of the grounding line. This in turn causes a region of higher basal shear stress. Next, we explore the consequences of this high basal shear stress region for grounding line retreat if basal properties are assumed static in time.

3.2 Transient Experiments

415 The solid curves in Fig. 6 show results from transient simulations using the coupled models with the ~~regularized-Coulomb~~ Budd law (T1.CB) and the ~~Budd-regularized Coulomb~~ law (T1.BC). The ice sheet and hydrological system start in a steady state with the grounding line near the top of the sill, found by solving the ~~fully-coupled~~ model in a steady state using ~~an ice-flow~~ parameter A of $0.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$, a buttressing parameter of 0.4 imposed on the longitudinal stress boundary condition (Eq. 3). The transient simulation starts with ~~this parameter~~ being increased to $2.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$ (corresponding to no

420 buttressing), which triggers ice thinning and grounding-line retreat. The grounding line rapidly retreats past the overdeepening ~~to reach towards~~ a steady state on the upstream prograde slope, a total retreat of about ~~626 km~~ 678 km for T1.B. In T1.C, the grounding line ~~starts further past the sill, so it takes longer to get over the sill. Once over, it~~ also undergoes rapid retreat ~~of almost 670 km~~ to a steady state on the prograde slope, moving almost 684 km. Looking closely near the grounding line of the T1 results in Fig. 7 (solid curves, bottom panels), we see the same peak in N and points of inflection in h , u , and N that

425 we saw in the steady-state solutions on the linear bed. This peak in N persists throughout the retreat over the prograde and reverse bed slopes. This suggests that the relationships between these variables discussed above in relation to the steady-state results also apply on this more complex bed topography and during retreat. Next we compare this coupled evolution with the evolution of an uncoupled ~~ice~~ model that uses a static effective pressure profile.

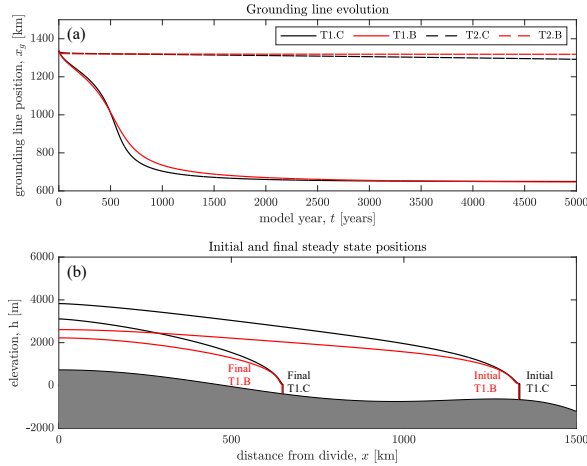


Figure 6. (a) The grounding-line position and (b) the initial and final ice-thickness profiles of the coupled model with a regularized Coulomb law (T1.C, black solid curves) and a Budd law (T1.B, red solid curves) over 5000 years of evolution after a perturbation to a fully removing ice-shelf buttressing (by changing B from $0.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$ to $2.9 \times 10^{-25} \text{ s}^{-1} \text{ Pa}^{-3}$) over 10 years. The dashed curves show the evolution of the static- N model experiment using a regularized Coulomb law (T2.C, black dashed curve) and a Budd law (T2.B, red dashed curve). The upper boundary of lower shaded region is the ice-sheet bed.

Figure 7 and the dashed curves in Figure 6a show results from T2.B and T2.C, where the effective pressure profiles are held static throughout the simulations at their initial values, derived from the fully-coupled-coupled solution that provided the initial steady-state conditions. Under these conditions the grounding line, instead of retreating past the overdeepening, approaches a steady-state position on the sill only has only moves a relatively small distance upstream of its initial position. In the first ten-fifty years of the simulations, the grounding line in T2.B approaches a new steady-state position about 3.5 moves approximately 12 km upstream of its starting position (Fig. 7a). In T2.C, the grounding line retreats only around 4.75-10 km in this ten-fifty year period (note however that it does not approach a steady state in this time-until later in the simulation). This minimal retreat is in stark contrast to the fully-coupled experiments (T1), which exhibit faster and larger magnitude grounding line-grounding-line retreat.

We identify the following reasons for these contrasts. In the T2 experiments, the effective pressure is no longer near zero immediately upstream of the terminus during retreat. After the grounding line begins to retreat, the basal shear stress near the terminus grows. The increasing shear stress slows ice flow (c.f. dashed and solid curves in Figs. 7e,f) and prevents further grounding-line retreat. Further retreat results in even higher N values, producing a negative feedback on the ice flow, as the basal shear stress increases further. The coupled model, on the other hand, allows N immediately upstream of the grounding line to remain close to zero as the grounding line retreats; the hydrological system evolves in response to the changing ice geometry to keep N (and therefore basal shear stress) low upstream of the grounding line, which in turn facilitates further retreat.

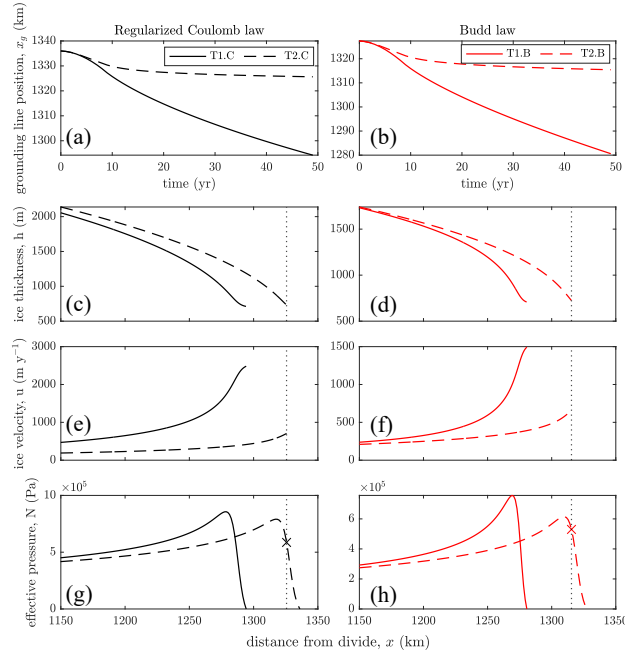


Figure 7. The grounding-line position over 40–50 years of evolution for the coupled model-experiment (T1, solid curves) and static- N model-experiment (T2, dashed curves) using a (a) regularized Coulomb law (black curves) and (b) Budd law (red curves). The (c,d) ice thickness, (e,f) ice velocity, and (g,h) effective pressure profiles after 40–50 years of evolution for the models described above. The vertical dotted lines show the position of the static- N grounding lines after 40–50 years. For the static- N effective-pressure profiles, we plot the initial steady-state profiles and the crosses indicate the effective pressure immediately upstream of the grounding line after 40–50 years of evolution.

These differences between the T1 and T2 simulations can also be understood in terms of the ice stress balance, as follows. The instantaneous increase in A reduces the longitudinal stress. Because N -removal of buttressing results in a reduction in longitudinal stress and an acceleration in ice flow near the grounding line. In T1, effective pressure is near zero immediately upstream of the grounding line; this reduction in the longitudinal stress forces the driving stress to drop to balance it. The drop in driving stress is accommodated by thinning and subsequent retreat of the grounding line so this acceleration does not lead to sufficiently increased basal shear stress to counteract the reduction in longitudinal stress. The acceleration leads to thinning and grounding-line retreat. In contrast, in Experiment T2, when N does not change with time, the grounding-line retreat corresponds to a higher N near the boundary (and therefore higher basal shear stress) requires a higher driving stress which grows to balance the same perturbation in A , which results in thicker ice and less grounding-line reduction in longitudinal stress stress, preventing further acceleration and retreat.

4 Discussion

We have developed a model of subglacial hydrology that is bidirectionally coupled to ice flow. In all solutions to the model, the subglacial ~~channel-drainage system~~ grows large in the region upstream of the grounding line, and an area of high effective pressure forms immediately upstream of this region. ~~These features form~~ This feature forms independent of whether we use a Budd or regularized Coulomb sliding law. A suite of sensitivity tests shows that the peak in ~~channel size and~~ N occurs across a wide parameter space. ~~An experiment using only one-way coupling between the ice and hydrology shows that~~ Our hydrology-only experiment shows how imposed ice geometries and velocities can produce similar profiles of N , though our transient experiments, discussed later, highlight how two-way coupling (specifically between ice geometry, basal hydraulic gradient, subglacial-channel size, and effective pressure) is needed for realistic retreat. Our plotting of terms in Fig. 5 demonstrates the roles different processes play in the effective-pressure profiles. Next, to further explore what occurs near the grounding line, we create a reduced model for the effective pressure, and show that it cannot apply at the grounding line. We discuss the behaviour of channel size at the grounding line, and comment on how a channel size increase feeds back on the effective pressure.

First, we reduce our coupled model by identifying parameters that are small in our dimensionless equations. δ is small, which means that the flow of water is primarily driven by the basic hydraulic gradient rather than the effective pressure gradient, at least in locations where effective-pressure gradients are not large. ϵ is small, which means that the water flow gradient is ~~mostly influenced~~ primarily driven by additional water sources along the channel, rather than by melt or creep of the channel walls. As identified earlier, the timescale for ice dynamics is much greater than that of the hydrology, meaning that β is small. Knowing that δ , ϵ , and β are small, Eqs. (12-14) can be reduced to:

$$N = \frac{Q}{S^{11/9}}, \quad (21)$$

$$\frac{\partial Q}{\partial x} = M, \quad (22)$$

$$S = \frac{Q^{3/4}}{\psi^{3/8}}. \quad (23)$$

Combining Eqs. (21) and (23) gives

$$N = Q^{1/12} \psi^{11/24}, \quad (24)$$

which holds for most of the ice sheet far from the grounding line. Equation (22) indicates that Q increases downstream. Assuming that the bed slope is small ($\frac{\partial b}{\partial x} \ll 1$) and that the ice sheet gets steeper further from the divide, meaning that $-\frac{\partial h}{\partial x}$ grows downstream, Eq. (24) grows downstream from the divide. However, Eq. (24) does not satisfy $N = 0$ at the grounding line. Consequently, a separate near-field solution would be required to describe a boundary layer in N near $x = x_g$. This requires a negative gradient in N within the boundary layer such that the upstream N represented by Eq. (24) will match with the $N = 0$ boundary condition.

The $N = 0$ boundary condition also impacts the channel cross-sectional area, S . As we approach the grounding line, N , and therefore the creep closure term SN^3 in Eq. (12), approach zero. This drop in SN^3 results in the melt-opening term in Eq. (12)

dominating, causing the channel cross-sectional area to grow large near the terminus. ~~However, if we consider the steady-state reduced model that applies~~ The channel in this region therefore grows until the advection term $\beta u \frac{\partial u}{\partial x}$ grows large enough to counteract the melt opening. We note how the fact that Eq. (24) only applies in regions far from the grounding line ~~;~~ supports this interpretation; Eq. (24) shows that, for a channel with ~~nonzero water flow, Q , enforcing $N=0$~~ $Q \neq 0$, $N=0$ requires S to be infinite. This is not physical, ~~so we recognize that the advection term $\beta u \frac{\partial S}{\partial x}$ must grow~~ but it is conceptually consistent with S growing large near the grounding line until the advection term, which is neglected in the reduced model, starts to play a role. This result highlights the importance of the ice velocity advecting the drainage system, as it allows the coupled model to reach a steady state (see also Drews et al., 2017).

~~The~~ Another way of looking at this is that channel cross-sectional area S growing large at the grounding line ~~in turn~~ facilitates N dropping to zero. Specifically, as discussed in Section 3, a large S results in the right side of Eq. (9) becoming small, which results in the effective pressure gradient approximately equalling the negative of the basic hydraulic gradient, i.e. $\psi \approx -\frac{\partial Q}{\partial x} \psi \approx -\frac{\partial N}{\partial x}$. Integrating this expression using the boundary condition $N(x_g) = 0$ yields

$$N \approx -\rho_w g b + \rho_i g h. \quad (25)$$

This expression is consistent with $N = 0$ at the grounding line, because the flotation condition is $\rho_i g h = \rho_w g b$. This expression, which is derived simply by assuming S is large, thus provides the negative gradient required to bring N to 0 from its far-field solution, as described by Eq. (24). Notably, this result is equivalent to assuming that the hydrology system is hydrostatically connected to the ocean, as done in previous modelling studies (e.g., Tsai et al., 2015; Brondex et al., 2017). The above discussion provides physical justification for this assumption and highlights how this simplification can be justified by the channel cross-sectional area growing large near the grounding line through ice-water coupling.

Consistent with previous work, we find that h and u pass inflection points in the region upstream of the grounding line, with the ice-thickness gradient tapering towards zero at the grounding line. Tsai et al. (2015) examined this feature using an ice-sheet model that assumed full hydrostatic connectivity with a ~~regularized~~ Coulomb law (i.e. basal shear stress was assumed to be proportional to effective pressure near the grounding line). This assumption means that, like in our model, N and τ_b vanished at the grounding line. ~~They~~ Consistent with our description of the stress balance near the grounding line in our model, ~~they~~ showed that these inflection points arise due to the vanishing basal shear stress at the grounding line (Tsai et al., 2015).

One potential implication of our steady-state experiment results is that, in areas with channelized subglacial drainage and relatively steep ice thickness profiles, the region immediately upstream of the grounding line will experience high effective pressure and basal shear stress. Previous models ~~and observations~~ are consistent with such a spatial distribution of ~~basal shear stress~~ effective pressure (e.g., Dow et al., 2018; De Fleurian et al., 2018; Hayden and Dow, 2023). For example, Hayden and Dow (2023) impose a realistic ice geometry on a two-dimensional multi-element subglacial-hydrology model, and their modelled effective pressures show the same abrupt increase in effective pressure immediately upstream of the grounding line that ~~we observe~~ our model exhibits, regardless of whether the water flow is channelized or distributed. McCormack et al. (2022) inferred high basal shear stresses in the downstream ~~region~~ portion of Thwaites Glacier and find lower basal shear stresses further upstream. While ~~(McCormack et al., 2022)~~ McCormack et al. (2022) discuss spatial variations in basal roughness (Schroeder

et al., 2014) and in drainage-system configuration (Schroeder et al., 2013) as contributors to this spatial pattern, we propose that it could also be explained by coupling between ~~a-channelized drainage system and ice flow~~ice geometry, basal hydraulic gradient, subglacial-channel size, and effective pressure. Future efforts to discriminate the control that hydrology has on basal friction from other factors will be valuable, particularly considering that the hydrologically controlled component of basal shear can potentially change rapidly (e.g., Das et al., 2008; Joughin et al., 2013).

Temporal evolution is the focus of our transient experiments. In the steady-state simulations, the ice thickness and velocity control the hydrology more consequentially than the other way around; this is demonstrated by experiment S2, in which we imposed the ice thickness and velocity. The transient experiments, by contrast, highlight the role hydrology can have on the ice. The key takeaway from these experiments—designed to emulate the approach of inverting for bed properties and leaving them unchanged that is used in most larger-scale ice-sheet models—is that holding the hydrology static severely impacts ice flow near the grounding line. In our model, this results in a significant reduction in grounding-line retreat. The evolution of the hydrology system together with the ice facilitates faster, larger-magnitude retreat. This follows results from Brondex et al. (2017), who use velocity and shear-stress profiles determined using a regularized Coulomb law to invert for a sliding parameter C_W in a Weertman sliding law that is held static. Their subsequent simulations with the Weertman sliding law result in minimal grounding-line retreat (Brondex et al., 2017). Inverting for C_W and holding it static is similar to our approach of holding N static. We confirm that this static assumption is what causes the lack of retreat, show that it also applies to Budd and regularized Coulomb sliding laws, and reveal the processes that control N in the region upstream of the grounding line.

The stark difference in retreat accommodated by the coupled models compared to that of the static- N models has ~~broader~~ implications for larger ice-sheet-modeling efforts. In many state-of-the-art ice-sheet models, it is common to invert for a spatially variable basal shear-stress or sliding-law parameter that encompasses all basal variables, subglacial hydrology included, and keep this static in time (e.g., Arthern and Gudmundsson, 2010; Morlighem et al., 2013; Arthern et al., 2015). However, these inversions are based on present-day measurements and holding the resulting bed properties constant does not account for future ice-sheet evolution (Arthern et al., 2015). Some large-scale ice-sheet models evolve basal conditions, but it is done through parameterizations (e.g., Leguy et al., 2021, 2014; Kazmierczak et al., 2022). Our work suggests a physical basis for one approach of assuming perfect hydraulic connectivity, but it is currently uncertain how good an approximation this is, particularly away from the region immediately upstream of the grounding line. This uncertainty emphasizes the need for efforts to better represent subglacial hydrology in ice sheet models.

Finally, although our coupled model includes the detailed physics of both a subglacial channel and a one-dimensional, marine-terminating ice sheet, it employs many simplifying assumptions. For the ice component, we neglect vertical velocities and vertical variability in horizontal velocities. We also neglect variation in ice temperature ~~ice-shelf buttressing effects~~, and lateral variability in the ice. This means that our model is applicable only to an ice sheet with ~~relatively low basal shear stress and a freely floating ice shelf (no buttressing)~~significant basal sliding. Variations in temperature would result ~~in nonuniform~~a nonuniform flow-law coefficient ~~A values~~ and alter ice dynamics, and variations at the ice-sheet base could result in ice freezing to the bed or in additional basal melt. For the hydrology component, we model only a single subglacial channel ~~in~~pseudo-steady-state, and do not consider distributed or multi-channel systems. This simplification leads to another assumption

that a region of the ice sheet large enough to control the ice dynamics has an effective pressure equal to the channel's effective pressure. Kingslake and Ng (2013)'s results suggests that to a first order, the effective pressure in a distributed linked cavity system connected to a channel follows that of the channel, but this will not be true far from the channel. Our findings may therefore apply only to regions with channelized drainage. Additionally, we assume a uniform and constant supply term M and input term Q_{in} , when in reality the channel could be supplied by spatially and temporally varying sources. ~~We also assume a channel that~~ Related to this, we assumed a pseudo-steady-state in the hydrology component of the model in numerical experiments. This was motivated by a scaling analysis which used the properties of the coupled ice-hydrology system (in particular, x_0 , h_0 and Q_0) to derive time scales of the hydrology system, rather than the time scale of external forcings.

Therefore, the pseudo-steady-state assumption would not apply if the timescales of, for example, meltwater input to the system were shorter, perhaps due to fluctuations in the flux of surface meltwater reaching the bed. Finally, we assume that the channel is formed by incision upwards into the ice, whereas observations and models suggest that channels can also be ~~form~~formed by incision downwards into sediments (Ng, 2000; Livingstone et al., 2016). Including these processes in our model, along with sediment deposition (Drews et al., 2017), would significantly impact its behavior. ~~All these considerations~~ These simplifications

and assumptions make our model unlikely to quantitatively ~~agree with~~reproduce observations, capture seasonal changes in hydrology, or to be applicable in areas where drainage systems change their configuration between distributed and channelized over space and time. Despite these limitations, the model's simplicity allows a more complete understanding of the model's behavior than would be possible if a more comprehensive model were used. This simplicity has allowed us to qualitatively demonstrate, and understand in detail, some of the ways that active subglacial hydrology could impact long-term ice-sheet retreat.

5 Conclusions and Outlook

We have developed a model that uses a novel combination of physical coupling points between a marine-terminating ice sheet and a subglacial channel. We allow the ice-sheet geometry to affect the hydraulic potential of our subglacial channel, the ice velocity to advect the ~~drainage system~~channel, and the subglacial water pressure to modulate the ~~shear-stress boundary~~shear stress at the ice base using different effective-pressure-dependent sliding laws. We use our model to investigate how these points of coupling can influence ice dynamics, and we examine the implications of the assumption of holding subglacial properties fixed during transient simulations. We find that the coupled ice-hydrology system creates a zone near the grounding line with high effective pressure. We then show that if the hydrology system is not allowed to evolve with the ice, the ice sheet is much less prone to grounding-line retreat, due to retreat into this zone of high effective pressure. In Section 4, we use a simplified model to further illustrate how the high effective-pressure region develops, and how the transition from high to zero effective pressure at the grounding line is coupled with a large increase in channel cross-sectional area. These results clarify the mechanisms underlying the stark differences in ice-sheet retreat between our transient experiments and between experiments done by others using different sliding laws (Brondex et al., 2017). Our simplified model analysis also provides a physical basis for the assumption of full hydrologic connectivity to the ocean for regions near the grounding line. Despite limitations to

590 our approach related to the simplifying assumptions discussed in Section 4, our findings highlight how potentially important actively evolving subglacial hydrological systems could be for marine-terminating ice-sheet stabilityretreat.

Our model limitations serve as motivation for future work to incorporate more physics into similar models, such that they can apply to greater range of settings. A first next step is including additional drainage elements, especially since a channel only occupies a limited portion of the bed and the pressure in the channel may not accurately represent pressures across large areas
595 of the bed. Adding additional subglacial hydrology elements such as a coupled channel-cavity system would better represent the full subglacial hydrology environment and could facilitate resolving seasonal effects (e.g., Pimentel et al., 2010; Kingslake and Ng, 2013; Hewitt, 2013). Another step is including additional points of coupling between the ice and hydrology models, for example, basal frictional melting that is a function of basal sliding and influences water flux in the drainage system (Hoffman and Price, 2014). Additional areas of investigation could include coupling the model with geothermal heat flux (Smith-Johnsen
600 et al., 2020), tidal forcing at the grounding line (Rosier et al., 2015), or groundwater aquifer flow and deformation (e.g., Li et al., 2022; Robel et al., 2023).

Code availability. The code for the model and figures in this manuscript is found here: https://github.com/glugeorge/coupled_ice_hydrology

Appendix A: ~~Additional model details~~Nondimensionalization

A1 ~~Nondimensionalization~~

In the following the scaling of the hydrology equations broadly follows Fowler (1999) and Kingslake (2013). The scaling of the ice-sheet equation follows a similar approach. From Eqs. (1), (2), (7)-(10), we define the following scales:

$$S = S_0 S', t = t_0 t', t_h = t_{h0} t', m = m_0 m', N = N_0 N', u = u_0 u', x = x_0 x', Q = Q_0 Q',$$

$$M = M_0 M', \psi = \psi_0 \psi', h = h_0 h', b = h_0 b', a = a_0 a'.$$

605 We use the same scale for b and h . Replacing the variables in Eq. (7) with their corresponding scales multiplied by their dimensionless variables from above and setting the first three coefficients equal yields

$$\frac{S_0}{t_{h0}} = \frac{m_0}{\rho_i} = K_0 S_0 N_0^3, \tag{A1}$$

which results in $N_0 = (K_0 t_{h0})^{-1/3}$ and $t_{h0} = \frac{\rho_i S_0}{m_0}$. Setting $\beta = u_0 \frac{t_{h0}}{x_0}$ gives the nondimensional version of Eq. (7):

$$\frac{\partial S'}{\partial t'_h} = m' - S' N'^3 - \beta u' \frac{\partial S'}{\partial x'}. \tag{A2}$$

610 Replacing the dimensional variables in Eq. (8) gives

$$\frac{S_0}{t_{h0}} \frac{\partial S'}{\partial t'_h} + \frac{Q_0}{x_0} \frac{\partial Q'}{\partial x'} = \frac{m_0}{\rho_i} r m' + M_0 M', \tag{A3}$$

where $r = \rho_i / \rho_w$. Substituting $t_{h0} = \frac{\rho_i S_0}{m_0}$, we obtain

$$\frac{m_0}{\rho_i} \frac{\partial S'}{\partial t'_h} + \frac{Q_0}{x_0} \frac{\partial Q'}{\partial x'} = \frac{m_0}{\rho_i} r m' + M_0 M'. \quad (\text{A4})$$

We define $M_0 = \frac{Q_0}{x_0}$ and the nondimensional parameter $\epsilon \equiv \frac{x_0 m_0}{Q_0 \rho_i}$, yielding the nondimensional form of Eq. (8):

$$\epsilon \frac{\partial S'}{\partial t'_h} + \frac{\partial Q'}{\partial x'} = \epsilon r m' + M'. \quad (\text{A5})$$

We nondimensionalize ψ using Eq. (11), and choose $\psi_0 = \rho_w g \frac{h_0}{x_0}$. Replacing the dimensional variables in Eq. (9) gives

$$\psi_0 \psi' + \frac{N_0}{x_0} \frac{\partial N'}{\partial x'} = f \rho_w g \frac{Q_0^2}{S_0^{8/3}} \frac{Q' |Q'|}{S'^{8/3}}, \quad (\text{A6})$$

which we use to define $S_0 = \left(f \rho_w g \frac{Q_0^2}{\psi_0} \right)^{3/8}$ and $\delta \equiv \frac{N_0}{x_0 \psi_0}$. This gives the nondimensional form of Eq. (9):

$$\psi' + \delta \frac{\partial N}{\partial x} = \frac{Q' |Q'|}{S'^{8/3}}. \quad (\text{A7})$$

Replacing the dimensional variables in Eq. (10) and equating the left side with [the](#) first term on the right defines

$$m_0 = \frac{Q_0 \psi_0}{L} \quad (\text{A8})$$

and yields the nondimensional form of Eq. (10):

$$m' = Q' \left(\psi' + \delta \frac{\partial N'}{\partial x'} \right). \quad (\text{A9})$$

Turning to the ice flow equations, replacing the dimensional variables in Eq. (1) gives

$$\frac{h_0}{t_0} \frac{\partial h'}{\partial t'} + \frac{h_0 u_0}{x_0} \frac{\partial (h' u')}{\partial x'} = a_0 a'. \quad (\text{A10})$$

We set $t_0 = \frac{x_0}{u_0}$. A balance of the accumulation flux with ice-flow over the grounding line leads to $a_0 x_0 = u_0 h_0$. Combining these two expressions leads to $a_0 = \frac{h_0}{t_0}$. And these expressions for t_0 and a_0 lead to the nondimensional version of Eq. (1):

$$\frac{\partial h'}{\partial t'} + \frac{\partial (h' u')}{\partial x'} = a'. \quad (\text{A11})$$

The nondimensionalization of Eq. (2) differs slightly depending on which sliding law we use; the ice velocity scale, u_0 , is different in each case. Replacing the dimensional variables in Eq. (2) using the regularized Coulomb sliding law, $\tau_b = C_C N \left(\frac{u}{u + A_s C_C^n N^n} \right)^{1/n}$, gives

$$2\bar{A}^{-1/n} \frac{h_0 u_0^{1/n}}{x_0^{1/n+1}} \frac{\partial}{\partial x'} \left[h' \left| \frac{\partial u'}{\partial x'} \right|^{1/n-1} \frac{\partial u'}{\partial x'} \right] - C_C N_0 N' \left(\frac{u_0 u'}{u_0 u' + A_s C_C^n N_0^n N'^n} \right)^{1/n} - \rho_i g \frac{h_0^2}{x_0} h' \frac{\partial (h' - b')}{\partial x'} = 0. \quad (\text{A12})$$

Defining $u_0 = A_s C_C^n N_0^n$, $\alpha = \frac{2u_0^{1/n}}{\rho_i g A^{1/n} h_0 x_0^{1/n}}$, $\gamma = \frac{C_C N_0 x_0}{\rho_i g h_0^2}$, the nondimensional version of Eq. (2) is

$$\alpha \frac{\partial}{\partial x'} \left[h' \left| \frac{\partial u'}{\partial x'} \right|^{1/n-1} \frac{\partial u'}{\partial x'} \right] - \tau'_b - h' \frac{\partial (h' - b')}{\partial x'} = 0, \quad (\text{A13})$$

635 where $\tau'_b = \gamma N' \left(\frac{u'}{u' + N'^n} \right)^{1/n}$. Alternatively, when using the Budd sliding law, $\tau_b = C_B N^q u^{1/n}$, replacing the dimensional variables in Eq. (2) yields

$$2\bar{A}^{-1/n} \frac{h_0 u_0^{1/n}}{x_0^{1/n+1}} \frac{\partial}{\partial x'} \left[h' \left| \frac{\partial u'}{\partial x'} \right|^{1/n-1} \frac{\partial u'}{\partial x'} \right] - C_B N_0 N' u_0^{1/n} u'^{1/n} - \rho_i g \frac{h_0^2}{x_0} h' \frac{\partial(h' - b')}{\partial x'} = 0. \quad (\text{A14})$$

Dividing through by $\rho_i g \frac{h_0^2}{x_0}$ and setting $u_0 = \left(\frac{\rho_i g h_0^2}{C_B N_0 x_0} \right)^n$ allows α to remain the same as when using a regularized Coulomb law, so the nondimensional equation remains Eq. (A13), where $\tau'_b = N' u'^{1/n}$.

We have now nondimensionalized all the equations. We assign values to Q_0 , x_0 , and h_0 , from which we determine the remaining scales:

$$S_0 = \left(f \rho_w g \frac{Q_0^2}{\psi_0} \right)^{3/8}, t_0 = \frac{x_0}{u_0}, t_{h0} = \frac{\rho_i S_0}{m_0}, m_0 = \frac{Q_0 \psi_0}{L}, \psi_0 = \rho_w g \frac{h_0}{x_0}, \\ N_0 = (K_0 t_{h0})^{-1/3}, u_0 = A_s C^n N_0^n, M_0 = Q_0/x_0, a_0 = \frac{h_0}{t_0}.$$

Additionally, we have five nondimensional parameters:

$$\epsilon \equiv \frac{x_0 m_0}{Q_0 \rho_i}, \delta \equiv \frac{N_0}{x_0 \psi_0}, \beta \equiv t_{h0}/t_0, \alpha \equiv \frac{2u_0^{1/n}}{\rho_i g A^{1/n} h_0 x_0^{1/n}}, \gamma \equiv \frac{C N_0 x_0}{\rho_i g h_0^2}.$$

640 [These parameter and scales equations are reduced to be in terms of imposed constants in Table 3.](#) To re-arrange the hydrology equations into 3 equations for our solver, we first [take-combine](#) Eqs. (A7) and (A9) ~~and-combine~~ to get $m' = \frac{|Q'|^3}{S'^{8/3}}$. Then substituting into Eq. (A2), we get

$$\frac{\partial S'}{\partial t'_h} = \frac{|Q'|^3}{S'^{8/3}} - S' N'^3 - \beta u' \frac{\partial S'}{\partial x'}. \quad (\text{A15})$$

Then, subbing this into Eq. (A5), we get our equation for $\frac{\partial Q'}{\partial x'}$:

$$645 \quad \frac{\partial Q'}{\partial x'} = \epsilon(r-1) \frac{|Q'|^3}{S'^{8/3}} + \epsilon \left(S' N'^3 + \beta u' \frac{\partial S'}{\partial x'} \right) + M'. \quad (\text{A16})$$

Finally, re-arranging Eq. (A7) for $\frac{\partial N'}{\partial x'}$ provides the third hydrology equation:

$$\frac{\partial N'}{\partial x'} = \frac{1}{\delta} \left(\frac{Q'|Q'|}{S'^{8/3}} - \psi' \right). \quad (\text{A17})$$

A1 **Coordinate Stretching**

Appendix B: [Coordinate Stretching](#)

650 For the ice flow equations, we use the same coordinate stretching as [described in](#) Appendix A in Schoof (2007). We also apply the same coordinate stretching to the hydrology equations, which are solved on a uniform grid that stretches with the grounding

line. Using $\sigma x_g = x$ and $\tau = t_h$, we find that $\frac{\partial}{\partial x}$ and $\frac{\partial}{\partial t_h}$ transform into $\frac{1}{x_g} \frac{\partial}{\partial \sigma}$ and $\frac{\partial}{\partial \tau} - \frac{\sigma}{x_g} \frac{\partial x_g}{\partial \tau} \frac{\partial}{\partial \sigma}$, respectively. Applying these coordinate transformations to the three hydrology equations gives

$$\frac{\partial S'}{\partial \tau} = \frac{|Q'|^3}{S'^{8/3}} - S' N'^3 + \frac{1}{x_g} \left(\sigma \frac{\partial x_g}{\partial \tau} - \beta u' \right) \frac{\partial S'}{\partial \sigma}, \quad (\text{B1})$$

$$655 \quad \frac{1}{x_g} \frac{\partial Q'}{\partial \sigma} = \epsilon(r-1) \frac{|Q'|^3}{S'^{8/3}} + \epsilon \left(S' N'^3 + \frac{\beta u'}{x_g} \frac{\partial S'}{\partial \sigma} \right) + M', \quad (\text{B2})$$

$$\frac{\partial N'}{\partial \sigma} = \frac{x_g}{\delta} \left(\frac{Q' |Q'|}{S'^{8/3}} - \psi' \right). \quad (\text{B3})$$

B1 Discretizing hydrology equations

~~We follows-~~

Appendix C: Discretizing hydrology equations

660 We follow the method described in Appendix A of Schoof (2007) to discretize and solve the ice-flow equations. We follow a similar approach to discretize and solve the hydrology equations. We use centered differences for the spatial derivatives and forward differences for the time derivatives. The discrete equations are as follows:

$$\frac{S_i^j - S_i^{j-1}}{\Delta \tau} = \frac{|Q_i^j|^3}{S_i^{j8/3}} - S_i^j N_i^{j3} + \frac{1}{x_g^j} \left(\sigma_i^j \frac{x_g^j - x_g^{j-1}}{\Delta \tau} - \beta u_i^j \right) \frac{S_{i+1/2}^j - S_{i-1/2}^j}{2\Delta \sigma}, \quad (\text{C1})$$

$$\frac{1}{x_g^j} \frac{Q_{i+1/2}^j - Q_{i-1/2}^j}{2\Delta \sigma} = \epsilon(r-1) \frac{|Q_i^j|^3}{S_i^{j8/3}} + \epsilon \left(S_i^j N_i^{j3} + \beta u_i^j \frac{S_{i+1/2}^j - S_{i-1/2}^j}{2x_g^j \Delta \sigma} \right) + M', \quad (\text{C2})$$

$$665 \quad \frac{\delta}{x_g^j} \frac{N_{i+1/2}^j - N_{i-1/2}^j}{2\Delta \sigma} = \frac{Q_i^j |Q_i^j|}{S_i^{j8/3}} - \psi_i^j, \quad (\text{C3})$$

where i subscripts denote the grid point number and j superscripts denote the time step number.

Appendix D: Sensitivity to spatial grid and time step size

670 We perform two additional suites of numerical experiments with both version of the coupled ice-hydrology model (i.e. using both the regularized Coulomb and Budd sliding laws), to ensure that our results do not qualitatively depend on the resolution of spatial grids and time step size.

First, we examine the dependence on the grid resolution by rerunning our S1.B and S1.C experiments with three sets of resolutions: [1] low resolution, with an ice grid with 100 points along 95% of the domain and 200 points along the remaining 5%, and a hydrology grid with 500 points, [2] medium resolution with an ice grid with 100 points along 85% of the domain and 600 points along the remaining 15%, and a hydrology grid of 1000 points, and [3] high resolution grid, with 3000 points for both the hydrology and ice grids. The medium resolution experiment uses the same spatial grids as our sensitivity experiments and the high resolution experiment uses the same grid as S1 and S2 (Table 1).

675

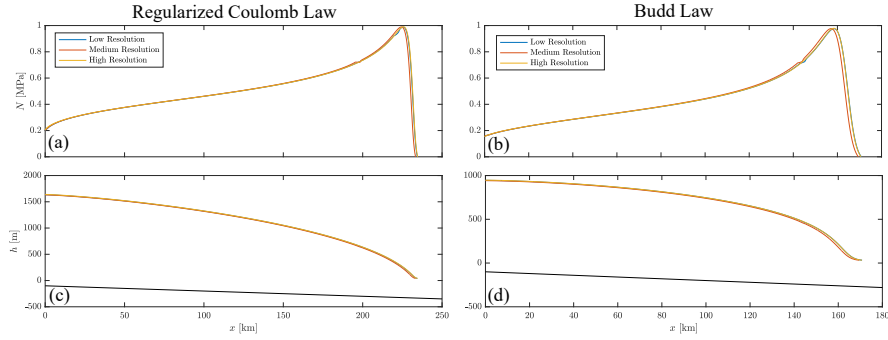


Figure D1. The steady-state effective pressure profiles (a,b) and the ice surface height and bed topography (c,d) for experiments S1.B and S1.C, using a range of spatial grids.

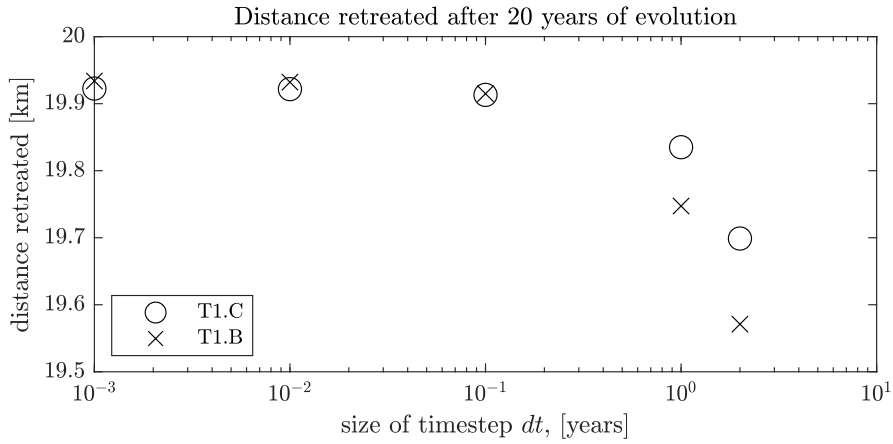


Figure D2. Grounding-line retreat after 20 years simulated by the transient, coupled model using a range of time-step sizes and each sliding law. Other than the time steps, all other parameters are the same as used in T1.B and T1.C.

Figure D1 plots steady-state profiles of effective pressure N and the ice-surface height ($h + b$) for experiments [1]-[3]. Across experiments using both sliding laws, the medium and low resolution profiles closely align with the high resolution profiles. In the medium and low resolution experiments, the maximum effective pressure and the maximum ice thickness agree to the corresponding values in the high resolution experiment to within 0.32% and 0.54%, respectively. The grounding-line position is slightly more sensitive to grid resolution, varying across the experiments by up to 0.7%. In the low and medium resolution experiments, a minor numerical artifact is visible at the grid junction between the coarse and fine ice grids, likely caused by the interpolation of variables from the uniform-spaced hydrology grid on to the two different ice grids.

We conclude from these experiments that, grid resolution does not qualitatively impact our main results.

685 Second, we examine model dependence on time-step size during a crucial part of our transient experiments: the start of the
simulations, when the buttressing perturbation is imposed. We perform five additional, short-duration, transient experiments
with each sliding law (based on T1.C and T1.B), while varying the time-step size between experiments. Each experiment lasts
20 years and begins with the same perturbation in ice-shelf buttressing used in T1 to trigger retreat. This perturbation is a
10-year-long, linear increase in the buttressing factor B from its initial value of 0.4 to 1. The 20-year simulations therefore
690 cover the 10-year period while B increases and the ice sheet begins to thin and retreat, and the subsequent 10 years of further
thinning and retreat. The experiments use a range of time steps: $dt \in \{0.001, 0.01, 0.1, 1, 2\}$ years.

Figure D2 plots the distance retreated by the grounding line at the end of each simulation. Over this wide range of time
step sizes the distance retreated varies by under 2%. Moreover, as the time step size decreases, the distance retreated by the
grounding line converges towards a single value in each set of experiments.

695 The start of the transient experiments, while the perturbation is being imposed is likely the most sensitive to time-step size.
Therefore, the results of this convergence test suggest that the results of our transient experiments do not depend qualitatively
on time-step size.

Author contributions. GL and JK initiated the study. GL led the modeling and writing, and JK advised on and contributed ideas to the model
and discussion in addition to helping to write the manuscript.

700 *Competing interests.* The authors declare no competing interests.

Acknowledgements. The authors acknowledge financial support from the US National Science Foundation's Office of Polar Programs and
Columbia University. The NSF award OPP-2003464 that provided primary support for G. Lu's Ph.D. studentship during this study, and that
made the Ph.D. studentship possible, results from a proposal written primarily by L. A. Stevens (now at the University of Oxford), with
contributions from J. Kingslake and M. Nettles. The authors acknowledge input from and discussions with M. Nettles about this work during
705 its early stages. G. Lu acknowledges the additional financial support of the Natural Sciences and Engineering Research Council of Canada
(NSERC), PGS-D 578042. The authors also acknowledge A. Robel and I. Hewitt for separate discussions about modeling, in addition to
A. Robel for providing code that forms the foundation of our scripts. The authors acknowledge the three anonymous reviewers for their
comments which have improved the manuscript.

References

- 710 Alley, R. B., Anandakrishnan, S., Bentley, C. R., and Lord, N.: A water-piracy hypothesis for the stagnation of Ice Stream C, Antarctica, *Annals of Glaciology*, 20, 187–194, <https://doi.org/10.3189/1994AoG20-1-187-194>, 1994.
- Arnold, N. and Sharp, M.: Flow variability in the Scandinavian ice sheet: modelling the coupling between ice sheet flow and hydrology, *Quaternary Science Reviews*, 21, 485–502, [https://doi.org/10.1016/S0277-3791\(01\)00059-2](https://doi.org/10.1016/S0277-3791(01)00059-2), 2002.
- Arthern, R. J. and Gudmundsson, G. H.: Initialization of ice-sheet forecasts viewed as an inverse Robin problem, *Journal of Glaciology*, 56, 527–533, <https://doi.org/10.3189/002214310792447699>, publisher: Cambridge University Press, 2010.
- 715 Arthern, R. J. and Williams, C. R.: The sensitivity of West Antarctica to the submarine melting feedback, *Geophysical Research Letters*, 44, 2352–2359, <https://doi.org/10.1002/2017GL072514>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/2017GL072514>, 2017.
- Arthern, R. J., Hindmarsh, R. C. A., and Williams, C. R.: Flow speed within the Antarctic ice sheet and its controls inferred from satellite observations, *Journal of Geophysical Research: Earth Surface*, 120, 1171–1188, <https://doi.org/10.1002/2014JF003239>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/2014JF003239>, 2015.
- 720 Barnes, J. M. and Gudmundsson, G. H.: The predictive power of ice sheet models and the regional sensitivity of ice loss to basal sliding parameterisations: a case study of Pine Island and Thwaites glaciers, West Antarctica, *The Cryosphere*, 16, 4291–4304, <https://doi.org/10.5194/tc-16-4291-2022>, publisher: Copernicus GmbH, 2022.
- Bartholomew, I., Nienow, P., Mair, D., Hubbard, A., King, M. A., and Sole, A.: Seasonal evolution of subglacial drainage and acceleration in a Greenland outlet glacier, *Nature Geoscience*, 3, 408–411, <https://doi.org/10.1038/ngeo863>, number: 6 Publisher: Nature Publishing Group, 2010.
- Bindschadler, R.: The Importance of Pressurized Subglacial Water in Separation and Sliding at the Glacier Bed, *Journal of Glaciology*, 29, 3–19, <https://doi.org/10.3189/S0022143000005104>, publisher: Cambridge University Press, 1983.
- Bodart, J. A., Bingham, R. G., Young, D. A., MacGregor, J. A., Ashmore, D. W., Quartini, E., Hein, A. S., Vaughan, D. G., and Blanken- 730 ship, D. D.: High mid-Holocene accumulation rates over West Antarctica inferred from a pervasive ice-penetrating radar reflector, *The Cryosphere*, 17, 1497–1512, <https://doi.org/10.5194/tc-17-1497-2023>, publisher: Copernicus GmbH, 2023.
- Brondex, J., Gagliardini, O., Gillet-Chaulet, F., and Durand, G.: Sensitivity of grounding line dynamics to the choice of the friction law, *Journal of Glaciology*, 63, 854–866, <https://doi.org/10.1017/jog.2017.51>, publisher: Cambridge University Press, 2017.
- Budd, W. F., Keage, P. L., and Blundy, N. A.: Empirical Studies of Ice Sliding, *Journal of Glaciology*, 23, 157–170, <https://doi.org/10.3189/S0022143000029804>, publisher: Cambridge University Press, 1979.
- 735 Bueler, E. and Brown, J.: Shallow shelf approximation as a “sliding law” in a thermomechanically coupled ice sheet model, *Journal of Geophysical Research: Earth Surface*, 114, <https://doi.org/10.1029/2008JF001179>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2008JF001179>, 2009.
- Chow, V. T.: Open-channel Hydraulics, Blackburn Press, google-Books-ID: JAJ7swEACAAJ, 1959.
- 740 Clarke, G. K.: Subglacial Processes, *Annual Review of Earth and Planetary Sciences*, 33, 247–276, <https://doi.org/10.1146/annurev.earth.33.092203.122621>, _eprint: <https://doi.org/10.1146/annurev.earth.33.092203.122621>, 2005.
- Das, S. B., Joughin, I., Behn, M. D., Howat, I. M., King, M. A., Lizarralde, D., and Bhatia, M. P.: Fracture Propagation to the Base of the Greenland Ice Sheet During Supraglacial Lake Drainage, *Science*, 320, 778–781, <https://doi.org/10.1126/science.1153360>, publisher: American Association for the Advancement of Science, 2008.

- 745 De Fleurian, B., Werder, M. A., Beyer, S., Brinkerhoff, D. J., Delaney, I., Dow, C. F., Downs, J., Gagliardini, O., Hoffman, M. J., Hooke, R. L., Seguinot, J., and Sommers, A. N.: SHMIP The subglacial hydrology model intercomparison Project, *Journal of Glaciology*, 64, 897–916, <https://doi.org/10.1017/jog.2018.78>, publisher: Cambridge University Press, 2018.
- Dow, C. F., Werder, M. A., Babonis, G., Nowicki, S., Walker, R. T., Csatho, B., and Morlighem, M.: Dynamics of Active Subglacial Lakes in Recovery Ice Stream, *Journal of Geophysical Research: Earth Surface*, 123, 837–850, <https://doi.org/10.1002/2017JF004409>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/2017JF004409>, 2018.
- 750 Dow, C. F., Ross, N., Jeofry, H., Siu, K., and Siegert, M. J.: Antarctic basal environment shaped by high-pressure flow through a subglacial river system, *Nature Geoscience*, 15, 892–898, <https://doi.org/10.1038/s41561-022-01059-1>, number: 11 Publisher: Nature Publishing Group, 2022.
- Drew, M. and Tarasov, L.: Surging of a Hudson Strait-scale ice stream: subglacial hydrology matters but the process details mostly do not, *The Cryosphere*, 17, 5391–5415, <https://doi.org/10.5194/tc-17-5391-2023>, publisher: Copernicus GmbH, 2023.
- 755 Drews, R., Pattyn, F., Hewitt, I. J., Ng, F. S. L., Berger, S., Matsuoka, K., Helm, V., Bergeot, N., Favier, L., and Neckel, N.: Actively evolving subglacial conduits and eskers initiate ice shelf channels at an Antarctic grounding line, *Nature Communications*, 8, 15 228, <https://doi.org/10.1038/ncomms15228>, number: 1 Publisher: Nature Publishing Group, 2017.
- Drouet, A. S., Docquier, D., Durand, G., Hindmarsh, R., Pattyn, F., Gagliardini, O., and Zwinger, T.: Grounding line transient response in marine ice sheet models, *The Cryosphere*, 7, 395–406, <https://doi.org/10.5194/tc-7-395-2013>, publisher: Copernicus GmbH, 2013.
- 760 Flowers, G. E.: Modelling water flow under glaciers and ice sheets, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 471, 20140 907, <https://doi.org/10.1098/rspa.2014.0907>, publisher: Royal Society, 2015.
- Fountain, A. G. and Walder, J. S.: Water flow through temperate glaciers, *Reviews of Geophysics*, 36, 299–328, <https://doi.org/10.1029/97RG03579>, _eprint: <https://agupubs.onlinelibrary.wiley.com/doi/pdf/10.1029/97RG03579>, 1998.
- 765 Fowler, A. C.: Breaking the seal at Grímsvötn, Iceland, *Journal of Glaciology*, 45, 506–516, <https://doi.org/10.3189/S0022143000001362>, publisher: Cambridge University Press, 1999.
- Gagliardini, O. and Werder, M. A.: Influence of increasing surface melt over decadal timescales on land-terminating Greenland-type outlet glaciers, *Journal of Glaciology*, 64, 700–710, <https://doi.org/10.1017/jog.2018.59>, publisher: Cambridge University Press, 2018.
- Gudmundsson, G. H., Paolo, F. S., Adusumilli, S., and Fricker, H. A.: Instantaneous Antarctic ice sheet mass loss driven by thinning ice shelves, *Geophysical Research Letters*, 46, 13 903–13 909, <https://doi.org/10.1029/2019GL085027>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2019GL085027>, 2019.
- 770 Hager, A. O., Hoffman, M. J., Price, S. F., and Schroeder, D. M.: Persistent, extensive channelized drainage modeled beneath Thwaites Glacier, West Antarctica, *The Cryosphere*, 16, 3575–3599, <https://doi.org/10.5194/tc-16-3575-2022>, publisher: Copernicus GmbH, 2022.
- Hayden, A.-M. and Dow, C. F.: Examining the effect of ice dynamic changes on subglacial hydrology through modelling of a synthetic Antarctic glacier, *Journal of Glaciology*, pp. 1–14, <https://doi.org/10.1017/jog.2023.65>, publisher: Cambridge University Press, 2023.
- 775 Helanow, C., Iverson, N. R., Woodard, J. B., and Zoet, L. K.: A slip law for hard-bedded glaciers derived from observed bed topography, *Science Advances*, 7, eabe7798, <https://doi.org/10.1126/sciadv.abe7798>, 2021.
- Hewitt, I. J.: Seasonal changes in ice sheet motion due to melt water lubrication, *Earth and Planetary Science Letters*, 371–372, 16–25, <https://doi.org/10.1016/j.epsl.2013.04.022>, 2013.
- 780 Hoffman, M. and Price, S.: Feedbacks between coupled subglacial hydrology and glacier dynamics, *Journal of Geophysical Research: Earth Surface*, 119, 414–436, <https://doi.org/10.1002/2013JF002943>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/2013JF002943>, 2014.

- Iken, A. and Bindschadler, R. A.: Combined measurements of Subglacial Water Pressure and Surface Velocity of Findelengletscher, Switzerland: Conclusions about Drainage System and Sliding Mechanism, *Journal of Glaciology*, 32, 101–119, <https://doi.org/10.3189/S0022143000006936>, publisher: Cambridge University Press, 1986.
- Joughin, I., Das, S. B., Flowers, G. E., Behn, M. D., Alley, R. B., King, M. A., Smith, B. E., Bamber, J. L., van den Broeke, M. R., and van Angelen, J. H.: Influence of ice-sheet geometry and supraglacial lakes on seasonal ice-flow variability, *The Cryosphere*, 7, 1185–1192, <https://doi.org/10.5194/tc-7-1185-2013>, publisher: Copernicus GmbH, 2013.
- Kaspari, S., Mayewski, P. A., Dixon, D. A., Spikes, V. B., Sneed, S. B., Handley, M. J., and Hamilton, G. S.: Climate variability in West Antarctica derived from annual accumulation-rate records from ITASE firn/ice cores, *Annals of Glaciology*, 39, 585–594, <https://doi.org/10.3189/172756404781814447>, 2004.
- Kazmierczak, E., Sun, S., Coulon, V., and Pattyn, F.: Subglacial hydrology modulates basal sliding response of the Antarctic ice sheet to climate forcing, *The Cryosphere*, 16, 4537–4552, <https://doi.org/10.5194/tc-16-4537-2022>, publisher: Copernicus GmbH, 2022.
- Kingslake, J.: Modelling Ice-Dammed Lake Drainage, PhD Thesis, University of Sheffield, Sheffield, United Kingdom, 2013.
- Kingslake, J. and Ng, F.: Modelling the coupling of flood discharge with glacier flow during jökulhlaups, *Annals of Glaciology*, 54, 25–31, <https://doi.org/10.3189/2013AoG63A331>, publisher: Cambridge University Press, 2013.
- Le Brocq, A. M., Payne, A. J., Siegert, M. J., and Alley, R. B.: A subglacial water-flow model for West Antarctica, *Journal of Glaciology*, 55, 879–888, <https://doi.org/10.3189/002214309790152564>, publisher: Cambridge University Press, 2009.
- Le Brocq, A. M., Ross, N., Griggs, J. A., Bingham, R. G., Corr, H. F. J., Ferraccioli, F., Jenkins, A., Jordan, T. A., Payne, A. J., Rippin, D. M., and Siegert, M. J.: Evidence from ice shelves for channelized meltwater flow beneath the Antarctic Ice Sheet, *Nature Geoscience*, 6, 945–948, <https://doi.org/10.1038/ngeo1977>, number: 11 Publisher: Nature Publishing Group, 2013.
- Leguy, G. R., Asay-Davis, X. S., and Lipscomb, W. H.: Parameterization of basal friction near grounding lines in a one-dimensional ice sheet model, *The Cryosphere*, 8, 1239–1259, <https://doi.org/10.5194/tc-8-1239-2014>, publisher: Copernicus GmbH, 2014.
- Leguy, G. R., Lipscomb, W. H., and Asay-Davis, X. S.: Marine ice sheet experiments with the Community Ice Sheet Model, *The Cryosphere*, 15, 3229–3253, <https://doi.org/10.5194/tc-15-3229-2021>, publisher: Copernicus GmbH, 2021.
- Li, L., Aitken, A. R. A., Lindsay, M. D., and Kulesa, B.: Sedimentary basins reduce stability of Antarctic ice streams through groundwater feedbacks, *Nature Geoscience*, 15, 645–650, <https://doi.org/10.1038/s41561-022-00992-5>, number: 8 Publisher: Nature Publishing Group, 2022.
- Lipscomb, W. H., Leguy, G. R., Jourdain, N. C., Asay-Davis, X., Seroussi, H., and Nowicki, S.: ISMIP6-based projections of ocean-forced Antarctic Ice Sheet evolution using the Community Ice Sheet Model, *The Cryosphere*, 15, 633–661, <https://doi.org/10.5194/tc-15-633-2021>, publisher: Copernicus GmbH, 2021.
- Livingstone, S. J., Utting, D. J., Ruffell, A., Clark, C. D., Pawley, S., Atkinson, N., and Fowler, A. C.: Discovery of relict subglacial lakes and their geometry and mechanism of drainage, *Nature Communications*, 7, ncomms11767, <https://doi.org/10.1038/ncomms11767>, number: 1 Publisher: Nature Publishing Group, 2016.
- MacAyeal, D. R.: Large-scale ice flow over a viscous basal sediment: Theory and application to ice stream B, Antarctica, *Journal of Geophysical Research: Solid Earth*, 94, 4071–4087, <https://doi.org/10.1029/JB094iB04p04071>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/JB094iB04p04071>, 1989.
- McArthur, K., McCormack, F. S., and Dow, C. F.: Basal conditions of Denman Glacier from glacier hydrology and ice dynamics modeling, *The Cryosphere*, 17, 4705–4727, <https://doi.org/10.5194/tc-17-4705-2023>, publisher: Copernicus GmbH, 2023.

- 820 McCormack, F. S., Warner, R. C., Seroussi, H., Dow, C. F., Roberts, J. L., and Treverrow, A.: Modeling the Deformation Regime of Thwaites Glacier, West Antarctica, Using a Simple Flow Relation for Ice Anisotropy (ESTAR), *Journal of Geophysical Research: Earth Surface*, 127, e2021JF006332, <https://doi.org/10.1029/2021JF006332>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2021JF006332>, 2022.
- Morlighem, M., Seroussi, H., Larour, E., and Rignot, E.: Inversion of basal friction in Antarctica using exact and incomplete adjoints
825 of a higher-order model, *Journal of Geophysical Research: Earth Surface*, 118, 1746–1753, <https://doi.org/10.1002/jgrf.20125>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/jgrf.20125>, 2013.
- Muszynski, I. and Birchfield, G. E.: A Coupled Marine Ice-Stream – Ice-Shelf Model, *Journal of Glaciology*, 33, 3–15, <https://doi.org/10.3189/S0022143000005281>, publisher: Cambridge University Press, 1987.
- Ng, F. S. L.: Canals under sediment-based ice sheets, *Annals of Glaciology*, 30, 146–152, <https://doi.org/10.3189/172756400781820633>,
830 publisher: Cambridge University Press, 2000.
- Nye, J. F.: Water Flow in Glaciers: Jökulhlaups, Tunnels and Veins, *Journal of Glaciology*, 17, 181–207, <https://doi.org/10.3189/S002214300001354X>, publisher: Cambridge University Press, 1976.
- Paterson, W. S. B.: 5 - Structure and Deformation of Ice, in: *The Physics of Glaciers (Third Edition)*, edited by Paterson, W. S. B., pp. 78–102, Pergamon, Amsterdam, <https://doi.org/10.1016/B978-0-08-037944-9.50011-X>, 1994.
- 835 Pimentel, S. and Flowers, G. E.: A numerical study of hydrologically driven glacier dynamics and subglacial flooding, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 467, 537–558, <https://doi.org/10.1098/rspa.2010.0211>, publisher: Royal Society, 2010.
- Pimentel, S., Flowers, G. E., and Schoof, C. G.: A hydrologically coupled higher-order flow-band model of ice dynamics with a Coulomb friction sliding law, *Journal of Geophysical Research: Earth Surface*, 115, <https://doi.org/10.1029/2009JF001621>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2009JF001621>, 2010.
840
- Robel, A.: SSAsimpleM, <https://github.com/aarobel/SSAsimpleM>, original Date: 2020-11-05. <https://github.com/aarobel/SSAsimpleM>, 2021.
- Robel, A. A., Sim, S. J., Meyer, C., Siegfried, M. R., and Gustafson, C. D.: Contemporary ice sheet thinning drives subglacial groundwater exfiltration with potential feedbacks on glacier flow, *Science Advances*, 9, eadh3693, <https://doi.org/10.1126/sciadv.adh3693>, publisher: American Association for the Advancement of Science, 2023.
845
- Rosier, S. H. R., Gudmundsson, G. H., and Green, J. a. M.: Temporal variations in the flow of a large Antarctic ice stream controlled by tidally induced changes in the subglacial water system, *The Cryosphere*, 9, 1649–1661, <https://doi.org/10.5194/tc-9-1649-2015>, publisher: Copernicus GmbH, 2015.
- Röthlisberger, H.: Water Pressure in Intra- and Subglacial Channels*, *Journal of Glaciology*, 11, 177–203, <https://doi.org/10.3189/S0022143000022188>, publisher: Cambridge University Press, 1972.
850
- Schoof, C.: The effect of cavitation on glacier sliding, *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 461, 609–627, <https://doi.org/10.1098/rspa.2004.1350>, publisher: Royal Society, 2005.
- Schoof, C.: Ice sheet grounding line dynamics: Steady states, stability, and hysteresis, *Journal of Geophysical Research: Earth Surface*, 112, <https://doi.org/10.1029/2006JF000664>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2006JF000664>, 2007.
- 855 Schroeder, D. M., Blankenship, D. D., and Young, D. A.: Evidence for a water system transition beneath Thwaites Glacier, West Antarctica, *Proceedings of the National Academy of Sciences*, 110, 12 225–12 228, <https://doi.org/10.1073/pnas.1302828110>, publisher: Proceedings of the National Academy of Sciences, 2013.

- Schroeder, D. M., Blankenship, D. D., Young, D. A., Witus, A. E., and Anderson, J. B.: Airborne radar sounding evidence for deformable sediments and outcropping bedrock beneath Thwaites Glacier, West Antarctica, *Geophysical Research Letters*, 41, 7200–7208, <https://doi.org/10.1002/2014GL061645>, eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/2014GL061645>, 2014.
- 860 Seroussi, H., Nowicki, S., Payne, A. J., Goelzer, H., Lipscomb, W. H., Abe-Ouchi, A., Agosta, C., Albrecht, T., Asay-Davis, X., Barthel, A., Calov, R., Cullather, R., Dumas, C., Galton-Fenzi, B. K., Gladstone, R., Golledge, N. R., Gregory, J. M., Greve, R., Hattermann, T., Hoffman, M. J., Humbert, A., Huybrechts, P., Jourdain, N. C., Kleiner, T., Larour, E., Leguy, G. R., Lowry, D. P., Little, C. M., Morlighem, M., Pattyn, F., Pelle, T., Price, S. F., Quiquet, A., Reese, R., Schlegel, N.-J., Shepherd, A., Simon, E., Smith, R. S., Straneo, F., Sun, S.,
- 865 Trusel, L. D., Van Breedam, J., van de Wal, R. S. W., Winkelmann, R., Zhao, C., Zhang, T., and Zwinger, T.: ISMIP6 Antarctica: a multi-model ensemble of the Antarctic ice sheet evolution over the 21st century, *The Cryosphere*, 14, 3033–3070, <https://doi.org/10.5194/tc-14-3033-2020>, publisher: Copernicus GmbH, 2020.
- Smith-Johnsen, S., Fleurian, B. d., and Nisancioglu, K. H.: The role of subglacial hydrology in ice streams with elevated geothermal heat flux, *Journal of Glaciology*, 66, 303–312, <https://doi.org/10.1017/jog.2020.8>, publisher: Cambridge University Press, 2020.
- 870 Stearns, L. A., Smith, B. E., and Hamilton, G. S.: Increased flow speed on a large East Antarctic outlet glacier caused by subglacial floods, *Nature Geoscience*, 1, 827–831, <https://doi.org/10.1038/ngeo356>, publisher: Nature Publishing Group, 2008.
- Tsai, V. C., Stewart, A. L., and Thompson, A. F.: Marine ice-sheet profiles and stability under Coulomb basal conditions, *Journal of Glaciology*, 61, 205–215, <https://doi.org/10.3189/2015JoG14J221>, publisher: Cambridge University Press, 2015.
- Weertman, J.: On the Sliding of Glaciers, *Journal of Glaciology*, 3, 33–38, <https://doi.org/10.3189/S0022143000024709>, publisher: Cambridge University Press, 1957.
- 875 Weertman, J.: Stability of the Junction of an Ice Sheet and an Ice Shelf, *Journal of Glaciology*, 13, 3–11, <https://doi.org/10.3189/S0022143000023327>, publisher: Cambridge University Press, 1974.
- Zoet, L. K. and Iverson, N. R.: A slip law for glaciers on deformable beds, *Science*, 368, 76–78, <https://doi.org/10.1126/science.aaz1183>, publisher: American Association for the Advancement of Science, 2020.