

Single field-of-view sounder atmospheric product retrieval algorithm: establishing radiometric consistency for hyper-spectral sounder retrievals

5 Wan Wu¹, Xu Liu¹, Liqiao Lei², Xiaozhen Xiong¹, Qiguang Yang², Qing Yue³, Daniel K. Zhou¹, Allen M. Larar¹

¹NASA Langley Research Center, Hampton, VA 23682, USA

²Science Systems and Applications, Inc., Hampton, VA23666, USA

³Jet Propulsion Laboratory, California Institute of Technology, Pasadena, CA 91109, USA

Correspondence to: Wan Wu (wan.wu@nasa.gov)

10 **Abstract.** The Single Field-of-view (SFOV) Sounder Atmospheric Product (SiFSAP) retrieval algorithm has been developed to address the need to retrieve high spatial resolution atmospheric data products from hyper-spectral sounders and ensure the radiometric consistency between the retrieved properties and measured spectral radiances. It is based on an integrated optimal estimation inversion scheme that processes data from the satellite based synergistic microwave (MW) and infrared (IR) spectral measurements from advanced sounders. The retrieval system utilizes the principal component radiative transfer model
15 (PCRTM) which performs radiative transfer calculations monochromatically and includes accurate cloud scattering simulations. SiFSAP includes temperature, water vapor, surface skin temperature and emissivity, cloud height and microphysical properties, and concentrations of essential trace gases for each SFOV at a native instrument spatial resolution. Error estimations are provided based on a rigorous analysis for uncertainty propagation from the Top-Of-Atmosphere (TOA) spectral radiances to the retrieved geophysical properties. As a comparison, the spatial resolution for the traditional hyper-
20 spectral sounder retrieval products is much coarser than the native resolution of the instruments due to common use of the ‘cloud clearing’ technique to compensate for the lack of cloud scattering simulation in the forward model. The degraded spatial resolution in traditional cloud-clearing sounder retrieval products limits their applications for capturing meteorological or climate signals at finer spatial scales. Moreover, rigorous uncertainty propagation estimation needed for long-term climate trend studies cannot be given due to the lack of direct radiative transfer relationships between the observed TOA radiances and
25 the retrieved geophysical properties. With advantages of the higher spatial resolution, the simultaneous retrieval of atmospheric, cloud, and surface properties using all available spectral information, and the establishment of ‘radiance closure’ in the sounder spectral measurements, the SiFSAP provides additional information needed for various weather and climate studies and applications using sounding observations. This paper gives an overview of SiFSAP retrieval algorithm, and assessment of SiFSAP atmospheric temperature, water vapor, clouds, and surface products derived from the Cross-track
30 Infrared Sounder (CrIS) and Advanced Technology Microwave Sounder (ATMS) data.

1. Introduction

Since the launch of the first space-borne hyper-spectral infrared (IR) sounder, the Atmospheric Infrared Sounder (AIRS), the value of spectrally-resolved IR measurements for weather forecasting (LeMarshall et al., 2006, Chahine et al., 2006, Jones et al., 2012), environmental monitoring (Chahine et al., 2008, Warner et al., 2017, Ribeiro et al., 2018, Nalli et al., 2020), and the study of climate forcing and feedbacks (Gettelman and Fu, 2018, McCoy et al., 2019, Liu et al., 2018) has been widely recognized. Hyper-spectral IR sounders like AIRS, Cross-track Infrared Sounder (CrIS), and the Infrared Atmospheric Sounding Interferometer (IASI) measure the outgoing longwave radiation using thousands of spectral channels. They are designed to achieve high vertical resolution sounding of atmospheric temperature and humidity profiles, to provide spectral information for the retrieval of cloud phase, height, and microphysical properties, and to capture spectral signatures of key trace gases. Multiple operational retrieval algorithms have been developed to generate Level-2 products of geophysical properties from Level-1 spectral radiance data. Examples of operational algorithms include the regression based algorithms such as the dual-regression algorithm (Smith et al., 2012, Smith and Weisz, 2017), the physical algorithms such as the Climate Heritage AIRS Retrieval Technique (CHART, Susskind et al., 2017), the Community Long-term Infrared Microwave Combined Atmospheric Product System (CLIMCAPS, Smith and Barnet, 2019), and the NOAA-Unique Combined Atmospheric Processing System (NUCAPS, Barnet, 2021), and the hybrid algorithms that perform physical retrieval for clear sky cases and regression for cloudy sky retrievals, e.g., the Level 2 IASI Product Processing Facility (PPF, August et al., 2012). There are ongoing efforts to exploit the use of hyper-spectral sounder measurements for new applications with requirements that have yet to be met by the operational sounder products mentioned above. The limits on the applications of these Level-2 products come from two perspectives: the degradation of spatial resolution as compared with the native resolution of the instruments and the lack of radiative closure between the retrieved geophysical properties and the TOA spectral measurements. Specifically, operational Level-2 data products from physical retrieval schemes including CHART (Susskind et al., 2017), CLIMCAPS (Smith and Barnet, 2019), NUCAPS (Barnet et al., 2021) uses 3×3 IR sounder field of views (FOVs) (along track \times across track) to construct a ‘cloud-cleared’ single spectrum that is reregistered with one sounder field of regard (FOR). As a result, the spatial resolution of the Level-2 properties is reduced by a factor of 3, i.e. 9 times less retrieved data. The degradation of spatial resolution limits the applications of these operational sounder products in various studies, such as tracing the source and propagation of gravity waves (Sato et al., 2016, Ern et al., 2017, Perrett et al., 2021), studying the impact of convection on Planetary Boundary Layer (PBL) thermodynamics (Elsaesser et al., 2019), and constructing vertical profiles of winds using temperature, humidity, and ozone profiles, etc. As compared with cloud-clearing based results, existing SFOV products (e.g. dual-regression and IASI PPF for cloudy-sky cases) are beneficial for data assimilation and now- and forecasting operations because of the higher spatial resolution. Smith (et al., 2020) have demonstrated that combining multiple polar overpasses of IASI and CrIS dual-regression retrieval with geostationary satellite Advanced Baseline Imager retrieval to improve not only the spatial resolution but also the temporal resolution of hyperspectral retrievals. Those retrieval schemes do not use optimal estimation based physical retrieval methodology and therefore do not establish radiative closure by their nature.

Establishing radiative closure, i.e. the radiometric consistency of the TOA spectra from radiative forward modelling using
65 retrieved geophysical properties with respect to the observations, is critical to studies of climate trends and anomalies. The
accuracy of climate trends derived from hyper-spectral IR observations depends on the radiometric accuracy of the
measurements and a rigorously defined relationship that links the measurements to the climate variables of interest (e.g. Liu
et al., 2017). The closure in physical retrieval schemes including CHART, CLIMCAPS, NUCAPS and the hybrid IASI PPF
can only be established for clear sky observations which just account for a small percentage of the global measurements.
70 Without including cloud scattering in the forward simulations, the impact of radiometric uncertainty on the retrieved climate
variables cannot be directly characterized. Estimation for radiometric errors and/or discontinuities and the corresponding
impact on climate variables retrieved is critical for the construction of long-term climate anomalies and/or trends data record.
From this perspective, a physical retrieval algorithm that establishes radiative closure by simulating cloud scattering in the
radiative transfer process is more suitable to produce accurate, long-term climate data records. Therefore, there is a growing
75 demand to develop SFOV physical retrieval schemes for hyper-spectral sounder data applications. The SFOV physical retrieval
methodology was first introduced to process airborne campaign data from the National Airborne Sounder Testbed-
Interferometer (NAST-I) onboard the NASA suborbital ER-2 aircraft (Cousins and Smith, 1997). Atmospheric profiles
together with cloud microphysical properties and surface properties can be retrieved under all sky conditions (Zhou et al.,
2005, 2007, Liu et al., 2007). The study of using SFOV methodology for satellite based hyper-spectral IR sounder
80 measurements has been eventually carried out (Liu et al., 2009, Zhou et al., 2009, Wu et al., 2017, Irion et al., 2018, DeSouza-
Machado et al., 2018). As the SFOV methodology matures, its operational application for hyper-spectral IR sounder missions
has become very promising.

The SiFSAP retrieval algorithm has been developed to supplement other operational products by sustaining the hyperspectral
sounder's spatial resolution and establishing the radiative closure. The principal component radiative transfer model (PCRTM,
85 Liu et al., 2006) is used for the forward simulation of the hyper-spectral IR sounder spectra in the SiFSAP system. PCRTM
uses empirical orthogonal functions (EOFs) to compress the spectral information so that the complete spectrum of hyper-
spectral sounder measurements from the full set of channels can be efficiently used. It facilitates an accurate multiple cloud
scattering calculation by using lookup tables constructed via 32-stream Discrete Ordinates Radiative Transfer (DISORT)
simulations (Stamnes et al., 1988). The SiFSAP algorithm simultaneously retrieves profiles of temperature, moisture, and trace
90 gases of interest, surface properties, and cloud parameters including visual optical depth, particle size, phase, and height. The
solution is obtained by fitting the TOA spectrum for each single FOV observation via an iterative minimization process
following the optimal estimation method (Liu et al., 2007, Liu et al., 2009, Wu et al., 2017). Compared to other retrieval
algorithms, the radiative relationships between the retrieved geophysical properties and the measured TOA radiances are
rigorously and consistently defined for both clear and cloudy sky conditions in the SiFSAP scheme, therefore the radiative
95 closure is established.

Leroy et al. (2018) found that erroneous priors used in AIRS retrievals introduce systematic biases in the anomalies of
stratospheric temperature over Antarctica. Using stringent *a priori* reduces the uncertainty in individual retrievals but can make

the results more prone to systematic errors if *a priori* is not properly established. The SiFSAP algorithm uses the climatology-based *a priori* for two important considerations: 1) uncertainty of individual measurements is less a concern as compared with systematic bias in long-term climate variability studies, and 2) the climatological *a priori* constraint constructed from globally distributed data maximizes the information determined from the radiances and minimizes the impact from *a priori* errors. The final solutions of SiFSAP usually deviate significantly from the first guess, i.e., the global mean of the climatological data, used in the retrieval (see Figure 1). This is very different from CHART and CLIMCAPS that constrain the results around the first guess, e.g., the deviation of retrieved temperature from its first guess value is less than 1 K (Wang et al., 2020, Yue et al., 2020). Avoiding the use of auxiliary data products as prerequisites enables the SiFSAP system to meet the primary latency requirements imposed on near real-time algorithms. Therefore, the SiFSAP algorithm is suitable for both climate and weather applications.

This paper gives a detailed introduction on the data content, the data processing scheme, and the physical retrieval methodology of SiFSAP. Validation of retrieval performance for SiFSAP key products is also presented.

2. Overview of the data content and the retrieval system

The SiFSAP system is designed to process data from major hyper-spectral sounders including AIRS, IASI and CrIS. It can be easily extended to process future sounders like IASI-Next Generation once the requisite PCRTM module is correspondingly updated. The system depends upon PCRTM's capability to simulate various hyper-spectral sounder measurements using a common forward model module. Previous forward model comparison studies have validated PCRTM's capability in simulating hyper-spectral sounder measurements with a high degree of radiometric fidelity (Aumann et al., 2018). Figure 2 demonstrates the use of SiFSAP to simulate sample TOA spectral radiances measured by three major hyper-spectral sounder instruments: IASI, CrIS, and AIRS. Benefiting from its modular design, the SiFSAP system is capable of using the collocated microwave (MW) observations to supplement IR retrievals under thick cloud conditions. Currently the SiFSAP system provides three retrieval schemes to meet different application needs based on the observation data availability: IR-only, MW-only, and IR+MW retrievals. The MW retrieval unit uses the Community Radiative Transfer Model (CRTM) to simulate the measurements by major MW sounders including the Advanced Technology Microwave Sounder (ATMS), the Advanced Microwave Sounding Unit (AMSU-A), and the Microwave Humidity Sounder (MHS). Details about CRTM can be found in CRTM user's guide (Han *et al.*, 2020) and its general introduction paper (Liu *et al.*, 2012). SiFSAP products are generated using the synergistic IR+MW retrievals with IR and MW spectra being fitted simultaneously during the combined retrieval process. SiFSAP products include temperature, water vapor, and trace gas profiles at 98 pressure levels, surface skin temperature, IR surface emissivity at native mono-frequency bins defined by the PCRTM, MW surface emissivity for all MW sounder channels, effective cloud top pressure, cloud optical depth (at 550 nm), cloud particle size, and cloud liquid water content. Table 1 lists the major geophysical properties included in SiFSAP.

Figure 3 illustrates the flow diagram of the SiFSAP system. The SiFSAP processing starts with a pre-processor that loads the Level-1B data of the IR and MW sounders and the surface pressure values from the National Centers for Environmental

Prediction (NCEP) Global Forecast System (GFS) model fields. The MW sounder data are spatially resampled to overlap with IR sounder observations of single FOVs via nearest neighbour gridding. The GFS surface pressure data are interpolated in time and space to the IR sounder footprints. At the synergetic data processing stage, the SiFSAP system includes three modular units: the initialization unit, the synergetic retrieval unit, and the post-processing unit. The initialization unit loads static data bases including PCRTM and CRTM forward model parameters, lookup tables (LUTs), climatological background fields, *a priori* covariance matrices, measurement uncertainties covariance matrices, and pre-trained spectral bias correction coefficients. The synergetic retrieval unit includes a two-step process: MW only retrieval followed by IR + MW combined retrieval. The temperature, water vapor, and surface skin temperature from the first step MW-only retrieval, once passed the MW radiance convergence test, are used as the first guess for the combined IR+MW retrieval. If the MW retrieval does not pass the first step convergence test, the climatological first guess is used for the combined retrieval. If the geophysical properties retrieved for one FOV pass the quality control (QC), they are used as the first guess values for the next FOV. Again, the climatological first guess will be used for the next FOV if the retrieval of the current FOV does not converge. The MW and the IR+MW combined retrieval results are passed to the QC and post-processing unit where QC flags are assigned, auxiliary data such as the tropopause height and the surface temperature are derived based on the retrieved atmospheric parameters, and the results are written to output files.

3. Inversion Methodology

3.1 Optimal Estimation

Both the MW-only retrieval and the IR + MW combined retrieval are optimal estimation-based physical inversion processes. They are used to find the geophysical state vector \mathbf{x} for a given measurement \mathbf{r} with

$$\mathbf{r} = F(\mathbf{x}) + \epsilon, \quad (1)$$

where F represents the radiative transfer forward model, ϵ represents the total error term that includes contributions from the measurement error, the forward model error, and the representation error. A solution \mathbf{x} is given by minimizing the cost function J , being defined as

$$J(\mathbf{x}) = (\mathbf{r} - F(\mathbf{x}))^T \mathbf{S}_\epsilon^{-1} (\mathbf{r} - F(\mathbf{x})) + (\mathbf{x} - \mathbf{x}_a)^T \mathbf{S}_a^{-1} (\mathbf{x} - \mathbf{x}_a). \quad (2)$$

where \mathbf{S}_ϵ is the covariance of the error term ϵ . \mathbf{X}_a and \mathbf{S}_a are the background and covariance of *a priori* constraint in the geophysical state vector domain. The nonlinearity of the radiative transfer function defined in Equation (1) requires an iterative minimization process to find a solution. Following the Gauss-Newton method suggested by Rodgers [2000], a solution can be given as,

$$\mathbf{x}_{n+1} - \mathbf{x}_n = (\mathbf{K}^T \mathbf{S}_\epsilon^{-1} \mathbf{K} + \mathbf{S}_a^{-1})^{-1} (\mathbf{K}^T \mathbf{S}_\epsilon^{-1} (\mathbf{r} - \mathbf{r}_n) - \mathbf{S}_a^{-1} (\mathbf{x} - \mathbf{x}_a)). \quad (3)$$

Here \mathbf{K} is the Jacobian, i.e., the first derivative which defines the sensitivity of the measurement to the input parameters,

$$\mathbf{K} = \left. \frac{dF(\mathbf{x})}{d\mathbf{x}} \right|_{\mathbf{x}=\mathbf{x}_n}. \quad (4)$$

The Gauss-Newton approach works well when the degree of nonlinearity is small. The step size of the iterative process must be optimally controlled to ensure it is still within the linear region. This is achieved in SiFSAP following the method described in Wu et al. 2017 and Lynch *et al.*, 2009. The method uses the radiance residual between the observation and simulation at each step as a proxy to control the step size. Specifically, the solution is obtained by,

$$\mathbf{x}_{n+1} - \mathbf{x}_n = (\mathbf{K}^T \mathbf{S}_r^{-1} \mathbf{K} + \mathbf{S}_a^{-1})^{-1} (\mathbf{K}^T \mathbf{S}_r^{-1} (\mathbf{r} - \mathbf{r}_n) - \mathbf{S}_a^{-1} (\mathbf{x} - \mathbf{x}_a)). \quad (5)$$

\mathbf{S}_r provides the constraint in the measurement domain that is adjusted during each step of the minimization approach. The inversion is known to be an ill-posed problem. The dimension reduction of inversion matrix is usually needed to stabilize the solution and reduce the computational cost. The dimension reduction can be done in both the measurement vector \mathbf{r} and the geophysical state vector \mathbf{x} domain. While MW sounders have limited number of channels (AMSU - 15 channels; MHS - 5 channels; ATMS - 22 channels), the dimension reduction is critical to process information from hyper-spectral IR sounders' thousands of spectral channels. In NUCAPS, CHART and CLIMCAPS, only a few hundred selected IR channels are used for the retrieval (due to processing constraints in forward model and inverse model calculations). In SiFSAP, the synergetic measurement vector \mathbf{r} for the IR+MW retrieval consists of the principal component (PC) scores of IR radiances and the channel brightness temperatures (BTs) of MW measurements:

$$\mathbf{r} = [p_1 \cdots p_{N_{ir}}, r_1 \cdots r_{N_{mw}}] \quad (6)$$

where p denotes the PC scores of IR radiances with N_{ir} being the total number of EOFs used and r_i denotes the MW BTs of N_{mw} channels. The use of PC representation allows us to use all spectral channels of IR sensors and filter out instrument random noise. The solution \mathbf{x} includes all retrieved parameters that are used to quantify atmospheric vertical profiles, cloud information, and surface properties in the SiFSAP system. The dimension of the state vector \mathbf{x} also needs to be limited to reduce the computational cost and ensure the numerical stability. For example, atmospheric vertical profiles are usually not directly represented as level (or layer) quantities on a high vertical resolution pressure grid in a retrieval system. Retrieval algorithms including NUCAPS, CHART and CLIMCAPS use a linear combination of pre-defined trapezoidal functions to represent vertical profiles. The principal component (PC) analysis is used to reduce the dimension of the geophysical state vector \mathbf{x} in SiFSAP. Atmospheric profiles and surface emissivity spectra are projected onto a set of pre-computed EOFs. Table 2 lists the dimension of measurement and geophysical state vectors used in SiFSAP. Both the IR+MW and MW only retrieval follow the same minimization scheme to find the solution of \mathbf{x} in the EOF domain. The dimensions of \mathbf{r} , \mathbf{S}_r , and \mathbf{K} are $1 \times N_{mw}$, $N_{mw} \times N_{mw}$, $N_{mw} \times N_x$ for the first-stage MW only retrieval, and $1 \times (N_{mw} + N_{ir})$, $(N_{mw} + N_{ir}) \times (N_{mw} + N_{ir})$, $(N_{mw} + N_{ir}) \times N_x$ for the second-stage IR+MW combined retrieval. Here N_x is the length of the geophysical state vector \mathbf{x} . Averaging kernels for retrieved atmospheric profiles are provided in SiFSAP. The vertical resolution of the retrieved atmospheric temperature, moisture and other trace gases can be characterized using the averaging kernel,

$$\mathbf{A} = (\mathbf{K}^T \mathbf{S}_r^{-1} \mathbf{K} + \mathbf{S}_a^{-1})^{-1} \mathbf{K}^T \mathbf{S}_r^{-1} \mathbf{K}. \quad (7)$$

Averaging kernels are also used to derive the Degrees of Freedom (DOF) of the signal,

$$d_s = \text{tr}(\mathbf{A}), \quad (8)$$

195 a scalar used to evaluate the vertical information content provided by the measurements. Error estimations for each retrieved variable are also included in SiFSAP output. Following the definition by Rodgers (1990), we calculate the total retrieval error covariance matrices:

$$\mathbf{S}_x = (\mathbf{K}^T \mathbf{S}_r^{-1} \mathbf{K} + \mathbf{S}_a^{-1})^{-1} \quad (9)$$

All geophysical variables are simultaneously and directly retrieved in the SiFSAP scheme. This avoids the complicated characterization of error propagation needed in sequential retrieval algorithms, e.g., CLIMCAPS (Smith and Barnett, 2019). The direct retrieval of state vector related to cloud properties also avoids the uncertainty introduced by ‘cloud clearing’, which is difficult to quantify and susceptible to the quality of the atmospheric state used to derive a clear-sky TOA spectrum for cloud clearing.

The overall QC flags are determined based on the cost function zeta (ζ) that characterizes how well the simulated radiance using forward model fits the observed radiances. It is calculated as:

$$\zeta = (\mathbf{r}^{simu} - \mathbf{r}^{obs})^T \mathbf{S}_\epsilon^{-1} (\mathbf{r}^{simu} - \mathbf{r}^{obs}) \quad (10)$$

The zeta threshold values for MW only and IR+MW retrievals are empirically assigned to achieve an optimized balance between retrieval accuracy and yield rate. The ζ for the retrieval of trace gas species are calculated using the selected IR sounder channels in the corresponding absorption regions.

210 3.2 A priori Constraint and Representation of Geophysical Variables

A priori is best used in the retrieval to supplement for the information that cannot be provided by the measurements. Depending on the information content that can be obtained from IR or MW sounder data, different *a priori* constraints are used for different retrieval variables. Climatological backgrounds and error covariances used for temperature and water vapor retrieval in the SiFSAP system are derived from a combined dataset with more than thirty thousand globally-distributed atmospheric profiles (Liu et al, 2009 and Wu et al 2017). These profiles include European Centre for Medium-Range Weather Forecasting (ECMWF) reanalysis data, radio sonde measurements, and satellite-based observations. The atmospheric profiles are represented by level quantities on a 98 pressure level grid from the surface to TOA in the retrieval system. The EOFs corresponding to the temperature and water vapor state vectors are derived from the background error covariance matrices. The surface level index, which is determined by the surface pressure value, can be quite different for different land regions while remaining relatively constant over ocean. Therefore, EOFs and *a priori* of temperature and water vapor are constructed as over-land and over-ocean groups. A conventional EOF transformation is used to represent temperature profiles in the form,

$$X_i^{Temp} = \sum_{j=1}^{98} U_{i,j}^{Temp} \cdot (P_j^{Temp} - \overline{P^{Temp}}), \quad (11)$$

where X_i represents the i th EOF coefficient of a corresponding temperature profile P , which has an unit of Kelvin, with the climatological background \bar{P} being given as the mean value of the profiles included in generating the covariance matrix, and U_i is the i th significant eigenvector. The water vapor EOFs are built as the logarithm of water vapor profiles,

$$X_i^{H_2O} = \sum_{j=1}^{98} U_{i,j}^{H_2O} \cdot (\log(P_j^{H_2O}) - \overline{\log(P^{H_2O})}). \quad (12)$$

EOFs of ozone profiles are also constructed using globally distributed data but separated as over-land and over-ocean groups, similar to temperature and water vapor. The absolute value of ozone concentration in the tropospheric region is very small compared with that in the stratospheric region. In order to better represent the variational feature of ozone profiles in the tropospheric region, the ozone EOFs are built as functions of the square root of ozone profiles:

$$X_i^{O_3} = \sum_{j=1}^{98} U_{i,j}^{O_3} \cdot (\sqrt{P_j^{O_3}} - \sqrt{P^{O_3}}). \quad (13)$$

Moreover, *a priori* for ozone retrieval is stratified according to latitude and tropopause height to better constrain the retrieval in the regions where the ozone signal is weak. *A priori* for Ozone is generated using a synergistic dataset that combines data from the Model for Ozone And Related chemical Tracers (MOZART), ozone sonde measurements, the European Centre for Medium-Range Weather Forecasts (ECMWF) analysis, and the Modern-Era Retrospective analysis for Research and Applications (MERRA). The synergistic dataset includes more than 400,000 ozone profiles and collocated temperature profiles. Those profiles are globally distributed and provide adequate coverage for seasonal variabilities. The ozone and temperature profiles are binned into 18 10-degree latitudinal zones with each zonal group being further stratified into 13 tropopause-dependent sub-groups. The tropopause height values are derived as the lowest level at which the temperature lapse rate decreases to 2K/km or less. To further cover the seasonal variation characteristics of the ozone climatology, a linear regression relationship between the ozone profiles and the collocated temperature profiles are derived for each latitude-tropopause sub-group. The *a priori* covariance of each sub-group are derived as the regression-prediction uncertainty using the temperature and ozone data and saved as a static database. With a given tropopause height and a latitude, an individual retrieval is first assigned to a sub-group so that the *a priori* covariance to be used in the SiFSAP system can be directly loaded. The first-guess values used for the ozone retrieval are obtained using the pre-established regression relationship of the assigned sub-group and the temperature profiles from the first-step MW retrieval. The SiFSAP system provides the option of using the tropopause height from either the real-time forecast data provided by National Centers for Environmental Prediction (NCEP) or that derived using temperature profiles from the first step MW retrieval. Both options are well suited for near-real-time applications. The latitude-referenced ozone climatology has been adopted as in CHART (Susskind et al. 2017) and NUCAPS (Barnet. et al. 2021), while the tropopause-referenced ozone climatology is also used for ozone retrieval studies using AIRS measurements (Wei et al., 2010) and that planned for the measurements by Tropospheric Emissions: Monitoring of Pollution (TEMPO) satellite (Johnson et al., 2018, Yang et al., 2019). The combined latitude and tropopause information provides a quality estimate of the ozone variability that changes latitudinally and correlates with the synoptic-scale meteorological features of the tropopause.

Carbon monoxide (CO) EOFs are also built on the logarithm of profiles. Carbon dioxide is retrieved as averaged column density values. Methane (CH₄) and Nitrous Oxide (N₂O) are similar in a way that their concentrations are relatively stable below the tropopause and decrease with height via various chemical processes in the stratosphere. Since CH₄ and N₂O are well mixed in the troposphere and their mixing ratios decrease dramatically above tropopause due to chemical reactions and photolysis, their ratio profiles (*P*) can be represented as a sigmoid-like function of altitude *h* to a good approximation,

$$P(h) = \frac{P_0}{1 + e^{-\left(\frac{h-h_0}{a_0}\right)}}, \quad (14)$$

where P_0 defines the near surface mixing ratio, h_0 defines the dependence of vertical profiles on tropopause height, and a_0 determines the rate of decrement in the stratosphere. In this way, the retrieval of CH₄ and N₂O profiles is constrained to a solution defined by three parameters. The atmospheric distributions of CH₄ and N₂O are rather uniform zonally but exhibit a gradient with latitude. P_0 , h_0 , and a_0 values for given individual profiles are obtained by fitting the vertical profiles according to the function defined by equation (14). The first-guess values and the corresponding covariance constraints for P_0 , h_0 , and a_0 are statistically obtained using a MOZART database that includes globally distributed CH₄ and N₂O vertical profiles of 12 different months. They are further stratified into 18×13 latitude-tropopause dependent groups. This is similar to the strategy adopted to construct the ozone *a priori* except that there is a lack of correlation between CH₄ or N₂O profiles and the collocated temperature profiles so that the mean values of specified groups are used as the first guess values instead. The first guess of surface mixing ratio P_0 for each individual retrieval is further adjusted according to the globally averaged, monthly mean atmospheric methane and nitrous oxide concentration determined from the observation network of various air sampling sites whose locations range in latitude from 90-degrees-S to 82-degrees-N (Dlugokencky et al., 1994).

The EOFs for MW surface emissivity over ocean are built from simulated emissivity spectra using the Wilheit (1979) model and an improved fast microwave water emissivity model FASTEM (Liu et al., 2011). The Masuda model (Masuda et al. 1988) and surface-leaving radiance model (Nalli et al. 2008a, 2008b) are used for the simulation of IR surface emissivity samples over ocean. The simulations use randomly generated wind speed and surface temperature data within a realistic dynamic range. The EOFs for MW land emissivity spectra are obtained using English's semi-empirical model (Hewison and English, 1999). The EOFs for IR land surface emissivity are constructed using data from the ECOSystem Spaceborne Thermal Radiometer Experiment on Space Station (ECOSTRESS) spectral emissivity databases (Meerdink, et al. 2019, Baldridge et al. 2009). For both MW and IR retrievals, the surface emissivity function

$$F(\varepsilon) = \log \left(\log \left(\frac{\varepsilon_{max} - \varepsilon}{\varepsilon_{max} - \varepsilon_{min}} \right) \right) \quad (15)$$

is introduced to constrain the retrieved surface emissivity within a range between ε_{max} and ε_{min} , which are empirically based on best knowledge of surface emissivity (Zhou et al. 2010).

Figures 4-6 demonstrate the representation of sample temperature, water vapor, ozone and carbon monoxide profiles using different numbers of EOFs as specified in Table 2. The temperature and water vapor profile samples used for the validation are from selected ECMWF reanalysis profiles. Ozone and carbon monoxide profiles are randomly selected from the synthesized datasets used to build *a priori* constraints for the retrieval, including data from sonde measurements, reanalysis databases, and geochemical model results. Along with the plots that illustrate the distribution of true profiles, the EOF representation errors are quantified in terms of their mean bias and root-mean-square (RMS) values. Figure 7 demonstrates the representation of sample N₂O and CH₄ vertical profiles from MOZART using the sigmoid representation functions.

3.3 Bias correction

As compared with the traditional IR+MW algorithms that rely on cloud-clearing, the SiFSAP algorithm fits the TOA radiance directly and maximizes the contribution from the measurement-provided information. The accuracy of the retrieval critically depends on how well the forward model errors are addressed. The correction for forward model errors (here referred as ‘bias correction’) in the SiFSAP scheme includes two parts: 1) the correction for the channel brightness temperatures of MW sounder measurements; 2) the correction for the hyperspectral measurements of IR sounders. Forward model errors, which can be generalized as the difference between the simulated radiance and the observations, may arise from the spectroscopy inaccuracies, and/or the fast parameterizations used in the radiative transfer models. In an optimal estimation-based retrieval scheme, forward model errors can be corrected by subtracting the systematic bias (the mean value of ϵ defined in Equation 1) from the observation and accommodating the uncertainty in the error covariance of radiance residuals after the subtraction (S_ϵ defined in Equation 6).

Estimation for the systematic bias and the error covariance is done by comparing the observations with radiances computed by the forward models using the best estimate of the truth as inputs. A common practice is to use the reanalysis data which are spatiotemporally matched to the selected ensemble of satellite observations as the truth of inputs. Data from ECMWF reanalysis has been used to evaluate the simulation of MW sounders like ATMS (Zhou, Y. and Grassotti, C. 2020) and MHS (Schulte et al. 2019). Aumann et al. (2018) used ECMWF data to evaluate the simulation of hyperspectral sounder measurements under cloudy sky conditions using various radiative transfer models (RTMs) with cloud scattering simulation capability, including PCRTM. All RTMs fit reasonably well in the 11- μm atmospheric window area. PCRTM has the smallest bias among the 6 RTMs for the cloudy sky observations at 900 cm^{-1} and provides best match with observed AIRS radiances in shortwave IR spectral region where the solar scattering of clouds are important.

MW sounder measurements are known to have systematic, scan-angle dependent errors due to effects of antenna side-lobes not being adequately accounted for in the calibration process. The differences between measured and computed spectra are usually scene dependent. Therefore, dynamic bias correction schemes for MW measurements have been implemented in the numerical weather prediction (NWP) data assimilation (DA) systems (Zhu et al. 2014, Dee et al. 2009) and the physical retrieval systems (Schulte et al. 2019). The dynamic bias correction schemes rely on the pre-trained relationship, being either a regression-based linear or neural network-based nonlinear scheme, between the radiance bias and the predictors. The predictors include satellite angles, atmospheric and surface properties collocated with observations. Zhou and Grassotti (2020) studied the use of the ATMS brightness temperature (BT) as the major predictor in the Microwave Integrated Retrieval System (MiRS, <https://www.star.nesdis.noaa.gov/mirs>). BTs are used along with other observation angle and scene dependent predictors including latitude, cloud liquid water, total precipitable water, and surface skin temperature in the bias correction scheme. In the SiFSAP scheme, the MW bias corrections are stratified for different scan angles. Considering that the information about atmospheric and surface properties is already embedded in MW spectra, we choose the MW spectra as the

only predictor in order to facilitate the operation of the SiFSAP algorithm, especially for near-real-time data production. The bias prediction used for the MW sounder is implemented through the following equation:

$$325 \quad \epsilon_j^\theta = \sum_{i=1}^{N_{mw}} A_{ji}^\theta R_i^\theta, \quad (16)$$

where j and i are MW sounder channel index numbers; ϵ_j^θ is the scan angle dependent bias in brightness temperature of MW sounder channel j ; A_{ji}^θ is the regression prediction coefficient that links the bias to the MW channel measurement R_i^θ ; and A_{ji}^θ is trained using the least-square fit on the training sample. The matchup training samples of ϵ^θ and R^θ are constructed using collocated ECMWF data and MW sounder measurements from selected ‘focus’ days. ECMWF does not provide surface emissivity and accurate cloud information. Therefore, emissivity is tuned along with cloud properties within the constraint defined by the preconstructed *a priori*. The solutions that provide the best match to the observations are selected. The difference between R^θ and the corresponding fitted radiances (in BT) is the bias ϵ^θ . We filter out the outliers of the matchup samples where the absolute differences between the simulated MW brightness temperatures using reanalysis data and the observed ones are greater than a predetermined threshold. Figure 8 illustrates the scan-angle dependent bias of ATMS measurements onboard of Suomi National Polar-orbiting Partnership (SNPP) and NOAA-20 satellites, respectively. Figures 9 and 10 further demonstrate the probability density distribution of brightness temperature difference between the observations and the simulations for different ATMS channels. Figures 9 and 10 also show that the scene-dependent biases can be effectively corrected using the regression-prediction scheme. It is noted here that the global mean daily biases from the simulation cannot be characterized as static offsets. The magnitudes of those offsets for different days can be very different and therefore cannot be effectively corrected via a static offset subtraction.

The bias correction for the IR hyperspectral retrieval follows a regression-prediction approach similar to that for the MW retrieval. IR sounder measurements do not have antenna related, scan-angle dependent errors so that a unified bias correction is used for measurements at all satellite scan angles:

$$345 \quad \epsilon_j = \sum_{i=1}^{N_{eof}} A_{ji} R_i. \quad (17)$$

Here both the bias and radiances are represented in the EOF domain. N_{eof} is the number of EOFs used to represent the hyperspectral sounder radiances. Again, we need to fit surface spectral emissivity and cloud properties to minimize the differences between the simulated spectral radiances and the corresponding sample observations. The static bias correction term ϵ_j is small. What is critical here is the magnitude and the distribution of spectral fitting residuals, which define the error covariance used for the retrieval (\mathbf{S}_ϵ in Equation 2). Figure 11 plots the spectral error covariance used for the SNPP-CrIS retrieval.

4. Results and Assessment

4.1 Radiance Fitting Assessment

One important quality assessment factor for sounder retrieval products is how well the retrieved properties fit the radiance measurements. Providing the best fit to the measured TOA radiances is the first important indicator of the correct utilization of maximized information provided by the measurement. The capability of providing radiance ‘closure’ justifies the retrieval products’ application for climate monitoring. It is especially critical to ensure the traceable accuracy when the data from multiple sounder measurements like AIRS, CrIS and IASI are fused together to establish a long-term climate data record (Strow et al., 2021; Wu et al., 2020). Figure 12 shows the global mean spectral fitting residuals between the CrIS radiances from SiFSAP and the observations for January 14, 2016. This daily mean fitting residual is derived using ~90% of CrIS single FOV measurements of that day. The capability of fitting the single FOV measurements under cloudy sky conditions greatly facilitates the use of SiFSAP for climate studies that requires high spatial resolution and all-sky sampling.

4.2 Temperature and Water Vapor Profiles

The validation of temperature and water vapor profiles from SiFSAP has been done using results from selected testing days. Figures 13 and 14 plot the global mean and RMS values of the differences between the temperature and the water vapor retrieved from SNPP-CrIS/ATMS measurements during July 16th of 2017 and that from the collocated ECMWF data. The bias and RMS for the temperature difference are calculated as:

$$T_{\text{Bias}} = \text{mean}(T_{\text{SiFSAP}} - T_{\text{ECMWF}}), \quad T_{\text{RMS}} = \sqrt{\text{mean}((T_{\text{SiFSAP}} - T_{\text{ECMWF}})^2)}. \quad (18)$$

The bias and RMS for the water vapor are calculated as:

$$H_2O_{\text{Bias}} = \frac{\text{mean}(H_2O_{\text{SiFSAP}} - H_2O_{\text{ECMWF}})}{\text{mean}(H_2O_{\text{ECMWF}})} \times 100\%, \quad \text{RMS} = \frac{\sqrt{\text{mean}((H_2O_{\text{SiFSAP}} - H_2O_{\text{ECMWF}})^2)}}{\text{mean}(H_2O_{\text{ECMWF}})} \times 100\%. \quad (19)$$

We can see that above 10 km, temperature profiles from SiFSAP have a better than 1 K retrieval accuracy. The retrieval uncertainty becomes larger in the lower troposphere region, mostly due to the limited sensitivity of IR sounders to atmospheric profiles below thick clouds. The retrieval accuracy for profiles below clouds becomes more dependent on the retrieval accuracy of the MW sounders as clouds get thicker. As compared with over ocean retrievals, the relatively larger uncertainty in the land surface emissivity leads to a larger uncertainty in the near surface temperature retrieval. The relative error of water vapor retrieval is around 20% or smaller in the complete tropospheric region.

4.3 Surface emissivity

Figure 15 demonstrates sample land surface emissivity spectra retrieved from CrIS observations over different areas with different surface conditions. We can clearly see the strong spectral feature in the quartz reststrahlen band between 8 μm and 10 μm ($1000 \text{ cm}^{-1} \sim 1250 \text{ cm}^{-1}$) for samples in the desert and very different emissivity features for surfaces of soil and/or plants. Figure 16 compares the land surface emissivity at 11 μm of two selected days (January 14, 2016 and August 8, 2017)

with the Aqua MODIS daily emissivity from MOD21 Land Surface Temperature and Emissivity product (Hulley et al. 2016). The difference between subplots A2 and A1 illustrates the change of surface emissivity that reflects the seasonal change (January - August) of vegetation coverage. There is a clear correlation between the emissivity change and the vegetation coverage change shown in subplots C1 and C2 as the normalized difference vegetation index (NDVI). The NDVI values are extracted from MODIS/Terra Vegetation Indices Monthly L3 Global 0.05 Degree Climate Modeling Grid product (Didan and Huete, 2015). There is a noticeable emissivity difference between subplots A1 and A2, which can partly be explained by the change of snow coverage in this area from January to August in 2016 (shown in subplots D1 and D2). The snow coverage data are extracted from daily Level-3 (L3) MODIS/Aqua snow coverage data products that provides the percentage of snow-covered land observed daily within 0.05° (approx. 5 km) MODIS Climate Modeling Grid (CMG) cells (Hall and Riggs, 2021).

390 4.4 Trace gases: O₃, CO, CO₂, CH₄, N₂O

The SiFSAP atmospheric composition products include the retrieved volume mixing ratio of CO₂, O₃, CO, CH₄, N₂O at 98 vertical pressure level grids defined by the PCRTM algorithm. SiFSAP products include trace gas profiles for each sounder FOV, i.e., matching the native spatial resolution of hyperspectral sounder instruments. SiFSAP O₃ data have been used to study stratospheric intrusion (Xiong et al., 2022A) and cold air outbreaks (Xiong et al., 2022B). SiFSAP CO data have been used for process-oriented analysis of emission from large wildfires and air pollution transport studies (Xiong et al., 2022C). The validation and further developments of those atmospheric composition products have been an on-going effort. Sample validation studies are presented here to illustrate the overall performance of SiFSAP.

Figure 17 demonstrates the inter-comparison study of satellite-based CO observation on/around May 12th, 2020 between SiFSAP of SNPP/CrIS, Metop-B/IASI daily CO product, and CO data from the Measurement of Pollution in the Troposphere (MOPITT) on board the Terra satellite. IASI CO data are generated using the Fast Optimal Retrievals on Layers for IASI (FORLI) software (Hurtmans et al. 2012). IASI measures TOA spectral radiances between 645 and 2760 cm⁻¹ with a 0.25 cm⁻¹ spectral interval between adjacent channels. CO vertical profiles are retrieved using the spectral channel measurements between 2128 and 2206 cm⁻¹. As a comparison, SNPP/CrIS lacks the spectral coverage between 2128 and 2155 cm⁻¹ and only provides spectral measurement with a 0.625 cm⁻¹ spectral interval. However, the ultra-low instrument noise of CrIS in the CO absorption region improves the information content that allows the capture of key features of the source and sink climatology of CO. The spatial and vertical distribution of CO concentration from SiFSAP in the middle-to-upper troposphere region agree well with FORLI CO data, which also generally agree with the MOPITT CO data (NASA/LARC/SD/ASDC, 2000). MOPITT measures CO using the near-infrared (NIR) band near 2.3 μm and the thermal-infrared (TIR) band near 4.7 μm. As compared with the swath width of CrIS and IASI that is around 2200 km, the swath width of MOPITT observations is only around 640 km, which can only allow a global coverage of CO measurements on a weekly basis. Therefore, the MOPITT CO data of multiple days (from May 10th to May 14th, 2020) are plotted together to have a better global scale visualization. The total column amounts of SiFSAP CO from SNPP-CrIS agree better with FORLI data in terms of spatial distribution at global scale. IASI FORLI results give much larger total column amount than that from both

SNPP-CrIS SiFSAP and MOPITT. SNPP-CrIS SiFSAP CO data agree better with MOPITT data in terms of the scale of the
415 total column amount over high CO concentration areas, but there is an obvious difference in spatial distributions which cannot
be simply ascribed to the temporal difference between two observations. IR sensors are known to have limited sensitivity close
to the surface due to the generally low thermal contrast between the ground and the air above it. MOPITT CO product is
supplemented with enhanced surface CO mixing ratio from *a priori* based on the Community Atmosphere Model with
Chemistry (CAM-chem, Buchholz et al. 2019). Consequently, the spatial distribution of total column amount of MOPITT CO
420 is strongly correlated with the surface CO distributions, which is not the case in SNPP-CrIS SiFSAP and FORLI CO products.
The validation of the CAM-chem based *a priori* and its impact on the CO retrieval in the lower troposphere to surface region
needs to be further studied.

Figure 18 compares the total column of O₃ on September 19th, 2019 from SNPP-CrIS SiFSAP with that from SNPP-CrIS
CLIMCAPS, SNPP-OMPS (Jaross, G., 2017), and MetopB FORLI daily O₃ product. The ozone hole over the Antarctica region
425 is clearly captured by all products. It is noted here that IR sensors like CrIS, AIRS, and IASI are generally more sensitive to
the ozone distribution in the upper troposphere while ultraviolet measurements like OMPS are more sensitive to stratospheric
ozone. Both instruments can measure the tropospheric columns but lack vertical sensitivity in the troposphere (Fu et al. 2018).
The results from two products (SiFSAP and CLIMCAPS) using the same sounder measurements agree well over most of the
area.

430 Figures 17 and 18 show that the SiFSAP system works effectively under all sky conditions. As compared with FORLI that
only provides CO and O₃ data for cloud free or almost clear (with a less than 13% cloud fraction) observations (George et al.,
2009, Boynard et al., 2018), the capability of accounting for the cloud scattering in the SiFSAP algorithm ensures a much
higher retrieval yield rate. Although CLIMCAPS can retrieve CO for most of the observations under cloudy sky conditions, it
fails in area under overcast skies (shown as white area in Figures 17 and 18) because the lack of contrast between observations
435 of adjacent FOVs impose challenges on the implementation of the cloud clearing method.

Validation to CO₂, N₂O, and CH₄ from SiFSAP is very limited and remains to be completed in the near future. Therefore, these
products are still subject to more research and improvement.

4.5 Cloud properties

Cloud optical depth, particle size, and cloud height (represented by the cloud top temperature CTT) are simultaneously
440 retrieved along with other geophysical variables in the SiFSAP algorithm. Details about the cloud scattering model can be
found in previously published PCRTM and physical retrieval algorithm papers (Liu et al. 2006, Liu et al. 2007, Liu et al. 2009,
Wu et al. 2017). Cloud properties for one individual CrIS footprint are retrieved under the assumption of one effective single
layer with the cloud transmittance, reflectance, and emissivity defined by the optical depth and the particle size. Ice and water
clouds are discerned based on the overall spectral characteristics of the cloud emissivity (transmittance). In the iterative
445 retrieval process, both cloud phase options are tried and the one providing the best spectral fitting is saved as the solution.

Earlier simulation studies have shown that the cloud phase can be retrieved with a very high accuracy rate (>95%) if the hyperspectral feature of the ice and water clouds can be fully explored (Wu et al. 2017).

Cloud properties from hyper-spectral sounder measurements can be validated using the collocated imager observations like MODIS or VIIRS (e.g. Yue et al. 2022). The collocated SNPP-CrIS and VIIRS cloud data (Eric Fetzer et al., 2022) based on the VIIRS Atmosphere L2 Cloud Properties Product (Platnick et al., 2017, Heidinger and Li, 2017) is used to validate the cloud properties from SiFSAP of SNPP CrIS. Since VIIRS does not have IR channels in the 13 μm CO₂ absorption band, the MODIS CO₂ slicing solution for cloud top pressure retrievals for cold clouds is replaced with an IR window channel optimal estimation approach coupled with a Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations (CALIPSO)-derived *a priori* (Heidinger et al. 2019). The CTT of SiFSAP CrIS is compared with the average values of the CTT of VIIRS pixels within the CrIS footprints as shown in Figure 19. The global scale spatial distribution of CTT from SiFSAP agrees well with that from the VIIRS cloud product except in the Arctic region where CTT retrieved from CrIS measurements tends to be warmer than VIIRS results. The correlation coefficient between the VIIRS CTT and CrIS CTT shown in Figure 19 is larger than 0.93. Uncertainty in retrieved cloud properties tends to be larger for very thin clouds due to the challenge of extracting weak IR spectral signatures embedded in the measurement or forward simulation errors. Figure 19 only shows results with retrieved cloud optical thickness larger than 0.4 (cloud emissivity larger than 0.1) to better illustrate the retrieval accuracy when there is adequate measurement-provided information. A larger than 0.8 correlation coefficient can still be achieved even when we include more thin cloud footprints with optical depth as small as 0.05.

Direct comparison between the effective cloud optical depth (COD) and the effective particle radius (Re) retrieved for an individual CrIS FOV and the corresponding mean values for the collocated VIIRS pixels within the CrIS FOV can be challenging due to several factors. First, the spatial heterogeneity among VIIRS pixels means the IR radiative contribution from a cloud layer with an averaged VIIRS COD can be very different from the combined contribution from individual VIIRS pixels due to the nonlinear nature of the radiative transfer

$$F(\overline{\text{COD}}, \overline{\text{Re}}) \neq \sum_{i=1}^N \frac{F(\text{COD}_i, \text{Re}_i)}{N}, \quad (20)$$

where F is the forward operator. Second, the inconsistency between the cloud scattering models used for sounder retrieval and for imager retrieval can further introduce large biases or uncertainties between two sets of COD and Re. Third, inconsistency can also arise from a lack of consistency and accuracy in the atmospheric and surface state assumed for the cloud property retrievals. As compared with COD and Re, it is relatively more straightforward to compare the effective cloud emissivity (fraction) values retrieved from CrIS and VIIRS measurements. The CrIS FOV cloud emissivity can be related with the VIIRS pixel effective cloud emissivity and the corresponding spatial fraction under the assumption that the total thermal emissions measured by CrIS and VIIRS within the same spectral band are consistent:

$$B_\nu(T_C^{\text{CrIS}})\epsilon_C^{\text{CrIS}} + B_\nu(T_S)\epsilon_S(1 - \epsilon_C^{\text{CrIS}}) = f \sum_{i=1}^N \epsilon_{C,i}^{\text{VIIRS}} B_\nu(T_{C,i}^{\text{VIIRS}}) + (1 - f \sum_{i=1}^N \epsilon_{C,i}^{\text{VIIRS}}) B_\nu(T_S)\epsilon_S, \quad (21)$$

where B_ν represents the Planck function at wavenumber ν , ϵ_C^{CrIS} and T_C^{CrIS} are CrIS cloud emissivity and CTT, $\epsilon_{C,i}^{\text{VIIRS}}$ and $T_{C,i}^{\text{VIIRS}}$ are cloud emissivity and CTT of individual VIIRS pixels, f represents the spatial fraction of VIIRS cloud pixels within

a CrIS FOV, T_s and ϵ_s are surface skin temperature and surface emissivity which are assumed to be homogeneous within a
 480 single CrIS FOV. Equation 21 is justified under the condition that ν is within a ‘window’ spectral region where atmospheric
 absorption and thermal emission can be neglected, and the effective cloud reflectivity is close to zero. Therefore, the cloud
 transmissivity is approximated as $1 - \epsilon_c$. A more simplified form can be used

$$\epsilon_c^{CrIS} T_c^{CrIS} + (1 - \epsilon_c^{CrIS}) T_s = \sum_{i=1}^N f_i \epsilon_{c,i}^{VIIRS} T_{c,i}^{VIIRS} + (1 - f \sum_{i=1}^N \epsilon_{c,i}^{VIIRS}) T_s \quad (22)$$

by utilizing the fact that the Planck function is linear enough and the surface emissivity is close to unity. Such an approach to
 485 check the radiometric consistency between cloud properties from IR sounders and imagers has been used in the AIRS-MODIS
 cloud retrieval validation study (Kahn et al. 2007, Nasiri et al. 2011). Figure 20 demonstrates the comparison between the
 effective brightness temperature of CrIS T_{eff}^{CrIS} and that of corresponding VIIRS measurements T_{eff}^{VIIRS} , with the definition being
 given as

$$T_{eff}^{CrIS} = \epsilon_c^{CrIS} T_c^{CrIS} + (1 - \epsilon_c^{CrIS}) T_s, \quad (23)$$

$$490 \quad T_{eff}^{VIIRS} = f \sum_{i=1}^N \epsilon_{c,i}^{VIIRS} T_{c,i}^{VIIRS} + (1 - f \sum_{i=1}^N \epsilon_{c,i}^{VIIRS}) T_s. \quad (24)$$

A good agreement is found between T_{eff}^{CrIS} and T_{eff}^{VIIRS} except a small percentage of samples in the Arctic. The cloud emissivity
 data used for this study are the retrieval results based on the NOAA Daytime Cloud Optical and Microphysical Properties
 (DCOMP; Walther and Heidinger, 2012) algorithm. Li et al. (2020) found that VIIRS cloud data products tend to have larger
 uncertainties in polar regions due to the lack of VIIRS spectral measurements in IR water and CO₂ absorption channels. They
 495 found a major improvement for the cloud mask can be achieved over polar regions by fusing the collocated CrIS measurements
 in the missing spectral region with the VIIRS data. Although the radiative consistency between cloud properties from SiFSAP
 CrIS and that from VIIRS is high, the surface skin temperature T_s , CTT, and the cloud effective emissivity (fraction) are highly
 correlated with each other. Uncertainties in either T_s or CTT will introduce inconsistency between the effective emissivity
 from these two measurements. Even though the three parameters compensate each other to fit radiometrically to the
 500 observations, the effective cloud emissivity from CrIS and VIIRS measurements can still be quite different. This is especially
 the case when there is a lack of thermal contrast between T_s and CTT.

4.6 Averaging kernels

Hyperspectral sounder measurements provide rich information for temperature and humidity vertical profiling. Figures 21 and
 22 demonstrate typical temperature and water vapor retrieval averaging kernels from SNPP CrIS SiFSAP. Figure 21 clearly
 505 shows that high vertical resolution temperature retrieval can be achieved by the SiFSAP algorithm even in the lower
 tropospheric region near the surface. The sum of the averaging kernel rows, also known as ‘verticality’, is usually used to
 characterize how much information comes from the measurements. A verticality value close to one means measurement
 provides dominant information so that a retrieval system’s dependence on the *a priori* is minimized. On the other hand, a
 verticality value close to zero indicates that the system is heavily dependent on the *a priori* since the measurement does not
 510 provide much information. Figure 21 shows that hyperspectral measurements can well resolve the temperature profile from

troposphere to stratosphere under a clear sky condition. The information from the measurements degrades in the lower troposphere under a cloudy condition region due to the weakening of thermal emission signal by clouds. The averaging kernel for water vapor retrieval (Figure 22) is relatively less sensitive to clouds, but the information provided by hyperspectral measurements to retrieve water vapor in upper troposphere and stratosphere region is limited.

515 As compared with temperature and water vapor, the measurement information from hyperspectral IR sounders for trace gases retrieval is relatively limited and more scene dependent. Figure 23 shows the averaging kernels of O₃ retrievals from SNPP CrIS SiFSAP of September 20th, 2019 for different latitudinal regions. The O₃ retrieval has sensitivity peaks in both stratosphere and upper troposphere. The measurement sensitivity for lower tropospheric O₃ is the highest in the tropical region and tends to decrease as the observations move to higher latitude regions. Overall, the SiFSAP system provides decent vertical
520 resolution of O₃ profiling based on real CrIS observation data, which is comparable to what has been demonstrated for IASI measurements via an end-to-end simulation study (Wu et al. 2017).

Samples averaging kernels from SiFSAP CO product are shown in Figure 24 for different latitudinal bands, as CO retrieval is more latitudinal dependent as compared with O₃. CrIS full spectral resolution measurements provide abundant information for the tropospheric CO retrieval in the tropical region (with verticality close to 1). The measurement information becomes less
525 dominant in the mid-latitude region and very limited in the polar regions. This is partly due to the fact that thermal emission signals due to CO absorption in the atmosphere are weaker in lower temperature region. Ultimately, the total measurement sensitivity of CO is limited by the CrIS instrument noise level in the CO absorption spectral region. The vertical resolution of CO retrieval is very limited in the current version of SiFSAP. Similar to SiFSAP, the reported vertical resolution of CO retrieval in other IR sounder retrieval systems, e.g. FORLI, AIRS CO retrieval, and CLIMCAPS (George et al. 2009, Smith and Barnett,
530 2020), is also very limited. This can be ascribed to the weak thermal contrast among signals in CO measurement channels of IR sounders and the vertical distribution constraints from the *a priori* that remain to be optimized.

5. Conclusions and Future Work

SiFSAP retrieval algorithm has been developed to generate a high spatial resolution and radiometrically consistent hyperspectral sounder product to explore the applications of sounder observations in areas that have not been fully addressed
535 by the current operational sounder products. SiFSAP products include temperature, water vapor, O₃, CO₂, CO, CH₄, and N₂O profiles, as well as surface properties (including surface skin temperature and surface emissivity) and cloud properties (including cloud top pressure, height, temperature, effective cloud optical depth, and effective cloud particle size). Following an optimal estimation scheme and the efficient and accurate forward radiative transfer model PCRTM, SiFSAP also provides users with the averaging kernels and error estimates to facilitate better uncertainty quantification in physical process studies
540 and data assimilations using sounder products, as well as intercomparisons of multiple observational and model products. Initial validation on key SiFSAP Level 2 variables has been carried out using SNPP-CrIS as an example. More extensive studies and validation of SiFSAP products for other satellites will be conducted. Validation for CO₂, CH₄, and N₂O has been

initiated but a lot of work remains to be done, so these three trace gas products are released as exploratory data products at the current stage.

545 One key advantage of the SiFSAP algorithm is its applicability for multiple IR and MW sounder systems. In addition to CrIS/ATMS onboard SNPP and Joint Polar Satellite System (JPSS) satellites, the SiFSAP system is ready for the processing of both AIRS/AMSU and IASI/AMSU/MHS data. Simulations based end-to-end studies and some evaluation work using sample IASI data have been demonstrated (Wu et al. 2017, Liu et al. 2009). Some AIRS retrieval case studies using the SiFSAP algorithm have already demonstrated the advantage of SiFSAP over traditional AIRS Level 2 product in capturing the high
550 spatial resolution feature of gravity wave signals in the stratospheric temperature (Wu et al. 2019). SiFSAP provides a solution to retrieve key climate variables from different hyperspectral sounder observations using a consistent physical algorithm. This is not only important for effectively fusing information from multiple instruments, but also essential to constructing a long-term continuous climate data record from the Program of Record sounder observations. The capability of using a unified radiative transfer model (i.e., PCRTM) to accurately fit the spectral radiances measured by all modern era operational
555 hyperspectral sounders under all sky conditions is essential for the climate trend/anomaly retrieval study from a radiometric consistency perspective.

SiFSAP will support weather and atmospheric dynamics studies by providing high spatial resolution temperature and water vapor profiles that can be used to reveal mesoscale atmospheric variations. The algorithm's capability of using the spectral information from all hyper-spectral channels via PC analysis makes it easy to be adapted and affordable for future sounder
560 applications with a much higher spectral resolution and much more channels (e.g. IASI-NG). The scheme requires minimal auxiliary data to provide the *a priori* constraints and is suitable for real-time and environmental monitoring applications. Future work includes exploring the SiFSAP algorithm's application potential in challenging areas (e.g. Planetary Boundary Layer studies) by further improving the utilization of spectral information and the accommodation for forward model errors. The development of a long-term climate record based on SiFSAP using the climate spectral fingerprinting scheme is also underway.

565

Data availability. SiFSAP will soon be available to public from the NASA Goddard Earth Sciences Data and Information Services Center (GES DISC). The availability of the SNPP SiFSAP data is currently on a request basis. The SNPP CLIMCAPS data is available from GES GISC (<https://10.5067/62SPJFQW5Q9B>). VIIRS cloud property data is available from Level-1 and Atmosphere Archive & Distribution System Distributed Active Archive Center (LAADS DAAC https://ladsweb.modaps.eosdis.nasa.gov/search/order/1/CLDPROP_L2_VIIRS_SNPP—5111). The collocated SNPP-CrIS and VIIRS data is available from GES GISC (https://disc.gsfc.nasa.gov/datasets/SNPP_CrIS_VIIRS750m_IND_1/summary?keywords=CrIS_VIIRS750m). AQUA MODIS monthly land surface emissivity data is available from the Land Processes Distributed Active Archive Center (LP DAAC <https://lpdaac.usgs.gov/products/myd11c3v006/>). AQUA MODIS monthly vegetation index data is available from LP DAAC (<https://lpdaac.usgs.gov/products/myd13c2v006/>). Snow coverage data is from NASA National
575 Snow and Ice Data Center Distributed Active Archive Center (<https://doi.org/10.5067/MODIS/MYD10C1.061>). METOP-B IASI O3 and CO data are available from IASI portal (<https://iasi.aeris-data.fr/o3/>, <https://iasi.aeris-data.fr/co/>). MOPITT CO

data is from the NASA Atmospheric Science Data Center (ASDC) (<ftp://15ftl01.larc.nasa.gov/MOPITT/>). OMPS O3 data is from NASA Earth Data (<https://omisips1.omisips.eosdis.nasa.gov/outgoing/OMPS/LANCE/NMTO3-L2-NRT/>).

580 **Author contributions.** WW and XL wrote the manuscript with discussion and editing inputs from XX DZ QY³ AL QY² and LL; The SiFSAP algorithm and PCRTM were developed by XL and WW; XL QY² and WW are responsible for the update of PCRTM. WW and LL produced CrIS/ATMS SiFSAP results; WW collected CLIMCAPS, IASI, MOPITT, MODIS and OMPS data used for the validation study. QY³ provided VIIRS cloud property data collocated with CrIS observations. WW carried out the validation study with suggestions and technical support from XL and XX and LL.

585

Competing interests. The contact author has declared that none of the authors has any competing interests.

Acknowledgement. We are grateful for the data production and storage technical support provided by the team members responsible for the Science Investigator-led Processing System (SIPS) at Jet Propulsion Laboratory, California Institute of Technology. We thank NASA Advanced Supercomputing (NAS) facility for providing the computational resources and the corresponding technical support. We also thank CRTM technical support team for providing the software and the instruction. This work was funded by the NASA 2017 Research Opportunities in Space and Earth Sciences (ROSES) solicitation NNH17ZDA001N-TASNPP and the NASA 2020 ROSES solicitation NNH20ZDA001N. The research work was mainly carried out at the NASA Langley Research Centre. The work by Qing Yue was carried out at the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration (80NM0018D0004).

References

- August, T., Klaes, D., Schlüssel, P., Hultberg, T., Crapeau, M., Arriaga, A., O'Carroll, A., Coppens, D., Munro R., and Calbet, X.: IASI on Metop-A: Operational Level 2 retrievals after five years in orbit, *Journal of Quantitative Spectroscopy & Radiative Transfer*, 113, 1340-1371, 2012.
- Aumann, H. H., Chen, X., Fishbein, E., Geer, A., Havemann, S., Huang, X., et al.: Evaluation of radiative transfer models with clouds. *Journal of Geophysical Research: Atmospheres*, 123, 6142–6157, <https://doi.org/10.1029/2017JD028063>, 2018.
- Baldrige, A. M., Hook S. J., Grove C. I. and Rivera G.: The ASTER Spectral Library Version 2.0, *Remote Sensing of Environment*, 113, 711-715, 2009.
- 605 Barnet. C. D. et al: The NOAA Unique CrIS/ATMS Processing System (NUCAPS): Algorithm Theoretical Basis Documentation, NOAA NESDIS STAR, star.nesdis.noaa.gov/jpsps/documents/ATBD/ATBD_NUCAPS_v3.1.pdf, 2021.

- Buchholz, R. R., Emmons, L. K., Tilmes, S., and the CESM2 Development Team: CESM2.1/CAM-chem Instantaneous Output for Boundary Conditions, UCAR/NCAR- Atmospheric Chemistry Observations and Modeling Laboratory, <https://doi.org/10.5065/NMP7-EP60>, 2019
- 610 Boynard, A., Hurtmans, D., Garane, K., Goutail, F., Hadji-Lazaro, J., Koukouli, M. E., Wespes, C., Vigouroux, C., Keppens, A., Pommereau, J.-P., Pazmino, A., Balis, D., Loyola, D., Valks, P., Sussmann, R., Smale, D., Coheur, P.-F., and Clerbaux, C.: Validation of the IASI FORLI/EUMETSAT ozone products using satellite (GOME-2), ground-based (Brewer–Dobson, SAOZ, FTIR) and ozonesonde measurements, *Atmos. Meas. Tech.*, 11, 5125–5152, <https://doi.org/10.5194/amt-11-5125-2018>, 2018.
- 615 Chahine, M.T., Pagano, T. S., Aumann, H. H., Atlas, R., Barnet, C., Blaisdell, J., Chen, L., Divakarla, M., Fetzer, E. J., Goldberg, M., et al.: AIRS: Improving weather forecasting and providing new data on greenhouse gases, *Bull. Am. Meteorol. Soc.*, 87, 911–926, 2006.
- Chahine, M. T., Chen, L., Dimotakis, P., Jiang, X., Li, Q., Olsen, E. T., Pagano, T., Randerson, J., and Yung, Y. L.: Satellite remote sounding of mid-tropospheric CO₂, *Geophys. Res. Lett.*, 35, L17807, <https://doi.org/10.1029/2008GL035022>, 2008.
- 620 Cousins, D., and Smith, W. L.: National Polar-Orbiting Operational Environmental Satellite System (NPOESS) Airborne Sounder Testbed-Interferometer (NAST-I), in: Proceedings from the SPIE, Application of Lidar to Current Atmospheric Topics II Conference, San Diego, CA, 3127, 323-331, 1997.
- Dee, D. P.; Uppala, S.: Variational bias correction of satellite radiance data in the ERA-Interim reanalysis, *Q. J. R. Meteorol. Soc.*, 135, 1830–1841, <https://doi.org/10.21957/8si33ip1>, 2009.
- 625 DeSouza-Machado, S., Strow, L. L., Tangborn, A., Huang, X., Chen, X., Liu, X., Wu, W., and Yang, Q.: Single-footprint retrievals for AIRS using a fast TwoSlab cloud-representation model and the SARTA all-sky infrared radiative transfer algorithm, *Atmos. Meas. Tech.*, 11, 529–550, <https://doi.org/10.5194/amt-11-529-2018>, 2018
- Didan, K. and Huete, A.: MOD13C2 MODIS/Terra Vegetation Indices Monthly L3 Global 0.05Deg CMG., NASA LP DAAC, <http://doi.org/10.5067/MODIS/MOD13C2.006>, 2015.
- 630 Dlugokencky, E. J., Steele L. P., Lang P. M., and Masarie K. A.: The growth rate and distribution of atmospheric methane, *J. Geophys. Res.*, 99, 17021-17043, 1994
- Fetzer E., Yue Q., Manipon G., and Wang L.: NASA MEASUREs SNPP CrIS-VIIRS 750-m Matchup Indexes V1., Jet Propulsion Laboratory, California Institute of Technology, USA, <http://doi.org/10.5067/MEASURES/WVCC/DATA211>, 2022
- 635 Ern, M., Hoffmann, L., and Preusse, P.: Directional gravity wave momentum fluxes in the stratosphere derived from high-resolution AIRS temperature data, *Geophys. Res. Lett.*, 44, 475–485, <https://doi.org/10.1002/2016GL072007>, 2017.
- Elsaesser, G., Jiang J., Su H., Schiro K.: AIRS vs MERRA-2: when and where do they both agree on the impact of convection on PBL thermodynamics?, NASA Sounder Science Team Meeting, 25 – 27 September 2020, College Park, MD, 2019.
- Fu, D., Kulawik, S. S., Miyazaki, K., Bowman, K. W., Worden, J. R., Eldering, A., Livesey, N. J., Teixeira, J., Irión, F. W.,
- 640 Herman, R. L., Osterman, G. B., Liu, X., Levelt, P. F., Thompson, A. M., and Luo, M.: Retrievals of tropospheric ozone

- profiles from the synergism of AIRS and OMI: methodology and validation, *Atmos. Meas. Tech.*, 11, 5587–5605, <https://doi.org/10.5194/amt-11-5587-2018>, 2018.
- Gottelman, A., Fu, Q.: Observed and Simulated upper-tropospheric water vapor feedback, *J. Clim.*, 21, 3282–3289, <https://doi.org/10.1175/2007JCLI2142.1>, 2008.
- 645 George, M., Clerbaux, C., Hurtmans, D., Turquety, S., Coheur, P.-F., Pommier, M., Hadji-Lazaro, J., Edwards, D. P., Worden, H., Luo, M., Rinsland, C., and McMillan, W.: Carbon monoxide distributions from the IASI/METOP mission: evaluation with other space-borne remote sensors, *Atmos. Chem. Phys.*, 9, 8317–8330, <https://doi.org/10.5194/acp-9-8317-2009>, 2009.
- Hall, D. K. and G. A. Riggs.: MODIS/Aqua Snow Cover Daily L3 Global 0.05Deg CMG, Version 61. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center, <https://doi.org/10.5067/650 MODIS/MYD10C1.061>, 2021.
- Han, Y., Delst P., Liu Q., Weng F., Yan B., and Derber J., CRTM: v2.4.0 User Guide, https://github.com/JCSDA/crtm/wiki/files/CRTM_User_Guide.pdf, NOAA/JCSDA, 2020.
- Heidinger, A. K., Bearson, N., Foster, M. J., Li, Y., Wanzong, S., Ackerman, S., Holz, R. E., Platnick, S., and Meyer, K.: Using Sounder Data to Improve Cirrus Cloud Height Estimation from Satellite Imagers, *J. Atmos. Ocean. Tech.*, 1331-1342, <https://doi.org/10.1175/JTECH-D-18-0079.1>, 2019.
- 655 Heidinger, A. K., Li Yue : AWG Cloud Height Algorithm Theoretical Basis Document, NOAA NESDIS CENTER for SATELLITE APPLICATIONS and RESEARCH, https://www.star.nesdis.noaa.gov/goesr/documents/ATBDs/Enterprise/ATBD_Enterprise_Cloud_Height_v3.1_Mar2017.pdf, 2017.
- Hewison, J., English, S. J.: Airborne Retrievals of Snow and Ice Surface Emissivity at Millimetre Wavelengths, *IEEE Trans. Geosci. Rem. Sensing*, 37, 1871-1879, <https://doi.org/10.1109/36.774700>, 1999.
- 660 Hulley, G., Malakar, N., Hughes, T., Islam, T., Hook, S.: Moderate Resolution Imaging Spectroradiometer (MODIS) MOD21 Land Surface Temperature and Emissivity Algorithm Theoretical Basis Document, USGS, https://modis-land.gsfc.nasa.gov/pdf/MOD21_ATBD_Hulley_v2.4.pdf, 2016
- Hurtmans, D., Coheur, P.-F., Wespes, C., Clarisse, L., Scharf, O., Clerbaux, C., & Hadji-Lazaro, J., George, M., Turquety, S.: FORLI radiative transfer and retrieval code for IASI. *Journal of Quantitative Spectroscopy and Radiative Transfer*, 113, 1391-1408, <https://doi.org/10.1016/j.jqsrt.2012.02.036>, 2012.
- 665 Irion, F. W., Kahn, B. H., Schreier, M. M., Fetzer, E. J., Fishbein, E., Fu, D., Kalmus, P., Wilson, R. C., Wong, S., and Yue, Q.: Single-footprint retrievals of temperature, water vapor and cloud properties from AIRS, *Atmos. Meas. Tech.*, 11, 971–995, <https://doi.org/10.5194/amt-11-971-2018>, 2018.
- 670 Jaross G.: OMPS-NPP L2 NM Ozone (O3) Total Column swath orbital V2, Greenbelt, MD, USA, Goddard Earth Sciences Data and Information Services Center (GES DISC), Accessed: [Oct. 01, 2022], [10.5067/0WF4HAAZ0VHK](https://doi.org/10.5067/0WF4HAAZ0VHK), 2017.
- Johnson, M. S., Liu, X., Zoogman, P., Sullivan, J., Newchurch, M. J., Kuang, S., ... and McGee, T.: Evaluation of potential sources of a priori ozone profiles for TEMPO tropospheric ozone retrievals, *Atmospheric Measurement Techniques*, 11(6), 3457-3477, <https://doi.org/10.5194/amt-11-3457-2018>, 2018.

- 675 Jones, T. A. and Stensrud, D. J.: Assimilating AIRS temperature and mixing ratio profiles using an ensemble kalman filter approach for convective-scale forecasts, *weather forecast*, 27, 541–564, 2012.
- Kahn, B. H., Fishbein, E., Nasiri S. L., Eldering, A., Fetzer, E. J., Garay, M. J., and Lee, S.-Y.: The radiative consistency of Atmospheric Infrared Sounder and Moderate Resolution Imaging Spectroradiometer cloud retrievals, *J. Geophys. Res.*, 112, D09201, doi:10.1029/2006JD007486, 2007.
- 680 LeMarshall, J., Jung, J., Derber, J., Chahine, M., Treadon, R., Lord, S. J., Goldberg, M., Wolf, W., Liu, H. C., Joiner, J., et al.: Improving global analysis and forecasting with AIRS, *Bull. Am. Meteorol. Soc.*, 87, 891–895, 2006.
- Leroy, S. S., Ao, C. O., and Verkhoglyadova, O. P.: Temperature trends and anomalies in modern satellite data: Infrared sounding and GPS radio occultation, *Journal of Geophysical Research: Atmospheres*, 123, <https://doi.org/10.1029/2018JD028990>, 2018.
- 685 Li, Y., Baum, B. A., Heidinger, A. K., Menzel, W. P., and Weisz, E.: Improvement in cloud retrievals from VIIRS through the use of infrared absorption channels constructed from VIIRS+CrIS data fusion, *Atmos. Meas. Tech.*, 13, 4035–4049, <https://doi.org/10.5194/amt-13-4035-2020>, 2020.
- Liu Q. et al.: Community radiative transfer model for radiance assimilation and applications, in: Proceedings of IEEE International Geoscience and Remote Sensing Symposium, Munich, Germany, 22-27 July 2012, 3700-3703, <https://doi.org/10.1109/IGARSS.2012.6350612>, 2012.
- 690 Liu Q., Weng F., and English S. J.: An Improved Fast Microwave Water Emissivity Model, *IEEE Transactions on Geoscience and Remote Sensing*, 49, 1238-1250, doi:10.1109/TGRS.2010.2064779, 2011.
- Liu, R., Su, H., Liou, K.-N., Jiang, J. H., Gu, Y., Liu, S. C. & Shiu, C.-J.: An assessment of tropospheric water vapor feedback using radiative kernels, *Journal of Geophysical Research: Atmospheres*, 123, 1499-1509, <https://doi.org/10.1002/2017JD027512>, 2018.
- 695 Liu, X., Smith W. L., Zhou D. K., and Larar A.: Principal component-based radiative transfer model for hyperspectral sensors: theoretical concept, *Appl. Opt.* 45, 201-209, <https://doi.org/10.1364/AO.45.000201>, 2006.
- Liu, X., Zhou D. K., Larar A., Smith W. L., and Mango S. A.: Case-study of a principal-component-based radiative transfer forward model and retrieval algorithm using EAQUATE data, *Q. J. R. Meteorol. Soc.* 133, 243–256, <https://doi.org/10.1002/qj.156>, 2007.
- 700 Liu, X., Zhou D. K., Larar A. M., Smith W. L., Schluessel P., Newman S. M., Taylor J. P., and Wu W.: Retrieval of atmospheric profiles and cloud properties from IASI spectra using super-channels, *Atmos. Chem. Phys.* 9, 9121–9142, <https://doi.org/10.5194/acp-9-9121-2009>, 2009.
- Liu, X., Wu, W., Wielicki, B. A., Yang, Q., Kizer, S. H., Huang, X., Chen, X., Kato, S., Shea, Y. L., and Mlynyczak, M. G.: Spectrally Dependent CLARREO Infrared Spectrometer Calibration Requirement for Climate Change Detection, *Journal of Climate*, 30(11), 3979-3998, 2017.
- 705 Masuda, K., Takashima, T., Takayama, Y.: Emissivity of pure water and sea waters for the sea surface in the infrared window regions, *Remote Sensing of Environment*, 24, 313-329, 1988.

- McCoy, D. T., Field, P. R., Elsaesser, G. S., Bodas-Salcedo, A., Kahn, B. H., Zelinka, M. D., et al.: Cloud feedbacks in extratropical cyclones: insight from long-term satellite data and high-resolution global simulations, *Atmospheric Chemistry and Physics*, 19(2), 1147-1172. <https://doi.org/10.5194/acp-19-1147-2019>, 2019
- Meerdink, S. K., Hook, S. J., Roberts, D. A., and Abbott, E. A.: The ECOSTRESS spectral library version 1.0. *Remote Sensing of Environment*, 230, 1–8, 2019.
- Nalli, N. R., Minnett, P. J., and Van Delst P.: Emissivity and reflection model for calculating unpolarized isotropic water surface-leaving radiance in the infrared. I: Theoretical development and calculations, *Appl. Opt.*, 47, 3701-3721, <https://doi.org/10.1364/ao.47.003701>, 2008a.
- Nalli, N. R., Minnett, P. J., Maddy E., McMillan W. W., Goldberg M. D.: Emissivity and reflection model for calculating unpolarized isotropic water surface-leaving radiance in the infrared. 2: validation using Fourier transform spectrometers. *Appl. Opt.*, 47, 4649-4671, <https://doi.org/10.1364/ao.47.00464>, 2008b.
- Nalli, N. R., Tan, C., Warner, J., Divakarla, M., Gambacorta, A., Wilson, M., Zhu, T., Wang, T., Wei, Z., Pryor, K., Kalluri, S., Zhou, L., Sweeney, C., Baier, B. C., McKain, K., Wunch, D., Deutscher, N. M., Hase, F., Iraci, L. T., Kivi, R., Morino, I., Notholt, J., Ohyama, H., Pollard, D. F., Té, Y., Velazco, V. A., Warneke, T., Sussmann, R., Rettinger, M.: Validation of Carbon Trace Gas profile retrievals from the NOAA-Unique Combined Atmospheric Processing System for the cross-track infrared sounder. *Remote Sens.*, 12, 3245, <https://doi.org/10.3390/rs12193245>, 2020.
- Nasiri, S. L., Dang, H. V. T., Kahn, B. H., Fetzer, E. J., Manning, E. M., Schreier, M. M., and Frey, R. A.: Comparing MODIS and AIRS Infrared-Based Cloud Retrievals. *Journal of Applied Meteorology and Climatology*, 50(5), 1057–1072, <http://www.jstor.org/stable/26174076>, 2011.
- Perrett, J. A., Wright, C. J., Hindley, N. P., Hoffmann, L., Mitchell, N. J., Preusse, P., et al.: Determining gravity wave sources and propagation in the Southern Hemisphere by ray-tracing AIRS measurements, *Geophysical Research Letters*, 48, e2020GL088621, <https://doi.org/10.1029/2020GL088621>, 2021
- Platnick, S., et al.: VIIRS Atmosphere L2 Cloud Properties Product. Version-1. NASA Level-1 and Atmosphere Archive & Distribution System (LAADS) Distributed Active Archive Center (DAAC), Goddard Space Flight Center, USA: http://dx.doi.org/10.5067/VIIRS/CLDPROP_L2_VIIRS_SNPP.001, 2017.
- Rodgers, C. D.: Characterization and error analysis of profiles retrieved from remote sounding measurements, *Journal of Geophysical Research*, 95, 5587-5595, 1990.
- Rodgers, C. D.: *Inverse Methods for Atmospheric Sounding: Theory and Practice*, World Scientific Pub Co Inc, Singapore, 2000.
- Ribeiro, I. O., Andreoli R. V., Kayano M. T., De Sousa T. R., Medeiros A. S., Guimaraes P. C., Barbosa C. G. G., Godoi R. H. M., Martin S. T., and De Souza R. A. F.: Impact of the biomass burning on methane variability during dry years in the Amazon measured from an aircraft and the AIRS sensor, *Sci. Total Environ.*, 624, 509-516, <https://dx.doi.org/10.1016/j.scitotenv.2017.12.147>, 2018.

- Sato, K., Tsuchiya, C., Alexander, M. J., and Hoffmann, L.: Climatology and ENSO-related interannual variability of gravity waves in the southern hemisphere subtropical stratosphere revealed by high-resolution AIRS observations, *J. Geophys. Res.-Atmos.*, 121, 7622–7640, <https://doi.org/10.1002/2015JD024462>, 2016.
- 745 Schulte, R. M., and Kummerow, C. D.: An Optimal Estimation Retrieval Algorithm for Microwave Humidity Sounding Channels with Minimal Scan Position Bias, *Journal of Atmospheric and Oceanic Technology*, 36(3), 409–425, <https://doi.org/10.1175/JTECH-D-18-0133.1>, 2019.
- Smith, N., Barnet, C. D.: Uncertainty Characterization and Propagation in the Community Long-Term Infrared Microwave Combined Atmospheric Product System (CLIMCAPS), *Remote Sens.*, 11, 1227, <https://doi.org/10.3390/rs11101227>, 2019.
- 750 Smith, W. L., Sr., Weisz, E., Kireev, S. V., Zhou, D. K., Li, Z., & Borbas, E. E.: Dual-Regression Retrieval Algorithm for Real-Time Processing of Satellite Ultraspectral Radiances, *Journal of Applied Meteorology and Climatology*, 51(8), 1455–1476, 2012.
- Smith, W. L., Weisz E.: Dual-Regression Approach for High-Spatial-Resolution Infrared Soundings, *Comprehensive Remote Sensing*, 7, 297–311, <https://doi.org/10.1016/B978-0-12-409548-9.10394-X>.
- 755 Smith, N. and Barnet, C. D.: CLIMCAPS observing capability for temperature, moisture, and trace gases from AIRS/AMSU and CrIS/ATMS, *Atmos. Meas. Tech.*, 13, 4437–4459, <https://doi.org/10.5194/amt-13-4437-2020>, 2020.
- Stamnes, K., Tsay, S.-C., Wiscombe, W., Jayaweera, K.: Numerically stable algorithm for discrete-ordinate-method radiative transfer in multiple scattering and emitting media, *App. Opt.*, 27, 2502–2509, <https://doi.org/10.1364/AO.27.002502>, 1988.
- Strow, L. L., Hepplewhite, C., Motteler, H., Buczkowski, S., DeSouza-Machado, S.: A Climate Hyperspectral Infrared
760 Radiance Product (CHIRP) Combining the AIRS and CrIS Satellite Sounding Record, *Remote Sens.*, 13, 418, <https://doi.org/10.3390/rs13030418>, 2021.
- Susskind J. and Blaisdell J.: CrIS CHART Retrieval Algorithm ATBD, NASA GFSC, https://docserver.gesdisc.eosdis.nasa.gov/public/project/SNPP/SNPP_limited_edition/SNPP.CrIMSS.CHART_V1.ATBD.pdf, 2017.
- Walther, A. and Heidinger, A. K.: Implementation of the Daytime Cloud Optical and Microphysical Properties Algorithm
765 (DCOMP) in PATMOS-x, *J. Appl. Meteorol. Clim.*, 51, 1371– 1390, <https://doi.org/10.1175/JAMC-D-11-0108.1>, 2012
- Wang T., Roman J., Yue Q., and Sun W.: Test Report of Performance of CLIMCAPS-SNPP and CLIMCAPS-JPSS1 Retrievals, <https://docserver.gesdisc.eosdis.nasa.gov/public/project/Sounder/CLIMCAPS.V2.Test.Report.pdf>, Jet Propulsion Lab, 2020.
- Warner, J. X., Dickerson, R. R., Wei, Z., Strow, L. L., Wang Y., and Liang, Q.: Increased atmospheric ammonia over the
770 world's major agricultural areas detected from space, *Geophys. Res. Lett.*, 44, <https://doi.org/10.1002/2016GL072305>, 2017.
- Wei, J. C., Pan, L. L., Maddy, E., Pittman, J. V., Divarkarla, M., Xiong, X., and Barnet, C.: Ozone Profile Retrieval from an Advanced Infrared Sounder: Experiments with Tropopause-Based Climatology and Optimal Estimation Approach, *Journal of Atmospheric and Oceanic Technology*, 27(7), 1123–1139, 2010.
- Wilheit, T. T.: A Model for the Microwave Emissivity of the Ocean's Surface as a Function of Wind Speed, *IEEE Transactions on Geoscience Electronics*, 17, 244–249, doi: 10.1109/TGE.1979.294653, 1979.
- 775

- Wu, W., Liu X., Zhou D. K., Larar, A. M., Yang Q., Kizer S. H., Liu, Q.: The Application of PCRTM Physical Retrieval Methodology for IASI Cloudy Scene Analysis, *IEEE Transactions on Geoscience and Remote Sensing*, PP, 1-15, <https://doi.org/10.1109/TGRS.2017.2702006>, 2017.
- 780 Wu, W., Liu, X., Yang, Q., Zhou, D.K. and Larar, A. M.: Radiometrically Consistent Climate Fingerprinting Using CrIS and AIRS Hyperspectral Observations, *Remote Sensing*, 12(8), 1291, <https://doi.org/10.3390/rs12081291>, 2020.
- Wu, W., Liu, X., Yang, Q., Zhou, D. K., Larar, A., Zhao, M., and Zhou, L., All Sky Single Field of View Retrieval System for Hyperspectral Sounding, in: *Proceedings of 2019 IEEE International Geoscience and Remote Sensing Symposium*, 28 July- 2 August 2019, Yokohama, Japan, <https://doi.org/10.1109/IGARSS.2019.8898307>, 7560-7563, 2019.
- 785 Xiong, X., Liu, X., Wu, W., Knowland, K. E., Yang, Q., Welsh, J. and Zhou, D. K.: Satellite observation of stratospheric intrusions and ozone transport using CrIS on SNPP. *Atmospheric Environment*, 273,118956, 2022A.
- Xiong, X., Liu, X., Wu, W., Knowland, K. E., Yang, F., Yang, Q. and Zhou, D. K.: Impact of Stratosphere on Cold Air Outbreak: Observed Evidence by CrIS on SNPP and Its Comparison with Models. *Atmosphere*, 13(6), 876, 2022B.
- Xiong, X., Liu, X., Wu, W., Yang Q., and Zhou, D. K.: Observation of Carbon Monoxide and Ozone From 2019–2020 Australia Fires Using Thermal Infrared and Near-Infrared Satellite Sensors, in: *Proceedings of 2022 IEEE International Geoscience and Remote Sensing Symposium*, 6502-6505, 17-22 July 2022, Kuala Lumpur, Malaysia, doi: 10.1109/IGARSS46834.2022.9884471, 2022C.
- 790 Yang, K. and Liu, X.: Ozone profile climatology for remote sensing retrieval algorithms, *Atmos. Meas. Tech.*, 12, 4745–4778, <https://doi.org/10.5194/amt-12-4745-2019>, 2019.
- Yue Q., Lambrigtsen B., and et al.: AIRS Version 7 Level 2 Performance Test and Validation Report, https://docsserver.gesdisc.eosdis.nasa.gov/public/project/AIRS/V7_L2_Performance_Test_and_Validation_report.pdf, Jet Propulsion Lab, 2020.
- 795 Yue, Q., Fetzer E. J., Wang L., Kahn B. H., Smith N., Blaisdell J., Meyer K. G., Schreier M., Lambrigsten B., and Tkatcheva I.: Evaluating the Consistency and Continuity of Pixel-Scale Cloud Property Data Records From Aqua and SNPP, *Atmospheric Measurement Techniques*, <https://doi.org/10.5194/amt-15-2>, 2022.
- 800 Zhou, D. K., Smith, W. L., Sr., Liu, X., Larar, A. M., Mango, S. A.: Tropospheric CO observed with the NAST-I retrieval methodology, analyses, and first results, *Appl. Opt.* 44, 3032-3044, <https://doi.org/10.1364/AO.44.003032>, 2005.
- Zhou, D. K., Smith, W. L., Sr., Liu, X., Larar, A. M., Mango, S. A., and Huang, H.: Physically Retrieving Cloud and Thermodynamic Parameters from Ultraspectral IR Measurements, *Journal of the Atmospheric Sciences*, 64(3), 969-982, <https://doi.org/10.1175/JAS3877.1>, 2007.
- 805 Zhou, D. K., Smith, W. L., Sr., Larar, A., Liu, X., Taylor J. P., Schlüssel P., Strow L., and Mango S. A.: All weather IASI single field-of-view retrievals: case study – validation with JAIVEx data, *Atmos. Chem. Phys.*, 9, 2241-2255, <https://doi.org/10.5194/acp-9-2241-2009>, 2009.

Zhou, D. K., Larar, A. M., Liu, X., Smith, W. L., Strow, L. L., Yang, P., ... and Calbet, X.: Global land surface emissivity retrieved from satellite ultraspectral IR measurements, *IEEE Transactions on Geoscience and Remote Sensing*, 49(4), 1277-810 1290, <https://doi.org/10.1109/TGRS.2010.2051036>, 2010.

Zhou, Y. and Grassotti, C.: Development of a Machine Learning-Based Radiometric Bias Correction for NOAA's Microwave Integrated Retrieval System (MiRS), *Remote Sens.*, 12, 3160, <https://doi.org/10.3390/rs12193160>, 2020.

Zhu, Y., Derber, J., Collard, A., Dee, D. P., Treadon, R., Gayno, G., Jung, J. A.: Enhanced radiance bias correction in the National Centers for Environmental Prediction's Gridpoint Statistical Interpolation data assimilation system, *Q. J. R. Meteorol. Soc.*, 140, 1479–1492, <https://doi.org/10.1002/qj.2233>, 2014.

820

825

830

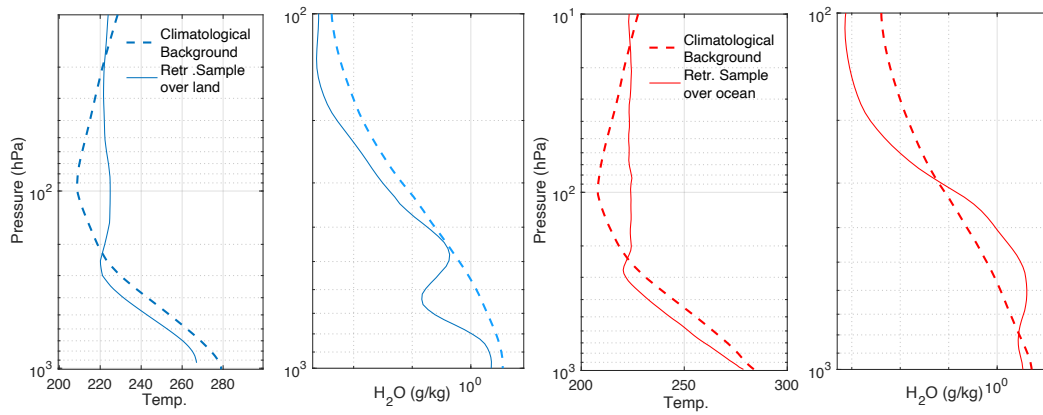


Figure 1 Climatological background used for temperature and water vapor retrievals (dash curves) in the SiFSAP algorithm. The final retrieval results (sample retrieved profiles presented as solid curves) can be very different from the background values.

835

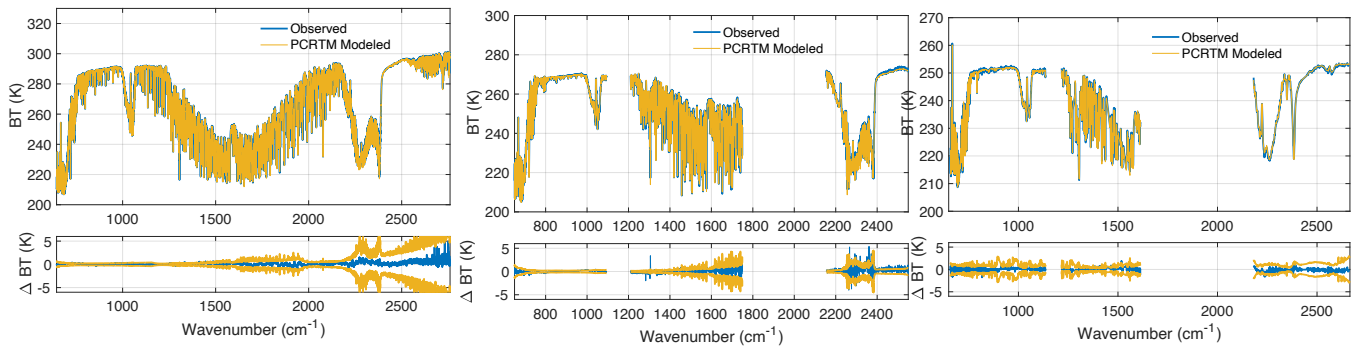


Figure 2 IR sounder radiances fitted by SiFSAP. Left: IASI; Middle: CrIS; Right: AIRS. The radiance fitting residues (blue curves in lower subplots) are compared with the instrumental random noise (with the magnitude being marked using yellow curves).

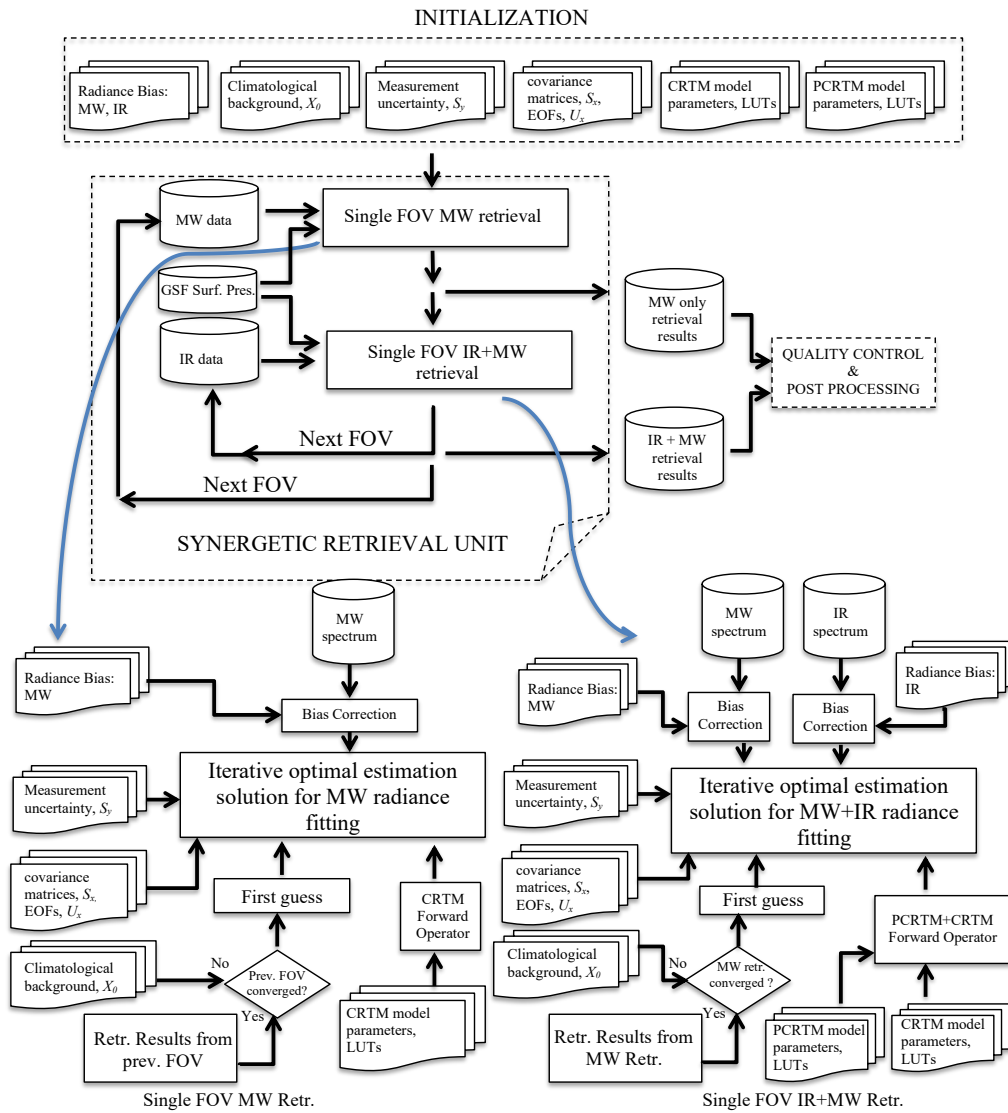


Figure 3 Flow diagram of the SiFSAP data processing scheme.

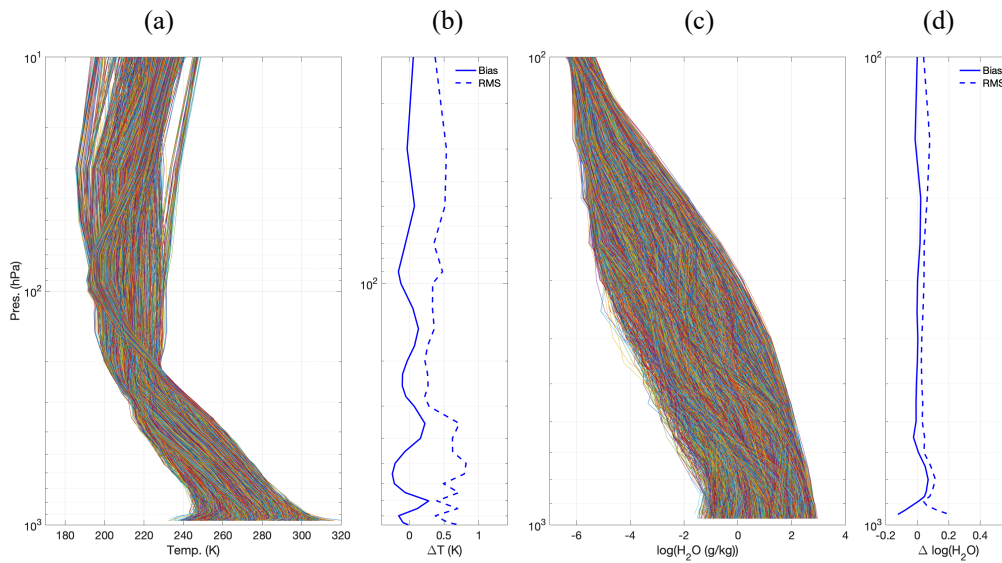


Figure 4 EOF representation errors of temperature and water vapor profiles. (a) and (c) the original temperature and water vapor profiles; (b) and (d) the mean and the RMS values for the difference between the original profiles and the profiles being represented using limited number of EOFs (20 EOFs are used for temperature profiles and 15 EOFs are used for water vapor).

840

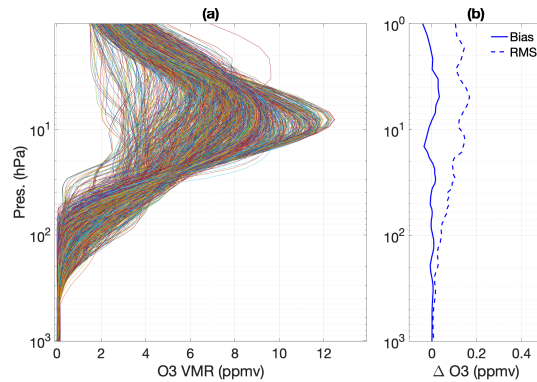


Figure 5 EOF representation errors of ozone profiles. (a) the original ozone profiles; (b) the mean and the RMS values for the difference between the original profiles and the profiles being represented using 10 EOFs.

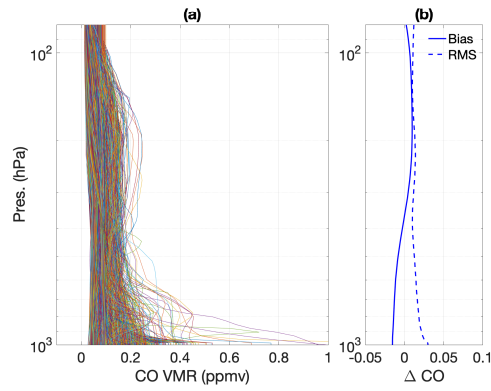


Figure 6 EOF representation errors of carbon monoxide profiles. (a) the original ozone profiles; (b) the mean and the RMS values for the difference between the original profiles and the profiles being represented using 4 EOFs.

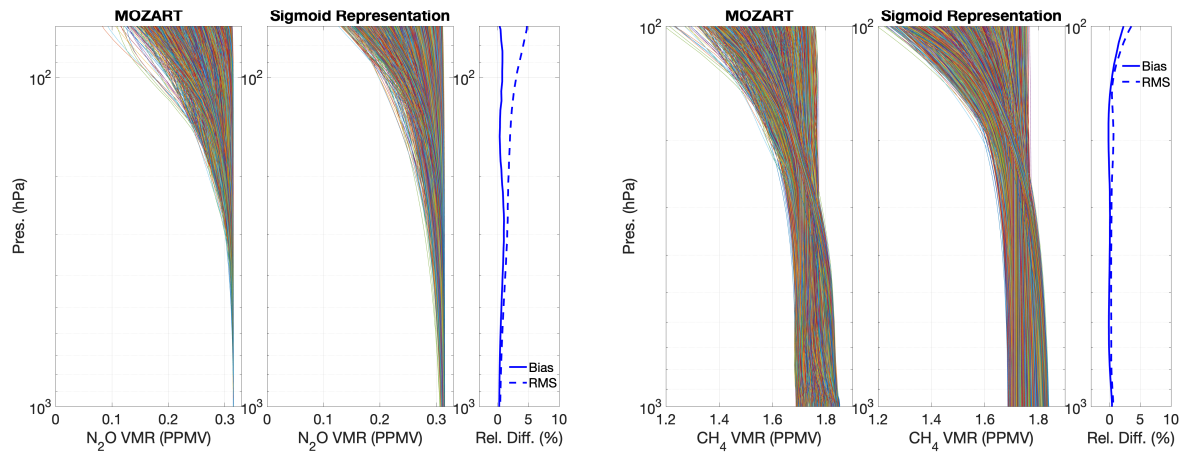


Figure 7 The representation of nitrous oxide and methane profiles using sigmoid functions.

845

850

Table 1. Geophysical parameters included in SiFSAP.

	From IR+MW Synergistic retrieval	From First Step MW only retrieval
¹ Temperature Profile (K)	Yes	Yes
¹ Water Vapor MMR profile (g/kg)	Yes	Yes
¹ CO ₂ VMR profile (ppmv)	Yes	
¹ O ₃ VMR profile (ppmv)	Yes	
¹ CH ₄ VMR profile (ppmv)	Yes	
¹ CO VMR profile (ppmv)	Yes	
¹ N ₂ O VMR profile (ppmv)	Yes	
Surface Skin Temperature (K)	Yes	Yes
² IR Surface Emissivity	Yes	
³ MW Surface Emissivity	Yes	Yes
Effective Cloud Top Pressure (hPa)	Yes	
Cloud Particle Size (μm)	Yes	
Cloud Optical Thickness	Yes	
Cloud phase (ice or water)	Yes	
Liquid Water Content (g/m^2)	Yes	Yes

¹ Atmospheric profiles are given at 98 pressure levels;

² IR surface emissivity at native mono-frequency bins defined by the PCRTM are provided. Number of frequency bins for different sounders are: AIRS - 500; IASI- 753; CrIS at full resolution - 540; CrIS at nominal resolution – 485;

860 ³ MW surface emissivity are given for each channel of MW sounders.

Table 2. Number of EOFs used in SiFSAP to represent radiances and geophysical parameters.

<i>Hyperspectral IR Instruments</i>		<i>Number of Channels</i>	<i>Number of EOFs used</i>
<i>Name</i>	<i>Measurement Band</i>		
AIRS	LWIR	1262	50
	MWIR	602	35
	SWIR	514	40
CrIS (NSR)	LWIR	713	50
	MWIR	433	30
	SWIR	159	25
CrIS (FSR)	LWIR	713	50
	MWIR	863	40
	SWIR	865	30
IASI	LWIR	2260	50
	MWIR	3160	60
	SWIR	3041	80

<i>Geophysical Parameters</i>	<i>Number of EOFs</i>
Temperature	20
Water Vapor	15
Carbon Dioxide	1
Ozone	10
Carbon Monoxide	4
IR Surface Emissivity	8
MW Surface Emissivity	5

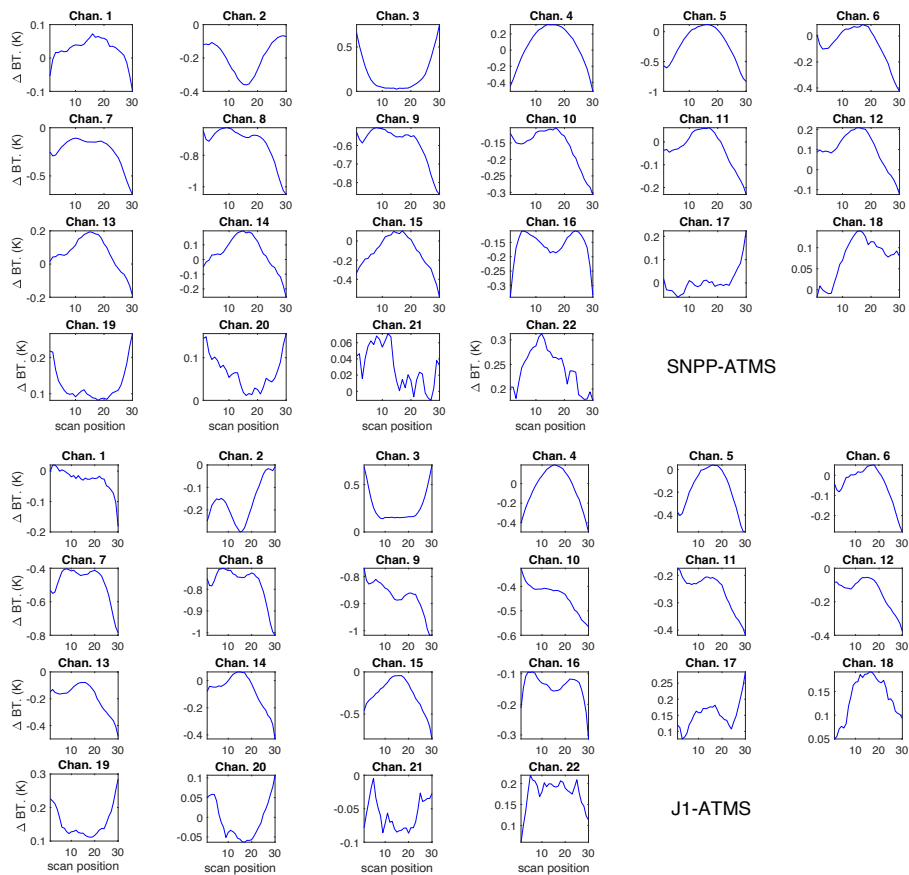


Figure 8 Global mean bias (in BTs) predicted by the SiFSAP algorithm for ATMS measurements onboard of SNPP and NOAA20(JPSS-1) on April 30th, 2020.

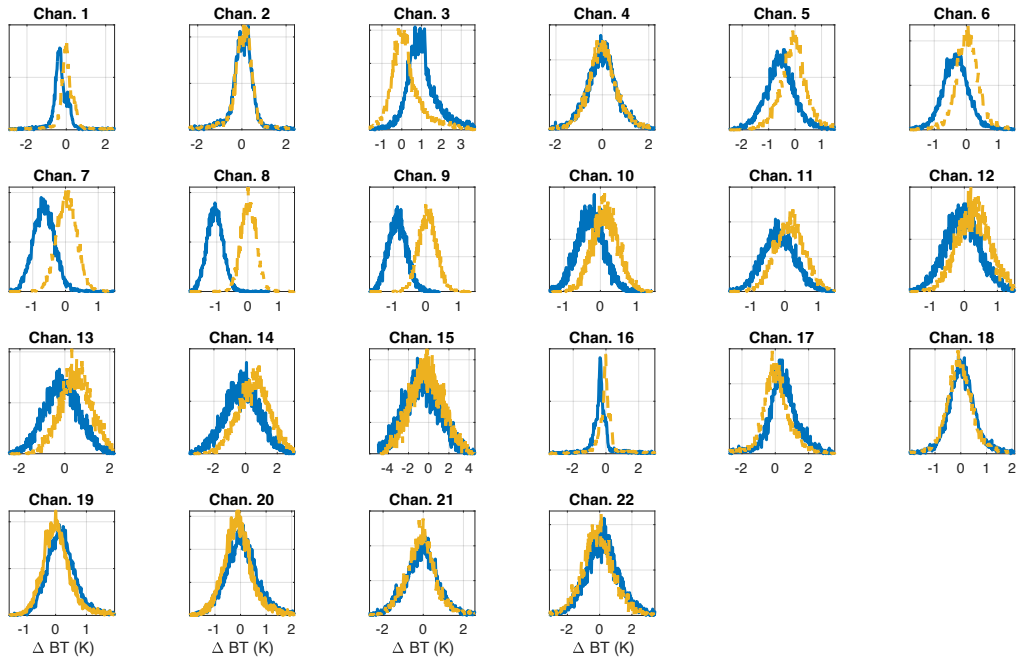


Figure 9 Blue solid curves: histograms that illustrates the distribution of biases in different SNPP-ATMS channels for over the land measurements during April 30th, 2020 at the 52.725o scan position, being derived from the study discussed in Section 3.3; Yellow dash curves: histograms of biases after the correction following the regression-prediction scheme.

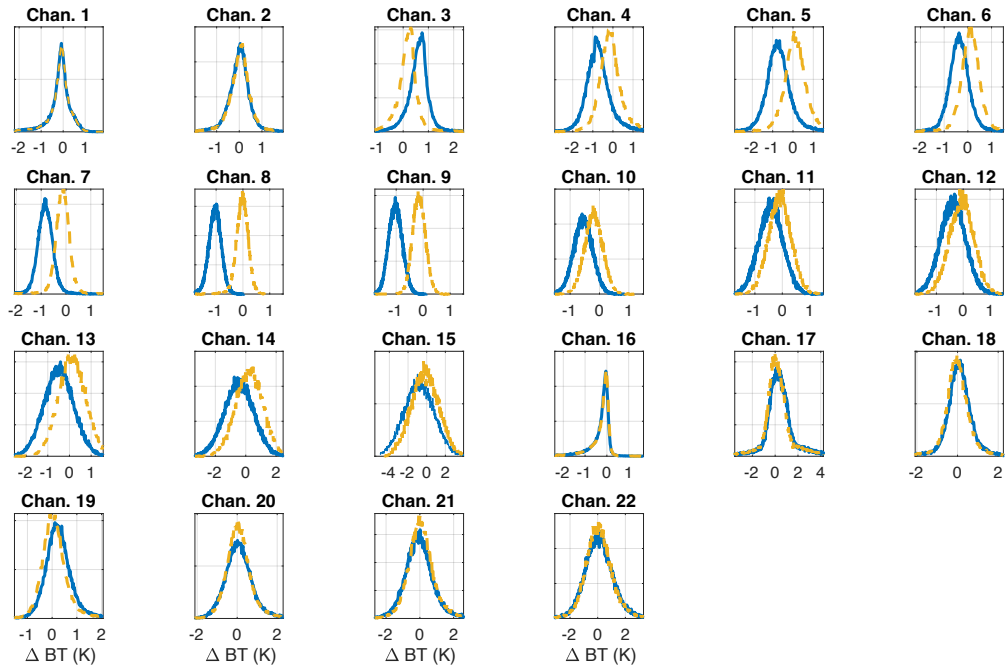


Figure 10 Blue curves: similar to Figure 9 but for histograms that illustrate the distributions of biases in different NOAA20-ATMS channels for over the ocean measurements the 52.725° scan position. Yellow dash curves: histograms of biases after the correction following the regression-prediction scheme.

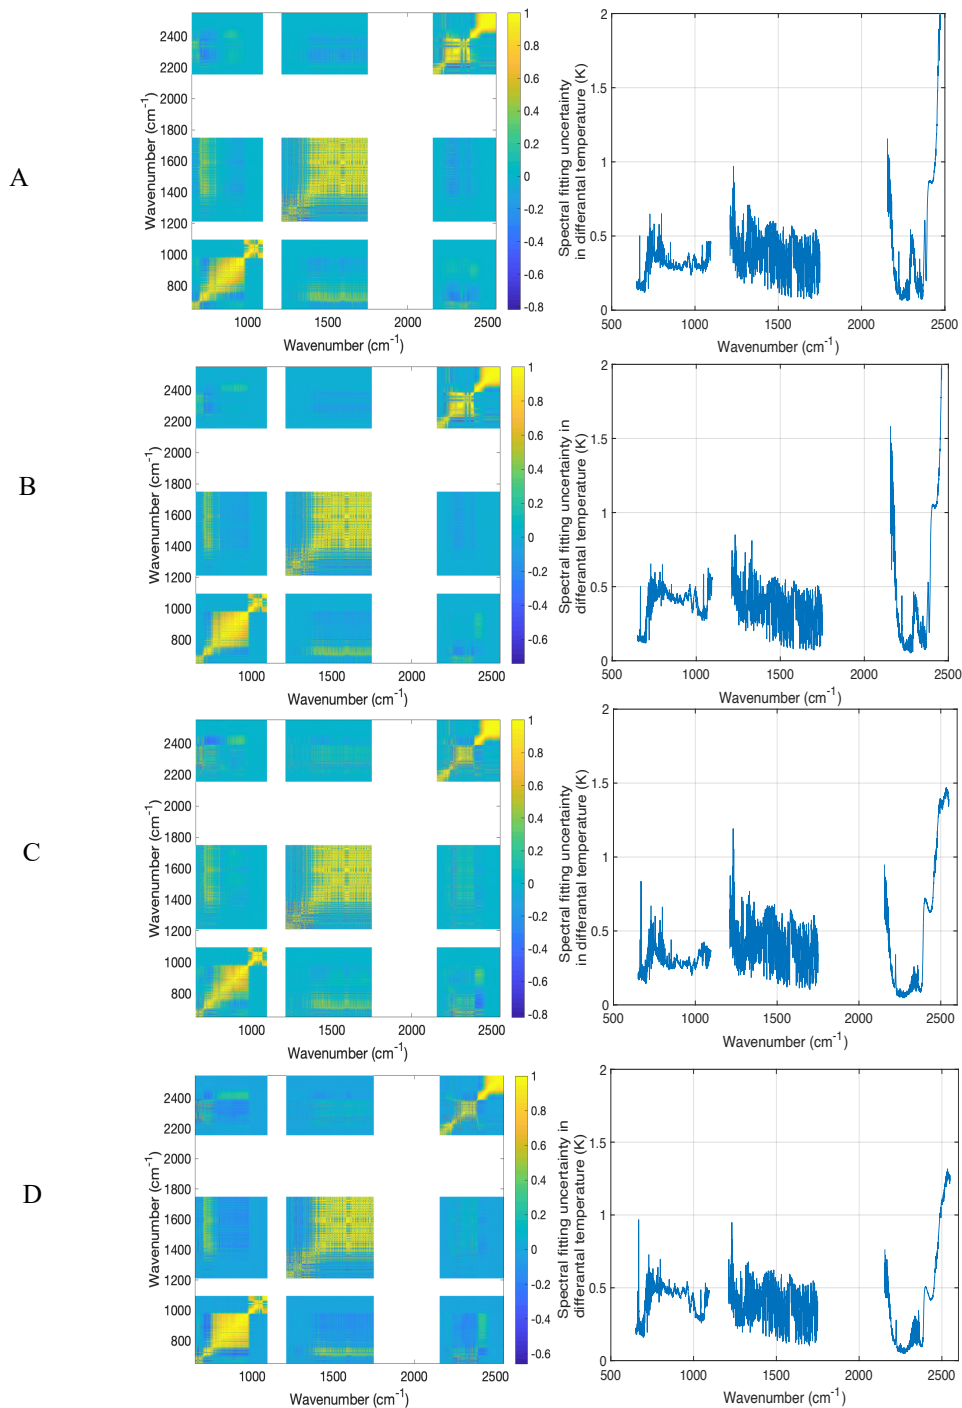


Figure 11 Left column: Spectral fitting error covariances (normalized by diagonal elements) used for SNPP-CrIS SiFSAP algorithm; Right column: Corresponding magnitude of the spectral fitting uncertainty for each CrIS channels (quantified as differential temperature at 280 K); A – For over ocean ascending observations; B – For over land ascending observations; C – For over ocean descending observations; D – For over land descending observations.

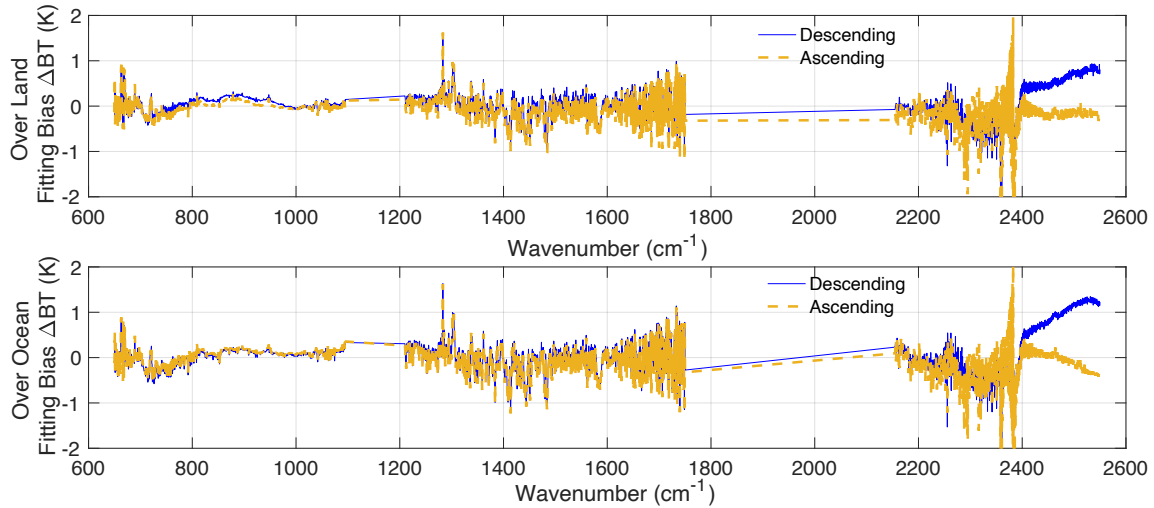


Figure 12 Global scale daily mean spectral fitting bias achieved by SiFSAP for SNPP-CrIS observations on January 14, 2016.

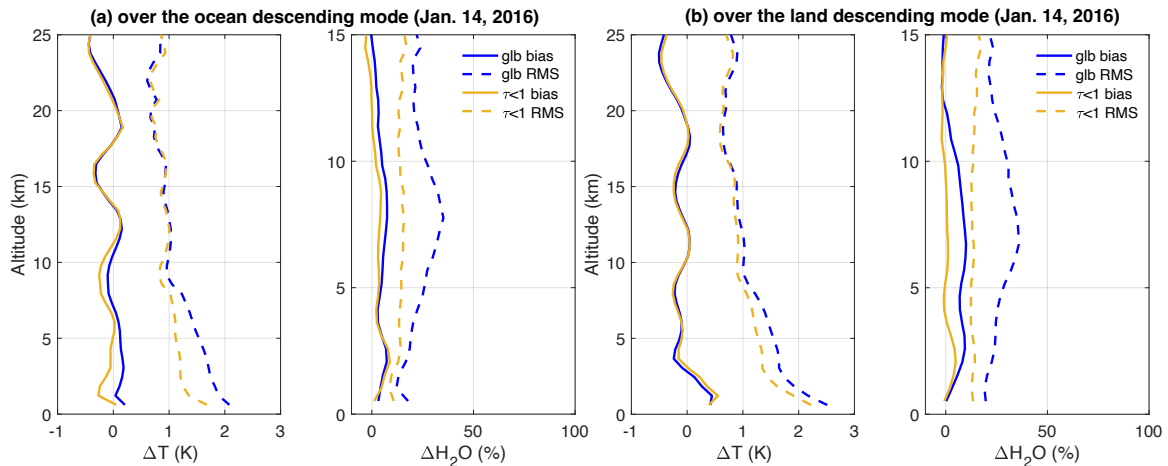


Figure 13 Error statistics of global temperature and water vapor profiles retrieved from SNPP-CrIS/ATMS descending observations with respect to ECMWF for (a) over the ocean scenes and (b) over the land scenes. Solid lines: biases of temperature and water vapor profiles; dashed lines: RMS errors of the temperature and water vapor profiles. In addition to the bias and RMS values for all CrIS/ATMS descending measurements, the statistics for observations of under either clear sky or thin cloud (with cloud optical depth less than 1.0) are explicitly plotted to illustrate the impact of cloud on the retrieval accuracy of temperature and water vapor profiles at low altitudes.

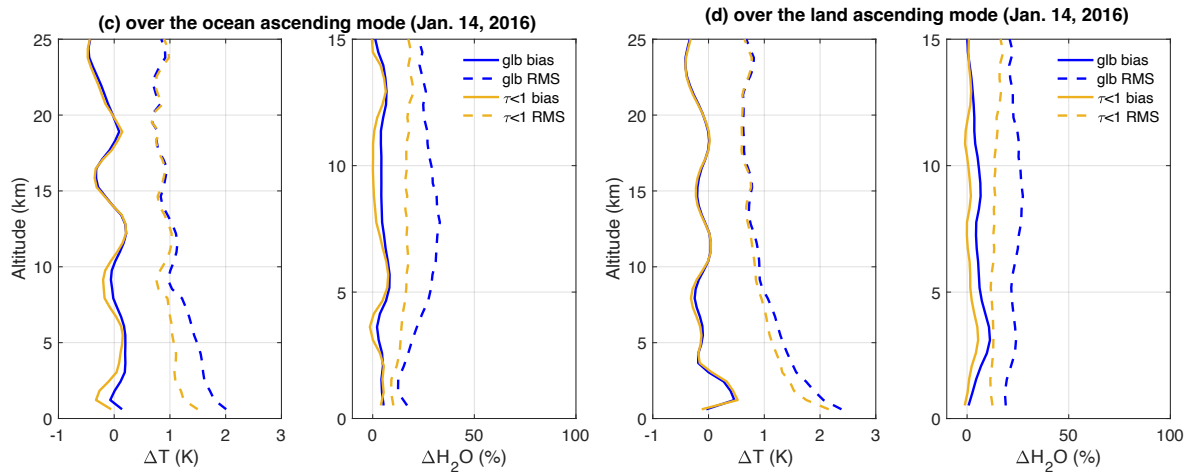


Figure 14 Error statistics of global temperature and water vapor profiles retrieved from SNPP-CrIS/ATMS ascending observations with respect to ECMWF for (c) over the ocean scenes and (d) over the land scenes.

885

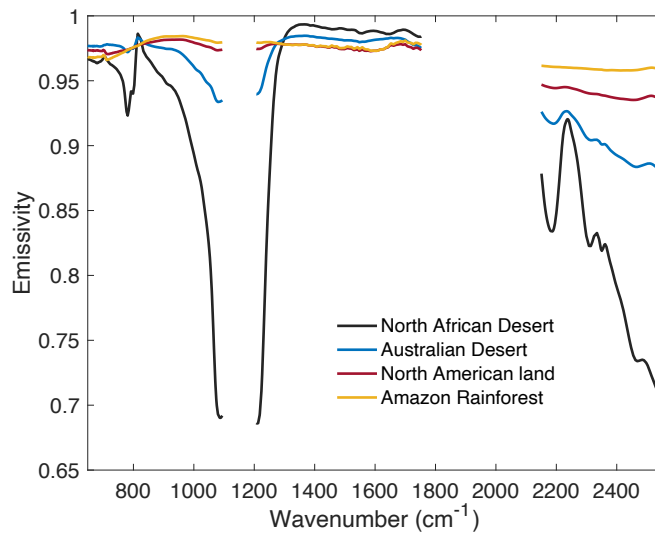


Figure 15 Sample land emissivity spectra from SiFSAP of SNPP CrIS.

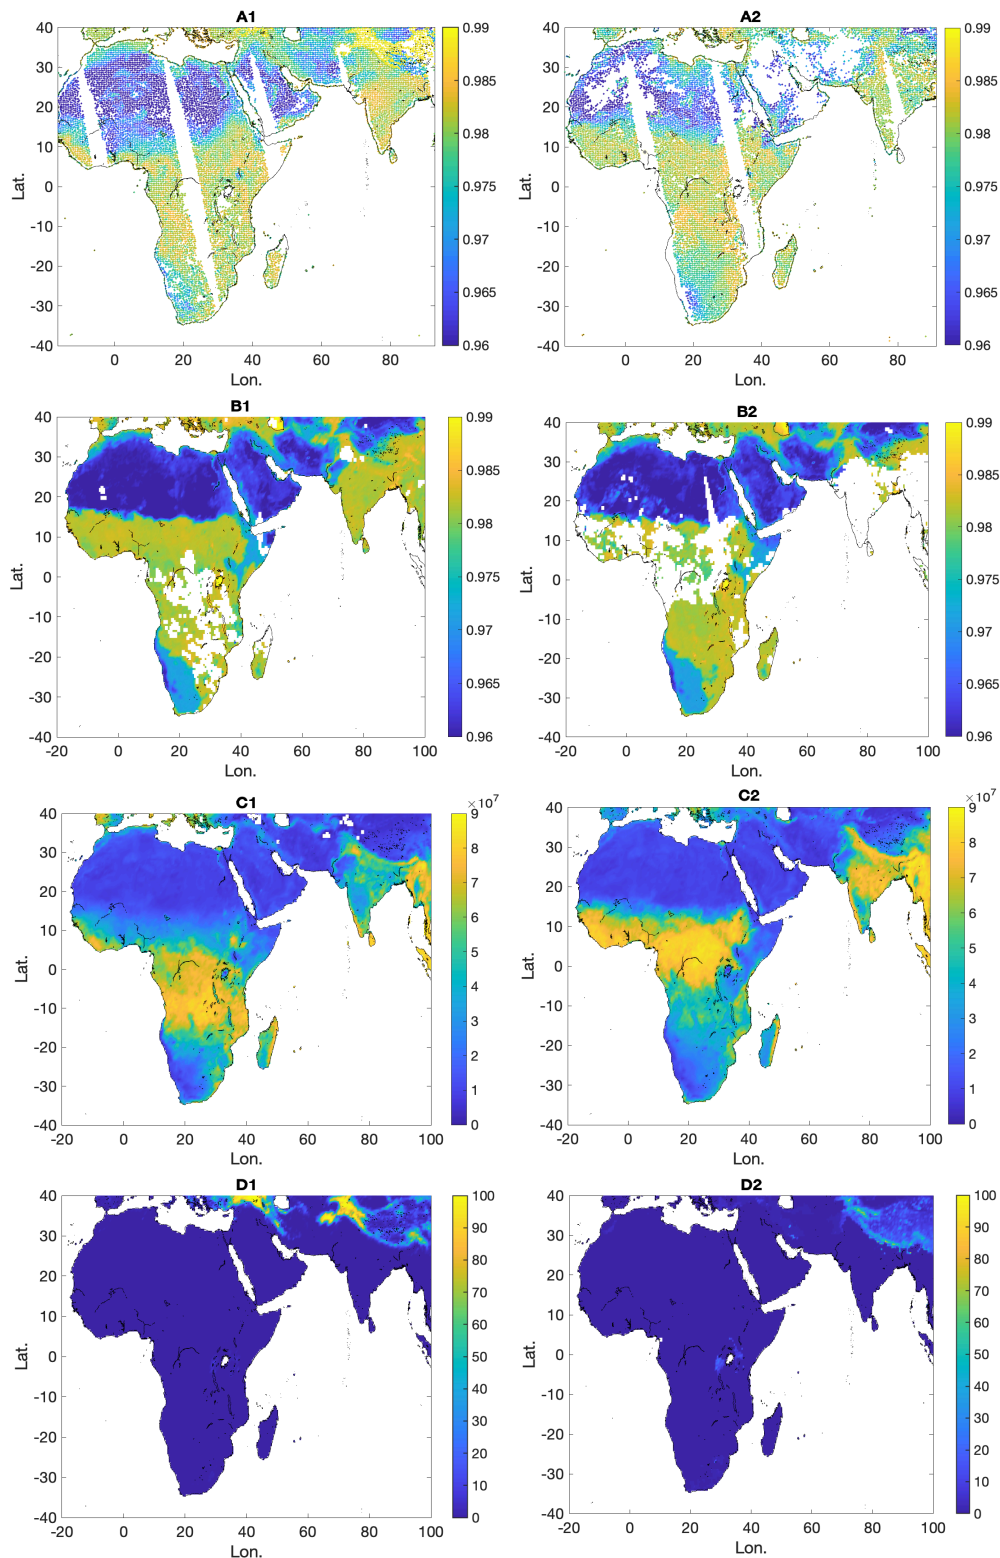


Figure 16 A1 and A2 – SiFSAP surface emissivity at 11 μm for January 14, 2016 and August 9, 2017, respectively; B1 and B2 – MODIS surface emissivity at 11 μm for January, 2016 and August of 2017, respectively; C1 and C2 – MODIS monthly NDVI values for January, 2016 and August of 2017, respectively; D1 and D2 – MODIS monthly snow coverage for January, 2016 and August of 2017, respectively; The area with relatively thicker clouds single (cloud optical depth larger than 1.0) are filtered out in subplots A1 and A2.

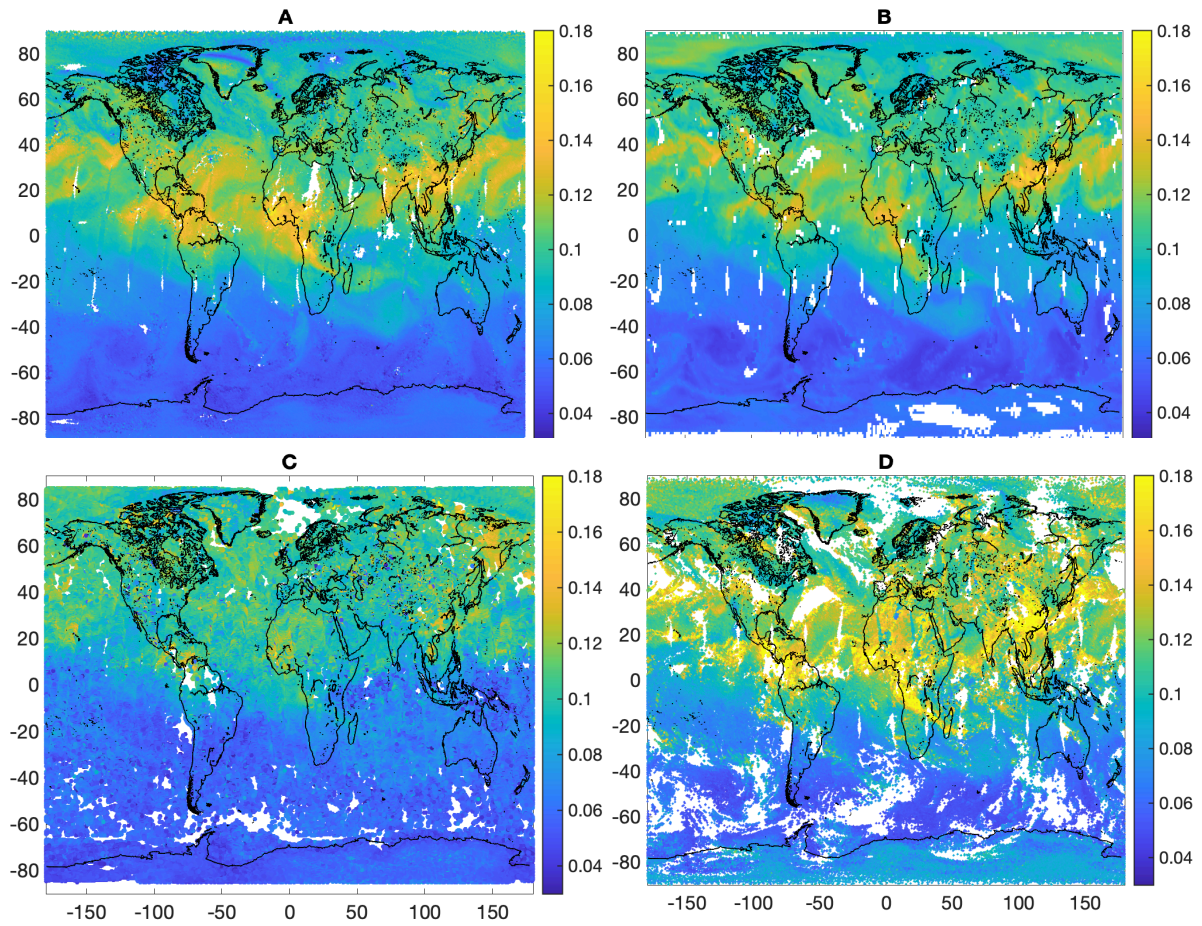


Figure 17 A and B are map plots of VMR (ppmv) of CO at 500 hPa from SNPP CrIS SiFSAP and SNPP CrIS CLIMCAPS for May 12th, 2020, respectively; C shows the corresponding MOPITT CO VMR at 500hPa (during May 10-14, 2020, to ensure a global scale spatial coverage). Metop-B IASI FORLI CO VMR at 500 hPa is plotted in D.

890

895

900

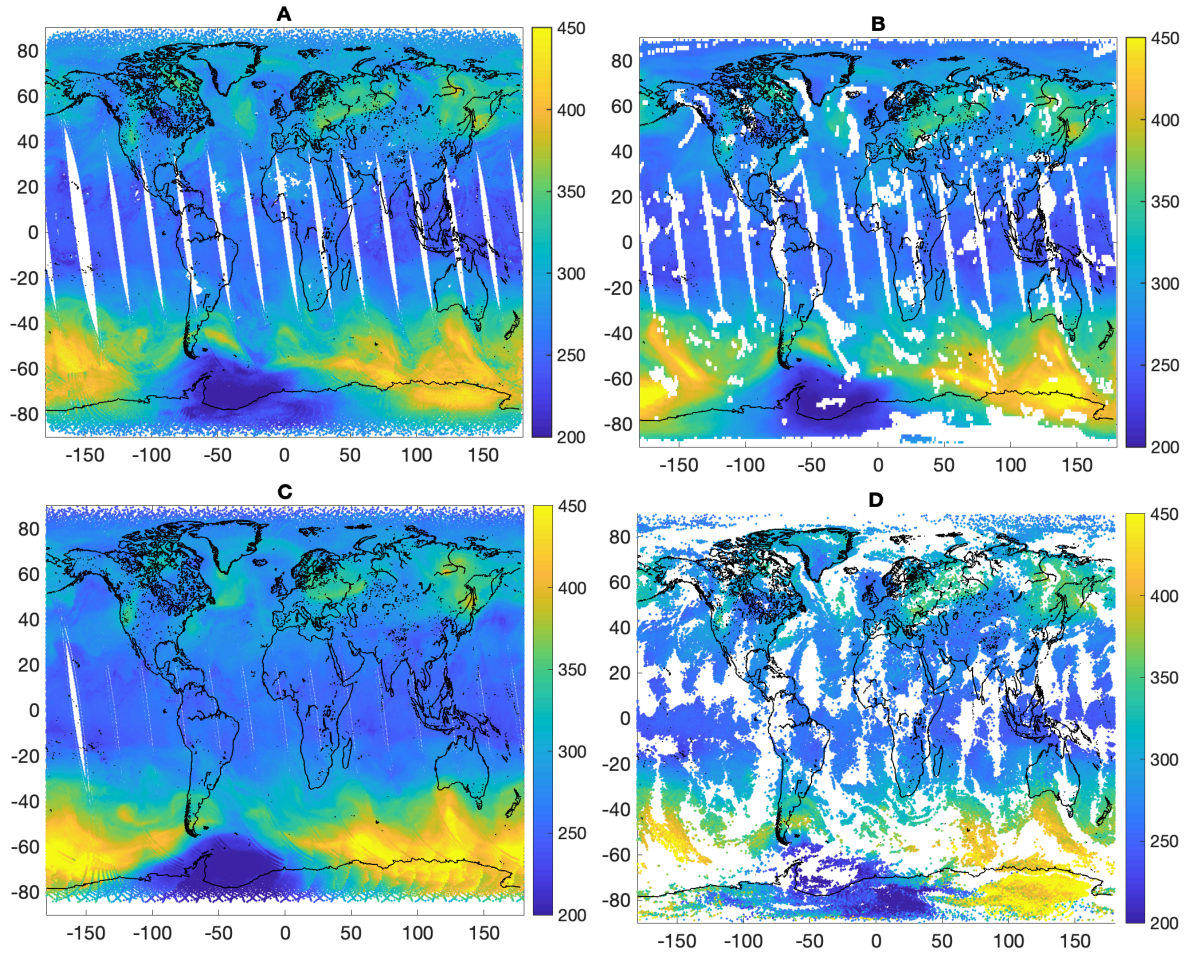


Figure 18 O₃ total column amount (DU) retrieved from satellite-based observations on September 20th, 2019 (A – SNPP/CrIS SiFSAP; B – SNPP/CrIS CLIMCAPS; C – SNPP-OMPS; D – Metop-B/IASI FORLI).

905

910

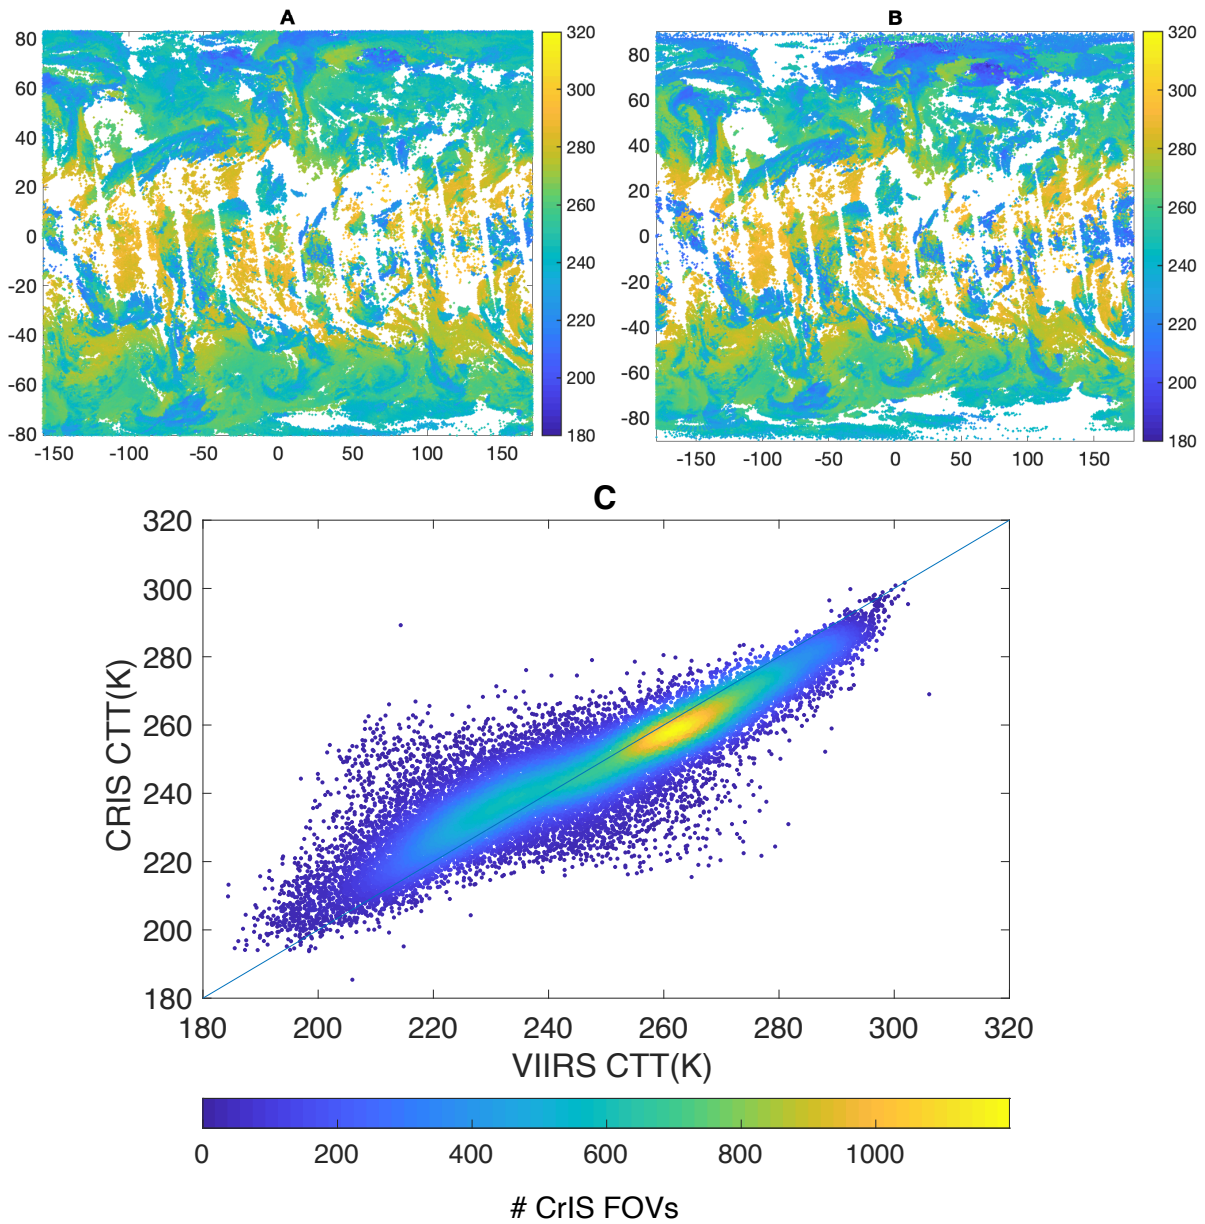


Figure 19 Cloud top temperature (K) for January 1st, 2016 from SNPP/CrIS SiFSAP (A) and that from SNPP/VIIRS cloud data products collocated to CrIS footprints (B). C is the corresponding scatter plot.

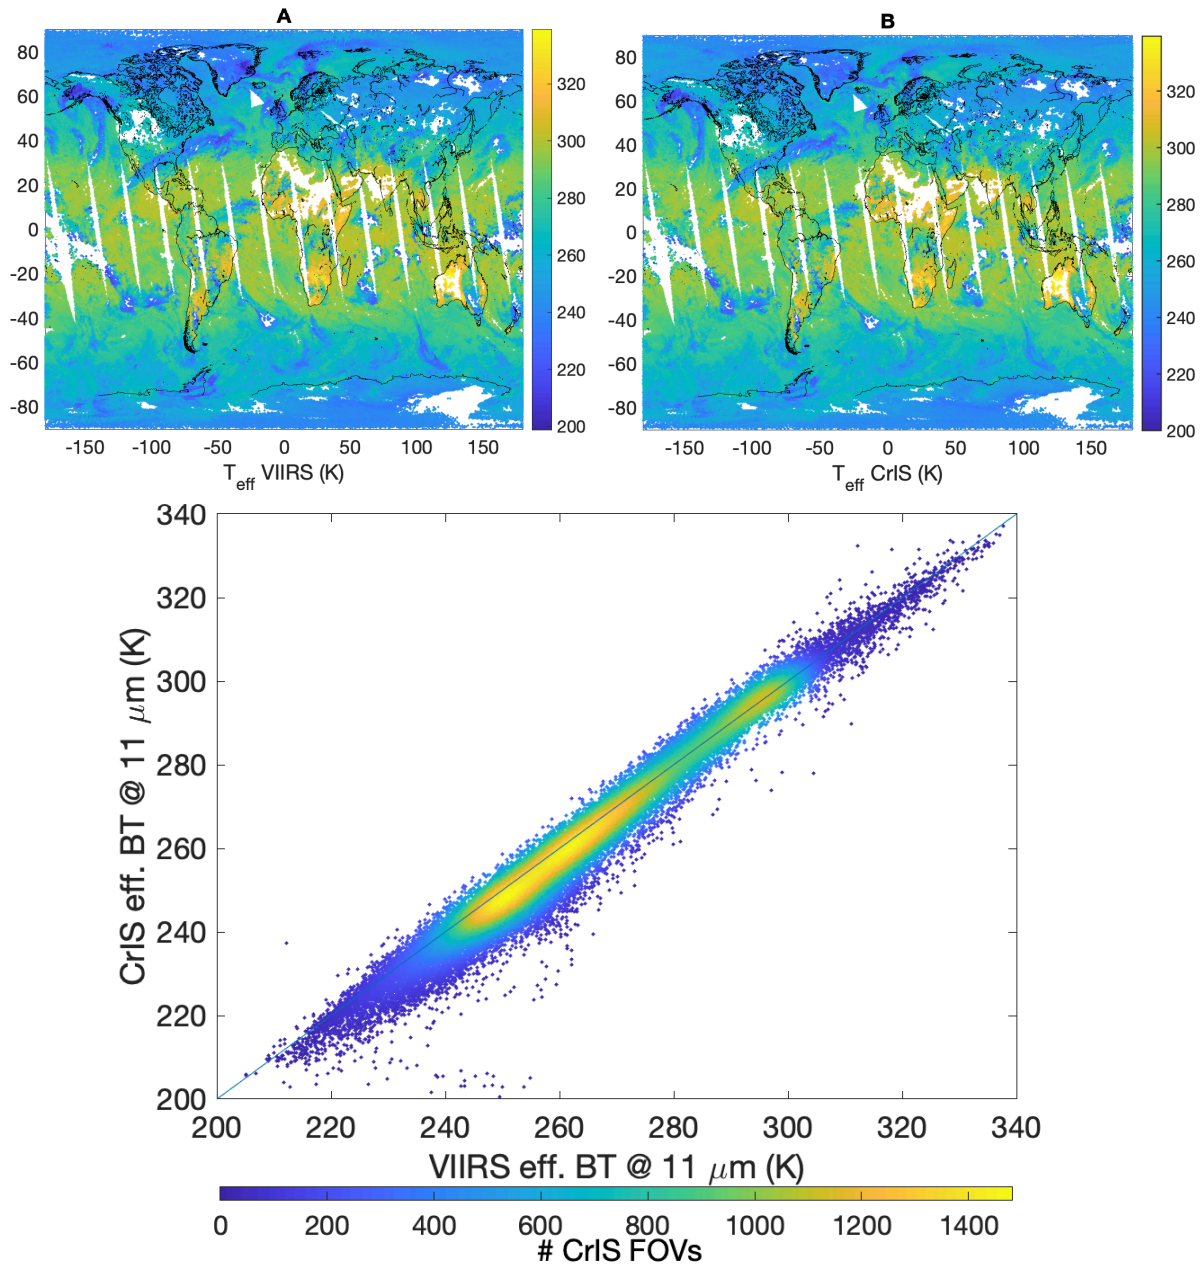


Figure 20 Effective brightness temperature (K) for January 1st, 2016 from SNPP/CrIS SiFSAP (A) and that from SNPP/VIIRS cloud data products collocated to CrIS footprints (B). C is the corresponding scatter plot.

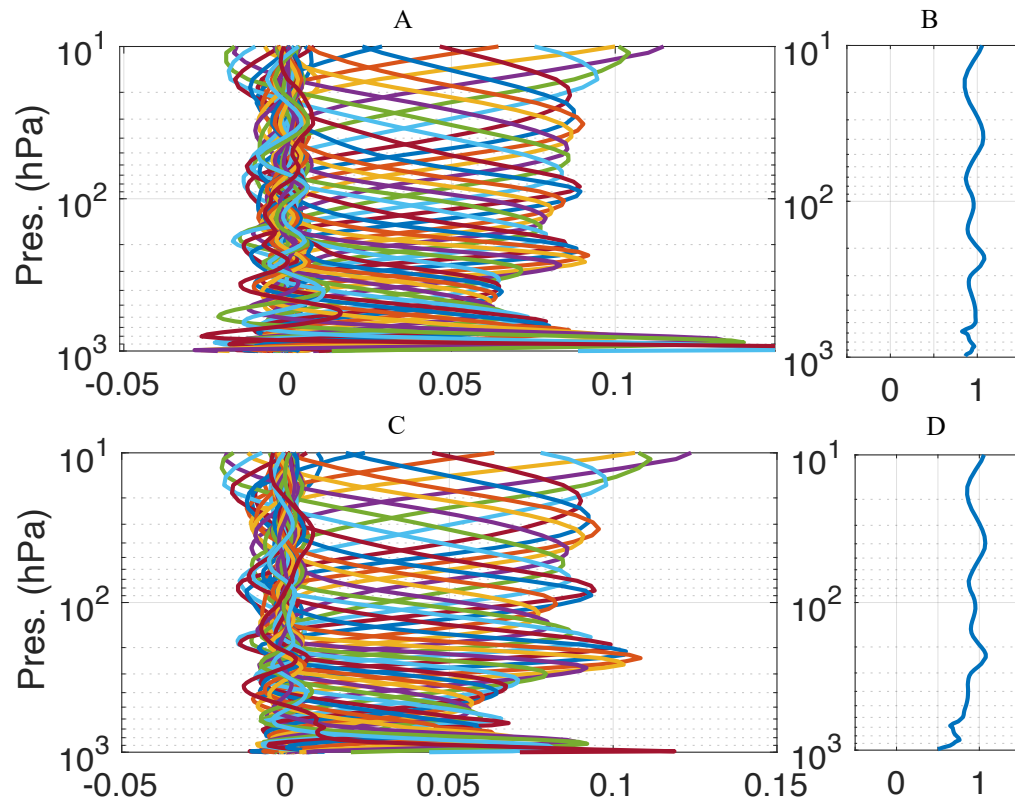


Figure 21 Sample temperature averaging kernels from SNPP/CrIS SiFSAP; A – averaging kernel under a clear sky condition; B – sum of averaging kernel rows at different pressure levels. C and D represent those under a cloudy sky condition.

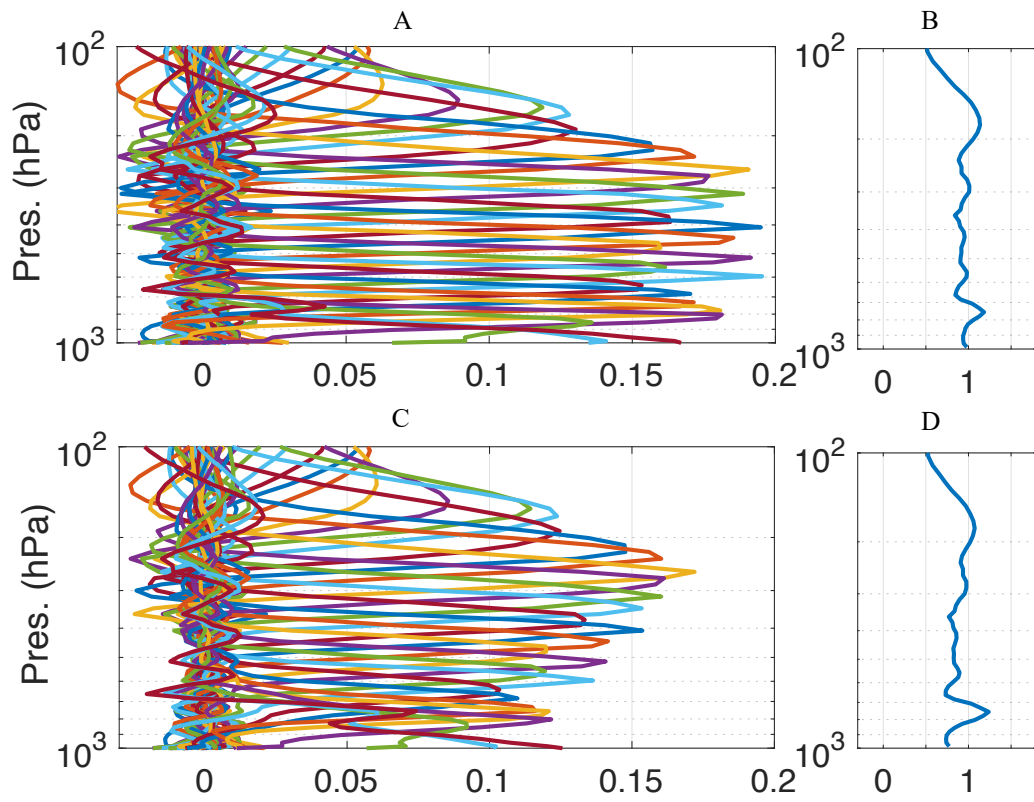


Figure 22 Similar to Figure 21 but for water vapor retrievals.

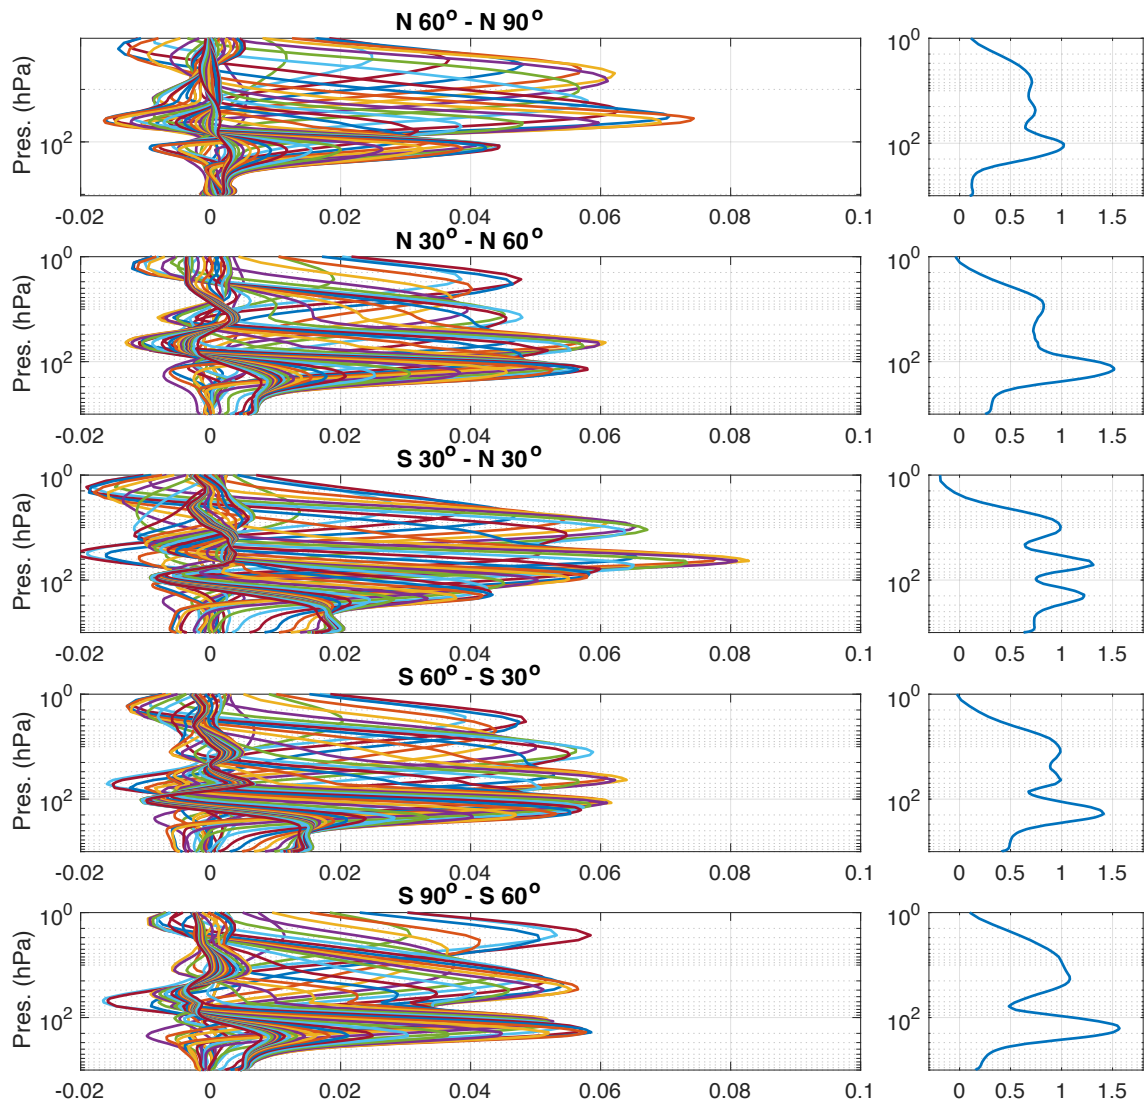


Figure 23 Ozone averaging kernels of September 20th, 2019 from SiFSAP of SNPP CrIS for different latitudinal regions.

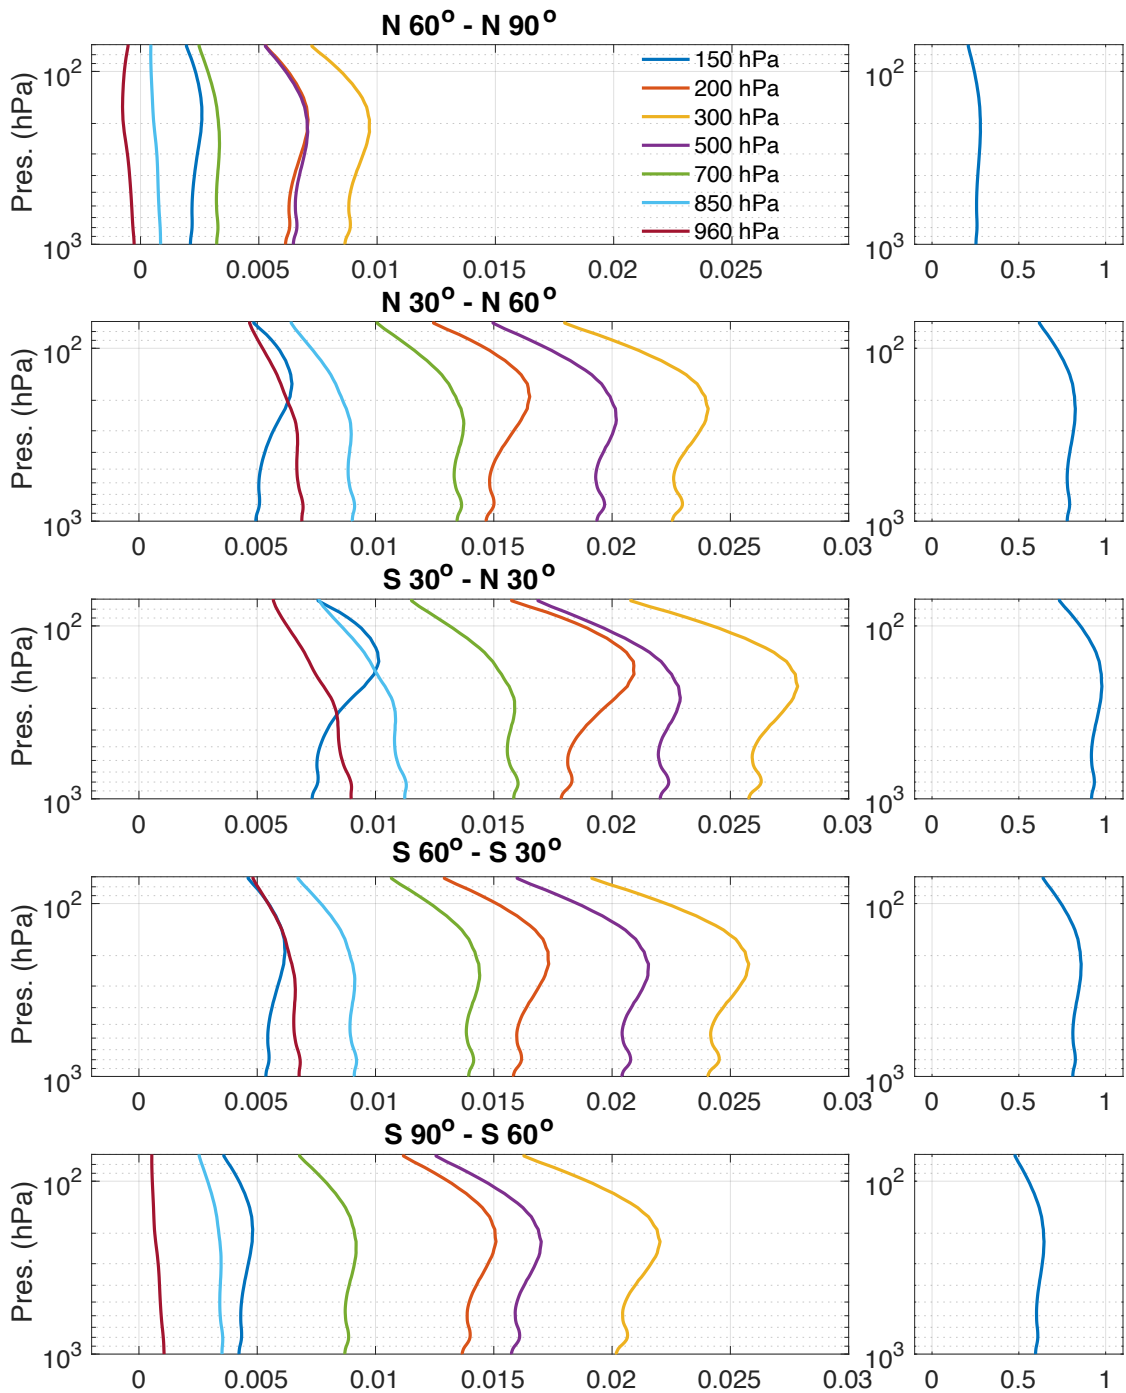


Figure 24 CO averaging kernels of May 12th, 2020 from SIFSAP of SNPP CrIS for different latitudinal regions.