

1 Width evolution of channel belts as a random walk

2 Jens M. Turowski^{1,2}, Fergus M^cNab¹, Aaron Bufo^{1,3}, Stefanie Tofelde⁴

3 ¹ Helmholtz Zentrum Potsdam, GeoForschungsZentrum (GFZ) Potsdam, Potsdam, Germany

4 ² State Key Laboratory of Hydrosience and Engineering, Tsinghua University, Beijing, China

5 ³ Department of Earth and Environmental Sciences, Ludwig Maximilian University Munich, Munich, Germany

6 ⁴ Institute of Geological Sciences, Freie Universität Berlin, Berlin, Germany

7
8 *Correspondence to:* Jens M. Turowski (jens.turowski@gfz-potsdam.de)

9 **Abstract.** Channel belts form by the mobilization and deposition of sediments during the lateral migration of
10 rivers. Channel-belt width and its temporal evolution is important for the hydraulics, hydrology, and ecology of
11 landscapes, and for human activities such as farming, protecting infrastructure, and natural hazard mitigation. Yet,
12 we currently lack a comprehensive theoretical description of the width evolution of channel belts. Here, we
13 explore the predictions of a physics-based model of channel-belt width for the transient evolution of channel belts.
14 The model applies to laterally unconfined channel belts in foreland areas as well as to laterally confined channel
15 belts in mountain settings (here, channel-belt width equals valley-floor width) The model builds on the assumption
16 that the switching of direction of a laterally migrating channel can be described by a Poisson process, with a
17 constant rate parameter related to channel hydraulics. As such, the lateral migration of the channel can be viewed
18 as a non-standard one-dimensional random walk. In other words, at each river cross section the river randomly
19 moves either to the left or right at a given time. The model predicts three phases in the growth of channel belts.
20 First, before the channel switches direction for the first time, the channel belt grows linearly. Second, as long as
21 the current width is smaller than the steady state width, growth follows an exponential curve on average. Finally,
22 there is a drift phase, in which the channel-belt width grows with the square root of time. We exploit the properties
23 of random walks to obtain equations for the distance from a channel that is unlikely to be inundated in a given
24 time interval (law of the iterated logarithm), distributions of times the channel requires to return to its origin and
25 to first arrive at a given position away from the origin, and the mean lateral drift speed of steady state channel
26 belts. All of the equations can be directly framed in terms of the channel's hydraulic properties, in particular its
27 lateral transport capacity that quantifies the amount of material that the river can move in lateral migration per
28 unit time and channel length. The distribution of sediment age within the channel belt is equivalent to the
29 distribution of times to return to the origin, which has a right-hand tail that follows a power-law scaling with an
30 exponent of $-3/2$. As such, the mean and variance of ages of sediment deposits in the channel belt do not converge
31 to stable values over time, but depend on the time since the formation of the channel belt. This result has
32 implications for storage times and chemical alteration of floodplain sediments, and the interpretation of measured
33 sediment ages. Model predictions compare well to data of sediment-age distributions measured at field sites and
34 the temporal evolution of channel belts observed in flume experiments. Both comparisons indicate that a random
35 walk approach adequately describes the lateral migration of channels and the formation of channel belts. The
36 theoretical description of the temporal evolution of channel-belt width developed herein can be used for
37 predictions for example in hazard mitigation and stream restoration, and to invert fluvial strata for ambient
38 hydraulics conditions. Further, it may serve to connect models designed either for geological or process
39 timescales.

40 **1 Introduction**

41 Rivers migrate laterally. Lateral river migration establishes the channel belt, which is defined as the corridor of
42 channel migration formed during one river-avulsion cycle (Bridge and Leeder, 1979; Nyberg et al., 2023).
43 Channel belts include the river channel and active bars, levees and abandoned channels, and other areas affected
44 by the river during floods or migration (Fig. 1a) (Nyberg et al., 2023). They can be represented by the planform
45 area that the river has interacted with since its last avulsion, and they can be either unconfined, for example in
46 foreland areas, or confined, for example by valley walls in mountain regions (Fig. 1a&b) (e.g., Howard, 1996;
47 Limaye, 2020; Turowski et al., 2024). Channel belts affect catchment hydrology, host aquifers and hydrocarbon
48 deposits (e.g., Andersen et al., 1999; Blum et al., 2013; Bridge, 2001), and present a key location for organic
49 carbon storage and alteration (e.g., Repasch et al., 2021). During lateral migration, rivers deposit sediment or
50 erode previously deposited sediment, thereby affecting chemical weathering, nutrient transport, and ecology (e.g.,
51 Fotherby, 2009; Jonell et al., 2018; May et al., 2013; Miller, 1995; Naiman et al., 2010; Schumm & Lichty, 1963;
52 Torres et al., 2017). Further, the exchange of sediment during lateral channel migration determines the distribution
53 of ages of the sediment stored at and near the surface along rivers, with implications for landscape dynamics, the
54 interpretation of fluvial stratigraphy, and nutrient cycles (e.g., Bradley & Tucker, 2013; Marr et al., 2000; Pizzuto
55 et al., 2017; Scheingross et al., 2021). Landforms such as backswamps or oxbow lakes, which are specific to
56 channel belts, often host unique ecological communities that depend on regular floods (e.g., Bayley, 1991; Junk
57 et al., 1989; Meitzen et al., 2018). Finally, lateral bank erosion is an important natural hazard that can destroy
58 agricultural areas and infrastructure (e.g., Badoux et al., 2014; Best, 2019). All of the mentioned effects make
59 channel belts an important component of fluvial response to environmental change (e.g., Hajek and Straub, 2017).
60 As such, channel belts record a river's past activity, and can be used as archives for Earth's history on the timescale
61 of hundreds to thousands of years (e.g., Allen, 1978; Bridge and Leeder, 1979).

62

63 The long-term dynamics of channel belts have been studied separately for meandering (e.g., Camporeale et al.,
64 2005; Greenberg & Ganti, 2024; van de Lageweg et al., 2013) and braided rivers (e.g., Bertoldi et al., 2009;
65 Limaye, 2020). Researchers have largely focused on channel characteristics and statistics, their temporal evolution
66 and approach to a steady state. For meandering rivers, these have typically included the linear and curvilinear
67 wavelength, the curvature of the channel, and the role of meander cuts-offs in reaching and maintaining a steady
68 state (e.g., Camporeale et al., 2005; Howard, 1996). For braided rivers, they have typically included braiding
69 indices and planform patterns (e.g., Bertoldi et al., 2009; Egozi and Ashmore, 2009). In comparison to these
70 statistics describing the channels within the channel belt, the belt width has received little attention. Greenberg et
71 al. (2024) found that channel-belt area scales with floodplain reworking timescales. Reworking timescales
72 monotonically increase as water partitions into fewer active channel threads, and as channels become more
73 sinuous, and thus vary between river systems with different planform types. Studying models of meandering
74 rivers, Camporeale et al. (2005) concluded that one time and one length scale are sufficient to explain steady state
75 characteristics of channel belts regardless of the hydrodynamic complexity of the underlying model. They
76 suggested that channel-belt width scales with the meandering wavelength, which in turn scales with flow depth.
77 A qualitative comparison to natural channels was favourable. Limaye (2020) postulated that channel-belt width
78 of braided rivers scales with channel width. Using flume experiments, he showed that both channel and belt width
79 follow a similar scaling relationship with discharge. Turowski et al. (2024) developed a steady state model for


80 confined and unconfined channel-belt width under the assumption that switches in the direction of lateral channel
81 migration are based on a random process with a uniform mean rate of switching in time. In their model, the
82 unconfined steady state channel-belt width linearly depends on flow depth. The steady state width of confined
83 channel-belt (i.e., the valley-floor width) is reduced relative to unconfined channel belts due to lateral input of
84 sediments from adjacent valley walls.

85

86 The temporal evolution of channel-belt width has so far hardly been explored. Limaye (2020) identified three
87 phases of channel-belt growth in his experiments, co-occurring with distinct phases of meandering or braiding. In
88 a first phase, the channel established a graded geometry from the initial imposed boundary condition. In the second
89 phase, the channel belt grew rapidly, while in the third phase, it reduced its growth rate. When compared in a
90 dimensionless framework, the switches between phases occurred at the same dimensionless time for different
91 experimental conditions. Wickert et al. (2013) and Bufe et al. (2019) observed an exponential approach to the
92 steady state width in experiments, when tracking the increase of the area visited by the channel over time. Hancock
93 & Anderson (2000) suggested that the initial rapid widening rate of a channel belt and the subsequent decrease of
94 the widening rate is due to the declining probability of the channel to be located at the belt boundary as the belt
95 widens. This notion was regularly picked up in subsequent work (e.g., Malatesta et al., 2017; Martin et al., 2011),
96 and has led to steady state descriptions of valley width (Tofelde et al., 2022; Turowski et al., 2024). Equations
97 relating the growth evolution of confined and unconfined channel belts to the hydraulic conditions in the channel
98 are currently not available. Yet, they could be useful in diverse topics. For example, they could be used as forward
99 models for making predictions related to flood hazard assessment and stream restoration or as inverse models to
100 obtain paleo-hydraulic conditions from fluvial stratigraphy and depositional sequences. Further, they could
101 provide a framework to interpret data from natural rivers with regard to nutrient cycling, channel-floodplain
102 interactions, and ecology.

103

104 Turowski et al. (2024) described lateral channel migration as a Poisson process, in which the switches in direction
105 occur randomly in time at a constant mean rate. They subsequently focused on the mean behaviour of the model,
106 and proceeded to derive equations for the steady state width of unconfined and confined channel belts. Here, we
107 explore the predictions of their model concept for the transient approach of channel belts to their steady state
108 width, and the consequences of a stochastic formulation for channel-belt dynamics. Specifically, we derive
109 analytical equations describing the temporal evolution and the bounds of channel belts, their average lateral drift
110 once they have reached a steady state, and the sediment residence-time distribution, which is equivalent to the
111 distribution of sediment ages. Analytical results are benchmarked with stochastic numerical simulations. We
112 compare the model results to data from flume two experiments (Bufe et al., 2016, 2019), and sediment age
113 distributions from three field sites (Everitt, 1968; Huffman et al., 2022; Skalak & Pizzuto, 2010).

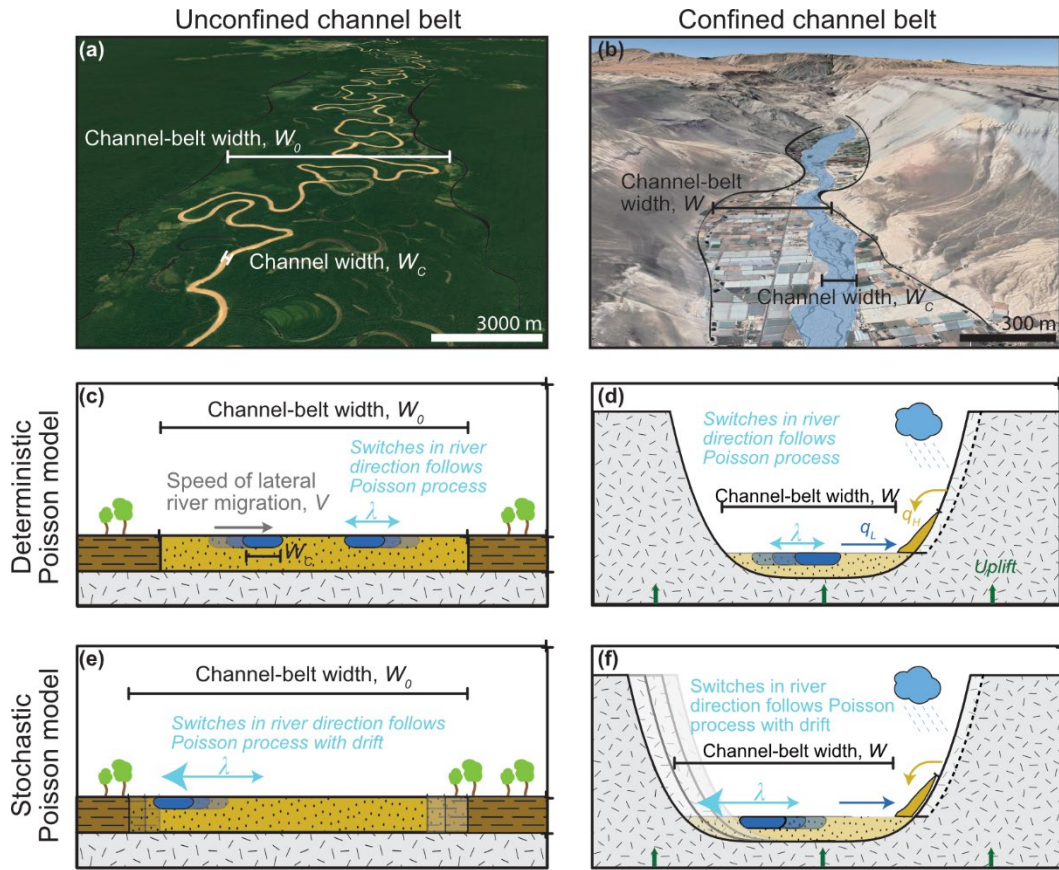

114

115 **Fig. 1: Schematic illustration of the model concept.** a) Unconfined channel belt of the Juruá River, Brazil (6.75° S,
 116 70.30° W; Map data: Google, ©2024 Maxar Technologies). b) Confined channel belt of the San Jose River, Chile (18.58°
 117 S, 69.97° W; Map data: Google, ©2024 Maxar Technologies, Airbus). (c, d) the channel switches the direction of motion
 118 after a certain timescale. It thus evolves to a steady-state width that does not change over time. In the Stochastic Poisson
 119 Model (e, f), the switching timescale is a random number. As such, the channel may migrate beyond the channel-belt
 120 limits (e) or erode the valley walls even after reaching the steady-state width. This migration can lead to a lateral drift
 121 of the unconfined or confined channel belt.

122 2 Theoretical developments

123 In this chapter, we will briefly summarize the valley width model by Turowski et al. (2024) (Section 2.1).
 124 Afterwards, we outline the basis of the stochastic model approach used herein (Section 2.2). Then, we derive
 125 equations for the temporal evolution of channel belts while approaching a steady state, and their lateral drift speed
 126 once they have reached steady state (Section 2.3), the limits of the channel-belt bounds (Section 2.4), the first
 127 passage distribution (Section 2.5), and the age distribution of sediment (Section 2.6).

128 2.1 Summary of the steady state model

129 Building on earlier work (e.g., Bufe et al., 2019; Martin et al., 2011; Tofelde et al., 2022), Turowski et al. (2024)
 130 developed a model for the steady state width of fluvial valleys (Fig. 1), which includes predictions for confined
 131 and unconfined channel belts. In the model, each cross-section contains a single channel, which is treated as if it
 132 moves independently from those upstream and downstream. River channels are assumed to move laterally by
 133 bank erosion and deposition. The channel belt widens when the river crosses beyond the previous channel belt
 134 boundaries (Fig. 1). The lateral channel-migration speed V [$L T^{-1}$] is equal to the ratio of the lateral transport

135 capacity q_L [L^2T^{-1}] and the bank height in the direction of motion H_+ [L], where q_L quantifies the amount of
 136 material that the river can move in lateral direction per unit time and channel length (Bufe et al., 2019):

$$137 \quad V = \frac{q_L}{H_+},$$

138 (1)

139 Turowski et al. (2024) viewed switches in the direction of lateral motion of the river as stochastic events. These
 140 are assumed to be independent and identically distributed, with a constant mean event rate per unit time, λ [T^{-1}],
 141 and can therefore be described by a Poisson process. The mean rate of switching λ is proportional to the ratio of
 142 the lateral transport capacity q_L and the square of the flow depth h [L] (Turowski et al., 2024)

$$143 \quad \lambda = k \frac{q_L}{h^2},$$

144 (2)

145 where k [-] is a dimensionless constant. We can define an effective switching time scale as a constant time scale
 146 that leads to the same steady state width as is obtained from a fully stochastic model. The effective switching time
 147 scale ΔT [T] is inversely proportional to λ

$$148 \quad \Delta T = \frac{c}{\lambda},$$

149 (3)

150 where c [-] is a dimensionless constant of order one. Integrating over the distance travelled laterally by the channel
 151 within ΔT yields an equation for the unconfined channel-belt width W_0 [L] (see Turowski et al., 2024, for details):

$$152 \quad W_0 = \int_0^{\Delta T} V dt + W_C = k_0 h + W_C.$$

153 (4)

154 Here, $k_0 = c/k$ [-] is a dimensionless constant, W_C [L] is the channel width, and t [T] is time. To arrive at the final
 155 equality in eq. (4), we assumed that in an unconfined channel belt that is neither incising nor aggrading, the bank
 156 height in the direction of motion, H_+ , is equal to the flow depth, h (cf. Turowski et al., 2024). In river valleys, the
 157 channel belt or valley floor is narrower than W_0 due to uplift or lateral supply of sediment from hillslopes, and the
 158 steady-state valley-floor width W_V [L] can be described by the equation (Turowski et al., 2024):

$$159 \quad W_V = \left(\frac{q_L - q_H}{U} \right) \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} + W_C.$$

160 (5)

161 Here, q_H [L^2T^{-1}] is the lateral supply rate of hillslope sediment per unit channel length, and U [$L T^{-1}$] is the uplift
 162 rate. Equation (5) predicts that river valleys reach a steady state width that depends on five input parameters (flow
 163 depth h , channel width W_C , uplift rate U , lateral transport capacity q_L , and lateral hillslope sediment supply q_H)
 164 and one constant (k_0) that needs to be determined from observations. Steady state valley width is reached when
 165 the system achieves a balance between local sediment input from hillslopes and by uplift, on the one hand, and
 166 the removal of sediment by the river, on the other hand.

167
 168 In summary, in their model, Turowski et al. (2024) assume that the switches in river direction follow a Poisson
 169 process and unconfined channel belts evolve to a steady-state width determined by flow depth and channel width
 170 (eq. 4). Fluvial valleys can attain a maximum steady state width that corresponds to the unconfined channel-belt

171 width W_0 . They are narrower than this unconfined width if they are affected by uplift or lateral hillslope sediment
 172 supply (eq. 5). We call this model the Deterministic Poisson Model hereafter.

173 **2.2 The Stochastic Poisson Model**

174 In order to investigate the temporal evolution of channel-belt width, we further develop the previous model of
 175 Turowski et al. (2024). Instead of assuming the channel switches with a constant characteristic timescale, the
 176 effective switching timescale ΔT (eq. 3), we now explore the consequences of a random switching timescale. This
 177 consideration allows us to observe the temporal behaviour of the random-walk model for lateral river migration.
 178 We call this model the ‘Stochastic Poisson Model’ hereafter. In a Poisson process, the probability mass function
 179 (PMF) that n [-] events (in this case, channel switches) occur within the a time of length Δt [T] is given by

$$180 \quad \text{PMF}_{\text{Poisson}} = \frac{(\lambda \Delta t)^n e^{-\lambda \Delta t}}{n!}. \quad (6)$$

181
 182 Both the expected number of events and their variance are given by $\lambda \Delta t$ [-]. For the derivations within this paper,
 183 we use the idea that the lateral motion of the river channel across the floodplain, in the model concept of a Poisson
 184 process, can be viewed as a non-standard one-dimensional random walk. The channel alternates between steps to
 185 the left and to the right within the cross section, thus switching direction after every step. The step length is not a
 186 constant, but a stochastic parameter equal to the waiting times between individual switching events multiplied by
 187 lateral migration speed. In a Poisson process, the waiting times T_W [T] between events are exponentially
 188 distributed with a mean waiting time of $1/\lambda$, a variance of $1/\lambda^2$, and a probability density function (PDF) given by

$$189 \quad \text{PDF}_{T_W} = \lambda e^{-\lambda T_W}. \quad (7)$$

190
 191 Similarly, for constant migration speed V [L T⁻¹], the PDF of the length of steps $\Delta x = V \Delta t$ [L] is given by

$$192 \quad \text{PDF}_{\Delta x} = \frac{\lambda}{V} e^{-\frac{\lambda}{V} \Delta x}. \quad (8)$$

193
 194 In the following, we will first derive an equation for the approach to the steady state width using the Deterministic
 195 Poisson Model (Turowski et al., 2024), and then use the mathematics of random walks to explore the effects of
 196 stochasticity on the channel belt’s temporal evolution. Finally, we investigate the distribution of floodplain ages.

197 **2.3 Temporal evolution of the channel-belt width**

198 **2.3.1 Approach to steady state in the Deterministic Poisson Model**

199 We first consider the evolution of the channel belt in an unconfined setting. Consider the river channel moving
 200 laterally with speed V . The channel belt widens when the river is located at and moves into the channel-belt
 201 boundary. In contrast, if the river is not located at the boundary, or moves away from it, the channel-belt width
 202 remains unchanged. At any given time, widening can be observed with a probability P [-], which is equal to the
 203 fraction of the time the river spends widening the valley (e.g., Hancock and Anderson, 2002; Tofelde et al., 2022).
 204 The temporal evolution of channel-belt width W [L] is then governed by the differential equation (Tofelde et al.,
 205 2022)

$$206 \quad \frac{dW}{dt} = PV.$$

207 (9)

208 Motion in either direction is equally likely, and, for a given set of hydraulic, tectonic, and sedimentological
 209 boundary conditions, V can be considered as a constant (Bufe et al., 2019; Turowski et al., 2024). In a transient
 210 phase, before the steady state width is reached, the probability of the river not widening, i.e., $1-P$, the channel belt
 211 is equal to the ratio of the current W [L] and the maximum W_0 [L] channel-belt width (Tofelde et al., 2022).
 212 Channel width W_C provides a starting point and needs to be subtracted. Thus, P is given by (Turowski et al., 2024)

$$213 \quad P = 1 - \frac{W - W_C}{W_0 - W_C} = \frac{W_0 - W}{W_0 - W_C}. \quad (10)$$

214
 215 The speed of lateral motion is equal to the ratio of the lateral transport capacity and the height of the bank in the
 216 direction of motion H_+ (eq. 1). Combining eqs. (1), (9) and (10), we obtain a differential equation for channel-belt
 217 evolution

$$218 \quad \frac{dW}{dt} = \frac{W_0 - W}{W_0 - W_C} \frac{q_L}{H_+}. \quad (11)$$

219
 220 Solving equation (11) and applying the boundary condition that channel-belt width W is equal to W_C at time $t = 0$,
 221 we obtain

$$222 \quad W(t) = W_0 - (W_0 - W_C) \exp\left\{-\frac{t}{\tau}\right\} + W_C. \quad (12)$$

223
 224 Here, τ is the governing timescale, which can be interpreted as a response time scale to an external perturbation
 225 (cf. Tofelde et al., 2021). It is given by

$$226 \quad \tau = (W_0 - W_C) \frac{H_+}{q_L}. \quad (13)$$

227
 228 In the unconfined case, H_+ is equal to flow depth h and substituting eqs. (1) and (2) into eq. (11), we find that τ is
 229 equal to the effective switching time scale ΔT (see eqs. 3 and 4):

$$230 \quad \tau = \frac{c}{\lambda} = \Delta T. \quad (14)$$

231
 232 We can use a similar approach to describe the evolution of a channel belt that is confined by valley walls when
 233 considering that at the valley walls, the lateral migration of the river slows down (cf. eq. 1). If the valley walls are
 234 made of alluvium, the bank height H_+ in eq. (9) is equal to the height of the valley wall H_W [L] and eq. (1) can be
 235 used as before. However, we need to adjust eq. (10), defining an equivalent probability $P_{confined}$ for a confined
 236 channel belt. The distance d [L] is the length that a channel moves on average across the valley floor in the
 237 effective time ΔT [T] between two events of switching the direction of motion. This distance d is the sum of the
 238 distance covered at higher speed V when moving in the floodplain, and the distance covered when moving at
 239 lower speed v [L/T] when cutting into the valley walls (cf. Tofelde et al., 2022)

$$240 \quad d = V(1 - P_{confined})\Delta T + vP_{confined}\Delta T. \quad (15)$$

241
 242 For the unconfined channel belt, we know that

$$243 \quad V\Delta T = W_0 - W_C.$$

244 (16)

245 Using eq. (16) to eliminate ΔT in eq. (15), and noting that d corresponds to the current width $W - W_C$, we obtain

$$246 P_{confined} = \frac{W_0 - W}{(W_0 - W_C) \left(1 - \frac{v}{V}\right)} = \frac{W_0 - W}{(W_0 - W_C) \left(1 - \frac{H_W}{h}\right)}. \quad (17)$$

247

248 Here, we used eq. (1) to substitute for V and v , using $H_+ = h$ and $H_+ = H_W$, respectively. Note that in the assumption
 249 behind eqs. (15) to (17), $P_{confined}$ for a confined valley (eq. 17) reduces to P for an unconfined floodplain (eq. 8)
 250 for $v = 0$ or $H_W = 0$ (rather than $v = V$ or $H_W = h$). This arises from eq. (15), which yields $d = V\Delta T$ for $v = V$,
 251 rendering $P_{confined}$ meaningless. Substituting eq. (17) into eq. (9) and integrating again yields eq. (12) with a
 252 different governing timescale τ given by

$$253 \tau = \frac{(W_0 - W_C)(H_W - h)}{q_L} = \left(\frac{H_W}{h} - 1\right) \frac{c}{\lambda}. \quad (18)$$

254

255 2.3.2 Channel belt evolution in the Stochastic Poisson model

256 As we did in Section 2.3.1, we first consider the evolution of an unconfined channel belt. In the Deterministic
 257 Poisson Model, we obtained an exponential approach to the steady state width (eq. 12) (Section 2.3.1). In the
 258 Stochastic Poisson Model, we can distinguish three different phases in the growth of the channel-belt width over
 259 time. In the first phase, before the first switch in direction occurs, width increases linearly in time. In this phase,
 260 the growth rate is determined by the speed of lateral channel migration, V in the unconfined case and v in the
 261 confined case (see eq. 1 and Section 2.3.1). In the second phase, before reaching the steady state width, the
 262 channel-belt width grows exponentially on average. This average exponential growth can be described by the
 263 same equation (eq. 12) that has been derived for the Deterministic Poisson Model (see Section 2.3.1). In the third
 264 phase, which starts approximately when the width for the first time reaches the steady state width, stochastic drift
 265 dominates. Stochastic drift arises because, due to the random motion of the channel, there is always a finite
 266 probability of widening the belt even after the steady state width has been reached. We already have equations for
 267 the linear (eq. 1) and the exponential (eq. 12) phase. In the following, we will fully exploit the stochastic properties
 268 of the model concept. In several of our considerations in this and the following sections, we use the central limit
 269 theorem, which states that the sum X of n stochastic variables with mean μ and variance σ^2 is normally distributed
 270 with mean $n\mu$ and variance $n\sigma^2$, if n is sufficiently large. In addition, we use the result that the sum or difference
 271 of two normally distributed parameters with means μ_1 and μ_2 and equal variance σ^2 follow a normal distribution
 272 with mean $\mu_1 \pm \mu_2$ and variance $2\sigma^2$.

273
 274 First, we will derive an equation for widening during the drift phase using the evolution of random walks in the
 275 limit of a large number of steps. In this case, we can apply the central limit theorem. Thus, the PDF of the location
 276 of the channel can then be described by a normal distribution. In a random walk, the width of this normal
 277 distribution increases with the square root of its variance $\text{VAR}_{UCB} [L^2]$, where the subscript stands for ‘unconfined
 278 channel belt’ (e.g., Lawler & Limic, 2010):

$$279 W_{drift} = \sqrt{\text{VAR}_{UCB}} + W_C. \quad (19)$$

280

281 To find an equation for the variance, we will use the concept of a random walk making steps in alternating
 282 directions with exponentially distributed step length. We consider m pairs of a total of n steps, where each of the
 283 n steps covers an average distance of V/λ . The difference of two consecutive identically exponentially distributed
 284 steps in opposite directions is described by the Laplace distribution with zero mean and variance $2V^2/\lambda^2$, with the
 285 PDF

$$286 \quad \text{PDF}_L = \frac{\lambda}{2V} e^{-\frac{\lambda}{V}|x|}. \quad (20)$$

287
 288 After each pair of two steps, the river is always in a position where it switches direction in the same way, for
 289 example from left to right. The switch in the other direction, from negative to positive, also follows eq. (20). In
 290 the limit of large m , the position of the river is given by the sum of the positions of many step pairs. The central
 291 limit theorem applies, and the normal approximation gives the distribution of locations where the river switches
 292 either from positive to negative or vice versa, with zero mean and a variance of $2m V^2/\lambda^2 = n V^2/\lambda^2$. Finally,
 293 the channel-belt width is the difference of the switching position on either side, so the final variance needs to be
 294 multiplied by a factor of two. Applying the law of large numbers, the distance covered in the sum of all steps is
 295 equal to the number of steps times the average step length V/λ . The average time of each step is the mean waiting
 296 time $1/\lambda$, and so we can write $n = \lambda t$:

$$297 \quad \text{VAR}_{UCB} = 2n \frac{V^2}{\lambda^2} = 2 \frac{t}{\lambda} V^2 = \frac{2}{k} q_L t. \quad (21)$$

298
 299 Thus, we obtain the width increase due to drift from eqs. (19) and (21) as

$$300 \quad W_{Drift}(t) = \sqrt{\frac{2}{k} q_L t} + W_C. \quad (22)$$

301
 302 For a confined channel belt, during the time the river incises into the confining walls, the speed of widening drops
 303 to q_L/H_W , where H_W is the height of the confining wall, while it remains at q_L/h , as before, when the river moves
 304 laterally within the channel belt. The average speed of motion is given by the geometric average of the two speeds,
 305 \bar{V}

$$306 \quad \bar{V} = \sqrt{v\bar{V}} = \sqrt{\frac{h}{H_W}} V. \quad (23)$$

307
 308 We obtain the variance by replacing V by \bar{V} in equation (22), giving the variance VAR_{CCB} for a confined channel
 309 belt

$$310 \quad \text{VAR}_{CCB} = 2t\bar{V}^2/\lambda = 2q_L t h/kH_W \quad (24)$$

311
 312 As before, the width during the drift phase evolves as the square root of the variance, giving

$$313 \quad W_{Drift}(t) = \sqrt{2 \frac{t}{\lambda} \bar{V}^2} + W_C = \sqrt{\frac{2}{k} \frac{h}{H_W} q_L t} + W_C. \quad (25)$$

314

315 2.3.3 Drift speed of channel belts and dimensionless scaling factor of the mean switching time scale

316 During the drift phase, the channel belt widens laterally, increasing the area that has been reworked by the channel
 317 with the square root of time (eq. 25). Yet, growth on one side of the channel belt makes it less likely that the
 318 channel moves close to the other side. As such, parts of the channel belt may be abandoned and, for example,
 319 reclaimed by vegetation (Fig. 1E). Similarly, in the case of a vertically incising river, the channel-belt width can
 320 stay at the steady state value W_V (eq. 5), while the entire belt is moving laterally, and uplift converts old parts of
 321 the channel belt to fluvial terraces. Here, we consider the case that the channel belt keeps its width constant at the
 322 steady state width, because any acquisition of area of the belt due to lateral motion on one side leads to the
 323 abandonment of an equivalent area on the other side. In this case, instead of widening, during the drift phase, the
 324 entire belt drifts laterally. We will now derive an equation for the average drift speed in this case. The average
 325 drifted distance in one direction, X_{Drift} , is equal to the square root of the variance, as before (cf. eq. 19). Because
 326 we consider a distance, rather than the width, it is smaller by a factor of two in comparison to eq. (25), giving

$$327 \quad X_{Drift}(t) = \sqrt{\frac{1}{k} \frac{h}{H_W} q_L t}. \quad (26)$$

329 The derivative of eq. (26) with respect to time, evaluated at the time when the valley reaches its steady state width,
 330 T_{SS} [T], gives the drift speed V_{Drift} [LT^{-1}]

$$331 \quad V_{Drift} = \frac{1}{2} \sqrt{\frac{1}{k} \frac{h}{H_W} \frac{q_L}{T_{SS}}}. \quad (27)$$

333 At time T_{SS} , X_{Drift} is equal to the steady state width W_0 , and we can use eq. (26) to obtain

$$334 \quad T_{SS} = k \frac{H_W}{h} \frac{(W_0 - W_C)^2}{2q_L}. \quad (28)$$

336 Substituting eq. (28) into eq. (27) yields

$$337 \quad V_{Drift} = \frac{1}{\sqrt{2k}} \frac{h}{H_W} \frac{q_L}{(W_0 - W_C)}. \quad (29)$$

339 We can use eq. (29) to arrive at a further result, and calculate the constant of proportionality c between the
 340 switching time scale ΔT and the rate constant λ (eq. 3). The ratio of the drift speed V_{Drift} and the lateral migration
 341 speed of the channel V is the same as the fraction of time that the river spends widening the channel belt. This is
 342 equal to the area under a normal distribution outside one standard deviation from the mean, $V_{Drift}/V = 0.3173$.

343 Setting $h/H_W = 1$ and substituting $q_L = Vh$, we find

$$344 \quad \frac{V_{Drift}}{V} = 0.3173 = \frac{1}{\sqrt{2k}} \frac{h}{(W_0 - W_C)} = \frac{1}{\sqrt{2c}}. \quad (30)$$

346 Equation (30) therefore yields $c = 2.2285$.

348 2.4 Channel-belt limits

349 We can use the properties of random walks to make a statement about the distance beyond which the river will
 350 rarely migrate over a given timescale. Knowledge of this distance may be useful to delineate zones for building,

351 or to assess in which areas the river is likely (or not) to interact with its surrounding, for example, by reworking
 352 sediment or evacuating erosion and weathering products. In random walks, this distance is described by the law
 353 of the iterated logarithm (e.g., Kolmogoroff, 1929), which is a limit theorem that sits in between the central limit
 354 theorem and the law of large numbers. In the limit of a large number of steps, this law provides an envelope to
 355 the area that the river almost surely will not leave in its stochastic motion. Consider the sum S over the distance
 356 travelled in n steps over dimensionless time t^* , which is a dimensionless stochastic variable with zero mean. The
 357 law of the iterated logarithm gives an upper and lower bound for this sum with the equation

$$S = \pm \sqrt{2t^* \ln\{\ln\{t^*\}\}}.$$

358
 359 (31)
 360 Here, \ln denotes the natural logarithm, and the plus and minus give the upper and lower bound, respectively. We
 361 define the dimensionless step length $s = \lambda \Delta x / V$. This step length is a stochastic variable that is exponentially
 362 distributed with a mean of zero and variance equal to one (compare to eq. 7). Because the random walk has to be
 363 symmetric for eq. (31) to apply, we consider the sum S of $m = n/2$ pairs of steps, distributed according to the
 364 Laplace distribution (eq. 20). Normalizing with the square root of the variance of the Laplace distribution, the
 365 dimensional distance is then given by $X = \sqrt{2}SV/\lambda$. This is the distance from the origin that the channel will
 366 almost surely not cross within timescale t . The dimensionless time is given as $t^* = 2Vt/h$, where the factor of
 367 two accounts for the pairs of steps. Putting everything together and adding half of the channel width, we obtain

$$X(t) = \sqrt{2} \frac{SV}{\lambda} + \frac{W_C}{2} = \pm 2 \frac{h}{k} \sqrt{2 \frac{\lambda t}{k} \ln\left\{\ln\left\{2 \frac{\lambda t}{k}\right\}\right\}} + \frac{W_C}{2}.$$

368
 369 (32)

370 2.5 First passage time distribution

371 We can derive another result that may be useful for planning and hazard mitigation purposes over long time scales.
 372 The first passage time distribution (e.g., Redner, 2001) is the distribution of times until the channel reaches a point
 373 that is located a distance b [L] from the channel's original location for the first time. This distribution can be used,
 374 for example, to calculate a lifetime distribution of structures located a distance b from the river. In random walks,
 375 the first passage time distribution is given by a Lévy distribution. The distribution PDF_{FP,R} of times T_{FP} [T] is
 376 given by:

$$\text{PDF}_{FP,R}(T_{FP}) = \frac{|b|}{\sqrt{2\pi \frac{h}{H_W} \frac{q_L}{k} T_{FP}^3}} \exp\left\{\frac{-b^2}{2 \frac{h}{H_W} \frac{q_L}{k} T_{FP}}\right\}.$$

377
 378 (33)

379 2.6 Sediment residence-time distribution

380 The probability distribution of residence times may be useful to calculate the age distribution of sediments. This
 381 is relevant, for example, for understanding weathering rates in river deposits or transfer times of sediment and
 382 carbon to the ocean (e.g., Repasch et al., 2021; Scheingross et al., 2019; Tofelde et al., 2021). The residence time
 383 distribution differs from the first passage distribution (Section 2.5), but can be derived from it. We start with a
 384 single step outward. The migrated distance Δx until the channel switches direction is then given by the exponential

385 distribution (eq. 8). We can then use the first passage distribution (eq. 33) for the time to return to the origin by
 386 migrating again a distance $b = \Delta x$. Finally, we need to account for all possible Δx in the initial step. Assuming that
 387 the first step has to erode into the valley walls, the distribution PDF_{RT} for the time needed to return to the origin
 388 T_R [T] is then given by

$$389 \quad \text{PDF}_{RT}(T_R) = \int_0^{\frac{h}{H_W} V t} \frac{\lambda}{\frac{h}{H_W} V} \exp\left\{\frac{-\lambda}{V} \Delta x\right\} \frac{|\Delta x|}{\sqrt{2\pi \frac{h}{H_W} \frac{q_L}{k} \left(T_R - \frac{\Delta x}{\frac{h}{H_W} V}\right)^3}} \exp\left\{\frac{-\Delta x^2}{2 \frac{h}{H_W} \frac{q_L}{k} \left(T_R - \frac{\Delta x}{\frac{h}{H_W} V}\right)}\right\} d\Delta x. \quad (34)$$

390
 391 Unfortunately, eq. (34) does not yield an analytical solution, but can be solved numerically. However, we can find
 392 an analytical limit for the right-hand tail, when T_R is large. Then, the integral reduces to

$$393 \quad \text{PDF}_{RT}(T_R \gg 0) = \int_0^\infty \frac{\lambda}{\frac{h}{H_W} V} \frac{|\Delta x|}{\sqrt{2\pi \frac{h}{H_W} \frac{q_L}{k} (T_R)^3}} \exp\left\{\frac{-\lambda}{V} \Delta x\right\} d\Delta x = \frac{\lambda}{\sqrt{2\pi}} \left(\frac{h}{H_W} \lambda T_R\right)^{-3/2}. \quad (35)$$

394
 395 We suggest an analytical approximation for the entire distribution (eq. 34) by assuming that, for small T_R , the
 396 PDF approaches a constant. Using this condition together with eq. (35) and fixing the integral to one, as required
 397 for any distribution, we obtain the function

$$398 \quad \text{PDF}_{RT}(T_R) \approx \frac{1}{\sqrt{2\pi}} \frac{a \frac{h}{H_W} \lambda}{1 + a \left(\frac{h}{H_W} \lambda T_R\right)^{3/2}}, \quad (36a)$$

399 with

$$401 \quad a = \left(\frac{3}{2}\right)^3 \left(\frac{3}{2\pi}\right)^{3/2}. \quad (36b)$$

403 3. Testing the Stochastic Poisson Model

404 We test the model predictions in two separate ways. First, we use a stochastic random walk model to benchmark
 405 the analytical equations (Section 3.1), by explicitly using the random properties to calculate the distributions and
 406 the mean behaviour. Next to the analytical equations derived so far, this is an independent way of evaluating the
 407 Stochastic Poisson Model. We refer to this approach as the Stochastic Benchmark, and use it to check that the
 408 derivations of the analytical equations are correct. Second, we want to test the results with published experimental
 409 or field data. A full comparison of all of the results derived herein is beyond the scope of the paper. Instead, we
 410 focus on scaling relationships that are indicative of random walks. Thus, we test whether channel belts can be
 411 described as a random walk, and validate the fundamental modelling assumptions and the approach that we used
 412 to derive the analytical equations. Two results are particularly suitable for this test. First, published distributions
 413 of floodplain sediment ages (Everitt, 1968; Huffman, 2022; Skalak & Pizzuto, 2010) (Section 3.2) allow us to
 414 measure the sediment residence time distribution and test the prediction of a -3/2 power-law scaling. Second, the
 415 temporal evolution of channel belts in braided channel experiments (Bufe et al. 2016a,b, 2019) (Section 3.3) allow

416 us to extract the average channel-belt-width evolution during the drift phase and validate the predicted square-
417 root scaling of average width with time during this phase.

418 **3.1 Stochastic Benchmark calculations**

419 To benchmark the analytical equations, we use a stochastic numerical random walk model, the Stochastic
420 Benchmark, as an independent evaluation of the Stochastic Poisson Model to check the analytical equations. The
421 Stochastic Benchmark builds on the same assumptions used to derive the analytical results, but explicitly generates
422 random step lengths of the channel in alternating directions, thereby generating random paths of channel
423 migration. We ran the Stochastic Benchmark in many iterations, calculated the average behaviour and the
424 corresponding distributions of the properties, and compared them to the analytical results. The analytical equations
425 and the results from the Stochastic Benchmark are both fully determined and mutually independent, and there is
426 no need to fit any free parameters. The scripts to run and evaluate the Stochastic Benchmark and to generate the
427 figures are available in the publication by M^cNab (2024). Except where otherwise stated, we fixed channel width
428 to zero, and all other free model parameters to one. For each step, the step length was randomly picked from an
429 exponential distribution (eq. 7), and the lateral position of the channel was tracked by alternately adding or
430 subtracting the obtained step length from the channel's previous position. Channel-belt width was calculated as
431 the difference of the maximum distance that the channel had migrated in the positive and negative directions from
432 the origin up to the time step of interest. In this way, we generated a total of 1,000 trajectories of position and
433 channel-belt width, each with a total length of 3,000 time steps. We repeated this exercise for ratios of valley
434 depth to channel depth of $H_w/h = 1, 10$ and 100 , for unconfined, moderately and highly confined scenarios,
435 respectively. We obtained the average position of the channel for bins spaced logarithmically in time. We used
436 the unconfined width in further simulations to check the drift equation (eq. 25). For this check, we ran the
437 Stochastic Benchmark, limiting the channel-belt width to the steady-state width by adjusting the one side of the
438 valley in an equal manner when the channel ventured beyond the channel-belt limit on the other side. This
439 procedure results in a valley of fixed width that moves laterally. We measured drift velocity for different steady
440 state widths by varying the channel depth, for different values of the lateral transport capacity, and, as above, for
441 ratios of valley depth to channel depth of $H_w/h = 1, 10$ and 100 , as before. These simulations were run for a total
442 of 3,000 time steps to ensure statistical convergence. To verify the dimensionless scaling factor c that relates the
443 mean switching time to the rate constant λ by c/λ , we compared the unconfined steady state width for various
444 conditions to flow depth (eq. 2) for simulations with $k = 1$. To obtain an independent estimate of W_0 from the data,
445 we fitted the exponential evolution equation (eq. 12) to the initial phase of channel-belt widening. To obtain the
446 first passage distribution, we ran 10,000 simulations, each until the walk reached a dimensionless distance of 10
447 from the starting point. We used the results to construct the first passage distribution. Similarly, to test the
448 distribution of channel belt ages, we ran the random walk simulations until the channel returned to the origin for
449 the first time. We repeated the simulation 10,000 times, for a maximum of 100,000 steps. The times needed to
450 return to the origin in each run was used to construct the distribution of sediment residence times.

451 **3.2 Floodplain ages from the field**

452 The $-3/2$ scaling in the distribution for the time needed to return to the origin (eqs. 34-36) is indicative of random
453 walks, and thus its presence in natural data would be a strong indication that this modelling approach is suitable

454 for describing the dynamics of channel belts. Yet, the controls on sediment ages in natural rivers can be
455 complicated. Depending on the location, sediments may not only be deposited by laterally migrating channels,
456 but also by overbank deposition, tributaries, or other processes such as soil erosion or debris flows. We thus do
457 not expect the sediment age distribution in every river to follow the prediction of our model (eqs. 34-36). To
458 compare to predictions, we picked three channels with published age distribution that feature conditions close to
459 the assumptions of the model: single thread channels undisturbed by processes other than fluvial deposition and
460 erosion (e.g., debris flows), without major tributaries in the study area. We digitised floodplain ages published by
461 Everitt (1968) for the Little Missouri River at Watford, North Dakota, USA, by Skalak & Pizzuto (2010) for the
462 South River near Waynesboro, Virginia, USA, and by Huffman et al. (2022) for the Powder River between
463 Moorhead and Broadus, Montana, USA, to compare against the predicted power-law scaling (eq. 35). In the
464 original study of Skalak & Pizzuto (2010), the cumulative distribution function (CDF) of floodplain ages is shown
465 (their Figure 8). We estimated the PDF by numerically differentiating the CDF using a centred finite-difference
466 scheme. Note that Skalak & Pizzuto (2010) already reported a power law scaling with an exponent close to $-3/2$
467 in their study, while both Everitt (1968) and Huffman et al. (2022) interpreted their data using an exponential
468 function.

469 **3.3 Analog Experiments**

470 We further validate the model against experimental data of Bufe et al. (2016a) and Bufe et al. (2019). Primarily,
471 we seek evidence for the drift phase, i.e., the increase of the average channel-belt width with the square root of
472 time in the later parts of the experiments. This would be a strong indication that channel belt development can be
473 described as a random walk. Bufe et al. (2016a) and Bufe et al. (2019) conducted and analysed experiments on
474 braided alluvial channels in a basin with dimensions of $4.8 \times 3.0 \times 0.6$ m and filled with well-sorted silica sand (D_{50}
475 = 0.52 mm). Water and sediment were supplied into the basin at a constant rate from the centre of one of the short
476 edges, and flowed out of the opposite side of the basin across a weir into a drain. After the start of the experiments,
477 the system evolved into an aggrading braided channel network. Once the average aggradation rate dropped to
478 below 20% of the input flux, a flexing metal sheet underneath the basin was used to simulate an uplifting fold.
479 Here, we focus on 25 hours of data that was collected before the onset of uplift from Run 5, and on 55 hours of
480 data from Run 7, an experiment without uplift (see Bufe et al., 2019, for more detail). Water discharge was set to
481 790 ml/s in both experiments and sediment supply was 15.8 ml/s in Run 7 and 2.4 ml/s in Run 5. Positions of the
482 channels were tracked at one-minute intervals in overhead images using blue-dyed water and were used to measure
483 the rate at which the area reworked by the channel expanded over time (Bufe et al., 2016a).

484 **4. Results**

485 In general, our analytical solutions (section 2) agree well with the Stochastic Benchmark (Section 3.1) (Figs. 2-
486 6), mostly yielding $R^2 > 0.99$ (Table 1). First, we compare the channel location in the Stochastic Benchmark with
487 the law of the iterated logarithm (eq. 32) that gives an upper bound on the locations of the channel through time
488 (Fig. 2a), and the expected gaussian distribution of locations (Fig. 2b). After 3,000 steps, no simulated random
489 walk lies outside the predicted bounds (Fig. 2a), and the gaussian provides a good description of the locations (R^2
490 = 0.9962). Further, we derive the total width of the channel belt in the simulations as the difference between the

491 two outermost points visited by each random walk (Fig. 2c). The temporal evolution of these widths shows all
492 three phases – linear increase, exponential increase and square root drift – that are expected by the random walk
493 model, and the analytical solutions predict the average behaviour well (Fig. 2c), with R^2 values exceeding 0.99
494 (Table 1).


495 Keeping the channel-belt width constant at the steady-state channel-belt width, we can measure a displacement of
496 the channel belt with respect to the origin in the Stochastic Benchmark (Fig. 3a), and calculate an average lateral
497 drift velocity. We find that the average drift velocity is inversely proportional to the steady-state channel-belt
498 width and proportional to the lateral transport capacity (Fig. 3b&c). The relationships agree with the prediction of
499 eq. (29) (dotted lines in Fig. 3b&c) with R^2 values of 0.9999 (Table 1). Further, we find that the steady state widths
500 of the simulated unconfined random walks increases as a function of the channel depth following a power-law
501 with an exponent of $c = 2.2285$ as predicted by eq. 30 (Fig. 4), with $R^2 = 0.9997$ (Table 1).

502 The first passage distribution describes the time for the random walk to reach a given distance from the origin and
503 is plotted in Fig. 5a for the Stochastic Benchmark. Again, the channel does not cross the theoretical bound given
504 by the law of the iterated logarithm (dashed line in Fig. 5a). The mean first passage time in the Stochastic
505 Benchmark is well fit by eq. (33) (Fig. 5b), with $R^2 = 0.9991$ (Table 1).

506 We found a similar correspondence between the Stochastic Benchmark, the bounds from the law of the iterated
507 logarithm, and the analytical solutions for the distribution of times to return to the origin (Fig. 6a&b), with $R^2 =$
508 0.9953 (Table 1). The analytical exact and approximate solutions of the Stochastic Poisson Model (eq. 34-35)
509 predict a monotonically declining probability density with increasing return times (Fig. 6b). The analytical
510 approximation of the age distribution (eq. 36, Fig. 6b) underpredicts the ages modelled by the Stochastic
511 Benchmark for small ages in comparison to the exact solution, but provides an exact description of the right-hand
512 power-law tail (Fig. 6b).

513
514 The scaling predicted in the analytical equations also agree well with the selected field and experimental datasets.
515 First, the $-3/2$ power-law scaling (eq. 35) for the distribution of times to return to the origin are consistent with
516 the data from the Little Missouri River at Watford, North Dakota, USA (Everitt, 1968), the South River near
517 Waynesboro, Virginia, USA (Skalak & Pizzuto, 2010), and the Powder River between Moorhead and Broadus,
518 Montana, USA (Huffman et al., 2022) (Fig. 7; $R^2 = 0.8434, 0.8168$ and 0.5576 , respectively). Second, in the
519 evolution of the channel belts in analog experiments, we can clearly identify a drift phase (Fig. 8). This phase is
520 apparent as a square root scaling of channel-belt width as a function of time (eq. 25). We find $q_L/k = 2.15 \times 10^{-5}$
521 m^2/s for Run 5 ($R^2 = 0.9995$) and $q_L/k = 2.62 \times 10^{-5}$ m^2/s for Run 7 ($R^2 = 0.9960$). The exponential phase (eq. 12)
522 can also be fitted independently (see Bufe et al., 2019). However, the data resolution is not good enough to fit
523 both relationships with consistent parameter values. Essentially, the resulting unconfined channel-belt width W_0
524 depends on the subjective choice of which data points to include into the fit.

525
526

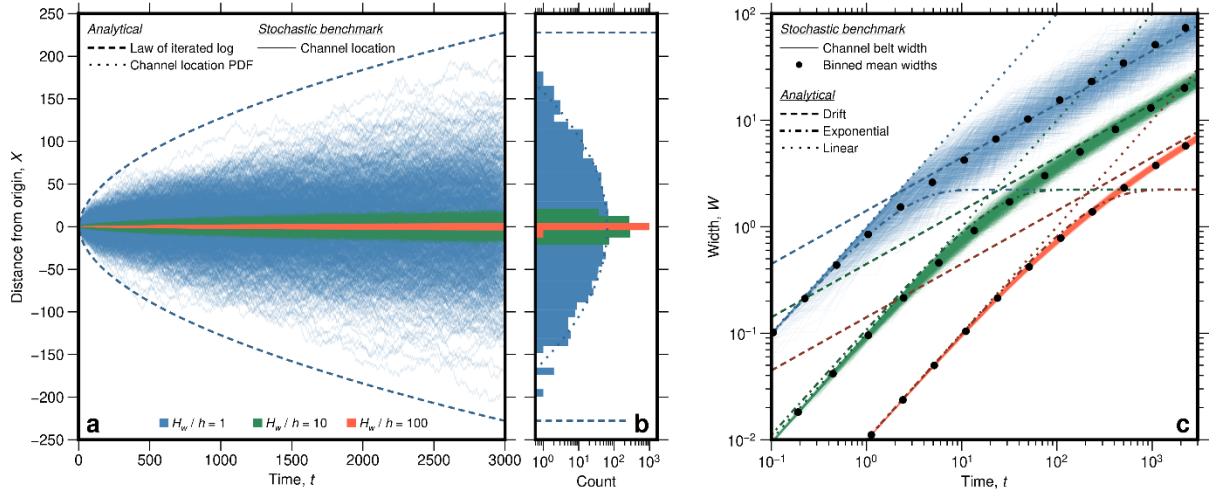

527

528

529

530

531

532

533

534

535


536

537

538

Fig. 2: Temporal evolution of channel-belt width in the Stochastic Benchmark and comparison between the Stochastic Benchmark and the analytical solutions. a) Modelled migration paths through time (coloured solid lines), bounded by the law of the iterated logarithm (dashed line, eq. 32), i.e., the area that the river almost surely does not crosses. Similar plots with longer runtimes can be found in Fig. 5a and Fig. 6a. The blue lines show the evolution of an unconfined river ($H_w/h = 1$), the green lines show a moderately confined case ($H_w/h = 10$), and the orange lines a highly confined case ($H_w/h = 100$). **b)** Location density at $t = 3000$. The dotted line gives the theoretically expected normal distribution for the unconfined case (blue), the dashed line marks the law of the iterated logarithm. **c)** Average width evolution with time, showing the analytical expressions for the linear (dotted lines, eq. 1), exponential (dash-dotted lines eq. 12) and drift phases (dashed lines eq. 25). Fine solid lines show the outputs from the numerical simulation and black circles show the mean widths of these simulations in bins spaced logarithmically in time. Standard errors of the means are smaller than the symbols.

539

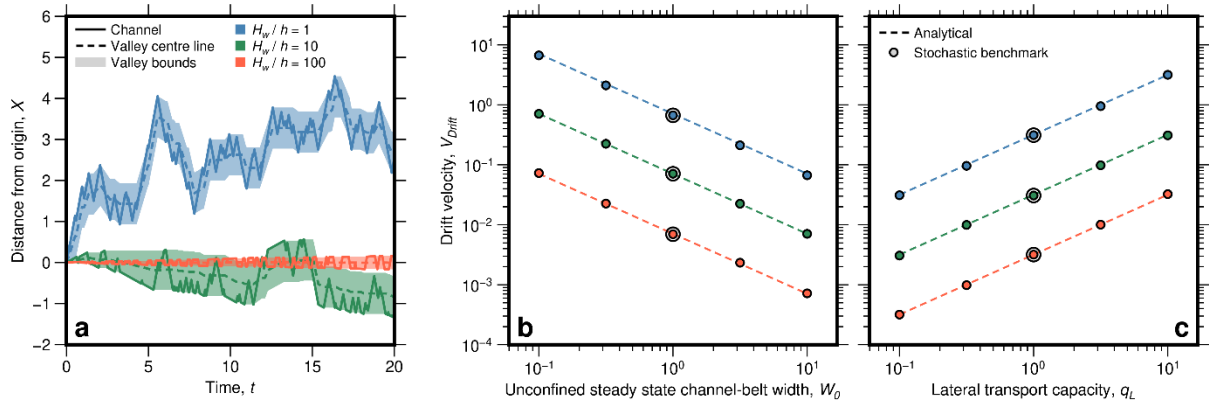

540

541

542

543

544


545

546

547

548


Fig. 3: Lateral drift speed of channel belts at constant steady state width for the drift-phase. For the calculation, channel-belt width was fixed to the steady state width, i.e., whenever the channel widened the channel belt on one side, the width was reduced by the same amount on the other side. a) Channel location as a function of time for different degrees of confinement (same colour code as in Fig. 2). Note that a) does not show the entire calculated trajectories; average drift velocities were measured after 10,000 steps. **b)** Average drift speed as a function of steady width from the Stochastic Benchmark are shown as circles. The analytical predictions (dotted lines) of eq. (29) fit the numerical results well. **c)** Average drift speed as a function of lateral transport capacity with the same symbology as in b). Larger circles in b) and c) show simulations plotted in a).

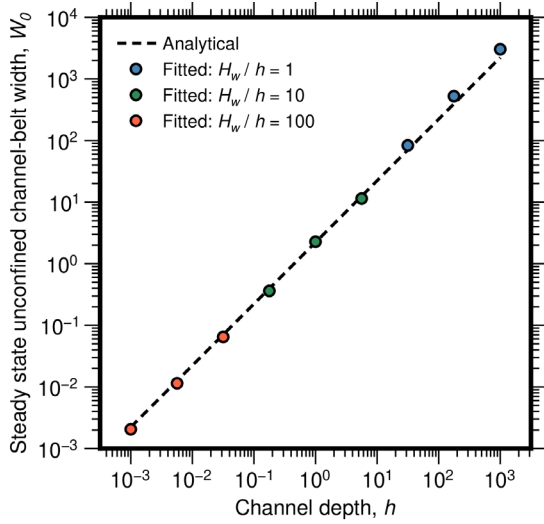

549

550 **Fig. 4:** Verifying the value of the constant c (see eq. 30) by comparing unconfined steady state channel-belt width
 551 obtained from fits to the Stochastic Poisson Model (Fig. 1) to channel depth for varying simulations. We set channel
 552 width $W_C = 0$ and $k = 1$ for these simulations. Then, the steady state channel-belt width and flow depth should be
 553 proportional with a constant of proportionality equal to $1/c$ (eq. 4). The dashed line gives the theoretically expected
 554 relationship with $c = 2.2285$ (eq. 30). The results show that the value of c is the same for unconfined and confined
 555 channel belts.


556

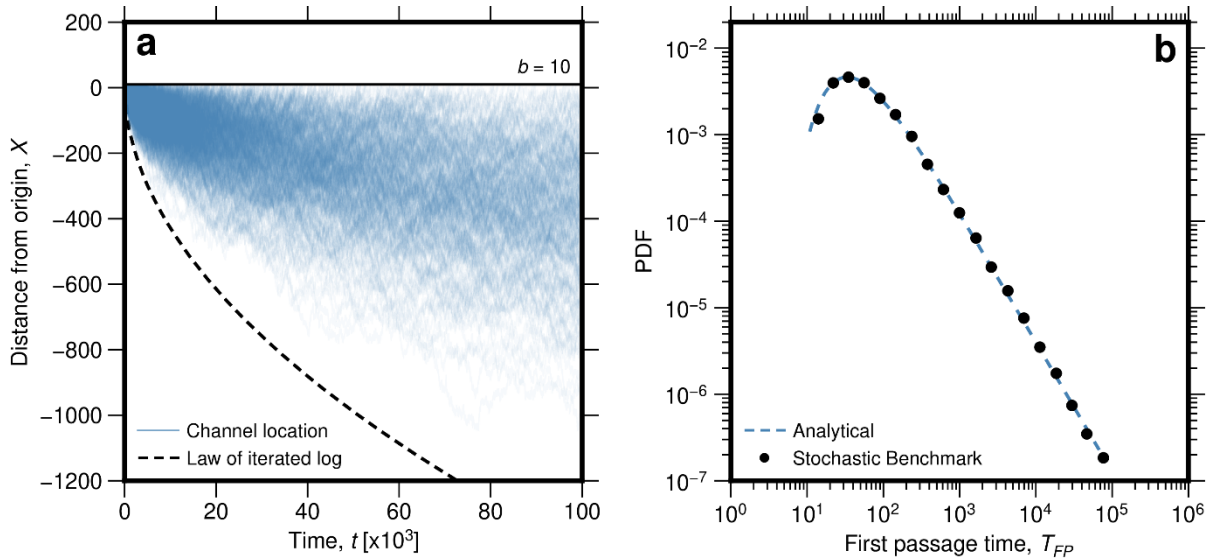

557

558 **Fig. 5:** The results for the first passage distribution. a) Paths of models to investigate time distribution to reach a point
 559 a distance b from the origin (horizontal black line). The dashed line gives the expectation from the law of the iterated
 560 logarithm (eq. 32). In comparison to Fig. 2a, substantially longer runs in time are shown here. b) First passage time
 561 distribution of the Stochastic Benchmark (black dots show binned means) in comparison to the analytical solution
 562 (dotted blue line, eq. 33).

563

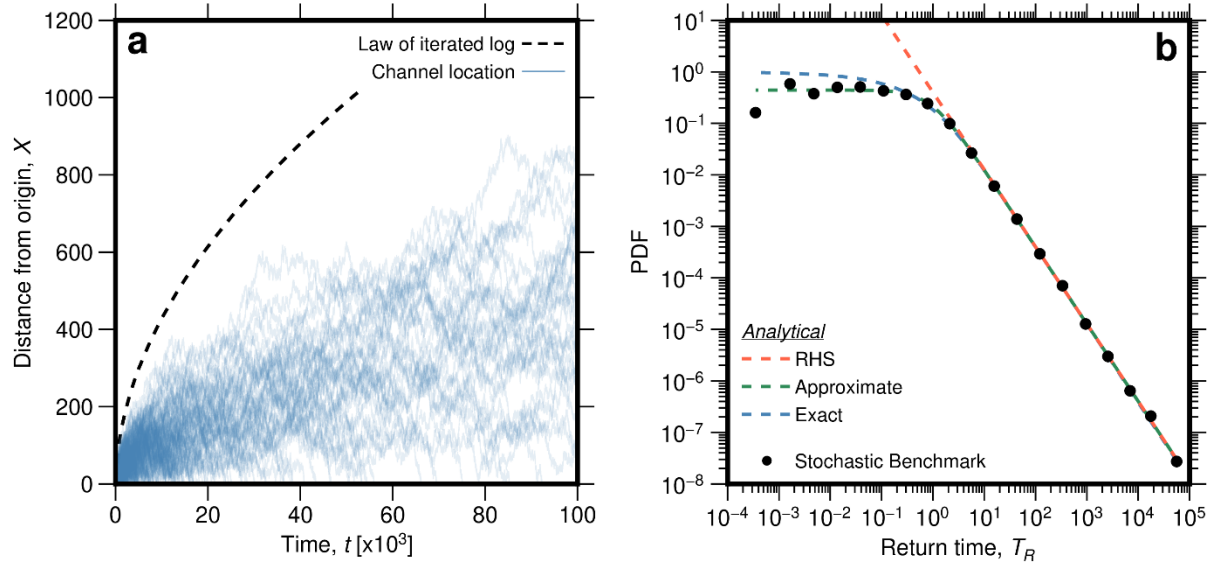

564


565 **Fig. 6:** The analytical results for the return time distribution, equivalent to the age distribution of sediments stored in
 566 the channel belt and comparison to data. a) Paths of 10,000 models to investigate the time distribution for the return
 567 to the origin. Once a model path reached the origin, later timesteps are not plotted. The dashed line gives the prediction
 568 of the return time from the law of the iterated logarithm (eq. 32). In comparison to Fig. 2a, substantially longer runs
 569 in time are shown here. b) Modelled return time distribution (black dots show binned means) compared to the exact
 570 analytical solution (blue, eq. 34), the power law decay in the right-hand tail with an exponent of $-3/2$ (red, eq. 35). The
 571 analytical approximation (green, eq. 36) is also shown.

572

Table 1: Statistics for the comparison of the analytical results with the Stochastic Benchmark and the data

Test	Equation #	Figure #	R^2
Comparison of analytical equations to the Stochastic Benchmark			
Normal distribution of channel positions		2b	0.9550
Width increase in the exponential phase	12	2c	0.9995
Width increase in the drift phase	25	2c	0.9966
Drift velocity as function of width	29	3b	0.9999
Drift velocity as function of lateral transport capacity	29	3c	0.9999
Verification of the value of c	30	4	0.9997
First passage distribution	33	5b	0.9991
Return time distribution, exact solution	34	6b	0.9953
Return time distribution, right-hand tail	35	6b	0.9995
Return time distribution, approximate solution	36	6b	0.9980
Comparison of analytical equations to data			
Return time distribution, fit to Everitt (1966)	35	7	0.8434
Return time distribution, fit to Skalak & Pizzuto (2010)	35	7	0.8168
Return time distribution, fit to Huffman et al. (2022)	35	7	0.5576
Drift in the experiment Run 5	25	8a	0.9995
Drift in the experiment Run 7	25	8b	0.9960


573

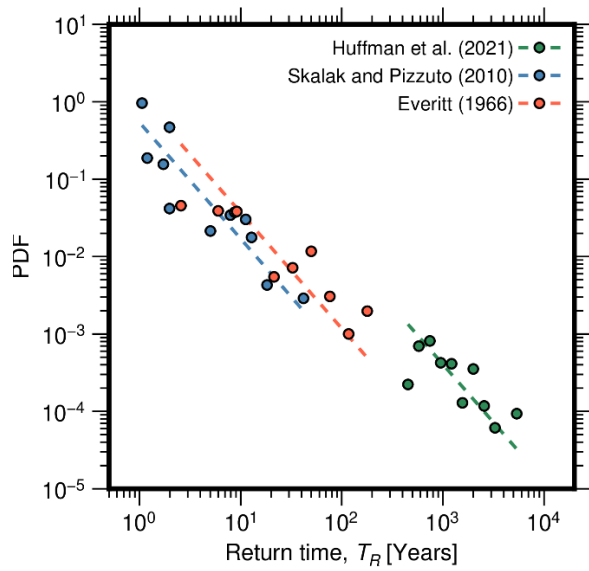

574

575 **Fig. 7: Floodplain age data from Everitt (1968), Skalak & Pizzuto (2010), and Huffman et al. (2022) are consistent with**
 576 **the -3/2 power law tail (eq. 35). R² values for the fits are given in Table 1.**

577

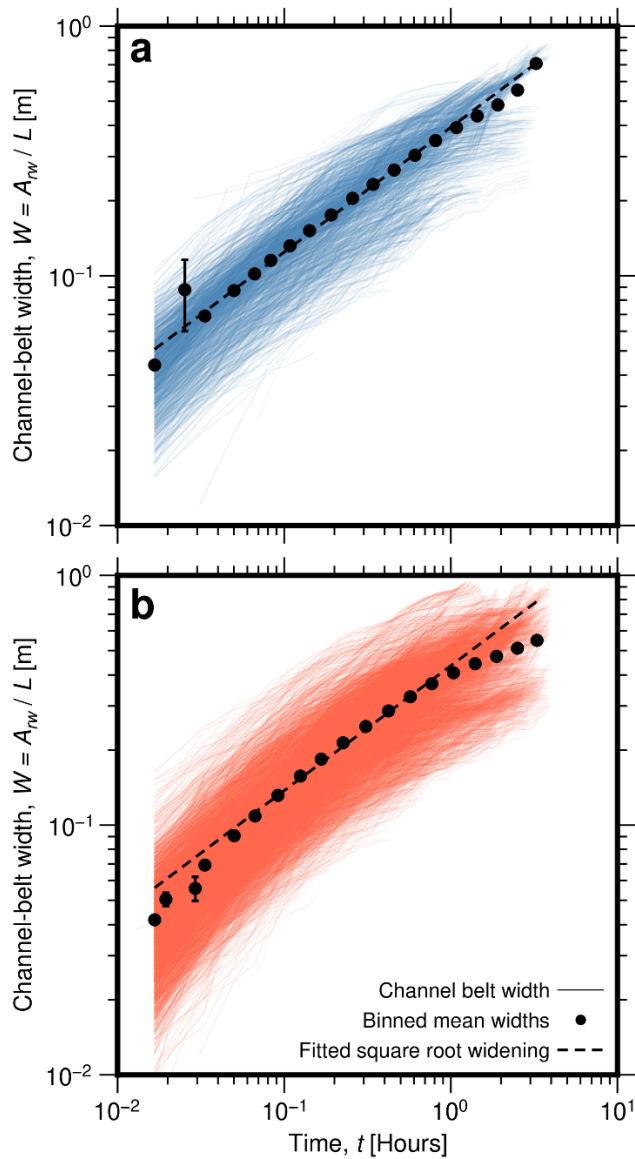

578

579 **Fig. 8: Temporal evolution of the cumulative inundated area in the experiments of Bufe et al. (2016a, 2019), with data**
580 **from a) Run 5 (blue) and b) Run 7 (red). Black dots give binned means, and error bars show the standard errors of the**
581 **means (mostly smaller than the symbols). The dashed line is the fitted square root widening relationship with time that**
582 **can be expected for the drift phase (eq. 25). R^2 values for the fits are given in Table 1.**

583 **5. Discussion**

584 **5.1 Model predictions and overview**

585 Using the Poisson concept for the formation and evolution of channel belts, we derived a range of results that hold
586 implications for fluvial geomorphology, quantitative landscape evolution studies, and river management
587 (Table 2). The stochastic treatment allowed us to theoretically quantify one of the two unconstrained parameters
588 in the model of Turowski et al. (2024). As such, apart from the factor of proportionality k in the definition of the
589 switching timescale λ (eq. 2), all of the model parameters can be directly related to channel geometry and
590 hydraulics. In particular, to parameterize the model, one needs measurements of flow depth h , channel width W_C ,
591 and the lateral transport capacity q_L . The former two have been routinely measured in the field. Yet, natural river
592 discharge changes over time, and it is currently unclear which flood size is responsible for setting the channel belt
593 in the long-term channel dynamics. The lateral transport capacity depends on discharge, sediment supply and
594 granulometry of a particular river (Bufe et al., 2019). The precise dependence is debated (e.g., Bufe et al., 2019;
595 Constantine et al., 2014; Ielpi and Lapôtre, 2019; Wickert et al., 2013), and likely depends on the characteristics
596 of the particular river, for example its planform type (Greenberg et al., 2024; Nyberg et al., 2023).

597
598 Our model has been constructed assuming a single laterally migrating channel as it constructs a channel belt
599 between two avulsion events (Bridge and Leeder, 1979; Nyberg et al., 2023). Yet, many rivers are braided or
600 anastomosing, featuring multiple channels. It is not clear at the moment whether the model can also be applied to
601 those rivers. A number of points can be made, though, based on generic arguments and observations (Turowski
602 et al., 2024). First, multiple channels would add a complexity to the model that is beyond the first-order treatment
603 developed here. Second, the channels in Bufe et al.'s (2016) experiments frequently split into multiple channels.
604 Nevertheless, the square root scaling expected for the drift phase can be observed (Fig. 8), and observed narrowing
605 of valleys in response to uplift closely follows the predicted relationship (eq. 5) (see Turowski et al., 2024). These
606 results may indicate that multiple channels lead to an average rate and pattern of lateral migration similar to that
607 of a single migrating channel. Third, Bufe et al. (2019) found that q_L scales approximately linearly with water
608 discharge in experiments featuring multiple channels. This indicates that the area affected by migrating channels
609 is independent of the detailed distribution of water between single or multiple channels. How different channels
610 interact by merging, splitting and crossing, and how this affects their lateral migration speed and dynamics needs
611 to be investigated in future work.

612

613 **Table 2: Overview of the analytical equations**

Result	Comment	Equation #	Equation
Channel lateral migration speed	Suggested by Bufe et al. (2019) from experimental data.	1	$V = \frac{q_L}{H_+}$
Average switching rate	Derived by Turowski et al. (2024).	2	$\lambda = k \frac{q_L}{h^2}$
Unconfined steady-state channel-belt width	Derived by Turowski et al. (2024).	4	$W_0 = \frac{c}{k} h + W_C$
Steady-state valley width	Includes uplift and lateral sediment supply as additional input parameters in comparison to eq. (4). Derived by Turowski et al. (2024).	5	$W_V = \left(\frac{q_L - q_H}{U} \right) \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} + W_C$
Exponential approach to steady state	Evolution equation in the exponential phase.	12	$W(t) = W_0 - (W_0 - W_C) \exp \left\{ -\frac{t}{\tau} \right\} + W_C$
Governing time scale, unconfined case	To be used in eq. (12).	13 & 14	$\tau = (W_0 - W_C) \frac{H_+}{q_L} = \frac{c}{\lambda}$
Governing time scale, confined case	To be used in eq. (12).	18	$\tau = \frac{(W_0 - W_C)(H_W - h)}{q_L} = \left(\frac{H_W}{h} - 1 \right) \frac{c}{\lambda}$
Square root widening	Average increase of area affected by the channel in the drift phase, after the steady state width has been reached.	25	$W_{Drift}(t) = \sqrt{\frac{2}{k} \frac{h}{H_W} q_L t} + W_C$
Average drift speed	Average drift speed in the drift phase, assuming the channel belt keeps a constant width.	29	$V_{Drift} = \frac{1}{\sqrt{2k}} \frac{h}{H_W} \frac{q_L}{(W_0 - W_C)}$
Channel-belt limits	Law of the iterated logarithm as an envelope to the area that the channel is unlikely to leave. Only valid for unconfined channel belts.	32	$X(t) = \pm 2 \frac{h}{k} \sqrt{2 \frac{\lambda t}{k} \ln \left\{ \ln \left\{ 2 \frac{\lambda t}{k} \right\} \right\}} + \frac{W_C}{2}$

First-passage time distribution	Distribution of times needed to reach a point a distance b from the origin (Lévy distribution).	33	$\text{PDF}_{FP,R}(T_{FP}) = \frac{ b }{\sqrt{2\pi \frac{h}{H_W} \frac{q_L}{k} T_{FP}^3}} \exp\left\{\frac{-b^2}{2 \frac{h}{H_W} \frac{q_L}{k} T_{FP}}\right\}$
Distribution of times needed to return to the origin	This is equivalent to the sediment residence-time distribution, or the age distribution of sediments, assuming a single deposition and remobilisation. The integral equation does not have an analytical solution.	34	$\text{PDF}_{RT}(T_R) = \int_0^{\frac{h}{H_W} V t} \frac{\lambda}{\frac{h}{H_W} V} \exp\left\{\frac{-\lambda}{V} \Delta x\right\} \frac{ \Delta x }{\sqrt{2\pi \frac{h}{H_W} \frac{q_L}{k} \left(T_R - \frac{\Delta x}{\frac{h}{H_W} V}\right)^3}} \exp\left\{\frac{-\Delta x^2}{2 \frac{h}{H_W} \frac{q_L}{k} \left(T_R - \frac{\Delta x}{\frac{h}{H_W} V}\right)}\right\} d\Delta x$
Analytical right-hand tail of the distribution of times needed to return to the origin	An analytical solution for the right-hand tail of eq. (34).	35	$\text{PDF}_{RT}(T_R \gg 0) = \frac{\lambda}{\sqrt{2\pi}} \left(\frac{h}{H_W} \lambda T_R\right)^{-3/2}$
Analytical approximation for the distribution of times needed to return to the origin	Analytical approximation for eq. (34).	36	$\text{PDF}_{RT}(T_R) \approx \frac{1}{\sqrt{2\pi} H_W} \frac{h}{1 + a \left(\frac{h}{H_W} \lambda T_R\right)^{3/2}},$ $a = \left(\frac{3}{2}\right)^3 \left(\frac{3}{2\pi}\right)^{3/2} = 1.1135$
Value for time scaling constant c .	The constant relates the average switching rate λ to the effective switching time ΔT (see eq. 3).	30	$c = \frac{1}{\sqrt{2} \frac{V_{Drift}}{V}} = 2.2285$

615 5.2 The effect of uplift

In our model, we have not explicitly considered the role of uplift or net incision on the channel-belt width. Uplift increases the bank height encountered by the channel in lateral motion (eq. 1) and thereby slows it down. Turowski et al. (2024) included uplift in their steady state valley-width model and demonstrated that a competition between uplift and lateral mobility of the channel, described by the lateral transport capacity, determines the final width of the valley. Yet, the inclusion of uplift in the Stochastic Poisson Model developed herein would introduce considerable complexity into the equations. It seems unlikely that analytical solutions are possible. Here, we suggest a simple approach to circumvent this problem. We use equations (1) to (5) to define an effective lateral migration speed \overline{V}_U [LT⁻¹] in an uplifted area

$$W = \frac{c\overline{V}_U}{\lambda} + W_C = \frac{q_L}{U} \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} + W_C. \quad (37)$$

625 Solving for \overline{V}_U , this yields

$$\overline{V}_U = \frac{kV^2}{cU} \ln \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} \quad (38)$$

We thus obtain an effective variance

$$\begin{aligned} VAR &= \frac{2}{k} \frac{h}{H_W} \frac{\overline{V}_U^2}{\lambda} t = \frac{2}{k} \left(\frac{k}{c}\right)^2 \frac{h}{H_W} \frac{V^4 t}{U^2 \lambda} \ln^2 \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} \\ &2 \left(\frac{k}{c}\right)^2 \frac{h}{H_W} \frac{q_L^2}{(W_0 - W_C)U^2} q_L t \ln^2 \left\{ 1 + \frac{U(W_0 - W_C)}{q_L} \right\} \end{aligned} \quad (39)$$

Equation (39) can be used in equation (19) for the drift to account for uplift. Other results also have to be updated accordingly. The approach outlined above needs to be benchmarked with numerical simulations, field or experimental data.

5.3 First-passage and floodplain age distributions

635 The Lévy distribution (eq. 33) describes the time needed until the channel moves a particular distance away from its starting location. When integrated to infinity, the distribution has an infinite mean and variance. Nevertheless, it could be used, for example, for assessing the risk of the destruction of a building near a river channel within a given timespan.

Lateral river dynamics determine the reworking of sediment in the floodplain, and, therefore, determine storage times and sediment ages (e.g., Bradley & Tucker, 2013). This has, for example, implications for chemical alteration of floodplain sediments, such as chemical weathering and organic carbon oxidation (e.g., Scheingross et al., 2021; Repasch et al., 2020; Torres et al., 2017). It has frequently been found that residence time distributions are highly skewed, and that the mean

residence time of sediment is much larger than their median residence time (e.g., Carretier et al., 2020; Pizzuto et al., 2017). Measurements of the distribution of floodplain ages have yielded a variety of contrasting behaviour (Pizzuto et al., 2017). The right-hand tail of the distribution of field data has been characterized both by an exponential (e.g., Huffman et al., 2022; Lancaster & Casebeer, 2007) and by a power law function (e.g., Bradley & Tucker, 2013; Pizzuto et al., 2017), in the latter case with exponents ranging from about -0.7 to about -1.5 (e.g., Lancaster et al., 2010; Pizzuto et al., 2017; Skalak & Pizzuto, 2010). Pizzuto et al. (2017) used a random walk to model the stochastic downstream motion of sediment to predict power-law travel-time distributions with exponents that decrease with increasing length of the river system.

650

Bradley & Tucker (2013) suggested that the Lévy distribution is suitable to model the distribution of floodplain ages. Analogous to our result for the age distribution (eq. 34), the Lévy distribution features a power-law right-hand tail with a scaling exponent of -3/2 (eq. 33). However, it strongly underpredicted the likelihood of small ages as generated by Bradley & Tucker's (2013) numerical model. The Lévy distribution has been derived for the time of the first passage of a point a pre-selected distance from the origin (eq. 33), and this distance cannot be equal to zero in the assumptions of the derivation. It therefore is not the correct distribution for the times to return to the origin. We derived a probability distribution for the time to return to the origin (eq. 34). The right-hand tail of the residence time distribution (eq. 35) exhibits the same scaling of the right-hand tail of the Lévy distribution (eq. 33), a power law with an exponent of -3/2 (Fig. 6b). In fact, this scaling is valid for any symmetric random walk, and should be independent of the precise assumptions used to set up such a random walk. It implies that the return-time distribution has both an infinite mean and standard deviation when integrated to infinity, similar to the distribution of first passage. This result implies that the mean age measured for a sediment body within a channel belt does not converge to a fixed value, but depends on the time since the onset of fluvial activity, no matter how long ago this onset occurred. The result implies that statements on the age of sediment in floodplains, or their chemical alteration, always have to be made with respect to the total age of the floodplain. A long-term average at steady state is never achieved. Further, it implies that some fluvial deposits are likely to survive for long times, storing information about the floodplain evolution and the history of river systems (cf. Carretier et al., 2020). The increase of the mean sediment residence time \bar{T}_R can be obtained by integrating the age distribution (eq. 34) multiplied with time, as in the integration for the mean. We can obtain the limit behaviour for old river systems by integrating over eq. (35)

$$\bar{T}_R(t) = \int_0^{T_A} \frac{\lambda}{\sqrt{2\pi}} \left(\frac{h}{H_W} \lambda t \right)^{-3/2} t dt = \sqrt{\frac{2}{\pi}} \left(\frac{H_W}{h} \right)^3 \frac{T_A}{\lambda}. \quad (40)$$

670

Here, T_A is the time since the formation of the channel belt. The mean residence time thus increases with the square root of time in this limit. In combination with eq. (35), eq. (40) can be used to estimate the age of a channel belt from sediment age data.

675 Our prediction of the $-3/2$ -scaling exponent in the age distribution (eqs. 34, 35) does align with some, but not all of the
measurements reported in the literature (cf. Pizzuto et al., 2017). It is consistent with the data of Everitt (1966), Skalak &
Pizzuto (2010), and Huffman et al. (2022) that we digitised for the present study (Fig. 7), but not with the datasets reported for
example by Lancaster et al. (2010). For our comparison, we selected data sets that, on first glance, comply with the assumptions
underlying our Stochastic Poisson Model. The model framework is strictly valid only for processes that can be modelled by a
680 lateral random walk of a single channel in an infinite domain. As such, we expect it to apply to single-thread channels without
major tributaries that are undisturbed by processes other than fluvial erosion and deposition. Further, the $-3/2$ -scaling applies
to channels that are short enough such that sediment, once it is eroded, is not redeposited within the system, but evacuated
downstream. Alternatively, the scaling could apply to data measured with dating methods where the date is reset after
remobilization of sediment, for example optically stimulated luminescence (e.g., Madsen & Murray, 2009). Multiple episodes
685 of deposition and erosion within the same system yields a power-law tail with an exponent that is dependent on the system
size (Pizzuto et al., 2017). This exponent should, generally, be smaller than $-3/2$, because re-deposition will increase the relative
fraction of old sediment. Even in short systems, the derived age distribution (eq. 34) cannot be expected to be universally
applicable. We expect that channels confined in a narrow valley, or those in which processes other than lateral channel
migration can deposit, evacuate or mobilize sediment, show different scaling behaviour. For example, the channels studied by
690 Lancaster and Casebeer (2007) and Lancaster et al. (2010) are located in confined valleys where debris flows regularly supply
and mobilize sediment, and exhibit age distributions with power-law scaling exponents of the order of -0.7 . In narrow confined
settings, sediment deposition and erosion may not be adequately described by a random walk. Further, the disturbance of
fluvial deposits and lateral sediment supply by debris flows or hillslope processes may have a large effect on the age
distribution.

695 **5.4 Parameter estimation and further tests**

The model contains a single dimensionless scaling factor, k , which is the factor of proportionality of the rate of switches of
direction of motion of the channel λ and the ratio of the lateral transport capacity q_L and the square of the flow depth h (eq. 2).
This parameter sets the unconfined channel-belt width (eq. 4). Two strategies for measuring this parameter appear from our
results. First, exploiting eq. (2) relies on direct measurements of the switching rate, as well as flow depth and q_L . The switching
700 rate λ can also be measured from the age distribution of sediment (eq. 41). Second, the width of the channel belt can be related
to flow depth and channel width using eq. (4). Both approaches seem more promising in an experimental setting than in nature,
because the necessary parameters can be either controlled or measured directly. In the field, it may be possible to obtain suitable
data, for example, from time series of orthophotos of river reaches (e.g., Nyberg et al., 2023; Greenberg & Ganti, 2024;
Greenberg et al., 2024) in combination with gauging data. Testing for the consistency of both approaches would be a strong
705 method to falsify or validate the model.

Our model is constructed at the reach scale of the channel and does not include detailed descriptions of fluvial processes. Yet, it should be possible to relate it to process-based models. Here, we make a tentative relation to models of meandering channels, which are available at different degrees of complexity (e.g., Edwards & Smith, 2002; Ikeda et al., 1981). Camporeale et al. (2005) studied models of meandering rivers at increasing levels of hydraulic detail. They concluded that the steady state statistics of the meander belt are determined by only two parameters, regardless of the complexity of the model. These are a length scale D_0 [L] proportional to the ratio of flow depth and the friction coefficient for open channel flow C_f

$$D_0 = \frac{h}{2C_f}, \quad (41)$$

and a time scale T_0 [T], given by

$$T_0 = \frac{D_0^2}{W_c U_f E}. \quad (42)$$

Here, U_f [LT^{-1}] is the mean streamwise flow speed and E [-] a dimensionless bank erodibility coefficient. Using their model considerations together with field observation, Camporeale et al. (2005) found that the meander belt width W_{MB} can be described by

$$W_{MB} = \alpha D_0 = \frac{\alpha h}{2C_f}. \quad (43)$$

Here, α [-] is a dimensionless proportionality coefficient with a value of 40 to 50. We can use eqs. (41) to (43) to make a tentative connection between our landscape-scale random walk model, and the reach-scale meandering models. First, we note both models suggest that channel-belt width is proportional to flow depth (see eq. 4). Comparing eqs. (4) and (43), we suggest that k_0 scales as

$$k_0 = \frac{c}{k} = \frac{\alpha}{2C_f}. \quad (44)$$

As such, we expect k to scale with the friction coefficient. Assuming $C_f = 0.05$ and $\alpha = 50$ (see Camporeale et al., 2005), we obtain $k = 0.0045$ and $k_0 = 500$. Second, we can assume that the governing time scale τ (eqs. 13, 14) is proportional to T_0 . Equating equations (14) and (42), and substituting equations (2), (41), and (43), we obtain

$$\frac{c}{\lambda} = \frac{ch^2}{kq_L} = \frac{\alpha h^2}{2C_f q_L} = \frac{D_0^2}{W_c U_f E} = \left(\frac{h}{2C_f} \right)^2 \frac{1}{W_c U_f E}. \quad (45)$$

Equation (45) can be solved for q_L to give

$$q_L = 2\alpha C_f W_C U_f E.$$

(46)

We can obtain some of the parameter values from the data used in this study. From fits to the floodplain age distributions, we obtain $\lambda = 0.12 \text{ yr}^{-1}$ (Everitt, 1966), $\lambda = 0.55 \text{ yr}^{-1}$ (Skalak & Pizzuto, 2010), and $\lambda = 0.00097 \text{ yr}^{-1}$ (Huffmann et al., 2022). Note that we assumed an unconfined channel belt for determining λ , i.e., we set $H_w = h$. In case of confinement, the estimates change with the ratio of the flow depth and the height of the confining walls (eq. 35). The numbers for the mean rate of switching seem plausible, varying from biannual switches (Skalak & Pizzuto, 2010) to once in a thousand years (Huffmann et al., 2022). The estimates should be further refined with detailed case studies.

745 5.5 Beyond the evolution of single cross sections

In the Stochastic Poisson Model developed herein, we concentrated on a single cross section, making the assumption that each cross section evolves independently of those upstream and downstream. This assumption is likely to be a simplification when applied to real river systems. In particular, we can expect that a channel that locally moves laterally far from the channel position upstream and downstream is pulled back towards the center. That is, a channel within a particular cross section of the valley is less likely to further migrate laterally into the same direction if within the cross sections upstream and downstream the channel has not migrated as far, or is moving in the opposite direction. This effect can be included into the model by modulating the probability of switching direction λ within the cross section of interest depending on the position of its channel with respect to the entire river system or to the cross sections immediately upstream and downstream. We suggest that the behaviour can be modelled by an Ornstein-Uhlenbeck process (e.g., Uhlenbeck & Ornstein, 1930), similar to the Langevin equation (Langevin, 1908), which includes a term that increases the probability to move back towards the origin as a function of the distance from it. It is beyond the scope of the present contribution to develop such a model. We expect that the suggested approach will yield a Gaussian distribution of channel positions, with similar results to those derived herein, but additional dimensionless scaling factors in the variances.

6. Conclusion

We have described the temporal evolution of unconfined and confined channel-belt width in the framework of a random walk. The temporal evolution can be described in three phases, which are associated with distinct timescales. First, channel belts grow linearly before the channel switches direction. Then, the channel-belt width increases exponentially until the steady state width is achieved. Finally, the channel belt enters the drift phase, where it grows on average with the square root of time. Using the mathematics of random walks, we derived a range of other results, including the limits of the channel belt (law of the iterated logarithm), the distribution of times to arrive at a particular distance from the origin (first passage distribution), and the distribution of times until the channel returns to its origin, which is equivalent to the distribution of sediment ages within

the channel belt. All results directly connect to hydraulic parameters such as flow depth, channel width, and the lateral transport capacity, and the model contains a single free parameter that needs to be calibrated on data. To validate the Stochastic Poisson Model, model predictions were compared to numerical simulations of channel-belt evolution, field data of floodplain ages, and analog experiments. The comparisons strongly support the basic assumption that channel belt development can be described by a random walk. The predicted scaling exponent for the age distribution of floodplain sediments is consistent with observations from streams that were selected to closely align with the assumption made in the model. In experimental data (Bufe et al., 2016a,b, 2019), average widening proceeds with the square root of time, as expected for the drift phase. Recent global datasets on channel belts derived by automatic processing of remote sensing data (e.g., Greenberg & Ganti, 2024, Greenberg et al., 2024; Nyberg et al., 2023) provide opportunities for comprehensive testing of the model. We have provided a range of analytical results (Table 2) that allow easy comparison of theory and data. These can also be directly implemented into landscape evolution models without major numerical costs, allowing a more comprehensive and realistic depiction of landscape dynamics. The Stochastic Poisson Model can in principle be used for forward predictions in the context of river management, flood hazard mitigation, and stream restoration. In addition, our work provides a theoretical framework to interpret observational data related to fluvial landscapes evolution, nutrient cycling, and for inverting fluvial strata for paleo-hydraulic conditions. In summary, all parameters of the Stochastic Poisson Model have a direct physical interpretation, and there is a single free, dimensionless scaling parameter that needs to be informed by data. As such, our approach can bridge across spatio-temporal scales and connect landscape-scale models with those operating on the process scale.

Symbols & Notation

<i>Symbol</i>	<i>Parameter</i>	<i>First appears in eq.</i>
α	Dimensionless proportionality coefficient with a value of 40 to 50 [-]	42
λ	Rate parameter of the Poisson process describing the switch in the direction of river motion [T ⁻¹]	2
τ	Governing timescale for the transient approach to a steady state [T]	12
a	Dimensionless constant approximately equal to 1.1135 [-]	36
b	Distance of an point of interest from the river channel at $t = 0$ [L]	33
c	dimensionless constant approximately equal to 2.2285 [-]	3
C_f	Open channel flow friction coefficient [-]	40
D_0	Characteristic length scale of meander belts [L]	40
E	Dimensionless bank erodibility coefficient [-]	41
h	Flow depth [L]	2
H_+	Height of the river bank in the direction of river motion [L]	1
H_W	Height of the walls confining the channel belt [L]	17
k	Dimensionless constant of order 10 ⁻² to 10 ⁻³ [-]	2
k_0	Dimensionless constant of order 10 ² , defined by c/k [-]	4
n	Number of stochastic events, generally used for the number of steps in the random walk [-]	6
m	Number of pairs of steps in the random walk, generally defined as $n/2$ [-]	
q_H	Rate of lateral sediment supply from hillslopes or valley walls per channel length [L ² T ⁻¹]	5
q_L	Lateral-transport capacity, i.e. the amount of sediment that the channel can move by lateral erosion per unit channel length per unit time [L ² T ⁻¹]	1
P	Fraction of time that a river spends at any of its channel belt margin [-]	9
$P_{confined}$	Fraction of time that a river spends at any of its channel belt margins for a confined belt [-]	15
S	Dimensionless envelope distance for the channel belt in the law of the iterated logarithm [-]	31
t	Time [T]	4
t^*	Dimensionless time [-]	31
Δt	Average switching timescale in the Poisson process [T]	6
T_0	Characteristic time scale of meander belts [T]	41
ΔT	The characteristic length of time the river moves on average in the same direction [T]	3
T_A	Time since the formation of the channel belt; age of the channel belt [T]	40

T_{FP}	First passage time, first point in time when the channel reaches at a point of interest located a distance b from the channel at $t = 0$ [T]	33
T_R	Time needed to return to the origin for the first time [T]	34
\bar{T}_R	Mean residence time of sediment [T]	
T_{SS}	Time at which the steady state width is reached [T]	27
T_W	Waiting times between events in a Poisson process [T]	7
U	Uplift rate [$L T^{-1}$]	5
U_f	Mean streamwise flow speed [$L T^{-1}$]	41
v	Lateral speed of the river as it reaches valley-floor margins, i.e. wall toes [$L T^{-1}$]	15
V	Lateral migration speed, i.e. the speed of river migrating back and forth across the valley floor [$L T^{-1}$]	1
\bar{V}	Average lateral channel migration speed in a confined channel belt [$L T^{-1}$]	23
V_{Drift}	Average lateral speed of a channel belt with constant width during the drift phase [$L T^{-1}$]	29
VAR_{CCB}	Variance of a confined channel-belt width [L^2]	24
VAR_{UCB}	Variance of an unconfined channel-belt width [L^2]	19
W	Channel-belt width [L]	5
W_c	River channel width [L]	4
W_{Drift}	Width of channel belt in the drift phase [L]	19
W_{MB}	Width of a meander belt [L]	42
W_V	Valley floor width [L]	5
W_0	Unconfined channel-belt width [L]	4
Δx	Distance travelled by the channel before switching direction for the first time [L]	34
X	Envelope distance for the channel belt in the law of the iterated logarithm, dimensional version of S [L]	32
X_{Drift}	Average distance drifted in the drift phase [L]	26

Data availability

790 Raw data for the experimental datasets are stored on the SEAD repository of Bufe et al. (2016b) with the identifier <http://dx.doi.org/10.5967/M0CF9N3H>. Derived quantities have been compiled from Bufe et al. (2016a,b) and Bufe et al. (2019). Sediment age data were digitised from the respective publications. Scripts used to generate Figures 2-7 are available in the publication by M^cNab (2024) with identifier <https://doi.org/10.5281/zenodo.12806574>.

795 Competing interests

At least one of the (co-)authors is a member of the editorial board of *Earth Surface Dynamics*. The authors have no other competing interests to declare.

Author contributions

800 JMT, AB and ST conceived this study. JMT designed and developed the theoretical approach and derived the equations with input of FM and AB, and wrote the paper. FM wrote the scripts for the Stochastic Benchmark and generated data figures. ST made illustrations. FM and AB developed and conducted the analysis of the experimental data. All authors contributed to data analysis, discussion, writing, and revisions.

805 Acknowledgments

Sophie Katzung implemented a first numerical realisation of the Poisson model and explored some of the implications of the random walk formulation during an internship with JMT. FM was supported by ERC Consolidator Grant #863490 GyroSCoPe to Taylor Schildgen. We thank two anonymous reviewers for their constructive comments on a previous version of the manuscript.

810 References

- Allen, J. R. L.: Studies in fluvial sedimentation: An exploratory quantitative model for the architecture of avulsion-controlled alluvial suites. *Sedimentary Geology*, 21(2), 129–147. [https://doi.org/10.1016/0037-0738\(78\)90002-7](https://doi.org/10.1016/0037-0738(78)90002-7), 1978.
- Anderson, M. P., Aiken, J. S., Webb, E. K., & Mickelson, D. M.: Sedimentology and hydrogeology of two braided stream deposits. *Sedimentary Geology*, 129(3-4), 187–199. [https://doi.org/10.1016/S0037-0738\(99\)00015-9](https://doi.org/10.1016/S0037-0738(99)00015-9), 1999.
- 815 Badoux, A., Andres, N., & Turowski, J. M.: Damage costs due to bedload transport processes in Switzerland, *Natural Hazards and Earth System Science*, 14, 279-294, <https://doi.org/10.5194/nhess-14-279-2014>, 2014.
- Baley, P. B.: The flood pulse advantage and the restoration of river-floodplain systems, *Regulated Rivers: Research & Management*, 6, 75-86, <https://doi.org/10.1002/rrr.3450060203>, 1991.
- Bertoldi, W., Zanoni, L., & Tubino, M.: Planform dynamics of braided streams. *Earth Surface Processes and Landforms*, 34(4),
820 547–557, <https://doi.org/10.1002/esp.1755>, 2009.

- Best, J.: Anthropogenic stresses on the world's big rivers, *Nature Geoscience*, 12, 7-21, <https://doi.org/10.1038/s41561-018-0262-x>, 2019.
- Blum, M., Martin, J., Milliken, K., & Garvin, M.: Paleovalley systems: Insights from Quaternary analogs and experiments. *Earth-Science Reviews*, 116, 128–169. <https://doi.org/10.1016/j.earscirev.2012.09.003>, 2013.
- 825 Bradley, D. N., & Tucker, G. E.: The storage time, age, and erosion hazard of laterally accreted sediment on the floodplain of a simulated meandering river, *Journal of Geophysical Research*, 118, 1308-1319, <https://doi.org/10.1002/jgrf.20083>, 2013.
- Bridge, J. S.: Characterization of fluvial hydrocarbon reservoirs and aquifers: problems and solutions. *Latin American Journal of Sedimentology and Basin Analysis*, 8(2), 87–114, 2001.
- Bridge, J. S., & Leeder, M. R.: A simulation model of alluvial stratigraphy, *Sedimentology*, 26, 617-644, 830 <https://doi.org/10.1111/j.1365-3091.1979.tb00935.x>, 1979.
- Bufe, A., Burbank, D. W., & Paola, C.: Fold erosion by an antecedent river, University of Michigan ARC Repository, 340 <http://dx.doi.org/10.5967/M0CF9N3H>, 2016b.
- Bufe, A., Paola, C., & Burbank, D. W.: Fluvial bevelling of topography controlled by lateral channel mobility and uplift rate, *Nature Geoscience*, 9(9), 706-710, <https://doi.org/10.1038/ngeo2773>, 2016a.
- 835 Bufe, A., Turowski, J. M., Burbank, D. W., Paola, C., Wickert, A. D., & Tofelde, S.: Controls on the lateral channel-migration rate of braided channel systems in coarse non-cohesive sediment: *Earth Surface Processes and Landforms*, 44(14), 2823-345 2836, <https://doi.org/10.1002/esp.4710>, 2019.
- Carretier, S., Guerit, L., Harries, R., Regard, V., Maffre, P., & Bonnet, S.: The distribution of sediment residence times at the foot of mountains and its implications for proxies recorded in sedimentary basins, *Earth and Planetary Science Letters*, 840 546, 116448, <https://doi.org/10.1016/j.epsl.2020.116448>, 2020.
- Constantine, J. A., Dunne, T., Ahmed, J., Legleiter, C., & Lazarus, E. D.: Sediment supply as a driver of river meandering and floodplain evolution in the Amazon Basin. *Nature Geoscience*, 7(12), 899–903. <https://doi.org/10.1038/ngeo2282>, 2014.
- Edwards, B. F. and Smith, D. H.: River meandering dynamics, *Phys. Rev. E*, 65, 046303, <https://doi.org/10.1103/PhysRevE.65.046303>, 2002.
- 845 Egozi, R., & Ashmore, P.: Experimental analysis of braided channel pattern response to increased discharge. *Journal of Geophysical Research*, 114, F02012. <https://doi.org/10.1029/2008JF001099>, 2009.
- Everitt, B.L.: Use of the cottonwood in an investigation of the recent history of a flood plain, *Am. J. Sci.*, 266, 417-439, 1968.
- Fotherby, L. M.: Valley confinement as a factor of braided river pattern for the Platte River, *Geomorphology*, 103, 562-576, <https://doi.org/10.1016/j.geomorph.2008.08.001>, 2009.
- 850 Greenberg, E., & Ganti V.: The pace of global river meandering influenced by fluvial sediment supply, *Earth Planet. Sci. Lett.*, 634, 118674, <https://doi.org/10.1016/j.epsl.2024.118674>, 2024.
- Greenberg, E., Chadwick, A. J., Li, G. K., & Ganti V.: Quantifying channel mobility and floodplain reworking timescales across river planform morphologies, *Geophys. Res. Lett.*, 51, e2024GL108537, <https://doi.org/10.1029/2024GL108537>, 2024.

- 855 Junk, W. J., Bayley, P. B., & Sparks, R. E.: The flood pulse concept in river-floodplain systems, p. 110-127 in D. P. Dodge (Ed.), *Proceedings of the International Large River Symposium*. Can. Spec. Publ. Fish. Aquat. Sci. 106, 1989.
- Hajek, E. A., & Straub, K. M.: Autogenic sedimentation in clastic stratigraphy. *Annual Review of Earth and Planetary Sciences*, 45(1), 681–709. <https://doi.org/10.1146/annurev-earth-063016-015935>, 2017.
- Hancock, G. S., & Anderson, R. S.: Numerical modeling of fluvial strath-terrace formation in response to oscillating climate. *Bulletin of the Geological Society of America*, 114(9), 1131–1142. [https://doi.org/10.1130/0016-3507606\(2002\)114<1131:NMOFST>2.0.CO;2](https://doi.org/10.1130/0016-3507606(2002)114<1131:NMOFST>2.0.CO;2), 2002.
- Howard, A. D.: *Modelling Channel Evolution and Floodplain Morphology*, In M. G. Anderson, D. E. Walling, & P. E. Bates (Eds.), *Floodplain processes* (pp. 15–62). Chichester: John Wiley and Sons, Ltd., 1996.
- Huffman, M. E., Pizzuto, J. E., Trampush, S. M., Moody, J. A., Schook, D. M., Gray, H. J., & Shannon, A. M.: Floodplain sediment storage timescales of the laterally confined meandering Powder River, USA, *J. Geophys. Res.*, 127, e2021JF006313, <https://doi.org/10.1029/2021JF006313>, 2022.
- Ielpi, A., & Lapôtre, M. G. A.: A tenfold slowdown in river meander migration driven by plant life, *Nature Geoscience*, 13, 82-86, <https://doi.org/10.1038/s41561-019-0491-7>, 2019.
- Ikeda, S., Parker, G., and Sawai, K.: Bend theory of river meanders. Part 1. Linear development, *J. Fluid Mech.*, 112, 363–377, <https://doi.org/10.1017/S0022112081000451>, 1981.
- 870 Jonell, T. N., Owen, L. A., Carter, A., Schwenniger, J.-L., & Clift, P. D.: Quantifying episodic erosion and transient storage on the western margin of the Tibetan Plateau, upper Indus River. *Quaternary Research*, 89, 281-306, <https://dx.doi.org/10.1017/qua.2017.92>, 2018.
- Kolmogoroff, A.: Über das Gesetz des iterierten Logarithmus, *Mathematische Annalen*, 101, 126–135, 1929.
- 875 Lancaster, S. T., & Casebeer, N. E.: Sediment storage and evacuation in headwater valleys at the transition between debris-flow and fluvial processes, *Geology*, 35(11), 1027-1030, <https://dx.doi.org/10.1130/G239365A.1>, 2007.
- Lancaster, S. T., Underwood, E. F., & Frueh, W. T.: Sediment reservoirs at mountain stream confluences: dynamics and effects of tributaries dominated by debris-flow and fluvial processes, *Geol. Soc. Am. Bull.*, 122, 1775-1786, <https://dx.doi.org/10.1130/B30175.1>, 2010.
- 880 Langevin, M. P.: On the theory of Brownian motion, *C. R. Acad. Sci. (Paris)* 146, 530–533, 1908.
- Lawler, G. F., & Limic, V.: *Random Walk: A modern introduction*, Cambridge University Press, ISBN 9780511750854, <https://doi.org/10.1017/CBO9780511750854>, 2010.
- Limaye, A. B. S.: How do braided rivers grow channel belts? *Journal of Geophysical Research: Earth Surface*, 125, 1–24. <https://doi.org/10.1029/2020JF005570>, 2020.
- 885 Maddy, D., Bridgland, D., & Westaway, R.: Uplift-driven valley incision and climate-controlled river terrace development in the Thames Valley, UK. *Quaternary International*, 79(1), 23–36. [https://doi.org/10.1016/s1040-6182\(00\)00120-8](https://doi.org/10.1016/s1040-6182(00)00120-8), 2001.
- Madsen, A. T., & Murray, A. S.: Optically stimulated luminescence dating of young sediments: A review, *Geomorphology*, 109, 3–16. <https://doi.org/10.1016/j.geomorph.2008.08.020>, 2009.

- Malatesta, L. C., Prancevic, J. P., & Avouac, J. P.: Autogenic entrenchment patterns and terraces due to coupling with lateral erosion in incising alluvial channels. *Journal of Geophysical Research: Earth Surface*, 122, 335–355. <https://doi.org/10.1002/2015JF003797>, 2017.
- Marr, J. G., Swenson, J. B., Paola, C., & Voller, V. R.: A two-diffusion model of fluvial stratigraphy in closed depositional basins, *Basin Research*, 12, 381–398, <https://doi.org/10.1111/j.1365-2117.2000.00134.x>, 2000.
- Martin, J., Cantelli, A., Paola, C., Blum, M., & Wolinsky, M.: Quantitative modeling of the evolution and geometry of incised valleys. *Journal of Sedimentary Research*, 81(1), 64–79. <https://doi.org/10.2110/jsr.2011.5>, 2011.
- May, C., Roering, J., Eaton, L. S., & Burnett, K. M.: Controls on valley width in mountainous landscapes: The role of 360 landsliding and implications for salmonid habitat. *Geology*, 41(4), 503–506. <https://doi.org/10.1130/G33979.1>, 2013.
- McNab, F.: Supplement to: "Width evolution of channel belts as a random walk" by Turowski et al., Version 2, Zenodo, <https://doi.org/10.5281/zenodo.13364594>, 2024.
- Meitzen, K. M., Kupfer, J. A., & Gao, P.: Modeling hydrologic connectivity and virtual fish movement across a large Southeastern floodplain, USA, *Aquatic Sciences*, 80(5), <https://doi.org/10.1007/s00027-017-0555-y>, 2018.
- Miller, A. J.: Valley morphology and boundary conditions influencing spatial patterns of flood flow. In: Costa, J. E., Miller, A. J., Potter, K. W., Wilcock, P. R. (Eds.), *Natural and Anthropomorphic Influences in Fluvial Geomorphology. Geophysical Monograph*, 89. American Geophysical Union, Washington, DC, 57–81, <https://doi.org/10.1029/GM089p0057>, 1995.
- Naiman, R. J., Bechtold, J. S., Beechie, T. J., Latterell, J. J., & Van Pelt, R.: A process-based view of floodplain forest patterns in coastal river valleys of the Pacific Northwest, *Ecosystems*, 13, 1–31, <https://doi.org/10.1007/s10021-009-9298-5>, 2010.
- Nyberg, B., Henstra, G., Gawthorpe, R. L., Ravnås, R., & Ahokas, J.: Global scale analysis on the extent of river channel belts, *Nature Communications*, 14, 2163, <https://doi.org/10.1038/s41467-023-37852-8>, 2023.
- Pizzuto, J., Keeler, J., Skalak, K., & Karwan, D.: Storage filters upland suspended sediment signals delivered from watersheds, *Geology*, 45(2), 151–154, <https://doi.org/10.1130/G38170.1>, 2017.
- Redner, S.: *A Guide to First Passage Time Processes*, 328 pp., Cambridge Univ. Press, New York. 2001.
- Repasch, M., Wittmann, H., Scheingross, J. S., Sachse, D., Szupiany, R., Orfeo, O., Fuchs, M., & Hovius, N.: Sediment transit time and floodplain storage dynamics in alluvial rivers revealed by meteoric ¹⁰Be, *Journal of Geophysical Research: Earth Surface*, 125, e2019JF005419, <https://doi.org/10.1029/2019JF005419>, 2020.
- Repasch, M., Scheingross, J. S., Hovius, N., Lupker, M., Wittmann, H., Haghypour, N., Gröcke, D. R., Eglinton T. I., and Sachse, D.: Fluvial organic carbon cycling regulated by sediment transit time and mineral protection, *Nat. Geosci.*, 14, 842–848, <https://doi.org/10.1038/s41561-021-00845-7>, 2021.
- Scheingross, J. S., Repasch, M. N., Hovius, N., Sachse, D., Lupker, M., Fuchs, M., Helevy, I., Gröcke, D. R., Golombek, N. Y., Haghypour, N., Eglinton, T. I., Orfeo, O., & Schleicher, A. M.: The fate of fluvially-deposited organic carbon during transient floodplain storage, *Earth and Planetary Science Letters*, 561, 116822, <https://doi.org/10.1016/j.epsl.2021.116822>, 2021.

- Schumm, S. A., & Lichty, R. W.: Flood-plain construction along Cimarron River, in southwestern Kansas, Geol. Surv. Prof. Pap. 352-DUS Gov. Printing Office, Washington, 1963. 365
- 925 Skalak, K., & Pizzuto, J.: The distribution and residence time of suspended sediment stored within the channel margins of a gravel-bed bedrock river, *Earth Surface Processes and Landforms*, 35, 435-446, <https://doi.org/10.1002/esp.1926>, 2010.
- Tofelde, S., Bernhardt, A., Guerit, L., & Romans, B. W.: Times associated with source-to-sink propagation of environmental signals during landscape transience, *Front. Earth Sci.*, 9, 628315, <https://doi.org/10.3389/feart.2021.628315>, 2021.
- Tofelde, S., Bufe, A., & Turowski, J. M.: Hillslope sediment supply limits alluvial valley width, *AGU Advances*, 3, 930 e2021AV000641. <https://doi.org/10.1029/2021AV000641>, 2022.
- Torres, M. A., Limaye, A. B., Lamb, M. P., West, A. J., & Fischer, W. W.: Model prediction of long-lived storage of organic carbon in river deposits, *Earth Surface Dynamics*, 5, 711-730, <https://doi.org/10.5194/esurf-5-711-2017>, 2017.
- Turowski, J. M., Bufe, A., & Tofelde, S.: A physics-based model for fluvial valley width, *Earth Surface Dynamics*, 12, 493-514, <https://doi.org/10.5194/esurf-12-493-2024>, 2024.
- 935 Uhlenbeck, G. E., & Ornstein, L. S.: On the theory of the Brownian motion, *Phys. Rev.* 36, 823-841, <https://doi.org/10.1103/PhysRev.36.823>, 1930.
- van de Lageweg, W. I., van Dijk, W. M., & Kleinhans, M. G. (2013). Channel belt architecture formed by a meandering river. *Sedimentology*, 60(3), 840–859. <https://doi.org/10.1111/j.1365-3091.2012.01365.x>
- Wickert, A. D., Martin, J. M., Tal, M., Kim, W., Sheets, B., & Paola, C.: River channel lateral mobility: Metrics, time scales, 940 and controls. *Journal of Geophysical Research: Earth Surface*, 118, 396–412. <https://doi.org/10.1029/2012JF002386>, 2013.