

Sediment transport capacity response to variations in water discharge in pressurized subglacial channels

Ian Delaney¹, Andrew J. Tedstone^{1,2}, Mauro A. Werder^{3,4}, and Daniel Farinotti^{3,4}

¹Institut des dynamiques de la surface terrestre (IDYST), Université de Lausanne, Bâtiment Géopolis, 1015 Lausanne, Switzerland

²Department of Geosciences, University of Fribourg, Ch. du Musée 1700, Fribourg, Switzerland

³Laboratory of Hydraulics, Hydrology and Glaciology (VAW), ETH-Zürich, Hönggerberggring 26, 8093 Zürich, Switzerland

⁴Swiss Federal Institute for Forest, Snow and Landscape Research (WSL), bâtiment ALPOLE, Sion, Switzerland

Correspondence: Ian Delaney (IanArburua.Delaney@unil.ch)

Abstract. Sediment transport capacity in both subaerial and subglacial channels depends on the shear stress exerted across the channel bottom, which varies with water velocity and channel width. In full subaerial channels, water discharge variations are accommodated by flow depth and width changes, along with water velocity. However, in subglacial channels, water is pressurized by the ice above, and they grow in response to frictional heating of water flowing through them. As a result, rapid changes in water discharge mainly result in velocity variations, as the channel geometry evolves slowly. Here, we present formulations of sediment transport capacity in different channel types and apply subglacial and subaerial hydraulics models to hydrographs from an Alpine glacier and a catchment of the Greenland Ice Sheet. Numerical experiments show that the changing channel size results in sediment transport capacity peaking before the maximum water discharge. This hysteresis causes a highly variable relationship between sediment and water discharge in a transport-limited subglacial system. The results also indicate that high subglacial sediment transport capacities can occur across a wide range of water discharges. Reducing water discharge variability by smoothing lessens the hysteresis effects, in some cases to the point where a covarying relationship between water discharge and sediment transport capacity can be approached, similar to subaerial systems. A second set of numerical experiments shows that subglacial sediment transport is highly non-linear with respect to water discharge, creating more variability in sediment transport capacity. Yet, results and formulations of subglacial sediment transport capacity show that its variability can approach that of subaerial systems when subglacial channel size is in equilibrium with water discharge. The implications of these findings help to evaluate sediment discharge from glaciers with different hydro-climatic forcings and establish sources of variability in the sediment export-water discharge relationships. These findings can improve the interpretation of sediment discharge records in glacierized catchments.

1 Introduction

Changes in glacier dynamics and hydrology have motivated numerous recent studies on sediment transport processes in cold regions (e.g. Li et al., 2022; Vergara et al., 2022; Zhang et al., 2022). Increases in sediment transport have been observed in Greenland (Bendixen et al., 2017), the European Alps (Costa et al., 2018), the Himalayas (Li et al., 2021), and the Andes

(Vergara et al., 2022). To accurately explain observed changes in sediment transport in glacierized catchments, the processes controlling sediment discharge and its variations with water discharge need to be examined (e.g. Riihimaki et al., 2005; Swift et al., 2005).

Glacier abrasion and quarrying sculpt landscapes, and create sediment that is transported fluvially over periods of millennia or longer (c.f. Hallet, 1979; Iverson, 2012; Ugelvig et al., 2018). Pressurized subglacial water can transport this sediment from underneath glaciers (Walder and Fowler, 1994; Creyts et al., 2013; Beaud et al., 2018; Delaney et al., 2019) if it is reachable by the water.

In a transport-limited regime, sediment discharge is controlled by sediment transport capacity, which is defined as the amount of sediment the water can carry. In both subglacial and subaerial channels, sediment transport capacity depends on the shear stress between water and the sediment it flows over (Shields, 1936; Meyer-Peter and Müller, 1948; Engelund and Hansen, 1967), along with the width of the channel bottom w over which sediment mobilizes. The shear stress τ responds to the velocity of water v flowing through the channel so that

$$\tau \propto v^2. \quad (1)$$

The mean velocity of the water flowing through a channel is

$$v = \frac{Q}{S}, \quad (2)$$

where Q is water discharge, and S is the channel's wetted area.

In subaerial channels operating with open channel flow, S evolves with changing water discharge Q , by changing both the channel width and the water depth (Leopold and Maddock, 1953). The change in water depth results in a proportional increase in water velocity, and the shear stress τ increases according to Equation 1.

The response of water velocity to changing water discharge in subglacial channels differs from subaerial ones, however. The size of subglacial channels is controlled by the opposing processes of channel opening by frictional heating of water flow on the one hand, versus creep closure by ice flow on the other (Röthlisberger, 1972). As a result, the subglacial channel size only evolves relatively slowly over days, whereas water discharge can vary more quickly over hours (e.g. Iken and Bindshadler, 1986; Andrews et al., 2014; Nanni et al., 2020). Therefore, subglacial water flow behaves more like pipe flow over short periods (hours, days). Changes in water discharge Q are mainly accommodated by changing water velocity v (Equation 2 and Figure 1; Alley et al., 1997).

Because of the above, sediment mobilization in subaerial and subglacial channels responds differently to changing water discharge. These differences are implicitly included in a range of models quantifying sediment transport in both subglacial and subaerial channels (e.g. Walder and Fowler, 1994; Alley et al., 1997; Tucker and Slingerland, 1997; Creyts et al., 2013; Beaud et al., 2018; Delaney et al., 2019; Hewitt and Creyts, 2019; Wickert and Schildgen, 2019). To date, several modeling frameworks examine subglacial sediment transport with evolving channel size (Creyts et al., 2013; Beaud et al., 2018; Delaney et al., 2019; Hewitt and Creyts, 2019). However, these works minimally discuss the impact of different hydrological regimes on sediment transport capacity underneath glaciers in the context of interpreting sediment transport records. The few explicit

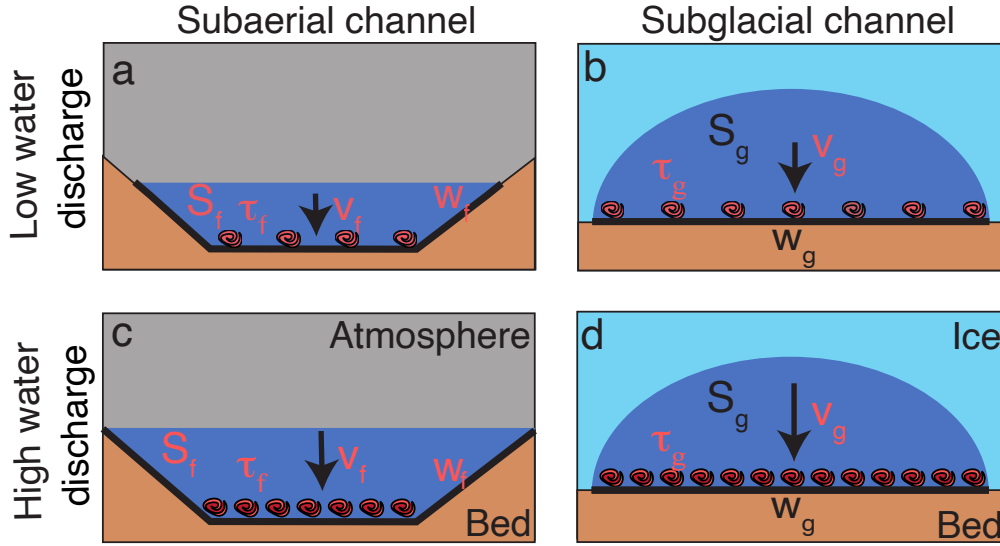


Figure 1. Sketch of the different responses of subglacial and subaerial channels to increased water discharge over short time scales, variables in black remain constant with short variations in water discharge, where as variables in color change. Arrow length denotes water velocity magnitudes in the subglacial (subaerial) v_g (v_f) channels. S_g (S_f) represents the wetted area in subglacial (subaerial) channels. The subglacial channel width w_g remains unchanged, while the subaerial channel width w_f evolves with water discharge. Subglacial (subaerial) shear stress τ_g (τ_f) is responsible for the mobilization of sediment.

parameterizations of subglacial sediment transport capacity with respect to water discharge assume fixed channel size (Alley et al., 1997). These formulations demonstrate a strongly non-linear response in subglacial sediment transport capacity to water discharge. Yet, continually evolving channels' size can impact variations in sediment transport capacity. Understanding these processes is imperative for establishing the effect of hydro-climatic conditions on subglacial sediment dynamics, especially as sediment discharge capacity controls the mobilization and deposition of sediment. This makes it a fundamental aspect of subglacial sediment evacuation, especially over short timescales.

Despite the different physical processes between the subaerial and subglacial systems, observed water discharge and sediment export are often compared in contemporary glacierized catchments (e.g. Willis et al., 1996; Hodson et al., 1998; Pearce et al., 2003; Richards and Moore, 2003; Swift et al., 2005; Chu et al., 2009; Tedstone and Arnold, 2012; Chu et al., 2012; Overeem et al., 2017; Delaney et al., 2018; Swift et al., 2021; Lu et al., 2022; Andresen et al., 2024). Many of these studies discuss the disparity between water discharge and sediment export, especially given the role of sediment availability or production. Yet, a variable relationship between water discharge and sediment export could be expected from glaciers with evolving conduit size in a transport-limited regime. The response of sediment transport capacity to water discharge variations may affect the interpretation of sediment transport records in these glacierized catchments (e.g. Ganti et al., 2016; Mancini et al., 2023; Núñez Ferreira et al., 2025). This relationship must be clarified as sediment dynamics change in glacierized regions along

with changing hydrology (e.g. Brunner et al., 2019), increasing variability of water discharge (Lane and Nienow, 2019) and
70 occurrence of extreme glacier melt (e.g. Overeem et al., 2015; Cremona et al., 2023) that may drive high magnitude sediment
transport events.

This manuscript has two objectives: 1) to establish the hydrological conditions where sediment transport capacity co-varies
with water discharge in subglacial systems, and 2) to evaluate the variability of sediment transport capacity in subglacial chan-
nels with evolving channel size and different hydrographs compared to subaerial ones. We use numerical models to examine
75 sediment transport capacity in both subglacial channels that evolve in size and subaerial channels that remain fixed. They are
applied to proglacial hydrological records from an Alpine glacier in Switzerland (Fieschergletscher) and a land-terminating
glacier in Greenland (Leverett Glacier). We also run a model ensemble to evaluate the sediment transport capacity variability
in subglacial channels compared to subaerial channels. Lastly, we present algebraic formulations of the sediment transport
capacity response to water discharge in subaerial, steady-state R-channel, and pipe flow conditions. These formulations extend
80 the relationships presented in Alley et al. (1997) and illustrate the sediment transport capacity behavior of different channel
assumptions. The manuscript then discusses the implications of variability in sediment transport capacity from glaciers and the
interpretation of sediment transport records.

2 Study sites and data

Water discharge data is from Alpine and ice sheet settings collected downstream of the glacier, and assumes no water storage
85 in the proglacial area. The Alpine site (labeled *ALPINE*) is Fieschergletscher in the Swiss Alps ($46^{\circ}29'07''$ N, $8^{\circ}08'3''$ E).
The water discharge data used here was collected at a 1min interval from May 24, 2014, to October 10, 2014 (Figure 2 a Felix
et al., 2022).

The Leverett Glacier in Greenland (labeled *ICESHEET*) serves as the ice sheet setting. Water discharge was measured
roughly 2km downstream from the terminus ($67^{\circ}03'5''$ N, $50^{\circ}12'59''$ W), at a 5 min time interval from May 28, 2012 to
90 August 8, 2012 (Tedstone et al., 2013, ; Figure 2 b).

3 Methods

The two models described below (Sections 3.1 and 3.2) represent relationships amongst water discharge, water velocity, and
channel geometry in both subaerial and subglacial channels (Table 1). Both models use the measured discharge to calculate
water velocity, shear stress, and width-integrated shear stress, upon which both suspended sediment and bedload transport
95 depend (Figure 1; Shields, 1936). Our choice to evaluate our results in terms of shear stress omits the selection of a sediment
transport relationship and a grain-size parameter (e.g. Shields, 1936; Meyer-Peter and Müller, 1948).

3.1 Subglacial channel model

The subglacial channel model accounts for the channel geometry and the water's velocity to evaluate the shear stress of water flowing across sediments underneath a glacier. We use a lumped hydraulics model from Werder et al. (2010), itself based upon that of Clarke (1996).

Here, it is assumed that the water is transported through a subglacial channel (Figure 1; Röthlisberger, 1972) beneath a glacier with channel length l , with a flat bed and a mean ice thickness of h_{ice} . The channel size grows from melt due to frictional heating from water flow and closes due to ice creep. The formulation here does not consider the englacial storage of water. The evolution of subglacial channel size S_g is given as

$$\frac{\partial S_g}{\partial t} = C_1 \frac{Q \Delta h}{l} - C_2 (h_o - \bar{h})^n S_g, \quad (3)$$

where t is time, $C_1 = (1 - \rho_w c_p c_t) \frac{\rho_w g}{\rho_i L}$ and $C_2 = 2A(\frac{\rho_w g}{n})^n$ are constants (values in Table 1), g is the acceleration due to gravity, Q is water discharge, $\bar{h} = \frac{1}{2}(h + h_p)$ is the mean hydraulic head in the channel with h_p being the proglacial hydraulic head equal to zero, l , $h_o = \frac{\rho_i}{\rho_w} h_{ice}$ is the mean ice overburden pressure expressed in meter water equivalent (ρ_w is density of water; ρ_i is density of ice), and n is Glen's n (usually $n = 3$; Glen, 1955). The first term on the equation's right side represents the channel opening by frictional heating, while the following term represents channel closure from ice deformation.

Following the Darcy-Weisbach equation, the head drop Δh is

$$\Delta h = l \frac{1}{2g} f_i \frac{v_g^2}{D_h}, \quad (4)$$

where f_r is a friction factor, D_h is the hydraulic diameter, l is the channel length, and $v_g = \frac{Q}{S_g}$ is the water velocity. The hydraulic diameter D_h is converted to wetted area S_g with

$$S_g = \frac{D_h^2}{2} \frac{(\frac{\beta}{2} + \sin \frac{\beta}{2})^2}{\beta - \sin \beta}, \quad (5)$$

where β is the central angle of the circular segment that comprises the channel (the Hooke angle, Hooke et al. (1990)). $\beta = \pi$ corresponds to a semi-circular channel and smaller values of β result in shallow, wide channels. This completes the subglacial hydraulic model which is described by the state variables S_g and Δh .

The shear stress, τ_g , between the water and the channel bed results from the Darcy-Weisbach formulation

$$\tau_g = \frac{1}{8} f_r \rho_w v_g^2, \quad (6)$$

where $v_g = \frac{Q}{S_g}$ is the water velocity. The width of the channel floor w_g is represented as

$$w_g = 2 \sin \frac{\beta}{2} \sqrt{\frac{2 S_g}{\beta - \sin \beta}}. \quad (7)$$

This value establishes the integrated shear stress across the channel $w_g \tau_g$.

3.2 Subaerial channel model

The hydraulics parameterization presented in Tucker and Slingerland (1997) is implemented to represent the subaerial channel. This model uses mass conservation and the Darcy-Weisbach relationship and assumes that the channel is sufficiently wide compared to its depth. This latter assumption means that the hydraulic radius is well approximated by the flow depth. Therefore, the resulting shear stress τ_f at the river bed is

$$\tau_f = \frac{\rho_w g^{\frac{2}{3}} f_f^{\frac{1}{3}}}{2} \left(\frac{Q}{w_f} \right)^{\frac{2}{3}} \nabla z_c^{\frac{2}{3}}, \quad (8)$$

where ∇z_c is the channel slope, and f_f is the friction factor for subaerial channels (Tucker and Slingerland, 1997). Channel width w_f is

$$w_f = k Q^\alpha, \quad (9)$$

where k is a constant and $\alpha = \frac{1}{3}$ is a commonly chosen exponent (Leopold and Maddock, 1953). Also following the Darcy-Weisbach, subaerial water velocity, v_f , is given as

$$v_f = \sqrt{\frac{8\tau_f}{f_f \rho_w}}. \quad (10)$$

As mentioned above, the width-integrated shear stress is $w_f \tau_f$.

Table 1. Variables, parameters, and constants. Where two values are given, the first refers to *ALPINE*, a scenario from Fieschergletscher, and the second to a glacier marginal to the *ICESHEET* a scenario from Leverett Glacier. A second line refers to the range of values examined in the parameter search.

Name	Symbol	Value (<i>ALPINE</i> or <i>ICESHEET</i>)	Units
Variables			
Water discharge	Q		$\text{m}^3 \text{s}^{-1}$
Water velocity (subglacial, subaerial)	$v, (v_g, v_f)$		m s^{-1}
Channel wetted area (subglacial, subaerial)	S_g, S_f		m^2
Channel depth (subaerial)	H		m
Hydraulic diameter	D_h		m
Width of channel floor (subglacial, subaerial)	$w, (w_g, w_f)$		m
Hydraulic head	Δh		m
Mean hydraulic head	$\bar{h}$		m
Hydraulic gradient	$\Psi = \frac{\Delta h}{l}$		m m^{-1}
Shear stress (subglacial, subaerial)	$\tau, (\tau_g, \tau_f)$		Pa m^{-2}
Stream power	Ω		kg m s^{-3}
Parameters and Constants			
Gravitational constant	g	9.81	m s^{-2}
Density of water	ρ_w	1000	kg m^{-3}
Density of ice	ρ_i	900	kg m^{-3}
Hooke angle of channel	β	$\frac{\pi}{6}$	rad
Friction factor (subglacial, subaerial)	$f, (f_r, f_f)$	$(\frac{\pi}{10}, \pi)$	$(-)$
		$-(5, (16, 3))$ $(0.01, 21)$	
Glacier thickness	h_{ice}	225 or 740	m
Effective glacier thickness	h_o	$\frac{\rho_i}{\rho_w} h_{ice}$	m
Effective glacier length	l	7,000 or 26,000	m
Hydraulic head at terminus	h_p	0	m
Constant 1 in Equation 3	C_1	2.2×10^{-5}	m^{-1}
Constant 2 in Equation 3	C_2	3.7×10^{-13}	$\text{m}^{-n} \text{s}^{-1}$
Latent heat of fusion	L	333.5	kJ kg^{-1}
Pressure melting coefficient	c_t	7.5×10^{-8}	K Pa^{-1}
Specific heat capacity of water	c_p	4180	$\text{J kg}^{-1} \text{K}^{-1}$
Ice flow constant	A	5.3×10^{-24}	$\text{Pa}^{-n} \text{s}^{-1}$
Ice flow exponent	n	3	$(-)$
Gradient of channel bed (subaerial)	∇z_c	0.02	$(-)$
		$(.01, 0.05)$	
Subaerial channel factor	k	8	s m^{-2}
Channel geometry exponent	α	$\frac{1}{3}$	$(-)$
		$(\frac{1}{3}, \frac{1}{2})$	

3.3 Implementation

135 Proglacial discharge records from the Fieschergletscher (scenario *ALPINE*) and Leverett Glacier (scenario *ICESHEET*) are used as inputs for the models above. The model outputs represent generalizable sediment transport characteristics from these hydrographs, rather than actual hydraulic conditions. To generalize these scenarios, *ALPINE* is exemplified by relatively thin ice ($h_{ice} = 225$ m Grab et al., 2021), low water discharge ($\sim 10 \text{ m}^3 \text{ s}^{-1}$) and high diurnal variability in water discharge at Fieschergletscher (Figure 2 a). *ICESHEET* is exemplified by thick ice ($h_{ice} = 700$ m; Morlighem et al., 2017), high water
140 discharge ($\sim 300 \text{ m}^3 \text{ s}^{-1}$) and low diurnal variability in water discharge at Leverett glacier (Figure 2 e). We note that the subglacial results apply to pressurized subglacial channels, not depressurized ones that can occur underneath glacier termini (Perolo et al., 2018).

In the first experiment, the models are applied to a reference test case for each glacier. These experiments assumes a subglacial channel with $\beta = \frac{\pi}{6}$ and a subaerial channel with $\alpha = \frac{1}{3}$ and slope of 0.02 (Table 1). Both friction factors f_r and f_f are
145 tuned so that reasonable water velocities ($\sim 1 - 1.5 \text{ m s}^{-1}$ Werder et al., 2010; Chandler et al., 2013) occur for both *ALPINE* and *ICESHEET*.

To test the covariance between sediment transport capacity and water discharge, model outputs are compared to water discharge from the glaciers using Spearman rank correlation. This metric accounts for the ordering of values, but not their magnitude. Rank correlation reduces the impact of the non-linear relationship between sediment transport capacity and hydrol-
150 ogy. Note that this subaerial channel model is purely algebraic, whereas the subglacial model comprises a differential equation for the evolution of S_g . Thus, the channel size in the subaerial model has no history dependence on the discharge Q_w , whereas the subglacial one does (Equation 3). Therefore, rank correlation is 1 between water discharge and sediment transport capacity subaerial systems, or subglacial ones where channel size S_g evolves more slowly than water discharge.

The second experiment aims to characterize the variability in sediment discharge capacity in subglacial relative to subaerial
155 channels across a range of channel slopes and shapes, and friction factors. Additionally, we examine the effects of differing water discharge smoothing periods from 15 min up to 15 days. The results below present water velocity (v_g, v_f), shear stress (τ_g, τ_f), and width-integrated shear stress ($w_g \tau_g, w_f \tau_f$) from the subglacial and subaerial models. For brevity, these values together are referred to as “model outputs” in the text. To evaluate variability, we subtract the model outputs from their daily averages. This creates a time series that is detrended from the seasonal variations in the model outputs and has an approximately
160 normal distribution. We then present the variability in the model output by taking the standard deviation of this detrended time series.

The effects of channel shape, gradient, and roughness are established by running the model with random parameter values in a range of channel slope and geometry factors ($\beta, \nabla z_c$, and α) and friction factors (f_r and f_f ; see Table 1 for value range). Runs with parameter combinations are accepted if their mean subglacial water velocity over the season lies between 0.5 m s^{-1}
165 and 2 m s^{-1} or if subaerial water velocity lies between 0.3 m s^{-1} and 1.2 m s^{-1} (e.g. Werder et al., 2010; Magnusson et al., 2012; Chandler et al., 2013). To be accepted, subglacial model runs must experience a flotation fraction ($\frac{\Delta h}{2h_o}$) of above 1.2 for less than 2.5 % of the run. A model spinup dictates the initial condition of cross-sectional area S_g . The spinup consists of

applying the maximum observed water discharge of the first 4 days of the study period to the model until there is no change in the channel area S_g .

170 The routine runs until 100 different parameter combinations for each water discharge smoothing period are accepted with the conditions described above. To test the effects of variability in water discharge, it is averaged over the smoothing periods with the moving average from 15 minutes to 15 days.

4 Results

4.1 Timing and covariance of subaerial and subglacial sediment transport capacity variations

175 The first numerical experiment aims to quantify the timing and covariance of the subglacial model outputs with respect to water discharge in response to different seasonal evolutions and peaks (Figure 2). Variable relationships between model outputs and water discharge emerge for the subaerial and subglacial cases as channel size evolves (Figure 2 a, e). Because subaerial channels have no history dependence, each water discharge value in the subaerial channel produces a unique water velocity, shear stress, and width-integrated shear stress (Section 3.1). This characteristic results in a perfect rank correlation between the variables
180 and water discharge (Figure 3). An inconsistent relationship between subglacial model outputs and water discharge persists across the range of parameters examined in the ensemble runs (see Section 4.2; Figure S15).

Peaks in subaerial model outputs occur coincident with peaks in water discharge (Figure 2). In the subglacial channel, peaks in model outputs generally occur when water discharge increases, but before the maximum water discharge. As the water discharge stabilizes at its peak, channel growth continues (Figure 2 a, e), causing water velocity and other model outputs to
185 decrease from their peak values (Figure 2 b-d, f-h). Subglacial sediment transport capacity is greatest on the hydrograph's rising limb, relative to the falling limb, creating a hysteresis effect.

The history dependence on channel size in subglacial channels means that different sediment transport characteristics, such as velocity, occur across a large range of water discharges. For instance, in subglacial channels in *ALPINE*, high water velocity values and shear stresses can occur from a low water discharge ($\sim 4 \text{ m}^3 \text{ s}^{-1}$) to the maximum water discharge at over 17
190 $\text{m}^3 \text{ s}^{-1}$ (Figure 3 a). In *ICESHEET*, water velocities close to the seasonal mean value can occur at water discharges between roughly $150 \text{ m}^3 \text{ s}^{-1}$ and $310 \text{ m}^3 \text{ s}^{-1}$. The subglacial channel's evolving width can counteract some of these effects. Width-integrated shear stress generally increases with water discharge, with greater rank correlation than water velocity or shear stress (*ALPINE*, Figure 3 a–c). Yet, even the width-integrated shear stress can vary substantially relative to water discharge. The highest values of width-integrated shear stress occur at water discharge values ranging from roughly $11 \text{ m}^3 \text{ s}^{-1}$ to over 17
195 $\text{m}^3 \text{ s}^{-1}$. The variability in width-integrated shear stress is less pronounced in the *ICESHEET* scenario, where the hydrograph has less diurnal variability (Figure 3 c, f).

Water discharge and sediment transport characteristics correlate better in *ICESHEET* with lower diurnal variations in water discharge compared to the *ALPINE*. To evaluate the impact of water discharge variability, we smoothed the two hydrographs across different periods and evaluated the Spearman rank correlation between sediment transport characteristics and water

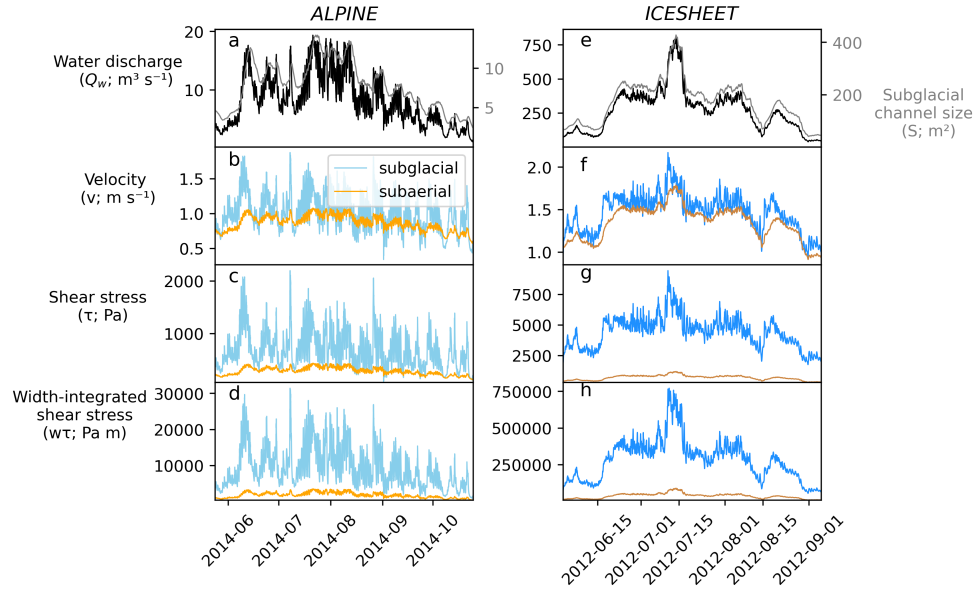


Figure 2. Model outputs from simulations using the hydrographs in panels a and e for the scenarios *ALPINE* (a-d) and *ICESHEET* (e-h). Black (gray) lines in a and e represent the subglacial water discharge (channel size). Blue (orange) lines represent outputs from the subglacial (subaerial) channel. Data are shown at 15min intervals. Arrows highlight cases where variables peak in the subglacial channel before the subaerial one.

200 discharge. We assume that a higher rank correlation indicates a reduced amount of hysteresis and behavior more similar subaerial channels (Figure 3).

Smoothing water discharge over periods longer than one day causes a substantial increase in rank correlation (Figure 4), removing diurnal variations (Figures S1-S14). Even with the variations removed, correlations in sediment transport characteristics in *ICESHEET* remain higher than *ALPINE*, which has more water discharge variations even when smoothed compared
 205 to *ICESHEET* (Figure S1-S14).

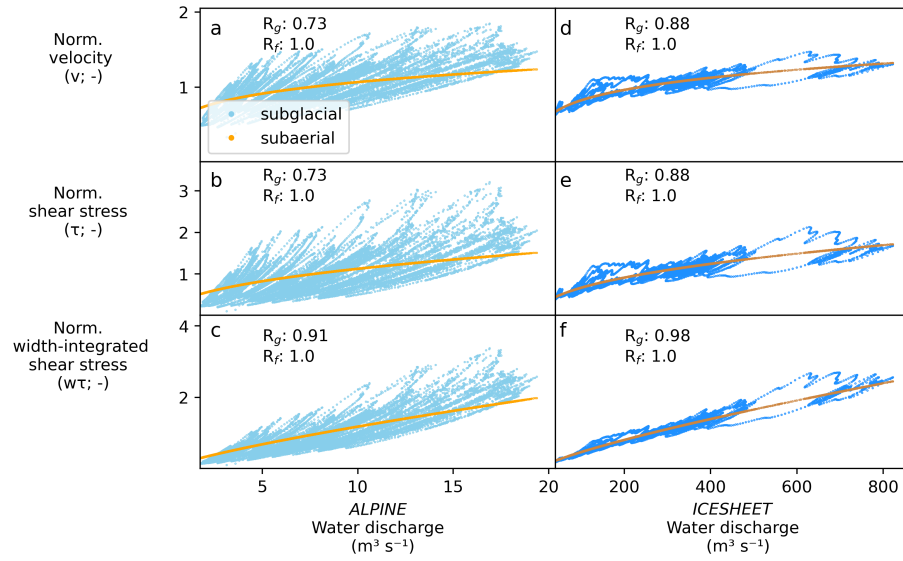


Figure 3. Relationships between water discharge and normalized velocity, shear stress, and width-integrated shear stress for *ALPINE* (a-c) and *ICESHEET* (d-f). Variables on the x-axis have been normalized to mean values. R_g (R_f) shows the Spearman rank correlations for the subglacial (subaerial) outputs. Plots are shown with discharge and model outputs at 15 min intervals.

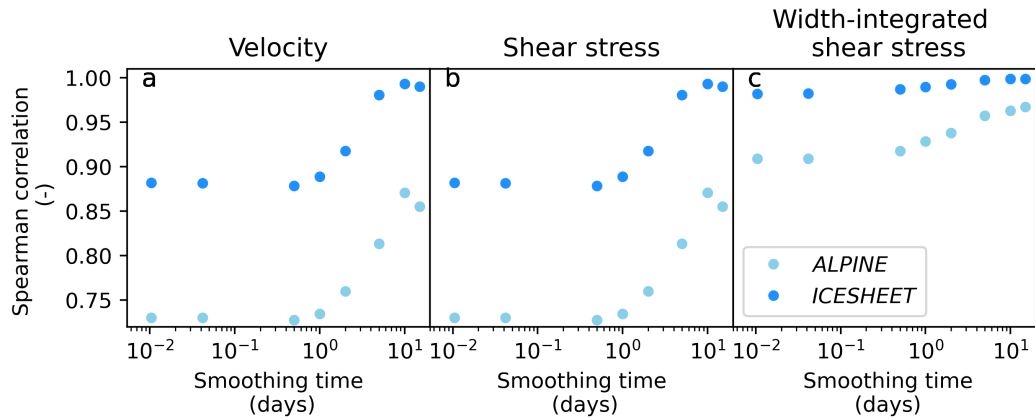


Figure 4. Spearman rank correlation between water discharge over a smoothing period and sediment transport characteristics (a) water velocity, (b) shear stress, (c) width-integrated shear stress. We assume that higher correlation scores approach subaerial behavior. Hydrographs for the different smoothing periods are shown in the supplement.

4.2 Variability in sediment transport capacity across a range of channel shapes, slopes, and friction values

The second numerical experiment aims to compare the variability between the subglacial and subaerial sediment transport capacities. To do this, model outputs from both systems are forced with a range of channel shapes, friction factors, and water discharge variability. This is accomplished by applying a range of parameter values to models applied to the different hydrological regimes and examining the variability in model outputs (Section 3.3).

Across the range of parameters examined, variability in all model outputs (i.e. velocity, shear stress, and width-integrated shear stress) remains higher in the subglacial system than the subaerial one for both *ALPINE* and *ICESHEET* (Figure 5). In some cases, subglacial model outputs' variability is a magnitude larger than their subaerial counterparts. Variability in both subglacial and subaerial outputs decreases with smoothing time longer than approximately 1–5 days (Figure 5). These smoothing timescales remove the diurnal variations in water discharge, thereby reducing variability in model outputs. Velocity variability in *ICESHEET*, with smaller relative water discharge variations, is substantially smaller than *ALPINE* (Figure 5 a and d). Variations in *ICESHEET* shear stress are comparable to *ALPINE* due to the effects of evolving shear stress with subglacial conduit size (Equations 3 and 12;). The much greater water flux and thus subglacial channel size in *ICESHEET* drives the larger width integrated shear stress variations (Figure 2 c and f).

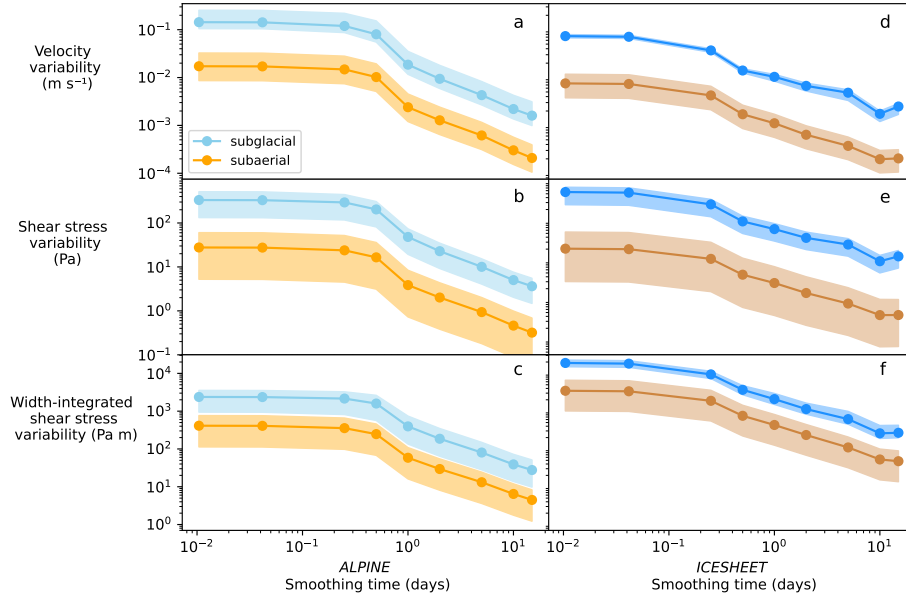


Figure 5. Standard deviation of detrended model outputs for different smoothing times with different subglacial and subaerial channel shapes and friction factors. Shaded areas denote the range of standard deviations from the accepted 100 parameter combinations (Section 3.3). Solid lines denote the mean value of standard deviations. Markers show smoothing periods (15 min, 1 hr, 6 hr, 12 hr, 1 d, 2 d, 5 d, 10 d, and 15 d).

220 Greater subglacial friction factors f_i result in greater variability in the shear stress and width-integrated shear stress in the *ALPINE* case (Figure 6). Low values of f_i result in slower growth rates in subglacial channels (Equations 3 and 4). Higher values of f_i allow faster channel growth that accommodates increases in water discharge, reducing velocity variability. Smaller values of channel factor β , creating low and broad channels where the channel width grows more quickly in response to water discharge increases than a semi-circular channel with $\beta = \pi$ (Equation 4).

225 Smaller values of subaerial channel shape factor α , or a channel cross-section shape closer to a slot canyon, result in greater variability in subaerial velocity and shear stress which can approach the variability of subglacial values (Figure 6). Steeper subaerial channel slopes ∇z_c result in greater variability in both shear stress and width-integrated shear stress, but only approach the subglacial channel's variability in the *ALPINE* case (Figure 6). Greater values of subaerial friction factors f_p result in greater variability of shear stress and width-integrated shear stress. Yet, subaerial values do not exceed the variability of

230 subglacial channels. We note that these parameter values span a commonly accepted range. Therefore, we do not anticipate a scenario where variability in the subaerial system would exceed the subglacial system with these two hydrologic forcings.

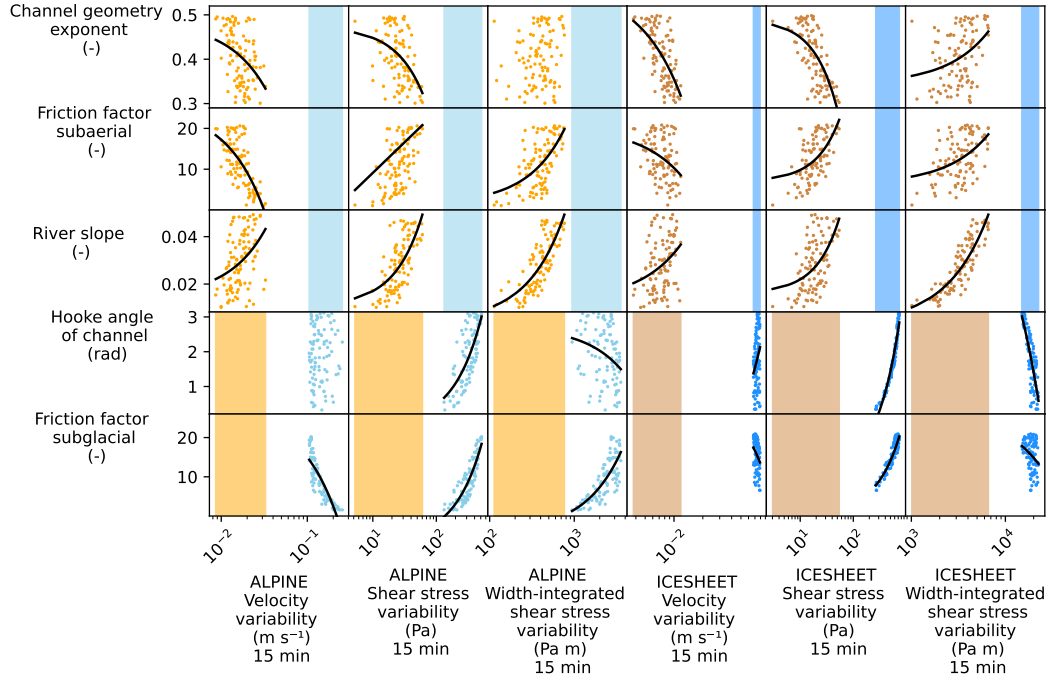


Figure 6. Parameter values compared to variability in model outputs. Plots on the left (orange, light blue) correspond to the *ALPINE* case. Plots on the right (brown, dark blue) correspond to the *ICESHEET* case. Outputs are shown using 15 minute smoothing time. Linear trends are denoted in black if they are significant at $p \geq 0.01$. To compare the range of model outputs for the subaerial and subglacial cases, shaded areas show the range of model outputs that are independent of the parameter values.

4.3 Sediment transport scaling in different channel types

The numerical experiments above consider the size evolution of subglacial channels and demonstrate that for these hydrographs subglacial sediment transport variability is greater than its subaerial counterpart (Section 4.2). Additionally, results demonstrate the impact of water discharge variability on sediment transport capacity. Here, we discuss and compare the sediment transport behavior of different channel types as they respond to water discharge, channel shape, and hydraulic gradient, extending the formulations presented in Alley et al. (1997).

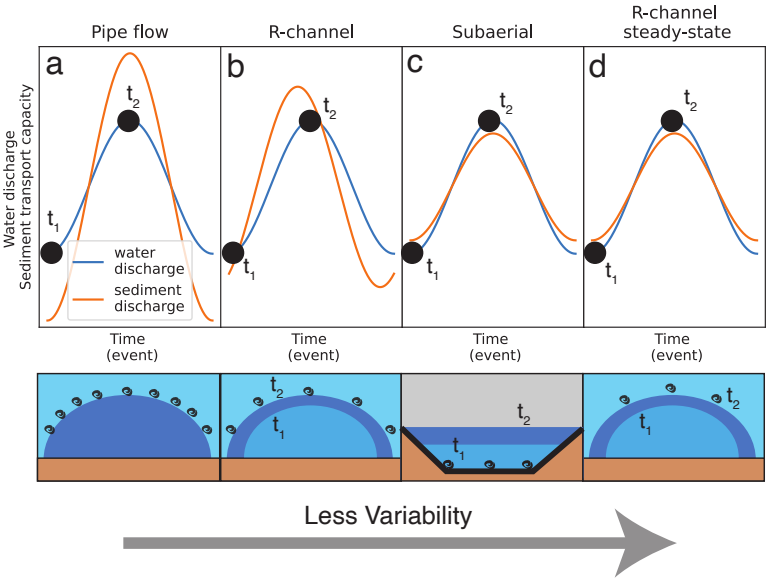


Figure 7. Response of sediment transport capacity (orange line) and channel size (bottom row) to a water discharge event (blue line) under different channel conditions. a) Pipe flow with fixed channel size described in Section 4.3. b) R-channel described in Section 3.1. c) Subaerial channel described in Section 3.2. d) Steady-state R-channel (channel size evolves in equilibrium with water discharge) described in Section 4.3. Note axes are not to scale. t_1 (t_2) represents low (high) water discharge.

Channel types examined include

1. pipe-flow (i.e. R-channels of fixed size that do not adjust their size to discharge conditions; Figure 7 a). This scenario could represent *ALPINE* with minimal discharge smoothing and high water fluctuations compared to channel size (i.e. Figure 2 a-d).
2. subaerial channels (Figure 7 c),
3. steady-state R-channels (Röthlisberger, 1972, Figure 7 d), where water discharge is in equilibrium with channel size. This scenario could be approached with a large amount of discharge smoothing (i.e. Figure 4) or hydrographs with minimal variations, and

These formulations do not allow us to evaluate non-steady state R-channels presented above (Section 3.1, Figure 7 b). The sediment transport capacity is calculated with a given water discharge and hydraulic gradient for three different sediment transport capacity formulas: Meyer-Peter Müller (MPM; Meyer-Peter and Müller, 1948), Engelund and Hansen (EH; Engelund and Hansen, 1967), and Bagnold (Bagnold, 1980); additionally width-integrated shear stress is assessed, instead of sediment transport, as above.

Sediment discharge is given by the MPM, EH, and Bagnold formulations as

$$Q_s \propto w \tau^{3/2}, \quad Q_s \propto w \tau^{5/2}, \quad Q_s \propto w \left(\frac{\Omega}{w} \right)^{3/2} H^{-2/3}, \quad (11)$$

respectively, for sediment transport conditions well above the threshold of sediment motion.

We use the Darcy-Weisbach equation to evaluate shear stress

$$\Psi \propto f \frac{Q^2}{D_h S^2}, \quad (12)$$

with $\Psi = \Delta h/l$ the head gradient and friction factor f . The shear stress and stream power are, respectively,

$$\tau \propto f v^2 = f \left(\frac{Q}{S} \right)^2, \quad \Omega \propto \Psi Q. \quad (13)$$

As in Section 3.2, the subaerial channel is assumed to have a width w much greater than its depth H , such that $D_h \approx 4H$, and to have a constant head gradient (Ψ) given by the topography. Further, it is assumed that its width can be approximated by a relation $w \propto Q^\alpha$ (Equation 9) with $\alpha \in [0, 1]$. End members $\alpha = 0$ or $\alpha = 1$ correspond to a subaerial channel of constant width (a slot canyon) or depth (no natural equivalent), respectively. For a steady-state R-channel, it is assumed that Ψ is constant (approximated by the gradient of the Shreve (1972) potential) and that S adjusts in steady state with Ψ and Q . Note that the R-channel model used above (Section 3.1), Equation 3 calculates Ψ from the time-evolving S_g via the Darcy-Weisbach Equation 4 and thus no Shreve approximation is then needed. Pipe flow-like conditions occur when an R-channel is subjected to rapid discharge variations such that the channel cannot adjust its size. Such a case could occur over diurnal variations in the *ALPINE* case, where water discharge changes rapidly with respect to channel size. In this case, it is assumed that the cross-sectional area S is fixed, and Ψ adjusts to the specified Q . For both steady-state R-channel and pipe flow, it is assumed that $D_h \propto S^{1/2}$.

With these assumptions, the Darcy-Weisbach equation (12) can be solved for the not-fixed quantity: H for a subaerial channel, S for a R-channel, and Ψ for pipe-flow. Then, using equations (13), the shear stress and stream power can be calculated. These results are summarised in Table 2. The results of the 12 combinations of shear stress and sediment transport capacity are presented in Table 3 and also in Table S1 where the fractions in the exponents are approximately given by decimal numbers for ease of comparison.

Table 3 shows the scaling of the proxy $w\tau$ as well as Q_s of the MPM, EH, and Bagnold sediment transport formulas with respect to Q , Ψ or S for the three different channel types and α values. Sediment transport in pipe-flow scales much more severely with discharge (Table 3); the exponent on Q being between 3 and 5, compared to the other two channel types when that exponent is at most $\frac{5}{3}$. Remarkably, the Bagnold formula has a negative exponent for f in all but the pipe-flow channel

Table 2. Relations for hydraulic variables for the three different channel types: subaerial channels, R-channel, and pipe-flow. Darcy-Weisbach equation is abbreviated with “D-W”, and stream power with “Stream p.”.

Channel type	Fixed	Determined via D-W (Equation 12)	Additional relations	Shear stress $\tau \propto$	Stream p. $\Omega \propto$
Subaerial	Ψ	$H \propto f^{1/3} Q^{2/3-2\alpha/3} \Psi^{-1/3}$	$w \propto Q^\alpha$ $S = wH$ $D_h \propto H$	$f^{1/3} Q^{2/3-2\alpha/3} \Psi^{2/3}$	$Q \Psi$
R-channel	Ψ	$S \propto f^{2/5} Q^{4/5} \Psi^{-2/5}$	$D_h \propto w \propto H \propto S^{1/2}$	$f^{1/5} Q^{2/5} \Psi^{4/5}$	$Q \Psi$
Pipe	S	$\Psi \propto f Q^2 S^{-5/2}$	$D_h \propto w \propto H \propto S^{1/2}$	$f Q^2 S^{-2}$	$f Q^3 S^{-5/2}$

Table 3. Sediment transport proxy ($w\tau$) and rates for the three considered different transport formulas: MPM (Meyer-Peter and Müller, 1948), EH (Engelund and Hansen, 1967), and Bagnold (Bagnold, 1980).

	Width $\times \tau$ $w\tau$	MPM $Q_s \propto w\tau^{3/2}$	EH $Q_s \propto w\tau^{5/2}$	Bagnold $Q_s \propto w^{-1/2} \Omega^{3/2} H^{-2/3}$
Subaerial	$f^{1/3} Q^{2/3+\alpha/3} \Psi^{2/3}$	$f^{1/2} Q \Psi$	$f^{5/6} Q^{5/3-2\alpha/3} \Psi^{5/3}$	$f^{-2/9} Q^{19/18-\alpha/18} \Psi^{31/18}$
R-channel	$f^{2/5} Q^{4/5} \Psi^{3/5}$	$f^{1/2} Q \Psi$	$f^{7/10} Q^{7/5} \Psi^{9/5}$	$f^{-7/30} Q^{31/30} \Psi^{26/15}$
Pipe	$f Q^2 S^{-1}$	$f^{3/2} Q^3 S^{-5/2}$	$f^{5/2} Q^5 S^{-9/2}$	$f^{3/2} Q^{9/2} S^{-14/3}$

type. The total transport formula EH gives a slightly stronger dependence on all variables due to the larger exponent on τ of $\frac{5}{2}$ versus $\frac{3}{2}$ for the MPM (Equation 11). Albeit, the sediment transport response in pipe flow for the Bagnold case is close to
280 EH. Conversely, the sediment transport proxies $w_g \tau_g$ and $w_f \tau_f$ used previously scale only as Q^2 for pipe-flow, whereas the sediment transport capacity scales at least with Q^3 . The exponent for the width scaling α only impacts the relationship between sediment transport and water discharge in the EH relation in any meaningful way. However, for the value of α around $\frac{1}{3}$ (a value appropriate for most streams), the exponent on Q for EH is only slightly greater than the other transport relations.

The sediment discharge capacity in the steady state R-channel scales very similarly to the subaerial channel case for all
285 relations and virtually identically for the $\alpha = \frac{1}{3}$ case (Table 3). However, the head gradients Ψ are likely higher for comparable Q in an ice-sheet marginal or alpine glacier setting than in a subaerial channel (Alley et al., 1997). Thus, sediment transport capacity is likely higher in a steady-state R-channel.

5 Experiment limitations

Several aspects of the models and experiment design make the comparison of the subaerial and subglacial systems difficult.
290 The lumped nature of the models means that they operate independently of the upstream drainage network. Additionally, we omit analysis of suspended sediment discharge records due to their dependence on sediment supply in capturing variations in sediment discharge, in addition to sediment transport capacity (e.g. Delaney et al., 2019). In reality, processes such as sediment

access are usually important in controlling sediment export in glacierized catchments (e.g. Herman et al., 2015; Vergara et al., 2022). Furthermore, meltwater can be distributed to flow through several adjacent conduits impacting the sediment transport capacity in each (e.g. Werder et al., 2013; Hewitt and Creyts, 2019; Delaney et al., 2023). The lumped models used here isolate the relationship between water discharge and sediment transport capacity in subglacial and subaerial systems. However, they neglect more complex, yet important, spatially distributed processes.

Different hydraulic gradients control the velocity and sediment transport capacity in the subglacial and subaerial cases (Section 3.1 and 3.2). The subglacial one is generally much steeper (Alley et al., 1997). This results in the shear stresses and width-integrated shear stresses across the channel bed that controls sediment transport capacity being much greater in subglacial channels (Figure 2). The parameters' range tested in Section 4.2 covers a likely span of viable shear stresses in both subglacial and subaerial channels. The greater sediment transport capacity in the subglacial channels implies that sediment grain size underneath subglacial channels is likely larger than subaerial counterparts, as smaller clasts would be evacuated. Note, however, that the mean water velocities are similar in both channel types.

The channel width and size variations in subglacial channels presented here also occur in subaerial channels in response to water discharge (Phillips and Jerolmack, 2016), likely over decadal timescales or in response to individual extreme events (e.g. Slater and Singer, 2013; Dean and Schmidt, 2013). These timescales are likely considerably longer than the continuous changes to the subglacial channel's response time of days. Furthermore, observations from subaerial systems can show a co-varying relationship between water discharge and sediment transport in time (e.g. Schmidt and Morche, 2006; Pitlick et al., 2021). Even so, if channel width changes occur in subaerial channels, then the values of α in Equation 9 could change in time. α must be less than 1, and even this would cause the exponent on Q in the $w_g \tau_g$ relationships to remain substantially below that of pipeflow (Section 4.3, Table 2 and 3)).

Width-integrated shear stress is examined in the two numerical experiments as it does not have a dependence on grain size, unlike sediment transport relationships (Meyer-Peter and Müller, 1948, Section 4.3). This makes comparison between the two systems simpler. Preferential transport of smaller sediment clasts and the input of upstream sediment impact sediment transport capacity as grain size distribution changes (e.g. Gomez, 1983). These processes are only beginning to be evaluated underneath glaciers (Aitken et al., 2024), but can be important in subaerial systems. Subglacial sorting processes could be an additional source of variability in sediment export from glaciers with respect to water discharge, especially for bedload transport.

6 Discussion

6.1 Interpreting sediment transport records from glacierized catchments with respect to water discharge

A variable relationship between subglacial sediment transport capacity and water discharge occurs due to hysteresis in subglacial channel size (Figure 3). This hysteresis can limit water discharge as an indicator of sediment discharge capacity in these systems, especially when water discharge is highly variable and out of equilibrium with subglacial channel size. As a result, characteristics such as bankfull or effective water discharge that link geomorphic work to hydro-climatic conditions could have limited meaning in evaluating subglacial sediment transport (Wolman and Miller, 1960; Lenzi et al., 2006). A glacier's sedi-

ment transport capacity is impacted by the ice thickness controlling the channel closure rate and the glacier's surface slope, in addition to water discharge and sediment size (Figure 5, Section 3.1; Röthlisberger, 1972; Gimbert et al., 2016; Stevens et al., 2022; Walder and Fowler, 1994; Núñez Ferreira et al., 2025). This multitude of processes lies in contrast to many subaerial channels, where transport capacity typically responds to water discharge, sediment size, channel shape, and hydraulic gradient.

330 The last of these parameters can remain relatively stable over years or longer (Section 3.2; e.g. Tucker and Slingerland, 1997). Strong correlations between water discharge and sediment export in glacier systems could indicate other processes, such as increased sediment access (Zhang et al., 2022). Furthermore, the observed correlation between water discharge and sediment discharge far downstream likely largely represents subaerial transport processes, especially with respect to bedload (Mancini et al., 2023).

335 Clockwise hysteresis loops between sediment concentration and water discharge in subaerial channels suggest that sediment availability is reduced over the event scale (Williams, 1989). These loops are often observed in glacierized catchments and used to suggest that access to subglacial sediment has been limited (e.g. Collins, 1979; Willis et al., 1996; Richards and Moore, 2003; Stott and Mount, 2007; Delaney et al., 2018). Results here suggest that clockwise hysteresis could also be expected in transport-limited regimes in many subglacial environments. Here, the smaller channel size on the rising limb would result in

340 greater sediment transport capacity and sediment mobilization (Figure 7 b). The subsequently larger channel size would reduce sediment transport capacity for an equivalent water discharge on the falling limb, creating clockwise hysteresis.

The co-varying relationship between sediment transport capacity and water discharge in subaerial conditions could be noticeable ~ 20 km downstream of the Leverett site. A strong correlation persists between sediment plume size and the Watson River's water discharge into the Kangerlussuaq fjord (Figure 7 c; Chu et al., 2009; McGrath et al., 2010). In contrast, in

345 marine-terminating glacier catchments, a less consistent relationship may occur between water discharge or melt extent and sediment plume size (Chu et al., 2012; Tedstone and Arnold, 2012). Here, ocean water pressurizes subglacial channels at the ice front (e.g. How et al., 2017), so the observed reduced correlation could result from the inconsistent relationship between subglacial sediment transport capacity and water discharge (Figures 3 and 7 b).

Water discharge measurements at sub-daily timescales could severely limit the ability of a subglacial sediment transport

350 model to capture specific events. The decreased model output variability beyond 1–5 days of smoothing could result in water discharge appearing to be in equilibrium with the subglacial channel when they are in fact not (Figure 5). Over this period, water discharge variations could lead to a stronger relationship with sediment transport capacity (Figure 7 d and Section 4.3). Particularly, if water discharge changes slowly with respect to the subglacial channel size, then it will covary with sediment transport capacity (Figure 7 d). Such a strong relationship would not represent the impact of actual shorter-term fluctuations in

355 water discharge.

6.2 Increased variability in sediment transport capacity in subglacial systems

The greater variations in shear stress in subglacial channels than subaerial channels may cause even greater variations in sediment transport capacity in subglacial channels than our numerical results suggest (Figure 5). In sediment transport capacity relationships, such as in Meyer-Peter and Müller (1948) or Engelund and Hansen (1967), shear stress is scaled to the power

360 of $\frac{3}{2}$ or $\frac{5}{2}$, respectively (e.g. Section 4.3). The exponent greater than 1 magnifies sediment discharge variability beyond the variable sediment transport parameters described above (Figure 5; Table 3).

R-channels rarely operate in a steady state with variations in water discharge, especially during severe rain or melt where melt water input timescales are too short for the channel to reach a steady state (Figures 2 and 3). In these cases with high water discharge variability, channels can behave more like a pipe of fixed cross-section. Here the cross-section responds to a characteristic discharge, but variations in water discharge deviate substantially from the flow conditions responsible for the channel size (i.e. diurnal water discharge variations in *ALPINE* case Figure 3; e.g. Gimbert et al., 2016). Thus fluctuations in discharge on short timescales (on the order of a day; Figure 5) have the potential to cause conditions with very high sediment transport capacities. Alternatively, at low water discharges these channels could become depressurized and transition to subaerial flow, resulting in sediment deposition (Perolo et al., 2018). These variations in sediment transport capacity are far larger than those of subaerial channels (Alley et al., 1997). Note, however, that pipe flow assumptions would cause sediment discharge capacity to covary with water discharge, as is not the case in normal R-channels (Figures 3 and 7 a and b). Covariance also occurs for steady-state R-channels (Section 4.1; Figure 7 d).

Greater variations in subglacial sediment transport capacity could cause a supply-limited regime at many glaciers due to their high sediment transport capacity under assumed pressurized flow conditions (Alley et al., 1997). In subglacial systems, sediment's critical shear stress, or the threshold at which sediment mobilization occurs, can be reached more frequently and across many water discharges, compared to subaerial systems (Figure 3). This result suggests sediment export here is especially sensitive to observed changes in water discharge variability (Lane and Nienow, 2019). Sediment exhaustion through repeatedly crossing the mobilization threshold may explain the stronger dependence of sediment discharge from the Greenland Ice Sheet on the glaciers' basal shear stress, a proxy for bedrock erosion, rather than glacier melt (Overeem et al., 2017). More generally, the same process could also result in sediment discharge's strong dependence on sediment production from glacial sliding, which is dependent on basal shear stress of the glacier (Herman et al., 2015; Koppes et al., 2015). In addition to greater variability, larger sediment transport capacity in subglacial systems compared to subaerial ones (Figure 2) could cause sediment deposition at the glacier margin in the transition from pressurized to open channel flow (Perolo et al., 2018; Mancini et al., 2023; Delaney et al., 2024).

385 At glaciers with abundant sediment at the bed, in a transport-limited regime, the great variability in subglacial sediment transport capacity may make it difficult to link sediment discharge to hydrology, especially when peak events occur (Cowan et al., 1988; Delaney et al., 2018; Lu et al., 2022). The results here suggest that different channel sizes with the same hydrology forcing can result in very different sediment transport capacities, making it challenging to establish the effects of individual extreme precipitation or melt events without establishing the antecedent state of the subglacial drainage system.

390 Catchments with reduced water discharge variability may experience less variability in sediment transport capacity, shown by the *ALPINE* and *ICESHEET* model outputs. Indeed, the more decoupled and variable relationship between model outputs and water discharge in *ALPINE* results from the relatively larger discharge variations on sub-daily to weekly timescales (Figure 3). This occurs because the subglacial channel's size evolves slowly compared to the variations in water discharge (Figure 7 b). High water discharge variability in *ALPINE* may cause width integrated shear stress to approach Q^2 in assuming pipe-flow

395 conditions where the water discharge varies largely compared to channel size (Figure 7; Section 4.3; c.f. Alley et al., 1997). Conversely, the reduced relative variability in water discharge in *ICESHEET* comes as a result of the larger catchment areas and longer travel times of the water (e.g. van As et al., 2017). Water discharge's stronger correlation with width-integrated shear stress in *ICESHEET* may result in the subglacial channel's size being closer to equilibrium from the smaller variations in water discharge (Figure 7 d). In this case, the exponent on water discharge for shear stress is likely substantially less than
400 $w\tau \propto Q^2$, but greater than $w\tau \propto Q^{\frac{4}{3}}$ that occurs in a steady-state R-channel (see Section 4.3). As a result, there is a stronger relationship between subglacial model outputs and water discharge in *ICESHEET* (Figure 3) and less variability model outputs in the *ICESHEET* case (Figure 5).

7 Conclusions

The sediment transport capacity of both subglacial and subaerial channels is driven by channel width and the shear stress
405 exerted by the flowing water, which is proportional to flow velocity squared. Subaerial channels immediately alter both their width and water velocity in response to changing water discharge. In contrast, pressurized subglacial channels largely accommodate rapidly changing water discharge by altering water velocity, while their size only responds to changes in discharge over longer timescales, typically, several days. Thus, sediment transport capacity is more sensitive to changes in water discharge in subglacial channels compared to subaerial ones.

410 The manuscript's first objective is to establish the conditions where water discharge covaries with subglacial sediment transport capacity. In subglacial channels, the timing of peak water velocity and sediment transport capacity occurs before peak water discharge during a discharge event on hydrographs from an alpine and an ice sheet catchment, due to evolving channel size. In subaerial channels, the timing of peak sediment transport capacity and water discharge coincide. Results here suggest that, even in a transport-limited subglacial system, a variable relationship exists between water and subglacial sediment
415 discharge. Water discharge variations in representative Greenland Ice Sheet and Alpine catchments are substantial enough to cause this inconsistent relationship, even when these water discharge records are smoothed. This variable relationship presents a challenge in linking hydro-climatic conditions or events to sediment export from glaciers. Water discharge and sediment transport capacity covariance could be possible when water discharge varies at a slower rate than subglacial channel size, such as Antarctica with minimal surface melt input. Results also suggest that water discharge records averaged over periods longer
420 than 12 hours from alpine and ice sheet hydrographs substantially impact subglacial sediment transport capacity characteristics.

The manuscript's second objective aims to evaluate the relative variability in sediment transport capacity between subglacial and subaerial channels. Results demonstrate that sediment transport capacity variability is higher in pressurized subglacial channels that are out of equilibrium with water discharge than subaerial channels. Increased variability occurs even in environments where the water discharge has relatively small diurnal variations in the *ICESHEET* case. Yet, elevated variability
425 is especially strong with greater water discharge variations, as in the *ALPINE* case. Further evaluation is needed to establish the role of high variability in sediment transport capacity in evaluating hydro-climatic signals from sediment records. Greater

variability in sediment transport capacity may also lead to sediment exhaustion by subglacial water repeatedly crossing the mobilization threshold across a range of water discharges.

430 Few observations of the subglacial environment hinders our ability to quantify processes such as the shape of subglacial channels and the response time of subglacial channels to water discharge variations. The poor constraints on subglacial sediment size and sorting processes make it difficult to link shear stress to sediment transport capacity. New methods are emerging to quantify these processes (Jenkin et al., 2023; Núñez Ferreira et al., 2025), better informing the response of sediment transport capacity to water discharge forcing in subglacial environments.

435 This study calls for the explicit consideration of evolving channel size when examining the relationship between sediment transport and hydro-climatic conditions from glacierized catchments, especially ones with high water discharge variability.

Code and data availability. Code, with links to the data, can be found at <https://bitbucket.org/IanDelaney/xsection/src/master/>. Data from Leverett glacier have been previously published in Tedstone et al. (2013). Data from Fieschergletscher have been previously published in Delaney et al. (2024). The code will be uploaded to a permanent repository, with FAIR principles pending acceptance of the paper.

440 *Author contributions.* I.D. designed the study, developed, and implemented the model and experiments, and wrote the manuscript. A.J.T. helped interpret findings from Leverett Glacier and guided experiment design. M.A.W. and D.F. provided data from Fieschergletscher and contributed to analysis. All authors provided key inputs in writing and editing the manuscript.

Competing interests. One or more of the (co-) authors is a member of The Cryosphere editorial board and is not involved in the review process.

445 *Acknowledgements.* SNSF Project No. PZ00P2_202024 provided funding for I. Delaney. A. Tedstone acknowledges funding from the European Research Council, award 818994 – CASSANDRA. G. King and M. J. Gevers provided useful comments on a previous version of this manuscript. We benefited from fruitful discussions with J. Irving. We thank B. Hubbard and an anonymous reviewer for constructive and critical comments on the manuscript, along with two reviewers for a previous version of the manuscript.

References

- Aitken, A. R. A., Delaney, I., Pirot, G., and Werder, M. A.: Modelling subglacial fluvial sediment transport with a graph-based model, Graphical Subglacial Sediment Transport (GraphSSeT), *The Cryosphere*, 18, 4111–4136, <https://doi.org/10.5194/tc-18-4111-2024>, 2024.
- Alley, R. B., Cuffey, K. M., Evenson, E. B., Strasser, J. C., Lawson, D. E., and Larson, G. J.: How glaciers entrain and transport basal sediment: physical constraints, *Quaternary Science Reviews*, 16, 1017–1038, [https://doi.org/10.1016/S0277-3791\(97\)00034-6](https://doi.org/10.1016/S0277-3791(97)00034-6), 1997.
- Andresen, C., Karlsson, N., Straneo, F., et al.: Sediment discharge from Greenland’s marine-terminating glaciers is linked with surface melt, *Nature Communications*, 15, 1332, <https://doi.org/10.1038/s41467-024-45694-1>, 2024.
- Andrews, L. C., Catania, G. A., Hoffman, M. J., Gulley, J. D., Lüthi, M. P., Ryser, C., Hawley, R. L., and Neumann, T. A.: Direct observations of evolving subglacial drainage beneath the Greenland Ice Sheet, *Nature*, 514, 80, <https://doi.org/10.1038/nature13796>, 2014.
- Bagnold, R. A.: An Empirical Correlation of Bedload Transport Rates in Flumes and Natural Rivers, *Proceedings of the Royal Society of London. A. Mathematical and Physical Sciences*, 372, 453–473, 1980.
- Beaud, F., Flowers, G., and Venditti, J. G.: Modeling sediment transport in ice-walled subglacial channels and its implications for esker formation and pro-glacial sediment yields, *Journal of Geophysical Research: Earth Surface*, 123, 1–56, <https://doi.org/10.1029/2018JF004779>, 2018.
- Bendixen, M., Iversen, L. L., Bjørk, A. A., Elberling, B., Westergaard-Nielsen, A., Overeem, I., Barnhart, K. R., Khan, S. A., Abermann, J., Langley, K., et al.: Delta progradation in Greenland driven by increasing glacial mass loss, *Nature*, 550, 101, <https://doi.org/10.1038/nature23873>, 2017.
- Brunner, M. I., Farinotti, D., Zekollari, H., Huss, M., and Zappa, M.: Future shifts in extreme flow regimes in Alpine regions, *Hydrology and Earth System Sciences*, 23, 4471–4489, <https://doi.org/10.5194/hess-23-4471-2019>, 2019.
- Chandler, D., Wadham, J., Lis, G., Cowton, T., Sole, A., Bartholomew, I., Telling, J., Nienow, P., Bagshaw, E., Mair, D., et al.: Evolution of the subglacial drainage system beneath the Greenland Ice Sheet revealed by tracers, *Nature Geoscience*, 6, 195–198, <https://doi.org/10.1038/ngeo1737>, 2013.
- Chu, V., Smith, L., Rennermalm, A., Forster, R., Box, J., and Reeh, N.: Sediment plume response to surface melting and supraglacial lake drainages on the Greenland ice sheet, *Journal of Glaciology*, 55, 1072–1082, 2009.
- Chu, V., Smith, L., Rennermalm, A., Forster, R., and Box, J.: Hydrologic controls on coastal suspended sediment plumes around the Greenland Ice Sheet, *The Cryosphere*, 6, 1–19, <https://doi.org/10.5194/tc-6-1-2012>, 2012.
- Clarke, G. K. C.: Lumped-element model for subglacial transport of solute and suspended sediment, *Annals of Glaciology*, 22, 152–159, <https://doi.org/10.3189/1996AoG22-1-152-159>, 1996.
- Collins, D. N.: Sediment concentration in melt waters as an indicator of erosion processes beneath an Alpine glacier, *Journal of Glaciology*, 23, 247–257, 1979.
- Costa, A., Molnar, P., Stutenbecker, L., Bakker, M., Silva, T. A., Schlunegger, F., Lane, S., Loizeau, J. L., and Girardclos, S.: Temperature signal in suspended sediment export from an Alpine catchment, *Hydrology and Earth System Sciences*, 22, 509–528, <https://doi.org/10.5194/hess-22-509-2018>, 2018.
- Cowan, E., Powell, R., and Smith, N.: Rainstorm-induced event sedimentation at the tidewater front of a temperate glacier, *Geology*, 16, 409–412, [https://doi.org/10.1130/0091-7613\(1988\)016](https://doi.org/10.1130/0091-7613(1988)016), 1988.
- Cremona, A., Huss, M., Landmann, J., Borner, J., and Farinotti, D.: European heat waves 2022: contribution to extreme glacier melt in Switzerland inferred from automated ablation readings, *The Cryosphere*, 17, 1895–1912, <https://doi.org/10.5194/tc-17-1895-2023>, 2023.

- 485 Creyts, T. T., Clarke, G. K. C., and Church, M.: Evolution of subglacial overdeepenings in response to sediment redistribution and glaciohydraulic supercooling, *Journal of Geophysical Research: Earth Surface*, 118, 423–446, <https://doi.org/10.1002/jgrf.20033>, 2013.
- Dean, D. and Schmidt, J.: The geomorphic effectiveness of a large flood on the Rio Grande in the Big Bend region: Insights on geomorphic controls and post-flood geomorphic response, *Geomorphology*, 201, 183–198, <https://doi.org/10.1016/j.geomorph.2013.06.020>, 2013.
- Delaney, I., Bauder, A., Werder, M. A., and Farinotti, D.: Regional and annual variability in subglacial sediment transport by water for two
490 glaciers in the Swiss Alps, *Frontiers in Earth Science*, 6, <https://doi.org/10.3389/feart.2018.00175>, 2018.
- Delaney, I., Werder, M. A., and Farinotti, D.: A Numerical Model for Fluvial Transport of Subglacial Sediment, *Journal of Geophysical Research: Earth Surface*, 124, 2197–2223, <https://doi.org/10.1029/2019JF005004>, 2019.
- Delaney, I., Anderson, L., and Herman, F.: Modeling the spatially distributed nature of subglacial sediment transport and erosion, *Earth Surface Dynamics*, 11, 663–680, <https://doi.org/10.5194/esurf-11-663-2023>, 2023.
- 495 Delaney, I., Werder, M., Felix, D., Albayrak, I., Boes, R., and Farinotti, D.: Controls on Sediment Transport From a Glacierized Catchment in the Swiss Alps Established Through Inverse Modeling of Geomorphic Processes, *Water Resources Research*, 60, e2023WR035589, <https://doi.org/10.1029/2023WR035589>, 2024.
- Engelund, F. and Hansen, E.: A monograph on sediment transport in alluvial streams, Tech. rep., Technical University of Denmark, Copenhagen, Denmark, 1967.
- 500 Felix, D., Abgottspon, A., Staubli, T., von Burg, M., Kastinger, M. and Albayrak, I., and Boes, R.: Untersuchung der Schwebstoffbelastung, der hydro-abrasiven Erosion und der Wirkungsgrad-änderungen an beschichteten Peltonturbinen in der Hochdruckwasserkraftanlage Fieschertal (Field investigation on suspended sediment, hydro-abrasive erosion and efficiency changes of coated Pelton turbines in the high-head hydropower plant Fieschertal), Tech. rep., Schlussbericht an das Bundesamt für Energie (BFE). VAW der ETH Zürich und Hochschule Luzern (in German), 2022.
- 505 Ganti, V., von Hagke, C., Scherler, D., Lamb, M., Fischer, W., and Avouac, J.-P.: Time scale bias in erosion rates of glaciated landscapes, *Science Advances*, 2, <https://doi.org/10.1126/sciadv.1600204>, 2016.
- Gimbert, F., Tsai, V. C., Amundson, J. M., Bartholomaus, T. C., and Walter, J. I.: Subseasonal changes observed in subglacial channel pressure, size, and sediment transport, *Geophysical Research Letters*, 43, 3786–3794, <https://doi.org/10.1002/2016GL068337>, 2016.
- Glen, J.: The creep of polycrystalline ice, *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences*, 228,
510 519–538, 1955.
- Gomez, B.: Temporal variations in bedload transport rates: The effect of progressive bed armouring, *Earth Surface Processes and Landforms*, 8, 41–54, <https://doi.org/10.1002/esp.3290080105>, 1983.
- Grab, M., Mattea, E., Bauder, A., Huss, M., Rabenstein, L., Hodel, E., Linsbauer, A., Langhammer, L., Schmid, L., Church, G., and et al.: Ice thickness distribution of all Swiss glaciers based on extended ground-penetrating radar data and glaciological modeling, *Journal of
515 Glaciology*, 67, 1074–1092, <https://doi.org/10.1017/jog.2021.55>, 2021.
- Hallet, B.: A theoretical model of glacial abrasion, *Journal of Glaciology*, 23, 39–50, 1979.
- Herman, F., Beyssac, O., Brughelli, M., Lane, S., Leprince, S., Adatte, T., Lin, J. Y. Y., Avouac, J. P., and Cox, S. C.: Erosion by an alpine glacier, *Science*, 350, 193–195, <https://doi.org/10.1126/science.aab2386>, 2015.
- Hewitt, I. and Creyts, T.: A model for the formation of eskers, *Geophysical Research Letters*, 46, 6673–6680,
520 <https://doi.org/10.1029/2019GL082304>, 2019.

- Hodson, A., Gurnell, A., Tranter, M., Bogen, J., Hagen, J., and Clark, M.: Suspended sediment yield and transfer processes in a small High-Arctic glacier basin, Svalbard, *Hydrological Processes*, 12, 73–86, [https://doi.org/10.1002/\(SICI\)1099-1085\(199801\)12:1<73::AID-HYP564>3.0.CO;2-S](https://doi.org/10.1002/(SICI)1099-1085(199801)12:1<73::AID-HYP564>3.0.CO;2-S), 1998.
- Hooke, R. L., Laumann, T., and Kohler, J.: Subglacial Water Pressures and the Shape of Subglacial Conduits, *Journal of Glaciology*, 36, 67–71, <https://doi.org/10.3189/S0022143000005566>, 1990.
- How, P., Benn, D. I., Hulton, N. R. J., Hubbard, B., Luckman, A., Sevestre, H., van Pelt, W. J. J., Lindbäck, K., Kohler, J., and Boot, W.: Rapidly changing subglacial hydrological pathways at a tidewater glacier revealed through simultaneous observations of water pressure, supraglacial lakes, meltwater plumes and surface velocities, *The Cryosphere*, 11, 2691–2710, <https://doi.org/10.5194/tc-11-2691-2017>, 2017.
- Iken, A. and Bindshadler, R. A.: Combined measurements of subglacial water pressure and surface velocity of Findelengletscher, Switzerland: conclusions about drainage system and sliding mechanism, *Journal of Glaciology*, 32, 101–119, 1986.
- Iverson, N. R.: A theory of glacial quarrying for landscape evolution models, *Geology*, 40, 679–682, <https://doi.org/10.1130/G33079.1>, 2012.
- Jenkin, M., Hofmann, M., Hubbard, B., Mancini, D., Miesen, F., Herman, F., and Lane, S.: Tracking coarse sediment in an Alpine subglacial channel using radio-tagged particles, *Journal of Glaciology*, 69, 1992–2006, <https://doi.org/10.1017/jog.2023.77>, 2023.
- Koppes, M., Hallet, B., Rignot, E., Mouginot, J., Wellner, J. S., and Boldt, K.: Observed latitudinal variations in erosion as a function of glacier dynamics, *Nature*, 526, 100–103, 2015.
- Lane, S. and Nienow, P.: Decadal-Scale Climate Forcing of Alpine Glacial Hydrological Systems, *Water Resources Research*, 55, 2478–2492, <https://doi.org/10.1029/2018WR024206>, 2019.
- Lenzi, M., L., M., and Comiti, F.: Effective discharge for sediment transport in a mountain river: Computational approaches and geomorphic effectiveness, *Journal of Hydrology*, 326, 257–276, <https://doi.org/10.1016/j.jhydrol.2005.10.031>, 2006.
- Leopold, L. and Maddock, T.: The hydraulic geometry of stream channels and some physiographic implications, vol. 252, US Government Printing Office, 1953.
- Li, D., Lu, X., Overeem, I., Walling, D. E., Syvitski, J., Kettner, A. J., Bookhagen, B., Zhou, Y., and Zhang, T.: Exceptional increases in fluvial sediment fluxes in a warmer and wetter High Mountain Asia, *Science*, 374, 599–603, <https://doi.org/10.1126/science.abi9649>, 2021.
- Li, D., Lu, X., Walling, D., Zhang, T., Steiner, J., Wasson, R., Harrison, S., Nepal, S., Nie, Y., Immerzeel, W., et al.: High Mountain Asia hydropower systems threatened by climate-driven landscape instability, *Nature Geoscience*, 15, 520–530, 2022.
- Lu, X., Zhang, T., Hsia, B.-L., Li, D., Fair, H., Niu, H., Chua, S., Li, L., and Li, S.: Proglacial river sediment fluxes in the southeastern Tibetan Plateau: Mingyong Glacier in the Upper Mekong River, *Hydrological Processes*, 36, e14 751, <https://doi.org/10.1002/hyp.14751>, 2022.
- Magnusson, J., Jonas, T., and Kirchner, J.: Temperature dynamics of a proglacial stream: Identifying dominant energy balance components and inferring spatially integrated hydraulic geometry, *Water Resources Research*, 48, <https://doi.org/10.1029/2011WR011378>, 2012.
- Mancini, D., Dietze, M., Müller, T., Jenkin, M., Miesen, F., Roncoroni, M., Nicholas, A., and Lane, S.: Filtering of the Signal of Sediment Export From a Glacier by Its Proglacial Forefield, *Geophysical Research Letters*, 50, e2023GL106082, <https://doi.org/10.1029/2023GL106082>, e2023GL106082 2023GL106082, 2023.
- McGrath, D., Steffen, K., Overeem, I., Mernild, S., Hasholt, B., and Van Den Broeke, M.: Sediment plumes as a proxy for local ice-sheet runoff in Kangerlussuaq Fjord, West Greenland, *Journal of Glaciology*, 56, 813–821, <https://doi.org/10.3189/002214310794457227>, 2010.

- Meyer-Peter, E. and Müller, R.: Formulas for bedload transport, in: Hydraulic Engineering Reports, International Association for Hydro-Environment Engineering and Research, 1948.
- 560 Morlighem, M., Williams, C., Rignot, E., An, L., Arndt, J., Bamber, J., Catania, G., Chauché, N., Dowdeswell, J., Dorschel, B., Fenty, I., Hogan, K., Howat, I., Hubbard, A., Jakobsson, M., Jordan, T. M., Kjeldsen, K., Millan, R., Mayer, L., Mouginot, J., Noël, B. Y., O’Cofaigh, C., Palmer, S., Rysgaard, S., Seroussi, H., Siegert, M., Slabon, P., Straneo, F., van den Broeke, M., Weinrebe, W., Wood, M., and Zinglensen, K.: BedMachine v3: Complete Bed Topography and Ocean Bathymetry Mapping of Greenland From Multibeam Echo Sounding Combined With Mass Conservation, *Geophysical Research Letters*, 44, 11,051–11,061, <https://doi.org/10.1002/2017GL074954>, 2017.
- 565 Nanni, U., Gimbert, F., Vincent, C., Gräff, D., Walter, F., Piard, L., and Moreau, L.: Quantification of seasonal and diurnal dynamics of subglacial channels using seismic observations on an Alpine glacier, *The Cryosphere*, 14, 1475–1496, <https://doi.org/10.5194/tc-14-1475-2020>, 2020.
- Núñez Ferreira, F., Zoet, L., Rawling III, J., Haseloff, M., Rehwald, M., and Ullman, D.: Subglacial hydrology insights from eskers developed atop soft beds of the Laurentide ice sheet, *Earth Surface Processes and Landforms*, 50, e6037, <https://doi.org/10.1002/esp.6037>, 2025.
- 570 Overeem, I., Hudson, B., Welty, E., Mikkelsen, A., Bamber, J., Petersen, D., Lewinter, A., and Hasholt, B.: River inundation suggests ice-sheet runoff retention, *Journal of Glaciology*, 61, 776–788, <https://doi.org/10.3189/2015JoG15J012>, 2015.
- Overeem, I., Hudson, B. D., Syvitski, J. P. M., Mikkelsen, A. B., Hasholt, B., van den Broeke, M. R., Noël, B. P. Y., and Morlighem, M.: Substantial export of suspended sediment to the global oceans from glacial erosion in Greenland, *Nature Geoscience*, 10, 859–863, <https://doi.org/10.1038/NGEO3046>, 2017.
- 575 Pearce, J., Pazzaglia, F., Evenson, E., Lawson, D., Alley, R., Germanoski, D., and Denner, J.: Bedload component of glacially discharged sediment: Insights from the Matanuska Glacier, Alaska, *Geology*, 31, 7–10, [https://doi.org/10.1130/0091-7613\(2003\)031<0007:BCOGDS>2.0.CO;2](https://doi.org/10.1130/0091-7613(2003)031<0007:BCOGDS>2.0.CO;2), 2003.
- Perolo, P., Bakker, M., Gabbud, C., Moradi, G., Rennie, C., and Lane, S.: Subglacial sediment production and snout marginal ice uplift during the late ablation season of a temperate valley glacier, *Earth Surface Processes and Landforms*, 0, 1–68, <https://doi.org/10.1002/esp.4562>, 2018.
- 580 Phillips, C. and Jerolmack, D.: Self-organization of river channels as a critical filter on climate signals, *Science*, 352, 694–697, <https://doi.org/10.1126/science.aad3348>, 2016.
- Pitlick, J., Recking, A., Liebault, F., Misset, C., Piton, G., and Vazquez-Tarrio, D.: Sediment production in French Alpine rivers, *Water Resources Research*, 57, e2021WR030470, <https://doi.org/10.1029/2021WR030470>, 2021.
- 585 Richards, G. and Moore, R. D.: Suspended sediment dynamics in a steep, glacier-fed mountain stream, Place Creek, Canada, *Hydrological Processes*, 17, 1733–1753, 2003.
- Riihimäki, C. A., MacGregor, K. R., Anderson, R. S., Anderson, S. P., and Loso, M. G.: Sediment evacuation and glacial erosion rates at a small alpine glacier, *Journal of Geophysical Research: Earth Surface* (2003–2012), 110, <https://doi.org/10.1029/2004JF000189>, 2005.
- 590 Röthlisberger, H.: Water pressure in intra- and subglacial channels, *Journal of Glaciology*, 11, 177–203, 1972.
- Schmidt, K.-H. and Morche, D.: Sediment output and effective discharge in two small high mountain catchments in the Bavarian Alps, Germany, *Geomorphology*, 80, 131–145, <https://doi.org/10.1016/j.geomorph.2005.09.013>, sedimentary Source-to-Sink-Fluxes in Cold Environments, 2006.
- Shields, A.: Anwendung der Aehnlichkeitsmechanik und der Turbulenzforschung auf die Geschiebebewegung, PhD Thesis Technical University Berlin, 1936.
- 595

- Shreve, R. L.: Movement of water in glaciers, *Journal of Glaciology*, 11, 205–214, 1972.
- Slater, L. and Singer, M.: Imprint of climate and climate change in alluvial riverbeds: Continental United States, 1950–2011, *Geology*, 41, 595–598, <https://doi.org/10.1130/G34070.1>, 2013.
- Stevens, D., Ely, J., Livingstone, S., Clark, C., Butcher, F., and Hewitt, I.: Effects of basal topography and ice-sheet surface slope in a subglacial glaciofluvial deposition model, *Journal of Glaciology*, pp. 1–13, <https://doi.org/10.1017/jog.2022.71>, 2022.
- Stott, T. and Mount, N.: Alpine proglacial suspended sediment dynamics in warm and cool ablation seasons: implications for global warming, *Journal of Hydrology*, 332, 259–270, <https://doi.org/10.1016/j.jhydrol.2006.07.001>, 2007.
- Swift, D., Nienow, P. W., and Hoey, T. B.: Basal sediment evacuation by subglacial meltwater: suspended sediment transport from Haut Glacier d’Arolla, Switzerland, *Earth Surface Processes and Landforms*, 30, 867–883, <https://doi.org/10.1002/esp.1197>, 2005.
- Swift, D., Tallentire, G., Farinotti, D., Cook, S., Higson, W., and Bryant, R.: The hydrology of glacier-bed overdeepenings: Sediment transport mechanics, drainage system morphology, and geomorphological implications, *Earth Surface Processes and Landforms*, 46, 2264–2278, <https://doi.org/10.1002/esp.5173>, 2021.
- Tedstone, A. and Arnold, N.: Automated remote sensing of sediment plumes for identification of runoff from the Greenland ice sheet, *Journal of Glaciology*, 58, 699–712, <https://doi.org/10.3189/2012JoG11J204>, 2012.
- Tedstone, A., Nienow, P., Sole, A., Mair, D., Cowton, T., Bartholomew, I., and King, M.: Greenland ice sheet motion insensitive to exceptional meltwater forcing, *Proceedings of the National Academy of Sciences*, 110, 19 719–19 724, <https://doi.org/10.1073/pnas.1315843110>, 2013.
- Tucker, G. E. and Slingerland, R.: Drainage basin responses to climate change, *Water Resources Research*, 33, 2031–2047, <https://doi.org/10.1029/97WR00409>, 1997.
- Ugelvig, S. V., Egholm, D. L., Anderson, R. S., and Iverson, N. R.: Glacial Erosion Driven by Variations in Meltwater Drainage, *Journal of Geophysical Research: Earth Surface*, 123, 2863–2877, <https://doi.org/10.1029/2018JF004680>, 2018.
- van As, D., Mikkelsen, A., Nielsen, M., Box, J., Liljedahl, L., Lindbäck, K., Pitcher, L., and Hasholt, B.: Hypsometric amplification and routing moderation of Greenland ice sheet meltwater release, *The Cryosphere*, 11, 1371–1386, <https://doi.org/10.5194/tc-11-1371-2017>, 2017.
- Vergara, I., Garreaud, R., and Ayala, Á.: Sharp increase of extreme turbidity events due to deglaciation in the subtropical Andes, *Journal of Geophysical Research: Earth Surface*, 127, e2021JF006 584, <https://doi.org/10.1029/2021JF006584>, 2022.
- Walder, J. S. and Fowler, A.: Channelized subglacial drainage over a deformable bed, *Journal of Glaciology*, 40, 3–15, <https://doi.org/10.3189/S0022143000003750>, 1994.
- Werder, M. A., Schuler, T. V., and Funk, M.: Short term variations of tracer transit speed on alpine glaciers, *The Cryosphere*, 4, 381–396, <https://doi.org/10.5194/tc-4-381-2010>, 2010.
- Werder, M. A., Hewitt, I. J., Schoof, C. G., and Flowers, G. E.: Modeling channelized and distributed subglacial drainage in two dimensions, *Journal of Geophysical Research: Earth Surface*, 118, 2140–2158, <https://doi.org/10.1002/jgrf.20146>, 2013.
- Wickert, A. D. and Schildgen, T. F.: Long-profile evolution of transport-limited gravel-bed rivers, *Earth Surface Dynamics*, 7, 17–43, <https://doi.org/10.5194/esurf-7-17-2019>, 2019.
- Williams, G. P.: Sediment concentration versus water discharge during single hydrologic events in rivers, *Journal of Hydrology*, 111, 89 – 106, [https://doi.org/10.1016/0022-1694\(89\)90254-0](https://doi.org/10.1016/0022-1694(89)90254-0), 1989.
- Willis, I. C., Richards, K. S., and Sharp, M. J.: Links between proglacial stream suspended sediment dynamics, glacier hydrology and glacier motion at Midtdalsbreen, Norway, *Hydrological Processes*, 10, 629–648, 1996.

- Wolman, M. G. and Miller, J. P.: Magnitude and frequency of forces in geomorphic processes, *The Journal of Geology*, 68, 54–74, 1960.
- 635 Zhang, T., Li, D., East, A., Walling, D., Lane, S., Overeem, I., Beylich, A., Koppes, M., and Lu, X.: Warming-driven erosion and sediment transport in cold regions, *Nature Reviews Earth & Environment*, pp. 1–20, <https://doi.org/10.1038/s43017-022-00362-0>, 2022.