

The effect of groundwater depth on topsoil organic matter mineralization during a simulated dry summer in North-West Europe

5 Astrid François^{1,2}, Orly Mendoza¹, Junwei Hu¹, Pascal Boeckx², Wim Cornelis¹, Stefaan De Neve¹ & Steven Sleutel¹

¹Department of Environment, Ghent University, Coupure Links 653, 9000 Ghent, Belgium

²Department of Green Chemistry and Technology, Ghent University, Coupure Links 653, 9000 Ghent, Belgium

10 Correspondence to: Astrid François (astrid.francoys@ugent.be)

Abstract. With climate change expected to intensify the occurrence and severity of droughts, the control of groundwater table (GWT) depth and capillary rise on topsoil moisture may render a critical driver of biological activity. Consequently, GWT depth could influence topsoil carbon (C) mineralization. In this study, undisturbed 200 cm long soil columns of three different textures (loamy sand, sandy loam and silt loam) were subjected to two artificial GWT depths (–165 cm and –115 cm) in the laboratory. We examined (1) upward moisture supply-flow by capillary rise-action along the soil profile and specifically into the top 20 cm soil, and (2) consequently the effect of GWT on decomposition of an added ¹³C-enriched substrate (ryegrass) over a period of ten weeks, with limited water applicationswetting events representing a dry summer. A 50 cm difference in GWT depth (–165 cm vs. –115 cm) resulted in different topsoil moisture for the sandy loam (31 % vs. 38 % Water-filled pore space (WFPS)) and silt loam (33 % vs. 43 % WFPS) soils. In the loamy sand soil, GWT-induced moisture differences appeared only up to 85 cm above the GWT. The expected acceleration of mineralization of the added ryegrass under a shallower GWT was not confirmed. In contrast, CO₂ efflux pulses mineralization pulses after some of the wetting events were even higher for the drier –165 cm GWT soils than for the –165 cm GWT across all three soil textures. Additionally, a model fitted to cumulative ryegrass mineralization showed a lower mineralization rate for the stable C_{ryegrass} pool in the silt loam soil with the shallowest GWT, where capillary rise contributed most significantly to topsoil moisture, compared to other combinations of soil texture and GWT depth. For the silt loam soil, where capillary rise supply had the largest contribution to topsoil moisture, a lower mineralization rate of the stable C_{ryegrass} pool was also found with shallower GWT. These findings suggest that a potentialthe upward capillary rise-moisture flow, along with theeffect of resulting increase ind topsoil moisture and the anticipated enhancement of biological activity and -on-ryegrass mineralization, might have been counteracted by other processes. One possible explanation could be that rewetting may have triggered a stronger mineralization response, commonly known as the Birch effect, in drier topsoils compared to conditions where the soil remained consistently wetter with a shallower GWT level. We postulate that rewetting might have induced a stronger mineralization response, often referred to as the Birch effect might

heeft opmaak toegepast: Subscript

have been magnified following the rewetting of, in drier topsoils under deeper GWT levels, ultimately enhancing mineralization compared to conditions where the soil remains/was consistently wetter under/shallower GWT levels/level. Based on our findings, including the process of texture-specific capillary supply from the GWT ~~can be~~ required to adequately simulate moisture in the topsoil during droughts as they occurred over the past summers in North-West Europe, depending on GWT and texture combination. ~~However, the net effect on topsoil C mineralization is complex and. A correct simulation of C mineralization may require further integration of specific processes connected to fluctuating soil moisture state, such as the Birch effect, an increased mineralization response after rewetting, which, in turn, might depend on the pre-wetting state of the soil. However, the net effect on topsoil C mineralization is complex and warrants further investigation, including the integration of processes related to fluctuating soil moisture following rewetting,~~

heeft opmaak toegepast: Engels (Verenigde Staten)

1 Introduction

When soil desiccates, soil-water potential becomes strongly negative, ~~and~~making eco-physiological conditions for soil micro-organisms less favorable. In particular, intracellular turgor pressure and cellular integrity are no longer guaranteed (Malik and Bouskill, 2022; Wang et al., 2015), while diffusion of substrates and extracellular enzymes becomes impeded (Manzoni et al., 2016). As a result, there is a strong moisture dependency of carbon (C) and nitrogen (N) mineralization in soils. Soil C models therefore simulate moisture ~~content~~ through hydrological modules. As precipitation and irrigation are usually the primary suppliers of topsoil moisture, most models do not account for lateral or upward moisture influxes. However, during prolonged dry periods, drying out of topsoil may lead to establishment of counter-gravity soil suction gradients inducing significant upward redistribution of water from the groundwater table (GWT) to the vadose zone through capillary action, and as such, control topsoil moisture. With progressing climate change throughout Europe, weather patterns are becoming more erratic, with already increased occurrence of unusually lengthy dry periods and even agricultural drought in the Maritime climatic region over the past years (Aalbers et al., 2023; CEU JRC, 2022).

Whether or not moisture supply via ~~upward~~ capillary ~~rise~~ flow is a relevant process to be accounted for by soil C models, will not only depend on climate, but also on factors such as the depth of the GWT and soil physical properties. But to date, the effect of the GWT depth and capillary moisture supply has nearly exclusively been studied in relation to crop yields (Awan et al., 2014; Feddes et al., 1988; Kroes et al., 2018; Zipper et al., 2015) and irrigation needs (Babajimopoulos et al., 2007; Jorenush and Sepaskhah, 2003; Prathapar et al., 1992; Yang et al., 2011). For example, Zipper et al. (2015) found optimal maize crop yield at GWT levels of 0.6, 0.8, and 0.9 m depth for sandy loam, loam, and silt loam soils, respectively, and attributed this to optimal ~~moisture supply resulting from capillary action. Awan et al. (2014) found that when GWT levels lowered from 100 cm to 150 cm to > 200 cm in silt (clay) loam soils, water supplied by capillary rise to the rootzone of cotton and wheat reduced from 28 % to 23 % to 16 % and 9 % to % 6 to 0 %, respectively, water supply resulting from capillary action.~~ When considering bare soils, simulations of the so-called extinction depth for GWT evaporation resulted in depths of 70, 130 and 420 cm for

respectively loamy sand, sandy loam and silt loam soils (Shah et al., 2007). This diverse range of modeling outcomes highlights the site-specific nature of capillary rise, ~~as it not only depends on obvious factors such as soil texture, GWT depth and soil water potential gradients, but also on soil structure and soil profile development. As a result, to~~ To the best of our knowledge, there exists no robust proof on whether or not, and when, GWT depth might significantly control topsoil heterotrophic activity. ~~Such insights are essential to determine whether incorporating GWT depth and upward, which may inform us on the pertinence of accounting for its depth and~~ capillary ~~moisture flow~~ rise in updated soil C models ~~is warranted~~. To validate simulation results, a few studies have been carried out with parallel small-scale field lysimeter experiments monitoring the soil water balance (Kelleners et al., 2005; Prathapar et al., 1992; Yang et al., 2011). Alternatively, Grünberger et al. (2011) injected a deuterium enriched solution to the GWT to follow capillary rise in arid areas. Both approaches, however, are labor intensive and/or require high investments and technical expertise. Li et al. (2022) instead simply excluded upward capillary moisture transport in a field trial on crop residue decomposition by placing a 5 cm gravel layer at a depth of 50 cm, and found that for sandy soils a GWT depth at just 60 cm was not shallow enough to notably provide the top 25 cm soil with capillary moisture. However, this approach required disturbance of the topsoil and moreover the artificial break of capillary rise also unintentionally cancelled out unsaturated downward ~~moisture~~water redistribution. Most importantly perhaps, the main impediment of observational field approaches, such as the ones listed above, is their inability to control ambient factors such as GWT depth, precipitation, temperature and relative humidity. This limitation restricts our ability to study the effect of individual components of the soil water balance like capillary ~~rise~~moisture supply.

As an alternative, a handful of laboratory-scale experiments have sought to infer the capillary moisture impact on soil biogeochemical processes. Rezanezhad et al. (2014) and Fiola et al. (2020) found that highest C mineralization was found at transient redox conditions above the capillary fringe, where moisture and oxygen are in balance. However, due to the small scale of the used setups (packed soil columns of 45 cm and 30 cm length, respectively) an appreciation of capillary rise was not possible. Malik et al. (1989), Shaw and Smith (1927) and Lane and Washburn (1947) assembled larger packed soil columns to determine maximum capillary rise height as a function of soil texture. They found capillary moisture supply up to 149 cm (loamy sand soil), 183 cm (sandy loam soil) and 359.2 cm (silt soil), respectively. But as those columns were repacked from sieved soil, soil structure was disrupted and in-field occurring heterogeneity and macropores were not well represented (Lewis and Sjöström, 2010), while neither the impact on C mineralization was assessed (Lewis and Sjöström, 2010). ~~In sum, there is no clear empirical evidence of the control of moisture supply by capillary rise on topsoil organic matter (OM) mineralization. In sum, there is little empirical evidence of the control of moisture dynamics by capillary rise on topsoil organic matter (OM) mineralization. Not only the impact of GWT onto mean topsoil water content seems a blind spot, but, but possibly also the amplitude of soil moisture fluctuation in topsoil may depend on the magnitude of moisture supply by capillary action. After a rainfall event, rewetting of dry soil leads to strongly increased C mineralization, often referred to as the Birch effect (Birch, 1958). This effect depends on the magnitude of the soil moisture increment and/or drier pre-wetting condition (Liang et al., 2023). With a stronger continuous supply of moisture via capillary rise we may expect smaller fluctuations in topsoil moisture and then also smaller Birch-effect induced soil C mineralization peaks.~~

Our main aim was to study if, during a (simulated) period ~~of drought~~with limited rainfall, there would be a significant effect of capillary ~~rise~~moisture flow from the GWT on topsoil moisture and OM mineralization for loess deposited arable lands in North-West Europe. We designed a setup wherein excavated 200 cm long undisturbed soil columns were incubated in the laboratory with ambient factors being regulated and soil moisture monitored. Columns of three soil textures were subjected to minimal watering events representing a dry summer and two GWT depths to study the interaction between both factors and to provide a representative depiction for our study region, i.e. North-West Europe. The decomposition of an introduced substrate, i.e. ¹³C-enriched ryegrass, was monitored through CO₂ headspace measurements. We hypothesized that a deeper GWT would result in reduced topsoil moisture ~~content~~ and as a result, C mineralization in the topsoil would be relatively inhibited compared to the treatment with shallower GWT. We expected an increasing susceptibility to reduced moisture of the C mineralization with coarser soil texture as water losses by evaporation would be less compensated by capillary moisture input. Although physicochemical protection of OM is stronger in finer-textured soils, we expected that such direct effect of soil texture on mineralization of the added OM would be of less importance in the short term (10 weeks) as opposed to regulation of soil moisture by the soil texture and GWT depth combinations.

2 Material and methods

2.1 Study area and undisturbed soil column collection

Undisturbed soil columns were collected from three croplands in North-West Belgium with different soil texture, that is a loamy sand soil (50°55'43.8"N 3°32'54.7"E, Kruisem), a sandy loam soil (50°57'47.3"N 3°45'37.2"E, Bottelare) and a silt loam soil (50°55'15.8"N 3°45'03.0"E, Oosterzele). [According to the WRB soil classification map of Flanders \(Dondeyne et al., 2014\), the soil profiles originating from Kruisem and Bottelare are classified as Eutric Retisols, while the soil profiles from Oosterzele are Eutric Cambisols \(Siltic\).](#) The fields were chosen based on their GWT depths between 100 and 200 cm in the year prior to our experiment. A cylinder auger set and a motorized percussion hammer (Eijkelkamp, The Netherlands) were employed to excavate the soil columns (Ø: 9.7 cm). First, 100 cm long columns were taken from the soil surface down to –100 cm depth. Then, a 100 cm deep pit (2 m²) was dug to likewise collect columns from –100 cm to –200 cm depth ~~from~~ withing the pit. Additionally, disturbed topsoil samples (from 0 cm to –20 cm) were collected near each sampling location. The soil columns were carefully transferred into PVC liners (2 half pipes tied together by strong cable ties) and transported to the laboratory. The two soil columns taken within one soil profile were then combined in 200 cm long PVC tubes, that were cut lengthwise beforehand to enable the transfer and later sensor installation. On the inner walls of the PVC tubes a waterproof foil was applied to avoid moisture losses. To ensure a hydrological connection between the two 100 cm samples, 5 cm of silt clay loam soil (17 % sand, 48 % silt and 35 % clay) was added in between. Additionally, small breaks were restored by using this soil, but when confronted with larger damage, cores were discarded. Therefore, per field and depth increment, six columns were deliberately sampled to only retain the four best structurally intact replicates for our experiment. After closing the PVC tubes, cable ties were tightly applied to attain a solid setup and avoid sidewall effects (Lewis and Sjöström, 2010).

130 2.2 Experimental design

2.2.1 Laboratory setup and incubation

A soil incubation experiment was set up in which mineralization of a model ^{13}C -labeled substrate amended to the topsoil was followed as a function of two constant GWT depths, viz. -165 cm and -115 cm (relative to the soil surface) (Fig. 1). ~~The setup was installed in a temperature controlled ($20.8 \pm 0.5^\circ\text{C}$) dark room. $^\circ\text{C}$) dark room. The top 20 cm of the soil columns was removed, such that undisturbed columns of 180 cm length remained.~~ The GWT treatments were consecutively applied to the same columns, resulting in two incubation periods under ~~identical-similar~~ laboratory conditions. ~~The top- but with renewed 20 cm soil was removed, such that topsoil on top of undisturbed columns of 180 cm length remained. The setup was installed in a temperature controlled ($20.8 \pm 0.7^\circ\text{C}$ during GWT -165 cm and $20.8 \pm 1.5^\circ\text{C}$ during GWT -115 cm) dark room.~~ The soil columns were submerged in 220 L barrels with tap water, to a height of 35 cm or 85 cm height, representing the -165 cm or -115 cm GWT depth, respectively. The soil columns were allowed to stabilize for 27 days. The loamy sand columns were covered by parafilm after 16 days to avoid further drying out. After this stabilization period, the disturbed topsoil samples (0 to -20 cm) collected near each sampling location in the field were mixed with ^{13}C -enriched ryegrass and repacked to a 20 cm layer on top of the undisturbed soil columns as described in more detail below. For both GWT treatments, the columns followed these identical preparation steps. We deliberately handled the deepest (-165 cm) GWT treatment first. This approach ensured that any potential impact of upward moisture transport on soil structure was confined to a height above the GWT, which was then exceeded during the subsequent, shallower (-115 cm) GWT treatment.

~~We used have chosen~~ a model OM substrate (*in casu* ^{13}C -labeled clipped ryegrass) ~~and focused solely on the mineralization of this added substrate in the topsoil, without including data on did not compare over a comparison of native soil OM mineralization. This approach was chosen primarily because, as its the inherently different quality and quantity between the three soils would no longer allow studying~~ the effect of GWT depth, soil texture and their interaction on soil OM mineralization. ~~mineralization could also be function of inherently different soil OM quality and quantity among the three studied soils.-~~ Additionally, ~~The native soil OM derived CO_2 effluxes from native soil OM included contributions in part originated from mineralization of native soil OM in their the undisturbed subsoil column (from -20 to -200 cm) soil, which was left unchanged between GWT treatment batches to reduce potential soil heterogeneity influences on moisture dynamics. As this soil column was not renewed between both GWT treatment batches, the quality of subsoil OM differed between both GWT treatments. For these reasons it is not meaningful to present native SOC mineralization data and results are kept restricted to ryegrass C mineralization.-~~ As native soil OM in this subsoil had thus already undergone partial mineralization during the first GWT treatment, starting conditions would differ for the second GWT treatment. Particularly so as subsoil was moreover kept uniform at 20°C , which deviates strongly from expected field conditions, where temperature is lower and typically decreases with depth. This discrepancy further limits the applicability of our setup for assessing subsoil OM mineralization.

The extra disturbed top 20 cm soil was first dried and sieved at 4 mm and visible root fragments were manually removed. Subsequently, the three soils were pre-incubated for one week at 20.8°C at a moisturewater content of 0.15, 0.22 and 0.28 m^3

heeft opmaak toegepast: Subscript

m³ for the loamy sand, sandy loam and silt loam columns, respectively. The model substrate, i.e. ¹³C-labeled ryegrass ($\delta^{13}\text{C} = +44.93 \pm 1.65 \text{ ‰}$), was added at a dose of 1.5 g C kg⁻¹ dry soil ($C_{\text{ryegrass}} = 38.74 \pm 0.99 \%$, C:N = 12.8) and mixed thoroughly.

165 The production of this ¹³C-enriched ryegrass is described by Li et al. (2023). To exclude differences in N availability between the various soil texture and GWT depth treatment combinations, KNO₃ (dissolved in water) was added at a dose equivalent to 100 kg N ha⁻¹. Each of these soil-grass mixtures for the three soil textures ~~texture-specific soil-grass mixtures~~ was then gently

packed on top of the columns to bulk densities of 1.50, 1.45 and 1.40 g cm⁻³ for the loamy sand, sandy loam and silt loam columns, respectively. Volumetric water sensors (type EC-5, 5TM, Teros10, Teros12, from Decagon and METER group, USA) were installed at different depths (-10, -30, -60, -85 and -120 cm) by puncturing the sensor rods through the waterproof foil. Prior to use, all sensors were calibrated for the three specific soil textures. Dataloggers, type ZL6 (METER group, USA), were used with a log frequency of one hour. Rainfall was simulated by gently adding 85 or 128 mL over a 30-minute period every 14 to 21 days, equivalent to a dose of 25 mm month⁻¹. With this watering scheme, we simulated a drier than usual (78 mm month⁻¹; 30-year Belgian average between the 21st of June to 20th of September over 1991-2020) local Maritime climate summer, without exceeding the actual measured lowest extreme of 5.2 mm month⁻¹ only observed in July 2022 (Royal Meteorological Institute, 2022). Moisture measurements at -10 cm depth were considered representative for the entire repacked topsoil layer (0 to -20 cm), and therefore suitable for assessing ¹³C-labeled ryegrass mineralization within this layer. Simulations in HYDRUS-1D confirmed that moisture had infiltrated to a depth of approximately about 20 - 30 cm, and that within 24-36 hours after water addition, the water content had become nearly uniform throughout the 0-20 cm layer (Fig. A1). nd the water content had become nearly constant with depth across the 0 - 20 cm layer 24 - 36 h after water addition (Fig. A1). Since soil CO₂ efflux measurements (see 2.2.2) were taken then to the earliest after watering events, the -10 cm measurements provided a representative state of the topsoil moisture state. Water levels in the barrels were kept constant daily with the help of a float and a time-of-flight sensor (Adafruit, VL53L0X) combined with a Raspberry Pi (small single-board computer). A plastic grid with a mesh size of 5 mm placed between the undisturbed soil column and the repacked topsoil

170 allowed its removal after completion of the first incubation batch while preserving the structure and hydraulic contact with the underneath undisturbed columns. Similarly, for the second GWT treatment, fresh topsoil mixed with ryegrass was once again added. Rainfall was simulated by gently adding 85 or 128 mL over a 30-minute period every 14 to 21 days, equivalent to a dose of 25 mm month⁻¹. With this watering scheme, we simulated a drier than usual (78 mm month⁻¹; 30-year Belgian average between the 21st of June to 20th of September over 1991-2020) local Maritime climate summer, without exceeding the actual measured lowest extreme of 5.2 mm month⁻¹ only observed in July 2022 (Royal Meteorological Institute, 2022). At the end of each GWT treatment incubation batch, the packed topsoil was removed and its gravimetric moisturewater content was determined. Both initial and final gravimetric moisturewater contents were converted into volumetric water content (θ_v) using the applied bulk densities and compared with the sensor values (Table A1). Deviating measurements were found for three sandy loam columns during the -115 cm GWT treatment, presumably due to air entrapment around the sensor rods after installation. To rectify this discrepancy, a correction was applied using linear regression (Fig. A2).

175 heeft opmaak toegepast: Superscript

180 heeft opmaak toegepast: Subscript

185

190

195

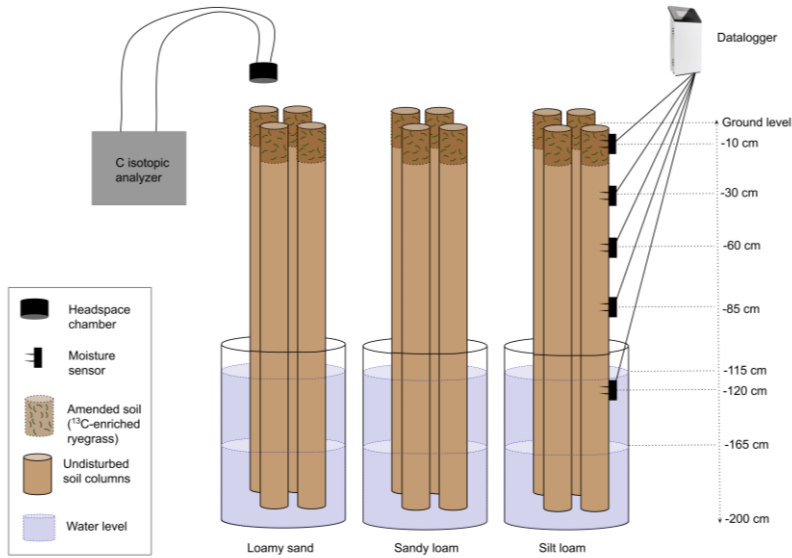


Figure 1: Schematic overview of the laboratory setup.

2.2.2 Soil CO₂ efflux measurements and calculations

Soil CO₂ efflux was regularly measured to record soil C mineralization and infer the progress of the cumulative amount of C_{ryegrass} mineralized over time. For CO₂ efflux measurements, a G2201-i Cavity Ring-Down Spectrometer (CRDS) (Picarro, USA) was consecutively connected via tubing to an air tight lid attached on top of the soil columns. The lid contained two sampling ports (gas in- and outlet), a vent tube (Ø: 1 mm) to minimize air pressure differences and a 9V battery-powered fan on the inside to ensure air circulation inside the headspace between soil surface, PVC tube and lid. The headspace volume varied between 0.52 and 0.82 L and covered an area of 73.90 cm². The CRDS recorded changes in the headspace CO₂ concentration and δ¹³C value every 2–3 seconds. CO₂ efflux rates were calculated as the slope of the linearly increasing CO₂

concentration over a 7 to 15 minutes time interval per soil column and were converted to a mass-based unit (mg CO₂·C kg soil⁻¹ h⁻¹) using the ideal gas law. To determine the δ¹³C (‰) value of emitted CO₂ (δ¹³C·CO₂, Eq. (1)), the Keeling plot method was applied in which measured δ¹³C values are plotted against the inverse CO₂ emission concentrations and the δ¹³C of emitted CO₂ is obtained from the y-axis intercept of a linear model fitted to the data (Keeling, 1958). Measurements were made on days 1, 2, 3, 5, 7, 9, 11, 13, 15, 20, 22, 24, 27, 29, 34, 36, 38, 42, 45, 48, 52, 57, 59, 62, 66 and 69 of each of both incubation batches. The CRDS was recalibrated at onset of each incubation using two certified standard gases of 400 ppm and 2500 ppm CO₂ with δ¹³C values of respectively -8.6 ‰ and -51 ‰. The contrasting δ¹³C values of the added ¹³C-labeled ryegrass (+ 44.93 ± 1.65 ‰) and soil organic carbon (- 25.68 ± 0.23 ‰ for loamy sand, - 25.57 ± 0.17 ‰ for sandy loam, and - 24.79 ± 0.11 ‰ for silt loam soils, Table 1) allowed to partition the total CO₂ efflux (CO₂·C_{total}) into a share resulting from ryegrass decomposition (CO₂·C_{ryegrass}) and from native SOC (CO₂·C_{SOC}) (μg CO₂·C kg⁻¹ soil) with an isotope mixing model following Eq. (1):

$$CO_2 \cdot C_{ryegrass} = \frac{\delta^{13}C \cdot CO_2 - \delta^{13}C \cdot CO_2 \cdot SOC}{\delta^{13}C \cdot CO_2 \cdot ryegrass - \delta^{13}C \cdot CO_2 \cdot SOC} * CO_2 \cdot C_{total} \quad (1)$$

The isotopic signature of CO₂ emitted from either end member, i.e. δ¹³C·CO₂·ryegrass and δ¹³C·CO₂·SOC, were analyzed in ancillary soil incubations as in Mendoza et al. (2022). The δ¹³C·CO₂·SOC was determined in parallel 20 cm packed soil columns with no ryegrass added. For δ¹³C·CO₂·ryegrass, such soil columns were amended with a high dose of ryegrass (3 g C kg⁻¹ soil; indicated as “high”). The rationale for using smaller columns compared to the main experimental setup was to exclude CO₂ emissions from the underlying soil OC, ensuring a more accurate assessment of δ¹³C·CO₂·ryegrass. and ~~and~~ The following Eq. (2) was applied:

$$\delta^{13}C \cdot CO_2 \cdot ryegrass = \frac{CO_2 \cdot C_{high} * \delta^{13}C \cdot CO_2 \cdot high - CO_2 \cdot C_{SOC} * \delta^{13}C \cdot CO_2 \cdot SOC}{CO_2 \cdot C_{high} - CO_2 \cdot C_{SOC}} \quad (2)$$

Emission measurements in these ancillary incubations were made on days 2, 7, 15, 29, and 52.

From ryegrass-derived CO₂ efflux (CO₂·C_{ryegrass} h⁻¹) cumulative amounts of mineralized C_{ryegrass} (in μg C kg⁻¹ soil) were calculated by integrating these mineralization rates over time intervals defined as half of the period before the previous measurement and half of the period until the next measurement. To describe the kinetics of mineralized ryegrass over time, relative to the added amount of ryegrass in % C_{ryegrass}, the following parallel two rate first-~~zero~~-order kinetic model was used (Sleutel et al., 2005; Zacháry et al., 2018), Eq. (3):

$$Cumulative C_{ryegrass-min}(t) = C_f * (1 - e^{-k_f * t}) + k_s * t \quad (3)$$

heeft opmaak toegepast: Subscript

where C_f (% of $C_{ryegrass}$) and k_f (day^{-1}) are parameters representing the easily mineralizable $C_{ryegrass}$ pool and the ~~first-order~~ mineralization rate, respectively, while k_s (% of $C_{ryegrass}$ day^{-1}) is ~~the zero-order~~ mineralization rate constant of a more stable $C_{ryegrass}$ pool.

2.3 Column analyses: physicochemical soil properties

At the end of the experiment, the 200 cm tubes were opened carefully by relieving cable ties, taking off one of both PVC half-pipes and opening the waterproof foil. Then, undisturbed soil samples (\varnothing : 5 cm, h: 5.1 cm) were taken by pressing Kopecky rings in the soil columns near the moisture sensor locations, i.e. at -15 to -10 cm; -35 to -30 cm; -55 to -50 cm; -85 to -80 cm and -125 to -120 cm depth. For each depth layer a soil-water retention curve was determined by measuring water contents of these ring samples on a silica sand tension table and pressure plates (Eijkelkamp, The Netherlands) at different matric tensions (-1 , -3 , -7 , -10 and -33 , -100 , -1500 kPa, respectively). Average water retention curves per texture and depth (Fig. B1) were further used to convert measured mean volumetric water contents in matric potentials, expressed as matric head in units of cm water height (cm WH). The latter were used to calculate hydraulic head differences (ΔH) between two ~~measurement heights, where height was defined to increase in the upward direction, adjacent sensor positions above the GWT, and with~~ hydraulic head the sum of matric head and gravitational head. They were used as an indicator for the ~~moisture-transportwater flux~~ direction: positive ΔH values indicate a net upward (capillary) water ~~transportflux~~, while negative ΔH values signify an overall downward water ~~transportflux~~. Soil texture, OC content and $\text{pH}_{\text{H}_2\text{O}}$ were determined on homogenized subsamples from -20 to -50 cm, -50 to -100 cm, -100 to -150 and -150 to -200 cm layers. Values for $\delta^{13}\text{C}$ were only determined for the repacked topsoil. Physicochemical properties of the soil columns are listed in Table 1.

2.4 Statistical analyses

Statistical analyses were made with R Studio statistical software, version 4.1.2 (~~The R foundation, Austria~~)-(R Core Team, 2021). Reported values represent means \pm standard errors. Linear mixed-effect models (R package “nlme”, function “lme”) (~~Pinheiro et al., 2023~~)(Pinheiro and Bates, 2000) in combination with estimated marginal means (R package “emmeans”, function “emmeans”) (Lenth et al., 2024) were used to detect statistical differences in average ~~moisturewater~~ content and $C_{ryegrass}$ mineralization rates between GWT treatments per texture over the entire incubation period. In this model, the GWT treatment was set as fixed factor, while column replicates ($n = 4$) were added as random intercept to represent the grouped structure of the experimental setup and an autocorrelation factor was included to account for temporal autocorrelation between measurements as well (Schielzeth and Nakagawa, 2013). Diagnostic plots for the linear mixed-effects fit were visually examined (R package “nlme”, function “plot.lme”). Additionally, paired two-tailed t-tests were used to compare $C_{ryegrass}$ mineralization rates between GWT treatments per measurement day (after checking assumptions of normality and homoscedasticity). Goodness-of-fit of the parallel ~~two rate~~ first-~~zero~~-order kinetic model was assessed through the Nash-Sutcliffe model efficiency coefficient (NSE) (R package “ie2misc”, function “vnse”) (~~Embry et al., 2023~~)(Embry et al., 2023).

To detect any effect of GWT treatment and texture on the kinetic parameters of the two rate first-~~zero~~-order C mineralization model (C_f , k_f and k_s) and cumulative $C_{ryegrass-min}$ at the end of the incubation, once more linear mixed-effect models (R package “lme4”, function “lmer”) (~~Bates et al., 2023~~) were applied in combination with estimated marginal means (R package “emmeans”, function “emmeans”). (~~Bates et al., 2015~~) were applied in combination with estimated marginal means (R package “emmeans”, function “emmeans”). This time, both GWT and texture were set as fixed factors, while the separate columns ($n = 12$) were set as a random effect to allow for a pairwise comparison. The normality assumption for the residuals was tested using a simulation based approach (R package “DHARMA”) (Hartig, 2020).

Table 1: Physicochemical properties of the undisturbed soil columns (n = 4).

Location cropland	Depth below the surface from; to (cm)	Soil texture ^b			USDA soil texture class	OC ^c (g kg ⁻¹)	$\delta^{13}\text{C}$ ^d (‰)	pH _{H2O} ^e (-)	Sensor depth (cm)	BD ^f (g cm ⁻³)
		Sand (%)	Silt (%)	Clay (%)						
Kruisem	0 ; -20 ^a					11.2 ± 0.3	-25.68 ± 0.23		-10	1.4050
	-20 ; -50	86.2 ± 0.3	10.4 ± 0.6	3.3 ± 0.3	Loamy sand	5.0 ± 1.0		7.3 ± 0.0	-30	1.54 ± 0.02
	-50 ; -100	89.5 ± 1.6	8.4 ± 1.4	2.1 ± 0.2	Sand	0.6 ± 0.2		7.3 ± 0.0	-60	1.58 ± 0.01
	-100 ; -150	85.3 ± 3.2	8.1 ± 2.6	6.6 ± 1.4	Loamy sand	0.2 ± 0.1		7.6 ± 0.0	-85	1.52 ± 0.01
	-150 ; -200	76.6 ± 5.7	14.1 ± 5.4	9.3 ± 0.7	Sandy loam	0.5 ± 0.1		7.7 ± 0.1	-120	1.66 ± 0.01
Bottelare	0 ; -20 ^a					10.0 ± 0.4	-25.57 ± 0.17		-10	1.45
	-20 ; -50	60.6 ± 0.8	33.1 ± 0.9	6.3 ± 0.3	Sandy loam	3.6 ± 0.6		7.4 ± 0.0	-30	1.55 ± 0.01
	-50 ; -100	62.8 ± 3.8	26.6 ± 3.6	10.6 ± 1.8	Sandy loam	0.7 ± 0.1		7.6 ± 0.0	-60	1.75 ± 0.02
	-100 ; -150	47.7 ± 1.0	36.7 ± 1.3	15.6 ± 0.4	Loam	0.5 ± 0.1		7.5 ± 0.0	-85	1.65 ± 0.02
	-150 ; -200	66.5 ± 4.6	23.0 ± 3.7	10.5 ± 0.9	Sandy loam	0.2 ± 0.1		7.3 ± 0.0	-120	1.65 ± 0.01
Oosterzele	0 ; -20 ^a					9.8 ± 0.2	-24.79 ± 0.11		-10	1.5040
	-20 ; -50	12.2 ± 1.2	68.8 ± 0.5	18.9 ± 0.8	Silt loam	4.3 ± 0.6		7.1 ± 0.1	-30	1.61 ± 0.02
	-50 ; -100	15.6 ± 3.8	66.8 ± 2.9	17.6 ± 0.9	Silt loam	1.4 ± 0.2		7.3 ± 0.2	-60	1.60 ± 0.02
	-100 ; -150	22.5 ± 4.3	60.7 ± 3.3	16.8 ± 1.1	Silt loam	0.9 ± 0.2		7.6 ± 0.2	-85	1.54 ± 0.01
	-150 ; -200	16.6 ± 2.1	66.2 ± 1.8	17.1 ± 0.4	Silt loam	1.8 ± 0.3		7.7 ± 0.0	-120	1.67 ± 0.01

285 ^a Repacked soil layer.

^b Measured with the pipette-sedimentation method, with fractions: Sand (0.05 mm – 2 mm); Silt (0.002 mm – 0.05 mm) and Clay (< 0.002 mm).

^c Organic Carbon (OC); Measured by a FORMACS™ HT-i TOC/TN analyser (Skalar, The Netherlands).

^d Measured with a PDZ Europa ANCA-GSL elemental analyser interfaced with a Sercon 20-22 IRMS with SysCon electronics (SerCon, UK) and EA-IRMS EA IsoLink interfaced through a ConFloIV to a delta Q (Thermo Scientific, Germany). All $\delta^{13}\text{C}$ values are $^{13}\text{C}/^{12}\text{C}$ ratios expressed relative to the international

290 VPDB (Vienna Pee Dee Belemnite) standard.

^e pH in 1:5 soil:water (volume fraction) suspensions, measured using a glass electrode.

^f Bulk Density (BD).

3 Results

3.1 Moisture transport as a function of Soil moisture dynamics in response to GWT treatment


3.1.1 Volumetric water content (θ_v) along soil profiles of undisturbed columns

Overall, there was a gradual decrease in θ_v with increasing height above the GWT for all GWT and soil texture treatments (Fig. 2). The applied water appeared to primarily affect θ_v in the upper 10 cm and not in deeper soil layers.

In the loamy sand columns, the average moisture levels at -85 cm and -60 cm depth were significantly lower ($P = 0.016$ and $P = 0.007$, respectively) for GWT -165 cm than for GWT -115 cm (Table 2). At -30 cm, only a less pronounced significant ($P = 0.067$) difference was observed, while at -10 cm, GWT treatment did not significantly impact θ_v ($P = 0.294$). The θ_v at an equivalent height of about 80 cm above both GWTs was lower in case of the -115 cm GWT treatment at -30 cm compared to -85 cm for the -165 cm GWT treatment, which was probably the result of evaporative losses. Conversely, for the GWT -165 cm treatment, θ_v was comparable at -30 cm and -10 cm, and this might indicate limited impact of evaporative losses on topsoil moisture.

In the sandy loam columns, θ_v generally decreased with increasing height above the GWT, aside from lower θ_v at 55 cm above the -115 cm GWT ($0.237 \text{ m}^3 \text{ m}^{-3}$) compared to that at 80 cm above the -165 cm GWT ($0.282 \text{ m}^3 \text{ m}^{-3}$). This inconsistency might be explained by the elevated bulk density at -60 cm ($1.75 \pm 0.02 \text{ g cm}^{-3}$) compared to that at -85 cm ($1.65 \pm 0.02 \text{ g cm}^{-3}$) (Table 1). The θ_v differed significantly between both GWT treatments with an effect of $0.02 \text{ m}^3 \text{ m}^{-3}$ ($P = 0.012$) at -85 cm ($P = 0.042$), $0.02 \text{ m}^3 \text{ m}^{-3}$ at -60 cm ($P = 0.028$) and $0.03 \text{ m}^3 \text{ m}^{-3}$ at -10 cm ($P = 0.026$), but surprisingly not at -30 cm ($0.01 \text{ m}^3 \text{ m}^{-3}$, $P = 0.31$) (Table 2).

In the silt loam columns, θ_v was comparable (about $0.310 \text{ m}^3 \text{ m}^{-3}$) at depths below 30 cm from the surface (Table 2). The surprisingly lower θ_v at -120 cm ($0.270 \text{ m}^3 \text{ m}^{-3}$) for the -165 cm GWT treatment might again be explained by the relatively higher BD ($1.67 \pm 0.01 \text{ g cm}^{-3}$) at that depth (Table 1). Between the GWT treatments, there were only marginally significant differences in θ_v at -85 cm ($0.01 \text{ m}^3 \text{ m}^{-3}$, $P = 0.062$) and -60 cm ($0.01 \text{ m}^3 \text{ m}^{-3}$, $P = 0.092$), but not at -30 cm ($P = 0.160$). At -10 cm, θ_v was lower at GWT -165 cm ($0.153 \text{ m}^3 \text{ m}^{-3}$) than at GWT -115 cm ($0.200 \text{ m}^3 \text{ m}^{-3}$) ($P = 0.028$).

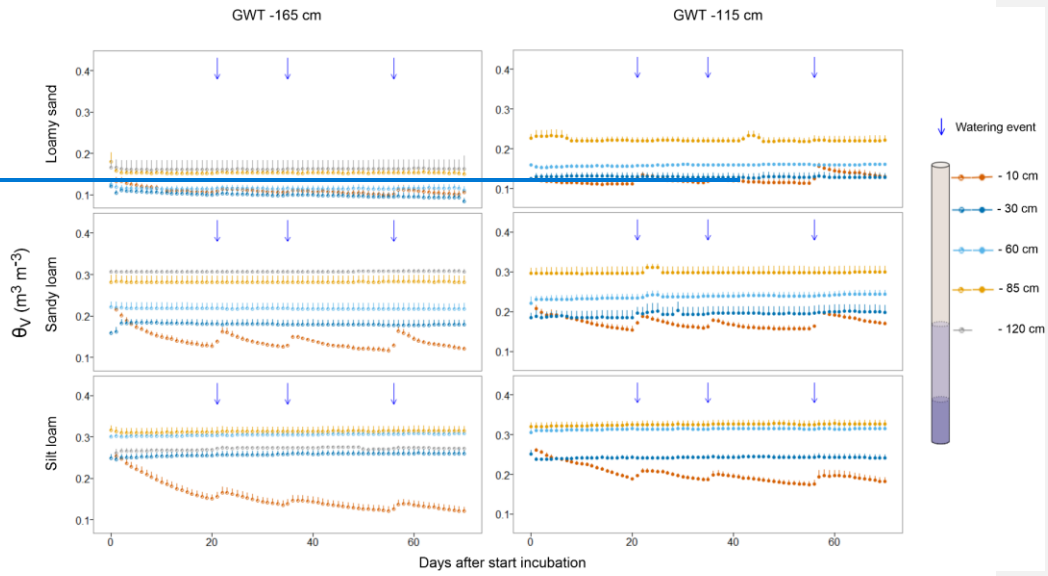

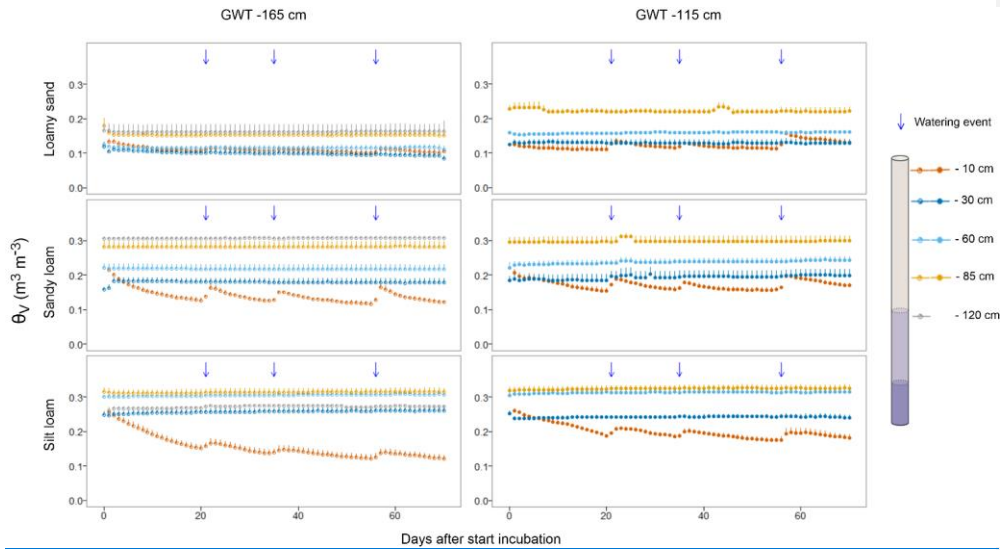


Figure 2: Evolution of soil moisture (θ_v) depth profiles ($n = 4$) over time for two GWT (groundwater table) treatments (depths at –165 and –115 cm) and three textures (loamy sand, sandy loam and silt loam). Note that the GWT treatment –115 cm does not have a sensor installed at –120 cm depth (i.e. below the established GWT).

Table 2: Estimated marginal means of [moisture](#) contents (θ_v) measured at different depths as a function of GWT treatment (depths at –165 cm and –115 cm).

	Sensor depth (cm)	Relative position above the GWT (cm)		θ_v ($m^3 m^{-3}$)	
		GWT	GWT	GWT	GWT
		–165 cm	–115 cm	–165 cm	–115 cm
Loamy sand	–10	155	105	0.109	0.123
	–30	135	85	0.099	0.129
	–60	105	55	0.115	0.159 *
	–85	80	30	0.153	0.222 *
	–120	45	/	0.162	/
Sandy loam	–10	155	105	0.140	0.172 *
	–30	135	85	0.179	0.193
	–60	105	55	0.217	0.237 *
	–85	80	30	0.282	0.298 *
	–120	45	/	0.307	/
Silt loam	–10	155	105	0.153	0.200 *
	–30	135	85	0.257	0.242
	–60	105	55	0.305	0.313
	–85	80	30	0.313	0.325
	–120	45	/	0.271	/


Symbols “.” and “*” indicate that moisture was significantly higher ($P < 0.1$ and $P < 0.05$, respectively) for GWT treatment –115 cm when compared to the [deeper](#) –165 cm treatment. Note that GWT treatment –115 cm did not have a sensor installed at –120 cm depth (i.e. under the established GWT).


350 **3.1.2 Hydraulic head differences**

Across all three textures and both GWT treatments, there was a negative hydraulic head difference (ΔH) between -10 cm and -30 cm during the first few days of the incubation. This indicates gravitational water transport due to wetter repacked topsoil layers at the start of the experiment towards the drier undisturbed soil layers. In the loamy sand columns, the ΔH between -10 cm and -30 cm remained mostly negative in case of the -165 cm GWT treatment during the rest of the experiment (Fig. 3). In contrast, between -60 cm and -30 cm, ΔH ranged from $+50$ to $+198$ cm WH, indicating upward water movement. For the shallower -115 cm GWT, water transport between -30 cm and -10 cm was alternately downward and upward depending on the watering applications (viz. ΔH ranging from -80 to $+30$ cm WH), followed by slight positive and quite constant ΔH ($+50$ cm WH) between -60 cm and -30 cm. For both GWT treatments, ΔH between -85 cm and -60 cm remained slightly positive throughout the experiment period. Between -120 cm and -85 cm we found an unforeseen negative ΔH of ~ -95 cm WH.

In the sandy loam columns, between -30 cm and -10 cm ΔH was positive and fluctuated in response to the water applications for both GWT treatments. In the -165 cm GWT treatment, higher ΔH maxima were observed as a result of drier topsoil compared to the -115 cm GWT treatment. Both GWT treatments exhibited fairly consistent positive ΔH between -60 cm and -30 cm, as well as between -85 cm and -60 cm, with average ΔH values of $\sim +37$ cm WH and $\sim +20$ cm WH (GWT -165 cm), and $\sim +32$ cm WH and $\sim +29$ cm WH (GWT -115 cm), respectively. Surprisingly, like with the loamy sand columns, we measured a negative ΔH of about -95 cm WH between -120 cm and -85 cm, for the GWT -165 cm treatment, i.e. close to the GWT.

In the silt loam columns, ΔH in the topsoil increased up to $+10800$ cm WH in case of the -165 cm GWT treatment as a result of topsoil drying out compared to underlying soil. In case of the shallower GWT of -115 cm, the ΔH between -10 cm and -30 cm alternated around 0 cm WH, with temporary negative values (i.e. downward moisture transport) directly after watering events, then followed by an increase in ΔH to positive values after several days (i.e. upward moisture transport). For GWT -165 cm positive ΔH values were found in all subsoil layers, which tended to decrease over time from $+830$ to $+450$ cm WH, $+245$ to $+100$ cm WH, $+120$ to $+30$ cm WH and $+110$ to $+90$ cm WH between respective depths of -60 cm to -30 cm, -85 cm to -60 cm and -120 cm to -85 cm. For the -115 cm GWT, upward (but rather constant) moisture transport existed as well, with average ΔH values of $+1200$ cm WH and $+135$ cm WH, for -60 cm to -30 cm and -85 cm to -60 cm, respectively.

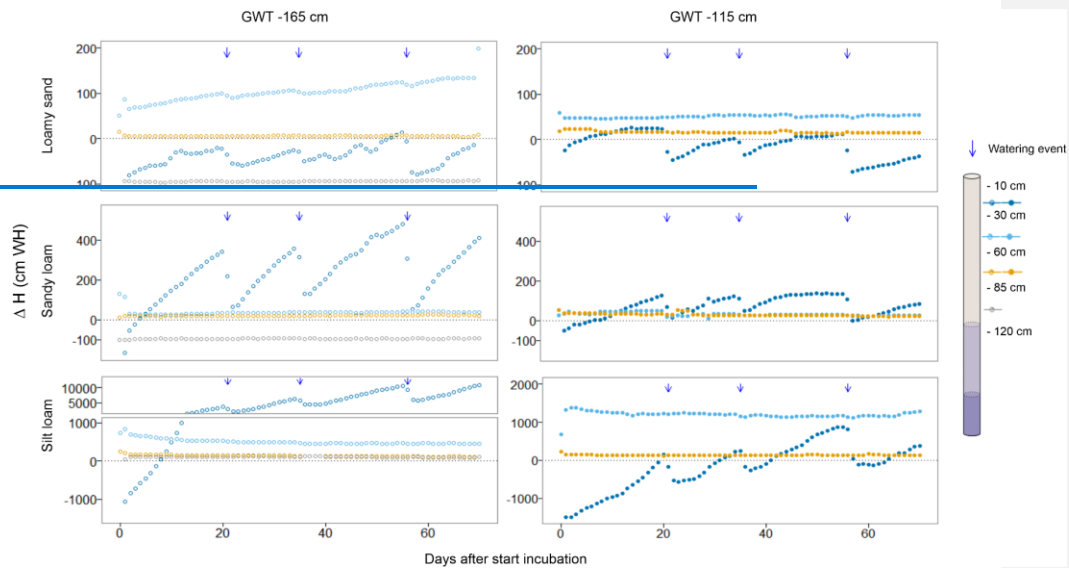

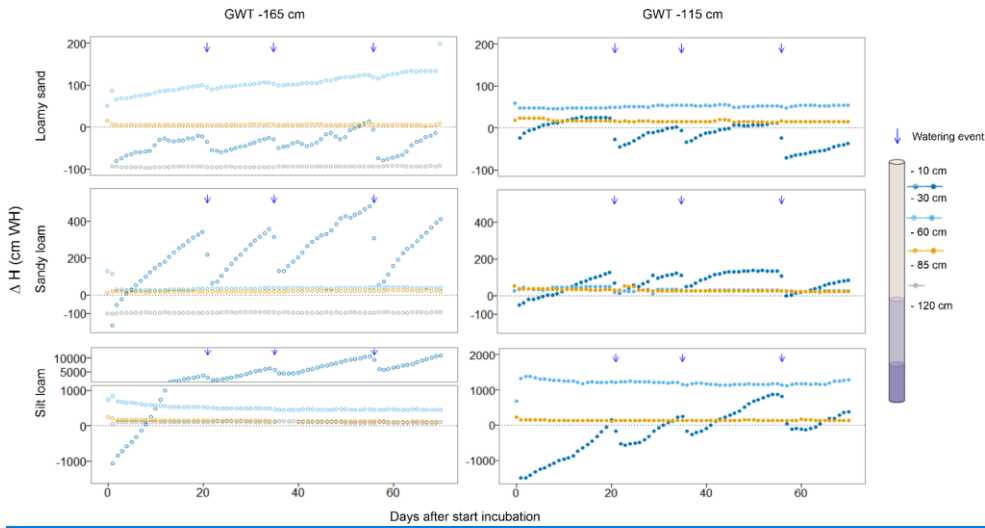


380 **Figure 3: Difference in hydraulic head (ΔH) over time for both GWT treatments (-165 cm and -115 cm) measured in loamy sand, sandy loam and silt loam soil columns. A positive (negative) ΔH indicates a hydraulic head difference enabling upward (downward) moisture transport. Note that GWT treatment -115 cm did not have a sensor installed at -120 cm depth and therefore no ΔH with -85 cm could be shown.**

3.2 Mineralization of added ryegrass

385 3.2.1 Mineralization rates and moisture in topsoil

During the initial five days of the incubation ryegrass mineralization rates were highest with mean maxima of 1643, 1053 and 1133 $\mu\text{g C}_{\text{ryegrass}} \text{kg}^{-1} \text{soil h}^{-1}$ for loamy sand, sandy loam and silt loam columns, respectively. From day seven onwards, the rates decreased gradually over time and after day 30, averaged around 72, 62 and 78 $\mu\text{g C}_{\text{ryegrass}} \text{kg}^{-1} \text{soil h}^{-1}$ for the three respective textures (Fig. 4). There was no significant effect of GWT treatment on the mean $\text{C}_{\text{ryegrass}}$ mineralization rate across 390 the entire incubation period per texture, although for some individual measurement days, rates did alternate between the GWT treatments. After the watering applications, mineralization rates in the drier, -165 cm GWT treatment, soil seemed to be more sensitive to the moisture input. Significant differences were observed only in comparison to the -115 cm GWT from the second watering application onwards in the loamy sand soil (72 vs 51 $\mu\text{g C}_{\text{ryegrass}} \text{kg}^{-1} \text{soil h}^{-1}$ at day 36), and after the third application for the sandy loam (59 vs 32 $\mu\text{g C}_{\text{ryegrass}} \text{kg}^{-1} \text{soil h}^{-1}$ at day 59) and silt loam (51 vs 13 $\mu\text{g C}_{\text{ryegrass}} \text{kg}^{-1} \text{soil h}^{-1}$ at 395 day 57) soil.

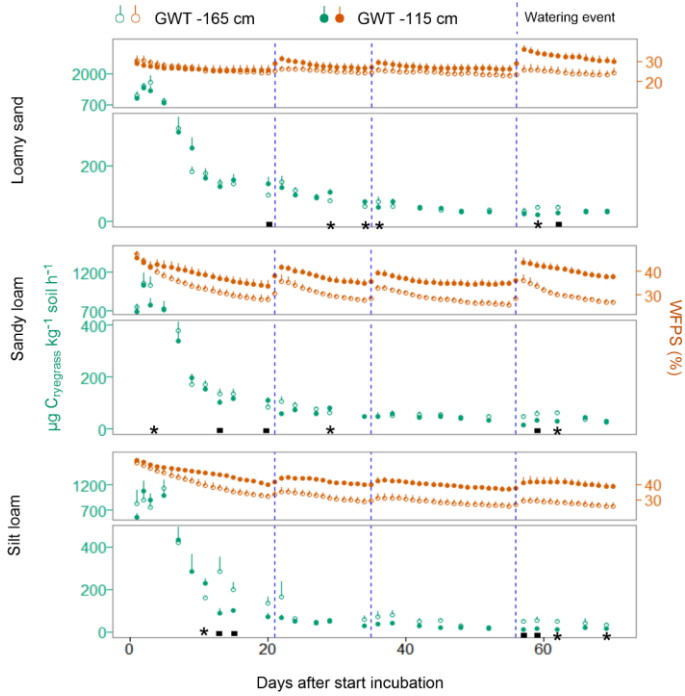

400

Figure 4: Ryegrass mineralization rates combined with the topsoil moisture content expressed in % of Water-Filled Pore Space (WFPS) for both GWT treatments in the loamy sand, sandy loam and silt loam soil columns (n = 4). Symbols "*" and "**" indicate significant differences for a specific measurement day at P < 0.1 and P < 0.05, respectively.

3.2.2 Cumulative ryegrass mineralization


405

Overall, 15 – 20 % of the added C_{ryegrass} was mineralized over the course of the 70-days incubation period. Cumulative $C_{\text{ryegrass-min}}$ did not differ between the three soil textures (19.3 %, 15.7 % and 17.4 % for the loamy sand, sandy loam and silt loam, respectively). In contrast, GWT treatment had a marginal significant effect ($P = 0.051$) with lower cumulative $C_{\text{ryegrass-min}}$ in case of the –115 cm GWT (16.2 %) compared to the –165 cm GWT (18.7 %).

410

The kinetic parallel [two rate](#) ~~first-~~ ~~zero~~-order mineralization model fitted very closely to the cumulative $C_{\text{ryegrass-min}}$ with NSE-values > 0.98 (Fig. 5). The estimated size of the easily mineralizable pool (C_f) was not different between the texture and GWT depth combinations, with average values between 10.3 % and 15.0 % of the initially added amount of C_{ryegrass} (Table 3). The mineralization rate of this fast C_{ryegrass} pool (k_f) was not different between the GWT treatments, but it was [0.041 d⁻¹ and 0.026 d⁻¹](#) lower for the silt loam compared to the loamy sand ($P = 0.004$) and sandy loam ($P = 0.049$) soils, [respectively](#). After the depletion of the fast C_{ryegrass} pool in about 2-3 weeks, the cumulative $C_{\text{ryegrass-min}}$ further proceeded at a much slower pace following a close to linear course, described by k_s . This k_s was significantly lower in case of the –115 cm GWT silt loam soil treatment compared to the other soil texture and GWT depth combinations.

415

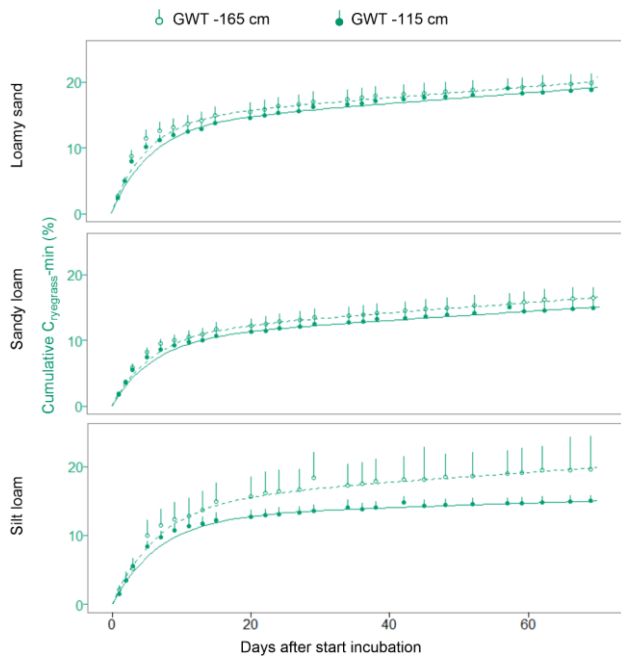

420 Figure 5: Cumulative $C_{ryegrass-min}$ (%) and fitted parallel two rate first-zero-order kinetic model for both GWT treatments in loamy sand, sandy loam and silt loam soil columns (n = 4).

Table 3: Parameters of the parallel two rate first-zero-order kinetic model characterizing the cumulative $C_{ryegrass-min}$ for both GWT treatments in loamy sand, sandy loam and silt loam soil columns.

	Loamy sand		Sandy loam		Silt loam	
	GWT -165 cm	GWT -115 cm	GWT -165 cm	GWT -115 cm	GWT -165 cm	GWT -115 cm
C_r (%)	14.3 ± 1.5 a	13.5 ± 0.9 a	11.0 ± 1.0 a	10.3 ± 1.0 a	15.0 ± 2.6 a	12.8 ± 1.0 a
k_f (d ⁻¹)	0.20 ± 0.00 a	0.18 ± 0.01 a	0.18 ± 0.01 a	0.17 ± 0.00 a	0.15 ± 0.02 b	0.15 ± 0.01 b
k_s (% d ⁻¹)	0.08 ± 0.00 a	0.08 ± 0.01 a	0.08 ± 0.01 a	0.07 ± 0.00 a	0.07 ± 0.02 a	0.03 ± 0.01 b ⁴³⁰

Letters indicate significant (P < 0.1) differences per parameter between soil texture and GWT depth combinations.

4 Discussion

435 With this experiment, we aimed to infer if and how GWT depth (here either at –165 cm and –115 cm) impacts topsoil moisture and C mineralization during simulated dry periods that could realistically occur in North-West Europe. Below we discuss capillary moisture supply as a function of GWT and soil texture combinations (4.1), the impact on OM mineralization (4.2) and -consequences for modelling of topsoil carbon on the landscape scale (4.3).

4.1 To what extent does groundwater table depth affect moisture during simulated drought?

440 Overall, the established GWT contrast (–165 cm vs. –115 cm) significantly affected topsoil (–10 cm) moisture content in the sandy loam and silt loam columns, but not in the loamy sand columns (Table 2).

In the loamy sand columns, with a GWT of –165 cm, moisture ~~contents~~ of the shallow layers (–30 cm and –10 cm) ~~were~~ consistently low ($\sim 0.1 \text{ m}^3/\text{m}^3$), and thus situated in the “dry” range of the soil water retention curve (Fig. B1). There was clear evidence that capillary moisture supply from deeper soil layers towards the topsoil was insignificant for this deepest GWT treatment. First, although positive hydraulic head differences (ΔH) between –60 cm and –30 cm enabled capillary action, they displayed an increasing trend throughout the experiment (Fig. 3). Hence, the soil was observed to be drying out at 105 cm and 135 cm above the GWT, indicating clearly that evaporative losses were insufficiently compensated by a capillary water flux. Second, hydraulic head differences between –30 cm and –10 cm ~~depth~~ were even negative, excluding upward moisture transport out of the directly underlying subsoil. In fact, watering events likely caused temporary downward moisture fluxes between these topsoil layers, as indicated by the fluctuating pattern of ΔH (–30 cm to –10 cm). Considering the moisture retention curve, it emerges that stronger suction forces than the ones recorded here would also not have readily resulted in marked further soil drying, which explains why moisture at –30 cm remained relatively constant despite temporal changes in ΔH . In sum, the absence of a significant upward moisture supply to the loamy sand topsoil at deep GWT is most likely directly attributable to a too limited capillary rise height characteristic of this texture. When the GWT was raised to –115 cm, moisture ~~content~~ at –30 cm was higher than at the –165 cm GWT, implying that ~~upward~~ capillary ~~moisture flow rise~~ markedly impacted soil moisture up to at least 85 cm above the GWT, less so beyond 105 cm and no more beyond 135 cm.

In the sandy loam and silt loam soil columns, GWT depth did clearly affect the topsoil moisture with higher ~~moisture~~ water contents when the GWT was at –115 cm compared to at –165 cm. Hence, it seems likely that upward moisture ~~supply~~ flow in the sandy loam and silt loam columns by capillary ~~rise~~ action reached at least up to a height of 135 cm. In case of the silt loam soils, ~~moisture~~ water contents were also consistently high ($\sim 0.310 \text{ m}^3 \text{ m}^{-3}$) up to 105 cm above the –165 cm GWT and so the capillary fringe likely extended beyond 135 cm above the GWT.

Our findings are substantiated by the calculated hydraulic head differences, especially with respect to (dis)continuity of evaporation from the topsoil layer. For example negative ΔH between –30 cm and –10 cm for the loamy sand during the –165 cm GWT treatment indicated that evaporation ceased, while for the other soil texture and GWT combinations this did not seem to be the case. However, ΔH was unexpectedly negative between –120 cm and –85 cm for the –165 cm GWT treatment of the

loamy sand and sandy loam columns. These observations imply a downward moisture transport, which could be the case if macropores served as preferential flow pathways. However, as we observed an increase in water content during the shallower GWT treatments above this soil segment, upward moisture movement would have been the dominant water flow, with the GWT as starting point of the flow path. We believe these unexpected negative ΔH values are therefore more likely a result of cumulative errors when converting measured θ_v into H using soil water retention curves obtained from drying phases. Due to hysteresis, such curves can be inaccurate for soil wetting, which seems to be highly unlikely, and we expect that they derive from an accumulation of errors when converting measured θ_v into H via soil water retention curves, which were obtained as drying curves. Due to hysteresis, such curves can be inaccurate for soil wetting (Hillel, 2003), which was the main expected process at the considered deeper depths near the GWT. A better approach would have been to directly measure hydraulic head with tensiometers, but their installation would likely have strongly disturbed the soil columns. In retrospect, a better experimental approach would have been to directly measure hydraulic head using compact tensiometers, especially in the undisturbed parts of the soil columns, where following moisture transport was the main objective. However, even for the smallest lab-scale models, their installation would likely have caused significant disturbance to the soil columns, in contrast to the volumetric sensors used in this study, which had very sharp fine rods able to pierce the waterproof foil surrounding the soil columns with minimal disruption.

heeft opmaak toegepast: Subscript

In sum, our experiment revealed that upward moisture transport from the GWT to the topsoil occurs when the GWT depth is located within specific depth ranges depending on texture, with a larger impact on moisture supply in case of a shallower (closer to the topsoil) depth. For the loamy sand soils, the depth of the GWT to still affect topsoil via capillary moisture supply was estimated at 85 cm below the surface. For the sandy loam, topsoil moisture supply occurred for GWT depths up to 135 cm below the soil surface, while for the silt loam soils, it seemed that capillary moisture supply from the GWT also at deeper depths than tested here would still markedly affect the topsoil. Former conducted laboratory experiments observed capillary moisture supply from the GWT up to heights of 117 cm and 149 cm in case of loamy sand soils, and up to 175 cm and 183 cm in sandy loam soils (Malik et al., 1989; Shaw and Smith, 1927). In another study (Lane and Washburn, 1947), upward moisture transport was seen up to 240 cm for soils with a D_{10} of 0.02 mm, which should resemble our silt loam soil (Mozaffari et al., 2022). These reported results are based on setups with repacked soil columns which do not reflect the soil structure of *in situ* conditions. In contrast, our undisturbed soil columns included small scale heterogeneities, with e.g. macropores, small stones, and cracks as they would occur in the field (Lewis and Sjöström, 2010), and this probably explains the somewhat lower capillary rise heights found for loamy sand in our experiment. Our setup was located in a temperature-controlled dark room, where environmental conditions do not approach the field situation. Ambient outdoor wind, temperature and relative air humidity determine evaporation from the topsoil and thus indirectly co-drive the upward suction force across the soil profile as well (Huo et al., 2020). But overall, we expect that mainly soil texture, structure and GWT depth predominantly dictate the height of capillary rise. Consequently, as we worked with 2 m undisturbed soil columns and realistic GWT depths, we do expect findings of GWT-dependent capillary moisture supply rise heights and topsoil moisture to be representative for the

500 field situation. Indeed, when GWT is deeper than the so-called evaporation characteristic length, hydraulic pathways get disconnected and even high evaporative demands will not lead to notable topsoil moisture supply (Balugani et al., 2018; Shokri and Salvucci, 2011). This was also observed in the lighter textured loamy sand soil in our study.

4.2 Impact of GWT on topsoil OM decomposition

505 Soil ~~moisture~~water content (θ_v or % WFPS) determines soil heterotrophic activity and OM mineralization along a bell-shaped relationship (Manzoni et al., 2012; Moyano et al., 2013; Skopp et al., 1990; Yan et al., 2018). Particularly in the intermediate dry range the response of OM mineralization to ~~volumetric~~ soil moisture is strong. ~~Although in the low moisture-, while at lower water content range, it is often more informative to use, mostly~~ water potential ~~as units, we chose % WFPS as a directly obtained measure, i.e. without any is a better predictor. Given the occurring moisture range and to avoid~~ conversion of measured ~~volumetric moisture~~ through pF curves sensitive to hysteresis, ~~we further used % WFPS as a more directly obtained measure of soil moisture~~. As average topsoil moisture was significantly higher in the -115 cm GWT compared to the -165 cm GWT treatment for the sandy loam (38 % compared to 31 % WFPS) and silt loam (43 % compared to 33 % WFPS) soils, we accordingly expected promotion of OM mineralization at shallower GWT for these two soil textures. In loamy sand, shallower GWT only slightly increased topsoil moisture (28 % vs. 25 % WFPS), and so a minimal effect on OM decomposition may be expected. Surprisingly however, the GWT treatment induced moisture differences did not hold the expected effect on $C_{ryegrass}$ mineralization rates (Fig. 4). Moreover, cumulative 70-days $C_{ryegrass-min}$ proved lower for the shallower -115 cm GWT treatment (Fig. 5). However, these observations need to be interpreted with care as GWT treatment induced topsoil moisture differences only occurred after day 8, while mineralization rates were an order of magnitude greater during the first five days than later on. Notwithstanding this, about half to two thirds of the cumulative $C_{ryegrass-min}$ occurred early in the first weeks of the experiment. This ~~unwanted asynchrony makes implies~~ that the effect of GWT treatment on $C_{ryegrass-min}$ should not be evaluated based on the 70-days cumulative $C_{ryegrass-min}$, but rather only after several weeks, with GWT treatment imposed topsoil moisture differences effective by then. From the fitted kinetic model it emerges that the easily mineralizable $C_{ryegrass}$ pool had already been mineralized around day 14 in case of the loamy sand and sandy loam soil and day 20 for the silt loam soil. Thereafter, cumulative $C_{ryegrass-min}$ followed a relatively constant course, i.e. it was determined by the mineralization of a more stable $C_{ryegrass}$ pool, and ~~therefore the artefact in our experiment makes that~~ evaluation of GWT on topsoil $C_{ryegrass}$ mineralization should further solely be based on effects on mineralization rate of the more stable $C_{ryegrass}$ pool (k_s). We accordingly expected lower k_s estimates with deeper GWT. However, there was no effect of GWT on k_s for the loamy sand and sandy loam soils, while for the silt loam soils, it was even lower for the -115 cm than for the -165 cm GWT treatment (0.03 vs. 0.07 % d^{-1} , respectively). These results thus lead to ~~refutereject~~ the hypothesis that a higher GWT-induced topsoil moisture availability would promote topsoil C mineralization.

530 To interpret these seemingly illogical effects, it ~~needs is important to be borne in mind that~~consider the ~~relation~~complexity of ~~the relationship~~ between soil moisture and C mineralization ~~is complex, especially~~ when moisture fluctuates as ~~it did~~ in our

experiment, compared. This is in contrast to when it remains constant as is typically the case in typical experiments to infer the bell-shaped $\theta_v - \theta_v - C$ -min relationship where moisture is held constant. Notably it is well known that rewetting of dry soil triggers a pulse of microbial activity, resulting in a CO₂ flush, and this phenomenon is referred to as the “Birch effect” (Barnard et al., 2020; Birch, 1958). Former studies found that these respiration pulses enlarge with bigger change in soil moisture state upon rewetting, but also with increased drier pre-wetting soil conditions (Lado-Monserrat et al., 2014; Manzoni et al., 2020; Unger et al., 2010; Fischer, 2009; Harrison-Kirk et al., 2013). (Fischer, 2009; Harrison-Kirk et al., 2013; Lado-Monserrat et al., 2014; Manzoni et al., 2020; Unger et al., 2010). For example Harrison-Kirk et al. (2013) observed an increased Birch effect in silt loam soils when pre-wetting moisture state was reduced from 33 % to 22 % WFPS. Indeed particularly shortly after water applications later in our experiment, the rates tended to deviate between both GWT treatments, with a stronger temporary stimulation in the drier pre-wetting, -165 cm GWT (24 %, 27 % and 29 % WFPS) topsoil, when compared to the wetter, shallower, -115 cm GWT treatment (26 %, 35 %, 39 % WFPS for respectively the loamy sand, sandy loam and silt loam soils) (Fig. 4). Accordingly, a potential explanation could be that the drier condition of topsoil with deeper GWT may have amplified the Birch effect, i.e. rewetting C mineralization pulses caused by the watering events. In the light of this, it is possible that the expected enhancement of C mineralization (as represented by ks) due to increased moisture from capillary action under shallower GWT depths was offset in loamy sand and sandy loam soils, and perhaps even overruled in silt loam soils, by a stronger Birch effect in drier soils with less capillary moisture supply. In other words, the reduced mineralization rates observed in silt loam under a shallower GWT (ks) might be explained, at least in part, by a larger capillary moisture supply compared to the other soil texture and GWT combinations, although other factors, such as an intertwined effects between moisture and temperature, could also be at play. Accordingly, we cautiously postulate that the drier condition of topsoil with deeper GWT might have amplified the Birch effect, i.e. rewetting C mineralization pulses caused by the watering events. In summary, the anticipated enhancing effect of the GWT-induced moisture increase under shallower GWT depth through capillary action on C mineralization, as represented by ks, was presumably counteracted (in the case of the loamy sand and sandy loam soils) and even overruled (in the case of the silt loam soil) by the stronger Birch effect on drier soils, i.e. soils which were less affected by capillary moisture supply. In other words, the reduced mineralization rates found for silt loam under the shallower GWT (ks) was there were likely an indirect effect of a larger capillary moisture supply compared to the other texture and GWT combinations. As dry-wet cycles are expected to intensify with climate change in Europe, i.e. longer periods of drought followed by intense rainfall events (CEU. JRC., 2022), such GWT-induced control on moisture variations and consequences for the C budget must be carefully considered.

4.3 Consequences for modelling moisture and SOC balances on the larger spatial landscape scale

Based on our findings, it emerges that variation in GWT at relatively shallow depths as seen in a large part of our study area (North-West Europe) will contribute to spatial variation in topsoil moisture during periods of limited rainfall. Along, Meles et al. (2020) adapted the often used Topography Wetness Index by inversely weighing it with the GWT depth, resulting into a

more accurate index for low-slope landscapes, such as our study region. Ukkola et al. (2016) further reported that there is a systematic tendency among numerous land surface models to overestimate the consequences of drought. They attributed this to the assumption of a free-draining soil boundary in these models, i.e. no account is taken of a GWT. According to our results, ~~the simplified hydrological modules which calculate water fluxes between adjacent soil layers, but with free-drainage~~ lower boundaries, applied in ~~some many~~ soil C models, e.g. DAYCENT (Schimel et al., 2001), ~~BIOME-BGC (Thornton, P.E and Law, B.E., 2010), CERES (Gabrielle et al., 1995), CANDY (Franko et al., 1995)~~, would be less accurate for simulation of topsoil moisture during periods with limited rainfall, as these models do not incorporate capillary moisture flow rise in simulating recharge and presuppose that water draining from the soil profile is lost. ~~Just a limited number of biogeochemical models do include bidirectional water flow by defining or even calculating a dynamic GWT, e.g. The discrepancy with real in-~~ soil occurring physical processes becomes even larger for models that not use the Richards equation but instead employ a simplistic cascade bucket approach, such as DSSAT (Jones et al., 2003), BIOME-BGC (Thornton, P.E and Law, B.E., 2010), CERES (Gabrielle et al., 1995) and CANDY (Franko et al., 1995). Only a limited number of biogeochemical models calculating water fluxes also include bidirectional water flow between the saturated and unsaturated zones by defining or even calculating a dynamic GWT, e.g. LandscapeDNDC (Haas et al., 2013; Liebermann et al., 2018) and DAISY (Abrahamsen and Hansen, 2000). However, the question remains ~~regarding the accuracy of~~ how accurate such models ~~in simulating~~ simulate upward moisture supply and ~~the relationship between moisture and~~ relate C mineralization to water content, particularly under dry conditions.

With respect to the latter question, Moyano et al. (2013) concluded that the predictive capacity of current models is still questionable and that these models should incorporate physically-based transport mechanisms for solutes, coupled with a more detailed portrayal of biological reactions to alterations in soil moisture. In order to reproduce respiration patterns caused by phenomena like the Birch effect, Evans et al. (2016) accordingly argued that models should include physicochemical mechanisms linking water content to microbial growth and to diffusion.

Although in our 70-days experiment two GWTs did not suggest a severe impact of GWT on C mineralization, we should not generally conclude that capillary moisture supply is an irrelevant process to be taken along in soil C models. When meteorological droughts extend over longer periods than the simulated period here, the combination of limited moisture supply and increased evaporation might not only lead to soil moisture deficits but it should also diminish groundwater recharge over the longer term (Brauns et al., 2020). This process could then lead to a further reduction of topsoil moisturewater content, creating a positive feedback system. As a result, in turn GWT could then deepen further than usually anticipated during summer, which was in fact also eminently observed over the past years in e.g. Flanders, Belgium (VMM et al., 2022). Especially for croplands in North-West Europe with a GWT close to the evaporation characteristic length, a tipping point in their moisture balance may be reached under future expected prolonged periods of drought in spring or summer. We conclude that soil models that are able to simulate upward moisture supply through capillary action and phenomena such as the Birch effect are better positioned to anticipate soil C trends.

5 Conclusion

600 Variation in GWT depth, typically to occur in North-West European arable land, was found to significantly impact the soil moisture profile of ~~lighter-finer~~-textured soils during periods with limited rainfall. The expected texture-dependent ~~ey of~~ reach of soil moistening by capillary rise could here be quantified to 85 cm above the GWT for loamy sand soils and minimally to 135 cm for sandy loam and silt loam soils. For situations where the GWT is within these ranges our findings should motivate to include bidirectional water flow, i.e. drainage and capillary ~~rise~~transport, in soil models. Nevertheless, contrary to our hypothesis, a rise of GWT did not enhance decomposition of the added substrate (ryegrass). ~~Moreover, we found that after rewetting, C mineralization pulses were larger for the deepest GWT treatment. We hypothesize that, as soil was drier for the deeper GWT owing to less capillary moisture supply, the imposed rewetting events caused stronger Birch effects. Hence, not just topsoil moisture state itself, but also the extent of its fluctuation over time, probably culminates into the here overall observed net effect of GWT depth onto C mineralization. To use empirical data from experiments like this to improve soil~~

605 ~~models, further studies will be needed to deconvolute the effects of soil moisture regimes on soil C mineralization. Moreover, it appeared that the magnitude of the Birch effect, i.e. C pulses after rewetting, was inversely affected by the extent of capillary moisture supply during the period of drought. The overall net effect of the GWT depth on C mineralization is therefore a trade-off and illustrates the complexity of soil moisture controls on soil biological processes with fluctuating moisture regime. During prolonged periodic droughts, expected to become more frequent under future climate, correct simulation of the mostly~~

610 ~~neglected capillary ~~rise~~-moisture ~~supply-transport~~ may become imperative for reliable simulation of C cycling in agricultural land in North-West Europe.~~

Appendix A

620

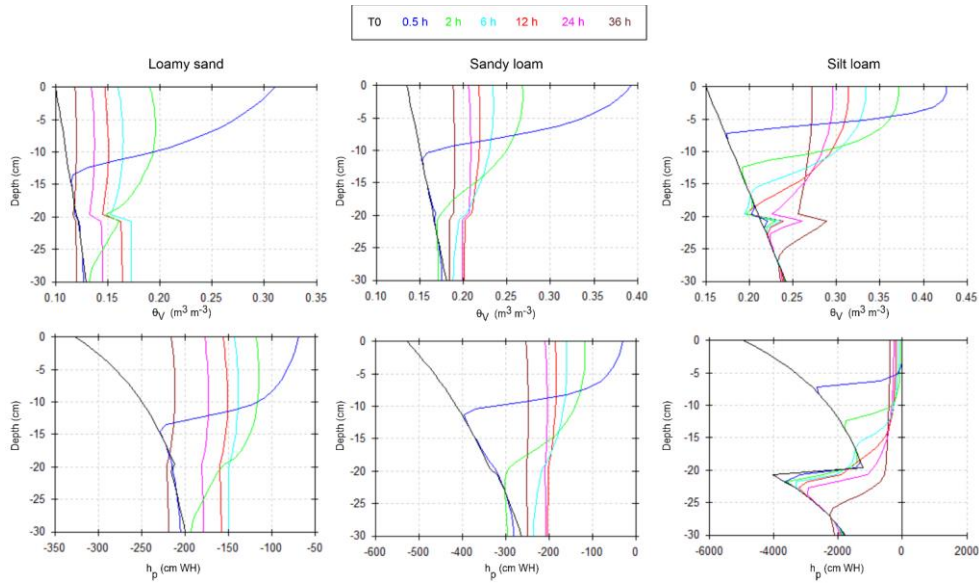


Figure A1: Simulations using HYDRUS-1D to determine when the water, added at T0, reached the lower boundary of the repacked topsoil containing ^{13}C -labeled ryegrass (at 20 cm depth). A 24-hour period after water addition was found sufficient for all three soil textures (loamy sand, sandy loam, and silt loam) to reach an approximately constant moisture level across the topsoil layer.


Met opmaak: Bijschrift

heeft opmaak toegepast: Superscript

625 Table A1: Comparison of volumetric moisture content measured with sensors at -10 cm and at the start and the end of the incubation of each groundwater treatment (“validation”). Sensor values indicated with “*” are subjected to a correction via linear regression (see Fig. A2).

Location cropland (Texture)	Column replicate	Point in time	θ_v (m ³ m ⁻³)				
			GWT -165 cm		GWT -115 cm		
			sensor	validation	sensor	validation	
Kruisem							
(Loamy sand)	1	Start	0.155	0.150	0.132	0.150	
		End	0.092	0.110	0.123	0.164	
	2	Start	0.139	0.150	0.122	0.150	
		End	0.125	0.097	0.126	0.155	
	3	Start	0.122	0.150	0.142	0.150	
		End	0.086	0.093	0.156	0.148	
	4	Start	0.114	0.150	0.103	0.150	
		End	0.099	0.104	0.115	0.182	
Bottelare							
(Sandy loam)	1	Start	0.205	0.218	0.106*	0.218	
		End	0.122	0.137	0.092*	0.156	
	2	Start	0.223	0.218	0.212	0.218	
		End	0.132	0.124	0.158	0.176	
	3	Start	0.205	0.218	0.152*	0.218	
		End	0.109	0.118	0.110*	0.168	
	4	Start	0.225	0.218	0.145*	0.218	
		End	0.121	0.117	0.103*	0.162	
	Oosterzele						
	(Silt loam)	1	Start	0.250	0.280	0.247	0.280
End			0.103	0.128	0.211	0.242	
2		Start	0.278	0.280	0.259	0.280	
		End	0.148	0.145	0.170	0.204	
3		Start	0.241	0.280	0.266	0.280	
		End	0.125	0.146	0.176	0.170	
4		Start	0.245	0.280	0.272	0.280	
		End	0.109	0.130	0.171	0.171	

630

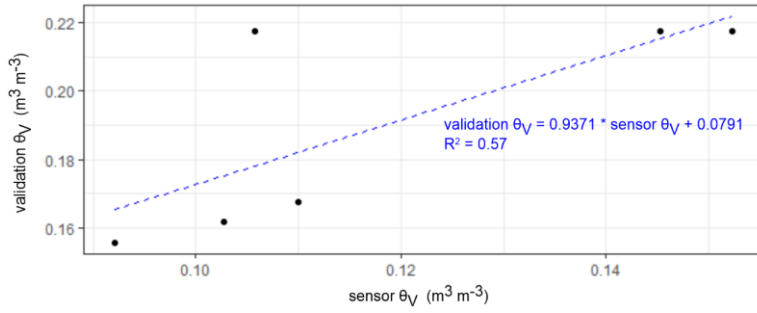

635 **Figure A2:** Sensors installed at a depth of -10 cm in sandy loam columns 1, 3 and 4 during GWT treatment -115 cm were subjected to a correction via linear regression.

Appendix B

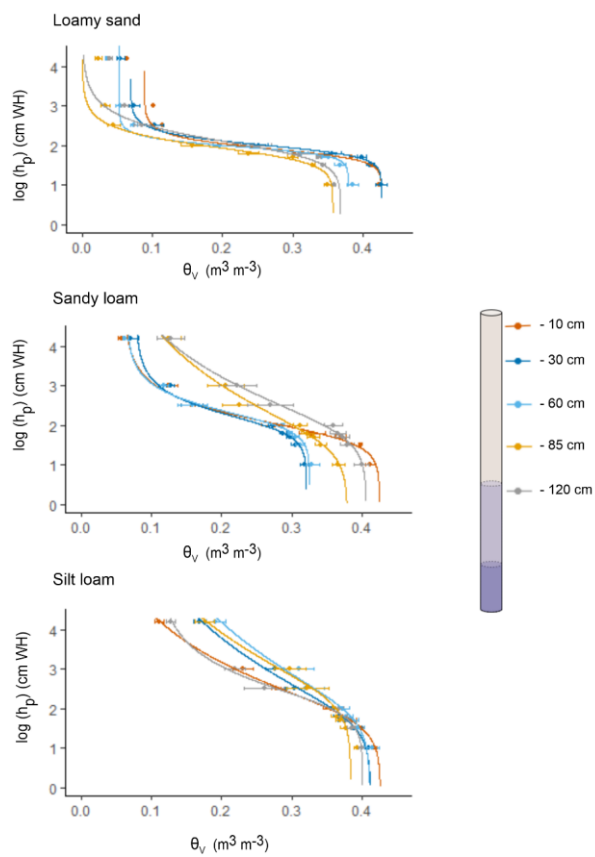


Figure B1: Soil water retention curves for different depths in our soil columns ($n=4$; except at -10 cm, $n = 2$).

Data / Code availability

Raw data and R scripts will be made available upon request.

Author contribution

645 Astrid François: Conceptualization, Methodology, Formal analysis, Visualization, Writing – original draft preparation. Orly
Mendoza: Visualization, Writing – review & editing. Junwei Hu: Formal analysis, Writing – review & editing. Pascal Boeckx:
Funding acquisition, Writing – review & editing. Wim Cornelis: Funding acquisition, Writing – review & editing. Stefaan De
Neve: Writing – review & editing. Steven Sleutel: Conceptualization, Methodology, Funding acquisition, Supervision, Writing
– review & editing.

650 Competing interests

Some authors are members of the editorial board of journal SOIL.

Acknowledgements

This study was funded by Flanders Research Foundation (FWO: G066020N). We would like to thank Stijn Willen, Kris
655 François and Viktor François for helping with the technical side of the laboratory setup. Further, we would like to
acknowledge the support we got from Patric Buggenhout, Wim De Smet and Hugo Hofman for allowing us to take the soil
column samples in their fields.

References

- 660 Aalbers, E. E., Van Meijgaard, E., Lenderink, G., De Vries, H., and Van Den Hurk, B. J. J. M.: The 2018 west-central European drought projected in a warmer climate: how much drier can it get?, *Nat. Hazards Earth Syst. Sci.*, 23, 1921–1946, <https://doi.org/10.5194/nhess-23-1921-2023>, 2023.
- Abrahamsen, P. and Hansen, S.: Daisy: an open soil-crop-atmosphere system model, *Environmental Modelling and Software*, 15, 313–330, [https://doi.org/10.1016/S1364-8152\(00\)00003-7](https://doi.org/10.1016/S1364-8152(00)00003-7), 2000.
- 665 Awan, U. K., Tischbein, B., and Martius, C.: A GIS-based approach for up-scaling capillary rise from field to system level under soil–crop–groundwater mix, *Irrig Sci.*, 32, 449–458, <https://doi.org/10.1007/s00271-014-0441-5>, 2014.
- Babajimopoulos, C., Panoras, A., Georgoussis, H., Arampatzis, G., Hatzigiannakis, E., and Papamichail, D.: Contribution to irrigation from shallow water table under field conditions, *Agricultural Water Management*, 92, 205–210, <https://doi.org/10.1016/j.agwat.2007.05.009>, 2007.
- 670 Balugani, E., Lubczynski, M. W., Van Der Tol, C., and Metselaar, K.: Testing three approaches to estimate soil evaporation through a dry soil layer in a semi-arid area, *Journal of Hydrology*, 567, 405–419, <https://doi.org/10.1016/j.jhydrol.2018.10.018>, 2018.
- Barnard, R. L., Blazewicz, S. J., and Firestone, M. K.: Rewetting of soil: Revisiting the origin of soil CO₂ emissions, *Soil Biology and Biochemistry*, 147, 107819, <https://doi.org/10.1016/j.soilbio.2020.107819>, 2020.
- 675 Bates, D., ~~Maechler~~Mächler, M., Bolker, B., ~~and~~ Walker, S., ~~Christensen, R. H. B., Singmann, H., Dai, B., Scheipl, F., Grothendieck, G., Green, P., Fox, J., Bauer, A., Krivitsky, P. N., and Tanaka, E.~~ *lme4*: Fitting Linear Mixed-Effects Models using “Eigen” and S4 *Using lme4*, *J. Stat. Softw.*, 67, <https://github.com/jme4/lme4,2023doi.org/10.18637/jss.v067.i01,2015>.
- Birch, H. F.: The effect of soil drying on humus decomposition and nitrogen availability, *Plant Soil*, 10, 9–31, <https://doi.org/10.1007/BF01343734>, 1958.
- 680 Brauns, B., Cuba, D., Bloomfield, J. P., Hannah, D. M., Jackson, C., Marchant, B. P., Heudorfer, B., Van Loon, A. F., Bessière, H., Thunholm, B., and Schubert, G.: The Groundwater Drought Initiative (GDI): Analysing and understanding groundwater drought across Europe, *Proc. IAHS*, 383, 297–305, <https://doi.org/10.5194/piahs-383-297-2020>, 2020.
- CEU. JRC.: Drought in Europe: August 2022 : GDO analytical report., Publications Office, LU, 2022.
- 685 [Dondeyne, S., Vanierschot, L., Langohr, R., Ranst, E. V., and Deckers, J.: The soil map of the Flemish region converted to the 3rd edition of the World Reference Base for soil resources, https://doi.org/10.13140/2.1.4381.4089, 2014.](https://doi.org/10.13140/2.1.4381.4089)
- Embry, I., Hoos, A., and Diehl, T. H.: *ie2misc*: Irucka Embry’s Miscellaneous USGS Functions, <https://gitlab.com/embry/CRAN.R-project.org/package=ie2misc>, 2023.
- Evans, S., Dieckmann, U., Franklin, O., and Kaiser, C.: Synergistic effects of diffusion and microbial physiology reproduce the Birch effect in a micro-scale model, *Soil Biology and Biochemistry*, 93, 28–37, <https://doi.org/10.1016/j.soilbio.2015.10.020>, 2016.
- 690 Feddes, R. A., Kabat, P., Van Bakel, P. J. T., Bronswijk, J. J. B., and Halbertsma, J.: Modelling soil water dynamics in the unsaturated zone — State of the art, *Journal of Hydrology*, 100, 69–111, [https://doi.org/10.1016/0022-1694\(88\)90182-5](https://doi.org/10.1016/0022-1694(88)90182-5), 1988.

- 695 Fiola, J. C., Rabenhorst, M. C., Scaduto, E., Seitz, C. R., and Rankin, K. M. S.: Soil biogeochemistry of the capillary fringe in laboratory mesocosms with contrasting soil textures, *Soil Sci. Soc. Am. j.*, 84, 1011–1021, <https://doi.org/10.1002/saj2.20076>, 2020.
- Fischer, T.: Substantial rewetting phenomena on soil respiration can be observed at low water availability, *Soil Biology and Biochemistry*, 41, 1577–1579, <https://doi.org/10.1016/j.soilbio.2009.04.009>, 2009.
- Franko, U., Oelschlägel, B., and Schenk, S.: Simulation of temperature-, water- and nitrogen dynamics using the model CANDY, *Ecological Modelling*, 81, 213–222, [https://doi.org/10.1016/0304-3800\(94\)00172-E](https://doi.org/10.1016/0304-3800(94)00172-E), 1995.
- 700 Gabrielle, B., Menasseri, S., and Houot, S.: Analysis and Field Evaluation of the Ceres Models Water Balance Component, *Soil Science Soc of Amer J*, 59, 1403–1412, <https://doi.org/10.2136/sssaj1995.03615995005900050029x>, 1995.
- Grünberger, O., Michelot, J. L., Bouchaou, L., Macaigne, P., Hsissou, Y., and Hammecker, C.: Capillary rise quantifications based on in-situ artificial deuterium peak displacement and laboratory soil characterization, *Hydrol. Earth Syst. Sci.*, 15, 1629–1639, <https://doi.org/10.5194/hess-15-1629-2011>, 2011.
- 705 Haas, E., Klatt, S., Fröhlich, A., Kraft, P., Werner, C., Kiese, R., Grote, R., Breuer, L., and Butterbach-Bahl, K.: LandscapeDNDC: a process model for simulation of biosphere–atmosphere–hydrosphere exchange processes at site and regional scale, *Landscape Ecol*, 28, 615–636, <https://doi.org/10.1007/s10980-012-9772-x>, 2013.
- Harrison-Kirk, T., Beare, M. H., Meenken, E. D., and Condron, L. M.: Soil organic matter and texture affect responses to dry/wet cycles: Effects on carbon dioxide and nitrous oxide emissions, *Soil Biology and Biochemistry*, 57, 43–55, <https://doi.org/10.1016/j.soilbio.2012.10.008>, 2013.
- 710 Hartig, F.: DHARMA: residual diagnostics for hierarchical (multi-level/mixed) regression models, <https://github.com/florianhartig/DHARMA>, 2020.
- Hillel, D.: *Introduction to Environmental Soil Physics*, Elsevier, <https://doi.org/10.1016/B978-0-12-348655-4.X5000-X>, 2003.
- Huo, S., Jin, M., Liang, X., Li, X., and Hao, H.: Estimating impacts of water-table depth on groundwater evaporation and recharge using lysimeter measurement data and bromide tracer, *Hydrogeol J*, 28, 955–971, <https://doi.org/10.1007/s10040-019-02098-6>, 2020.
- [https://doi.org/10.1016/S1161-0301\(02\)00107-7](https://doi.org/10.1016/S1161-0301(02)00107-7), 2003.
- 720 Jorenush, M. H. and Sepaskhah, A. R.: Modelling capillary rise and soil salinity for shallow saline water table under irrigated and non-irrigated conditions, *Agricultural Water Management*, 61, 125–141, [https://doi.org/10.1016/S0378-3774\(02\)00176-2](https://doi.org/10.1016/S0378-3774(02)00176-2), 2003.
- Keeling, C. D.: The concentration and isotopic abundances of atmospheric carbon dioxide in rural areas, *Geochimica et Cosmochimica Acta*, 13, 322–334, [https://doi.org/10.1016/0016-7037\(58\)90033-4](https://doi.org/10.1016/0016-7037(58)90033-4), 1958.
- 725 Kelleners, T. J., Soppe, R. W. O., Ayars, J. E., Šimůnek, J., and Skaggs, T. H.: Inverse Analysis of Upward Water Flow in a Groundwater Table Lysimeter, *Vadose Zone Journal*, 4, 558–572, <https://doi.org/10.2136/vzj2004.0118>, 2005.
- Kroes, J., Supit, I., Van Dam, J., Van Walsum, P., and Mulder, M.: Impact of capillary rise and recirculation on simulated crop yields, *Hydrol. Earth Syst. Sci.*, 22, 2937–2952, <https://doi.org/10.5194/hess-22-2937-2018>, 2018.

- 730 Lado-Monserrat, L., Lull, C., Bautista, I., Lidón, A., and Herrera, R.: Soil moisture increment as a controlling variable of the “Birch effect”. Interactions with the pre-wetting soil moisture and litter addition, *Plant Soil*, 379, 21–34, <https://doi.org/10.1007/s11104-014-2037-5>, 2014.
- Lane, K. S. and Washburn, D. E.: Capillarity tests by capillarimeter and by soil filled tubes, *Highway Research Board Proceedings*, 26, 460–473, 1947.
- 735 Lenth, R. V., Ben Bolker, Paul Buerkner, Iago Giné-Vázquez, Maxime Herve, Maarten Jung, Jonathon Love, Fernando Miguez, Hannes Riebl, and Henrik Singmann: emmeans: Estimated Marginal Means, aka Least-Squares Means, <https://github.com/rvlenth/emmeans>, 2024.
- Lewis, J. and Sjöstrom, J.: Optimizing the experimental design of soil columns in saturated and unsaturated transport experiments, *Journal of Contaminant Hydrology*, 115, 1–13, <https://doi.org/10.1016/j.jconhyd.2010.04.001>, 2010.
- 740 Li, H., Van Den Bulcke, J., Mendoza, O., Deroo, H., Haesaert, G., Dewitte, K., De Neve, S., and Sleutel, S.: Soil texture controls added organic matter mineralization by regulating soil moisture—evidence from a field experiment in a maritime climate, *Geoderma*, 410, 115690, <https://doi.org/10.1016/j.geoderma.2021.115690>, 2022.
- Li, H., François, A., Wang, X., Zhang, S., Mendoza, O., De Neve, S., Dewitte, K., and Sleutel, S.: Field-scale assessment of direct and indirect effects of soil texture on organic matter mineralization during a dry summer, *Science of The Total Environment*, 899, 165749, <https://doi.org/10.1016/j.scitotenv.2023.165749>, 2023.
- 745 [Liang, G., Reed, S. C., Stark, J. M., and Waring, B. G.: Unraveling mechanisms underlying effects of wetting–drying cycles on soil respiration in a dryland. *Biogeochemistry*, 166, 23–37, <https://doi.org/10.1007/s10533-023-01085-0>, 2023.](#)
- Liebermann, R., Breuer, L., Houska, T., Klatt, S., Kraus, D., Haas, E., Müller, C., and Kraft, P.: Closing the N-Budget: How Simulated Groundwater-Borne Nitrate Supply Affects Plant Growth and Greenhouse Gas Emissions on Temperate Grassland, *Atmosphere*, 9, 407, <https://doi.org/10.3390/atmos9100407>, 2018.
- 750 Malik, A. A. and Bouskill, N. J.: Drought impacts on microbial trait distribution and feedback to soil carbon cycling, *Functional Ecology*, 36, 1442–1456, <https://doi.org/10.1111/1365-2435.14010>, 2022.
- Malik, R. S., Kumar, S., and Malik, R. K.: Maximal capillary rise flux as a function of height from the water table, *Soil Science*, 148, 322–326, 1989.
- 755 Manzoni, S., Schimel, J. P., and Porporato, A.: Responses of soil microbial communities to water stress: results from a meta-analysis, *Ecology*, 93, 930–938, <https://doi.org/10.1890/11-0026.1>, 2012.
- Manzoni, S., Moyano, F., Kätterer, T., and Schimel, J.: Modeling coupled enzymatic and solute transport controls on decomposition in drying soils, *Soil Biology and Biochemistry*, 95, 275–287, <https://doi.org/10.1016/j.soilbio.2016.01.006>, 2016.
- 760 Manzoni, S., Chakrawal, A., Fischer, T., Schimel, J. P., Porporato, A., and Vico, G.: Rainfall intensification increases the contribution of rewetting pulses to soil heterotrophic respiration, *Biogeosciences*, 17, 4007–4023, <https://doi.org/10.5194/bg-17-4007-2020>, 2020.
- Meles, M. B., Younger, S. E., Jackson, C. R., Du, E., and Drover, D.: Wetness index based on landscape position and topography (WILT): Modifying TWI to reflect landscape position, *Journal of Environmental Management*, 255, 109863, <https://doi.org/10.1016/j.jenvman.2019.109863>, 2020.

- 765 Mendoza, O., De Neve, S., Deroo, H., Li, H., François, A., and Sleutel, S.: Soil Organic Carbon Mineralisation is Controlled by the Application Dose of Exogenous Organic Matter, *SSRN Journal*, <https://doi.org/10.2139/ssrn.4258872>, 2022.
- Moyano, F. E., Manzoni, S., and Chenu, C.: Responses of soil heterotrophic respiration to moisture availability: An exploration of processes and models, *Soil Biology and Biochemistry*, 59, 72–85, <https://doi.org/10.1016/j.soilbio.2013.01.002>, 2013.
- 770 Mozaffari, H., Moosavi, A. A., and Dematte, J. A. M.: Estimating particle-size distribution from limited soil texture data: Introducing two new methods, *Biosystems Engineering*, 216, 198–217, <https://doi.org/10.1016/j.biosystemseng.2022.02.007>, 2022.
- Pinheiro, J., and Bates, D., ~~DebRoy, S., Sarkar, D., EISPACk authors, Heisterkamp, S., Van Willigen, B., Ranke, J., and R Core Team: nlme: Linear and Nonlinear, Mixed-Effects Models, in S and S-PLUS. Springer-Verlag, New York, <https://svn.r-project.org/R/packages/trunk/nlme/>, 2023~~ [10.1007/b98882](https://doi.org/10.1007/b98882), 2000.
- 775 Prathapar, S. A., Robbins, C. W., Meyer, W. S., and Jayawardane, N. S.: Models for estimating capillary rise in a heavy clay soil with a saline shallow water table, *Irrig Sci*, 13, <https://doi.org/10.1007/BF00190238>, 1992.
- [R Core Team: R: A Language and Environment for Statistical Computing., 2021.](#)
- 780 Rezaeezad, F., Couture, R.-M., Kovac, R., O'Connell, D., and Van Cappellen, P.: Water table fluctuations and soil biogeochemistry: An experimental approach using an automated soil column system, *Journal of Hydrology*, 509, 245–256, <https://doi.org/10.1016/j.jhydrol.2013.11.036>, 2014.
- Royal Meteorological Institute: Klimatologische overzichten van 2022, Koninklijk Meteorologisch Instituut, 2022.
- Schielzeth, H. and Nakagawa, S.: Nested by design: model fitting and interpretation in a mixed model era, *Methods Ecol Evol*, 4, 14–24, <https://doi.org/10.1111/j.2041-210x.2012.00251.x>, 2013.
- 785 Schimel, D., Ojima, D., Hartman, M., Parton, W., Brenner, J., Mosier, A., and Del Grosso, S.: Simulated Interaction of Carbon Dynamics and Nitrogen Trace Gas Fluxes Using the DAYCENT Model, in: *Modeling Carbon and Nitrogen Dynamics for Soil Management*, edited by: Hansen, S., Shaffer, M., and Ma, L., CRC Press, <https://doi.org/10.1201/9781420032635.ch8>, 2001.
- Shah, N., Nachabe, M., and Ross, M.: Extinction Depth and Evapotranspiration from Ground Water under Selected Land Covers, *Groundwater*, 45, 329–338, <https://doi.org/10.1111/j.1745-6584.2007.00302.x>, 2007.
- 790 Shaw, C. F. and Smith, A.: MAXIMUM HEIGHT OF CAPILLARY RISE STARTING WITH SOIL AT CAPILLARY SATURATION, *HILGARDIA*, 2, 399–409, 1927.
- Shokri, N. and Salvucci, G. D.: Evaporation from Porous Media in the Presence of a Water Table, *Vadose Zone Journal*, 10, 1309–1318, <https://doi.org/10.2136/vzj2011.0027>, 2011.
- Skopp, J., Jawson, M. D., and Doran, J. W.: Steady-State Aerobic Microbial Activity as a Function of Soil Water Content, *Soil Science Society of America Journal*, 54, 1619–1625, <https://doi.org/10.2136/sssaj1990.03615995005400060018x>, 1990.
- 795 Sleutel, S., De Neve, S., Prat Roibás, M. R., and Hofman, G.: The influence of model type and incubation time on the estimation of stable organic carbon in organic materials, *European J Soil Science*, 56, 505–514, <https://doi.org/10.1111/j.1365-2389.2004.00685.x>, 2005.
- Thornton, P.E and Law, B.E: Biome BCG version 4.2: Theoretical Framework of Biome-BCG, 2010.

- 800 Ukkola, A. M., De Kauwe, M. G., Pitman, A. J., Best, M. J., Abramowitz, G., Haverd, V., Decker, M., and Haughton, N.: Land surface models systematically overestimate the intensity, duration and magnitude of seasonal-scale evaporative droughts, *Environ. Res. Lett.*, 11, 104012, <https://doi.org/10.1088/1748-9326/11/10/104012>, 2016.
- Unger, S., Máguas, C., Pereira, J. S., David, T. S., and Werner, C.: The influence of precipitation pulses on soil respiration – Assessing the “Birch effect” by stable carbon isotopes, *Soil Biology and Biochemistry*, 42, 1800–1810, <https://doi.org/10.1016/j.soilbio.2010.06.019>, 2010.
- 805 VMM, Kern Beheer en Investerings Waterlopen, and Kern Planning Integraal Waterbeleid: Toestand van het watersysteem - 8 september 2022, Dokter De Moorstraat 24-26, 9300 Aalst, 2022.
- Wang, L., Manzoni, S., Ravi, S., Riveros-Iregui, D., and Caylor, K.: Dynamic interactions of ecohydrological and biogeochemical processes in water-limited systems, *Ecosphere*, 6, art133, <https://doi.org/10.1890/ES15-00122.1>, 2015.
- 810 Yan, Z., Bond-Lamberty, B., Todd-Brown, K. E., Bailey, V. L., Li, S., Liu, C., and Liu, C.: A moisture function of soil heterotrophic respiration that incorporates microscale processes, *Nat Commun*, 9, 2562, <https://doi.org/10.1038/s41467-018-04971-6>, 2018.
- Yang, F., Zhang, G., Yin, X., Liu, Z., and Huang, Z.: Study on capillary rise from shallow groundwater and critical water table depth of a saline-sodic soil in western Songnen plain of China, *Environ Earth Sci*, 64, 2119–2126, <https://doi.org/10.1007/s12665-011-1038-4>, 2011.
- 815 Zacháry, D., Filep, T., Jakab, G., Varga, G., Ringer, M., and Szalai, Z.: Kinetic parameters of soil organic matter decomposition in soils under forest in Hungary, *Geoderma Regional*, 14, e00187, <https://doi.org/10.1016/j.geodrs.2018.e00187>, 2018.
- Zipper, S. C., Soylu, M. E., Booth, E. G., and Loheide, S. P.: Untangling the effects of shallow groundwater and soil texture as drivers of subfield-scale yield variability: YIELD, GROUNDWATER, SOIL, *Water Resour. Res.*, 51, 6338–6358, <https://doi.org/10.1002/2015WR017522>, 2015.

820