

The effect of beaver dams on the physico-chemical properties of stream water in the Carpathians (Poland and Slovakia)

Joanna Wąs¹, Joanna P. Siwek², Małgorzata Kijowska-Strugała¹, Elżbieta Gorczyca²

¹Department of Geoenvironmental Research, Institute of Geography and Spatial Organization, Polish Academy of Sciences, św. Jana 22, 31-018 Kraków, Poland

²Institute of Geography and Spatial Management, Jagiellonian University in Kraków, ul. Gronostajowa 7, 30-387 Kraków, Poland

Correspondence to: Joanna Wąs (joanna.was@zg.pan.krakow.pl)

Abstract. In recent decades, the population of the Eurasian beaver (*Castor fiber*) has undergone a rapid recovery from near extinction to abundance across large areas of Europe. The ability of this species to build dams of varying durability and extent has a significant impact on ecological processes, making beaver reintroduction an important environmental factor in recolonised areas. Although the effects of beaver dams on stream water chemistry have been studied extensively, general conclusions are often limited by site-specific conditions. Therefore, the aim of this study was to assess the impact across the seasons of the flooding extent and age of beaver pond sequences on the physico-chemical properties of the water in and below beaver ponds compared to upstream channel sections.

The study was conducted on nine beaver-inhabited streams distributed across the Western Carpathians (Poland and Slovakia). The beaver ponds were divided into two categories based on flooding extent: overflowing the river banks, or confined to the river channel (in-channel). Ponds were classified into three age categories: young (≤ 3 years old), moderate (4–9), and old (≥ 10). The age of the ponds ranged from ≤ 3 years to ≥ 10 years. Water samples were collected above, within, and below the beaver pond sequences under baseflow conditions during four seasons in 2022–2023.

The results showed that beaver dams have a strong impact on some physico-chemical streamwater parameters during warm periods, when high temperatures accelerate biogeochemical activity. In particular, beaver ponds were associated with increase in water temperature and decrease in dissolved oxygen, pH, NO_3^- and SO_4^{2-} concentrations. The age of the beaver ponds had a more pronounced effect was a more statistically significant factor in altering stream water chemistry than the pond type/flooding extent of the ponds. There was a greater decrease in dissolved oxygen and pH (throughout the study period) and SO_4^{2-} concentrations (in spring and summer) in older ponds compared to younger ones. These changes might be regulated by the decomposition and aerobic/anaerobic oxidation of organic matter, which is more abundant in older ponds. Moreover, greater decreases in NO_3^- concentrations were observed in overflowing ponds than within in-channel ponds, which suggests a more intense denitrification process in the former. The denitrification process requires anoxic conditions, which were favoured in overflowing ponds due to their higher temperatures and longer water residence time compared to in-channel ponds. The decrease in NO_3^- concentrations may also be due to the increased uptake

~~of mineral nitrogen by vegetation and the accumulation of nitrogen-rich organic sediment at the bottom of overflowing ponds. Overall, the results suggest that seasonal conditions and pond age are important factors influencing the biogeochemical effects of beaver dams in mountain streams. However, m~~Most of the effects observed within the ponds were, to some extent, attenuated in downstream river sections. ~~However, further research based on a larger dataset and a more frequent sampling strategy is needed to identify the biogeochemical processes that occur in beaver ponds under specific hydro-meteorological conditions.~~

1 Introduction

Beavers, the two semi-aquatic species of the genus *Castor*, significantly alter riverine ecosystems through their foraging activity and construction of dams, canals, burrows and lodges (Rosell et al., 2005; Brazier et al., 2021). Their influence on hydrological, geomorphological and ecological processes makes them perfect examples of environmental engineers and a keystone species (Jones, 1994; Holtmeier, 2015). Their ability to build dams is particularly important because of the strong impact their structures have on the hydrogeomorphological system (Gurnell, 1998). The physical features of the ponds they create and their influence on biogeochemical cycles affect habitat availability for other organisms and lead to increased biodiversity (Wright et al., 2002; Larsen et al., 2021). In addition, beavers are recognised as providers of important ecosystem services, for example, in the way their activities support water retention and purification (Puttock et al., 2017; Thompson et al., 2021).

The Eurasian beaver (*Castor fiber*) was once widespread across ~~both continents~~Europe and Asia, until excessive hunting resulted in the disappearance of the species from most of its former range. By the beginning of the 20th century, only eight remnant populations were left (Nolet and Rosell, 1998). Subsequent reintroductions, hunting restrictions and natural dispersal led to a substantial population increase on both continents and the near re-establishment of the species distribution in some countries, e.g. in Poland (Halley et al., 2020). ~~According to the data collected by Wróbel (2020), the highest beaver population density among the six Carpathian countries is currently to be found in Poland, followed by Slovakia.~~ A few centuries before the species disappeared from the lowest parts of the Polish Carpathians in the 19th century, it was extirpated from more elevated catchments (Żurowski, 1986). Beaver releases in Poland, conducted since the 1940s, have mainly focused on the lowlands (Dzięciółowski and Gozdziwski, 1999). The first reintroduction programme aimed at re-establishing Carpathian populations was successfully carried out between 1980 and 1985 (Żurowski and Kasperczyk, 1990). The beavers now present in the northern part of Slovakia originated solely from the Polish reintroduction (Pachinger and Hulik, 1999), and were first documented along the Ondava river in 1981 (Valachovič, 2012). Since then, both countries have observed substantial increases in the range and abundance of their recovering beaver populations (Čanády et al., 2016; Wróbel and Krzysztofia-Kaniewska, 2020).

In recent decades, there has been a growing interest in studying the impact of beavers on river water chemistry. Understanding the implications of beaver activity for water resource management and nature conservation (Bason et al., 2017; Čiuldiēnē et

— sformatowano: Czcionka: Kursywa

al., 2020; Stevenson et al., 2022; Bylak et al., 2024) is particularly important in the face of contemporary environmental crises. Most beaver-related studies have focused on the areas inhabited by the Canadian beaver (*Castor canadensis*) (Halley et al., 2020; Larsen et al., 2021). It is commonly assumed that both species exert a similar influence on the environment, even though the Eurasian beaver expresses less advanced building activity in terms of the number and size of the structures it creates (Gurnell, 1998; Rosell et al., 2005), and inhabits different ecosystems. Thus the impacts of the Eurasian beaver are still relatively understudied, even as its significance for shaping fluvial processes is growing due to the increasing population. Moreover, to our knowledge, most of the studies on the impact of the Eurasian beaver on water properties have focused on lowland areas (Puttock et al., 2018; Čiuldienė et al., 2020; Kalvītė et al., 2021; Bylak et al., 2024) despite the high activity rates of the species and its influence on hydrogeomorphological processes in mountain regions (Giriat et al., 2016; Gorczyca et al., 2018). The species has recently become a prominent environmental factor across the Carpathian mountains after centuries of absence, making an understanding of its impact in this area particularly important.

Beaver dams reduce water flow velocity, thereby promoting the sedimentation of suspended solids and increased nutrient retention (Maret et al., 1987; Puttock et al., 2018). Consequently, beaver ponds may act as substantial catchment-scale sinks for nitrogen (Lazar et al., 2015). The accumulation of organic carbon and phosphorus is also commonly observed (Lizarralde et al., 1996; Wohl et al., 2012; Čiuldienė et al., 2020). Moreover, the filtering effect of beaver dams results in the attenuation of heavy metal concentrations downstream of beaver ponds compared to upstream river sections (Čiuldienė et al., 2020; Murray et al., 2021). The influence of beavers on river water quality is often recognised as positive because they enhance self-purification processes. Consequently, they have the potential to be considered as a restoration tool for degraded streams (Bason et al., 2017; Puttock et al., 2017; Bylak et al., 2024). However, The beaver ponds may also act as hotspots for greenhouse gas emissions, such as CO₂, CH₄, and N₂O (Smufer et al., 2023; Fairfax and Westbrook, 2024). most studies highlight the role of seasonal changes in source and sink transitions, as these depend. The biogeochemical role of ponds may shift seasonally, with ponds functioning as sources or sinks of nutrients and products of their transformations, depending on flow rates and ecosystem productivity (Maret et al., 1987; Wegener et al., 2017; Murray et al., 2021; Hallberg et al. 2026).

The impact of a particular beaver dam on the physico-chemical stream water parameters may not reflect generally recognised trends, due to the influence of local site-specific characteristics (Kalvītė et al., 2021). Brazier et al. (2021) also pointed out the potential differences in the impact of a single pond compared to a pond sequence of multiple ponds. Such issues may get in the way of deriving general conclusions about the impact of complex beaver-mediated modifications to river channels, especially when contradictory patterns are observed (Ecke et al., 2017; Majerova et al., 2015; Weber et al., 2017). For instance, both an increase and decrease in phosphate concentrations were recorded downstream to beaver dams (Klotz, 1998; Larsen et al., 2021). The identification of factors that reflect the diversity of beaver ponds and their impact on water chemistry would improve our understanding of the effects of beaver presence in river systems. The age of beaver ponds has often been proposed as such a feature in previous studies on the upstream-downstream gradients of physico-chemical parameters in beaver-occupied streams. For example, Bason et al. (2017) found a greater reduction of suspended solids in older dam sequences compared to

younger ones. Metal sequestration rates and sediment organic matter content inside beaver ponds also rise with pond age, according to the study by Murray et al. (2021). Hydrological and thermal differences have been observed between various geomorphic units within beaver ponds, for example, the main channel, its margins and backwater areas (Majerova et al., 2020). The effect of these different units in relation to floodplain inundation ~~may explain some especially has been suggested as a potential geomorphic factor that could explain~~ differences between study sites (Murray et al., 2021). Spatially expansive beaver ponds are expected to facilitate a higher proportion of low-velocity areas and increases in water residence time, the extent of the hyporheic zone, overbank sedimentation, and the growth of aquatic vegetation, compared to ponds confined to the river channel. Both the age of a beaver pond and its flooding extent may correspond with prolonged sediment-water interactions, resulting in enhanced biogeochemical processes.

The objective of this study was to determine the effects of beaver dams on physico-chemical water properties in mountain streams of the Western Carpathians (Poland and Slovakia), taking into account seasonality and pond characteristics. The paper focuses on answering the following three questions:

- 1) How do physico-chemical water parameters change between river sections located upstream of, within, and downstream of beaver ponds, and what biogeochemical processes might be responsible for these differences?
- 2) How do these differences vary seasonally?
- 3) How are these differences affected by the flooding extent and age of beaver ponds?

2 Methods


2.1 Study area

The study was conducted on nine beaver-inhabited gravel-bed streams in the Outer Western Carpathians (Fig. 1a). This region consists mainly of alternating layers of sandstones, conglomerates, mudstones and shales, which make up the sedimentary deposits of the Carpathian flysch (Ślęczka et al., 2006; Łajczak et al., 2014). The relief morphology of the study area corresponds to the general underlying geological units. The lower-lying foothills in the north are composed largely of the shale-rich thin-bedded flysch of the Silesian Nappe, while the mountains in the south are composed of the Magura Nappe, dominated by thick-bedded sandstones (Margielewski, 2012; Golonka et al., 2019; Święchowicz et al., 2021). In just over half of the studied catchments (sites 1, 2, 4-6), easily weathered, soluble shales comprise a large portion of the geological structure (Burtan et al., 1994; Kopciowski et al., 1997; Jankowski, 2014). In the southern part of the study area (sites 7-9), less weathered sandstones predominate (Kopciowski, 2000; Kováčik et al., 2011). The stream at site 3, despite its location in the northern foothills of the mountains, drains one of the highest foothill ranges, the Brzanka Range, which is largely composed of sandstone (Marciniec and Zimnal, 2009). Streams that drain areas underlain by shales and mudstones are typically characterised by higher concentrations of bicarbonate, calcium and magnesium ions due to increased weathering of carbonates and clay minerals,


while streams in areas composed mainly of sandstone are usually more diluted and characterised by a lower level of total dissolved solids (e.g. Siwek, 2021; Solár and Tomaškovič, 2023).

The geomorphologically diverse terrain in the study area ranges from foothills to medium mountains (Gilewska et al., 1982; Borzuchowski and Olędzki, 2011). The highest parts of the Outer Western Carpathians are classified as medium mountains.

130 These areas are characterised by steep slopes (with a gradient that often exceeds 30%) and significant relative relief (ranging from 400 to 800 m). Low mountains can be found at the margins of these ranges and in isolated ridges. These feature steep slopes and smaller relative relief (ranging from 200 to 400 m). The foothill zone is primarily located in the northern part of the study area. It reaches elevations of approximately 500 m above sea level. This zone is mainly characterised by wide, gently sloping ridges that rise from 40 to 300 m above the flat valley floors (Starkel, 1990). The mean annual temperature in all the
135 selected catchments ranges from 5.1 to 9.1°C, and the average precipitation is 770–1140 mm (based on the 2000–2010 period; CARPATCLIM, 2013; Szalai et al., 2013). Rivers in this area are mainly characterised by a nival–pluvial hydrological regime (Wrzesiński, 2017).

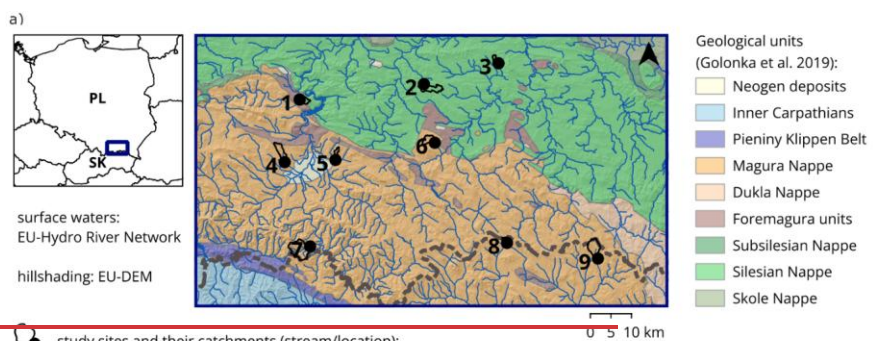

1 – Stroń/Bilsko, 2 – Turza/Rzepiennik Biskupi, 3 – unnamed/Czermna, 4 – Brzeźnianka/Brzezna, 5 – Krasówka/Nowy Sącz, 6 – Bystrzanka/Bystra, 7 – Czercz/Piwniczna-Zdrój, 8 – Ondava/Ondavka, 9 – Hrišov/Medvedie

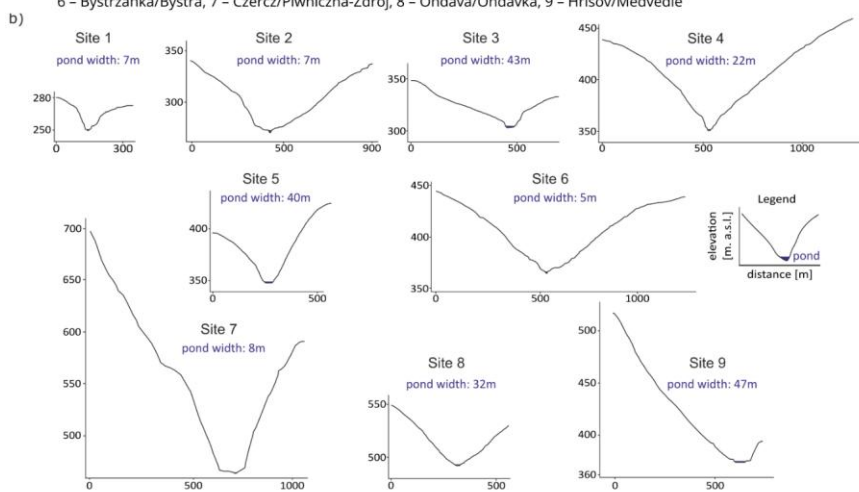

terrain profiles based on 1x1m grid Digital Elevation Models obtained from the Head Office of Geodesy and Cartography (Polish acronym: GUGiK) and Geodesy, Cartography and Cadastre Authority of the Slovak Republic (Slovak acronym: ÚGKK)

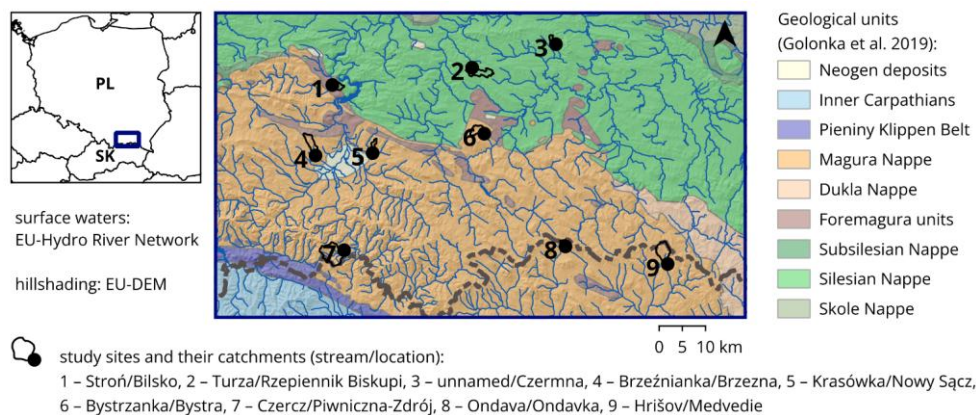


Figure 1: Study area—location (a) and valley cross-sections (b).

All of the catchments consisted of a mixture of forest and agricultural areas (i.e. arable lands and meadows). Despite the widespread abandonment of agricultural land and the generally low-to-moderate intensity of agricultural practices in the mountainous catchments (Pazúr et al., 2014; Kolecka et al., 2017), the impact of these activities may be locally significant, as evidenced by the increase in nitrate concentrations observed in the Ondava catchment due to the use of fertilisers (Pekarova et al., 2006; Balejčíková et al., 2020). Overall, agricultural practices in the Polish and Slovakian Carpathians are widespread, but characterised by low-input management and mowing and grazing on a small-scale (Pazúr et al., 2014; Kolecka et al., 2017; Affek et al., 2023). According to the national agricultural statistics (Central Statistical Office of Poland, 2025), the average consumption of mineral fertilisers (NPK) in the Małopolskie and Podkarpackie Voivodeships remains one of the lowest in the country (80–95 kg NPK ha⁻¹ year⁻¹ compared to the national average of ~125 kg ha⁻¹) and has shown little change over the last two decades. A similar situation is observed in the northern part of Slovakia, where the average use of industrial fertilisers is less than 60 kg NPK ha⁻¹ year⁻¹ (Siman and Velísková, 2018). Consequently, the direct inflow of nutrients from fertilisers into streams is minimal, although local enrichment may occur near farms or areas of intensive grazing. In contrast, domestic wastewater has been identified as the main source of stream water pollution in the rural areas of the Polish Carpathians (Siwek, 2021). The intensity of housing development across the study area ranged from negligible levels to artificial surfaces covering up to 4% of the area and containing a few hundred buildings.

The Slovak part of the Carpathians is characterised by large plots of agricultural land and small, dispersed settlements that are mainly concentrated in the valleys. This pattern is due to the impact of the post-1990 land reforms on land use and farm structure, both of which are characterised by large corporate farms and agricultural cooperatives (Lazikova et al., 2017). Despite the privatisation of land in Slovakia, land continues to be managed by large holdings and production companies

(Bański, 2017), and the average size of an arable land parcel is 21.0 ha (Lieskovský et al., 2015). In the Polish Western Carpathians, settlements are more dispersed throughout the slopes, and land reform has led to a progressive fragmentation of agricultural land (arable land and grassland) due to the constant division of land between successive owners (Kroczak et al., 2018). In the Polish Carpathians, the average agricultural parcel size is 0.5 ha (Kolecka and Kozak, 2019).

The primary criterion for the selection of streams for the study was the presence of beaver dams that spanned the entire riverbed. The study sites were distributed randomly across the North-South transect of the Outer Western Carpathians in Poland and Slovakia. In addition to their varying topography, the sites differed in terms of human activity, such as catchment land use and the presence of river control structures (Table 1). The height of the beaver dams studied did not exceed 1.5 m. In most dam sequences, the ponds were directly connected. The only exception was site 7, where short sections of free-flowing reaches were observed between the ponds. For further analysis, the study sites were classified based on the beaver pond characteristics. Two types were distinguished, based on the extent of the beaver dam: in-channel (dams within river banks) and overflowing (dams that extended beyond the river bank, with flooding that affected adjacent parts of the river valley). The types of ponds were partly determined by the morphology of the river valleys (Fig. 1b). The area covered by the overflowing ponds was two to seven times larger than their respective river channels, which indicates a substantial proportion of flooded riparian areas. The age of the beaver ponds was assessed based on the archived orthophotos, and they were divided into three categories classified as: young (≤ 3 years old), moderate (4–9 years old), and old (≥ 10 years old) (Table 1).

Table 1: Characteristics of the study sites.

Subject	Parameter	Study sites								
		1	2	3	4	5	6	7	8	9
Catchment	Area [km ²]	2.6	7.7	2.2	7.1	2.0	5.2	16.9	1.1	9.8
	Outlet altitude [m a.s.l.] ^a	245	271	294	348	343	364	457	487	368
	Dominating land cover category: ^b B - broadleaved forest; C - coniferous forest; H - permanent herbaceous	B	H	B	H	C	H	C	H	B
	Share of sealed artificial surfaces [%] ^b	2.1	1.8	1.1	3.1	2.3	4.1	1.0	0.2	0.1
	Approximate number of buildings ^c	250	300	90	530	150	590	650	20	30
	Share of forests [%] ^b	51.2	46.9	59.0	40.4	55.3	37.9	85.4	38.8	86.8
	Channel gradient [%] ^a	1.9	0.8	1.1	2.1	1.8	1.8	3.1	2.6	2.0
Stream section	Length [km]	0.4	0.6	1.3	0.2	0.5	0.1	0.3	0.6	0.3
	Pond sequence area [ha] ^d	0.14	0.24	1.70	0.22	0.42	0.01	0.18	0.57	0.68

The biggest pond area [ha] ^d	0.04	0.03	0.38	0.07	0.05	0.01	0.02	0.12	0.36
Approximate age of the beaver pond sequence [years] ^d	4-9	4-9	≥10	≤3	≥10	≤3	≤3	≥10	≥10
Beaver pond type: I - in-channel; O - overflowing	I	I	O	O	O	I	I	O	O
Ratio of the pond sequence area to the area of the river channel	1:1	1:1	7:1	2:1	4:1	1:1	1:1	5:1	4:1
Number of ponds in the sequence	6-10	6-10	>10	3-5	6-10	1-2	3-5	>10	3-5
River regulation structures: + presence, - absence	+	-	-	+	-	+	-	-	+

The closure points for all characterised catchments were located at the sampling sites downstream of the beaver ponds.

Data sources:

a - digital elevation models (1x1m) obtained from Polish Office of Geodesy and Cartography, and Geodesy Cartography and Cadastre Authority of the Slovak Republic

b – dataset CLCplus Backbone 2018 (10x10m) obtained from Copernicus Land Monitoring Service

c - dataset based on Open Street Map obtained through QuickOSM plugin (QGIS)


d - orthophotos obtained from Polish Office of Geodesy and Cartography (PZGiK) and available in Google Earth Pro

2.2 Water sampling and chemical analysis

The research followed a three-dimensional sampling scheme: seasonal sampling, longitudinal sampling, and vertical profile sampling (Fig. 2). The following water parameters were measured: temperature (T), dissolved oxygen (DO), specific conductivity (SEC), pH(H⁺) and the ionic composition (Ca²⁺, Mg²⁺, Na⁺, K⁺, NO₃⁻, NH₄⁺, HCO₃⁻, SO₄²⁻, Cl⁻).

a) SEASONAL SAMPLING (2022-2023)

Spring: 7 sites, Summer, Autumn, Winter: 9 sites




Sampling points:

1 - above pond cascade or the individual pond 2 - the biggest pond/the individual pond 3 - below pond cascade or the individual pond

b) LONGITUDINAL PROFILES (10 September 2023):

Site 3*



Site 6*




Sampling points:


1 - 130 m above; 2 - 100 m above; 3 - 70 m above; 4 - 40 m above; 5 - 10m above; 6 - Upper pond; 7 - Random pond; 8 - Main pond (backwater); 9, 10 - Main pond (middle); 11 - Main pond (above the dam); 12, 13 - Random ponds; 14 - Lower pond; 15 - 10m below; 16 - 40 m below; 17 - 70 m below; 18 - 100 m below; 19 - 130 m below

c) VERTICAL PROFILES (10 July 2024)

Site 3*

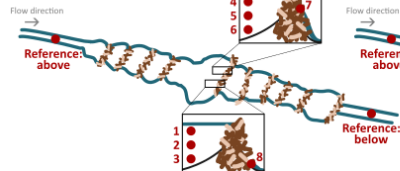

Site 2*



Sampling points:

Site 3: 1 - Profile 1 (top); 2 - Profile 1 (middle); 3 - Profile 1 (bottom); 4 - Profile 2 (top); 5 - Profile 2 (middle); 6 - Profile 2 (bottom); 7 - outflow from the dam (15 cm from dam top) 8 - outflow from the dam (near the bottom)
Site 2: 9 - Profile 1 (top); 10 - Profile 1 (middle); 11 - Profile 1 (bottom); 12 - Profile 2 (top); 13 - Profile 2 (middle); 14 - Profile 2 (bottom); 15, 16 - outflow on the dam surface

* number refers to the Fig. 1

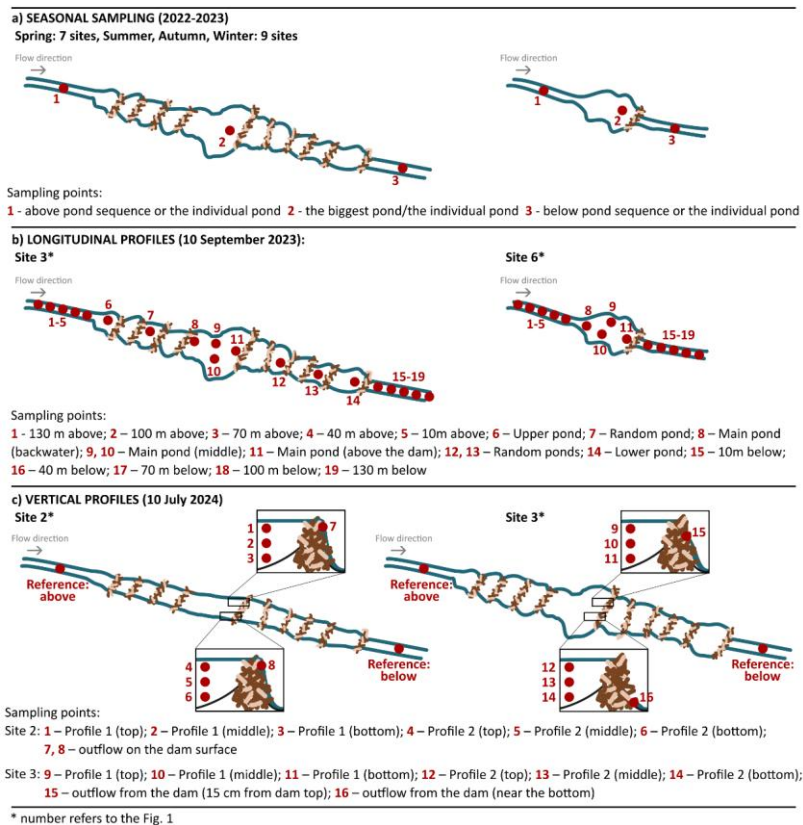


Figure 2: Study sampling schemes.

190 Although both geological variability and human pressure affect the chemical composition of stream water, a sampling design based on comparisons along the longitudinal gradients helped to minimise the impact of differences between the catchments. Three samples were collected at each site in late spring (June), summer (July–September), autumn (October–November) and winter (February) in 2022–2023, during baseflow conditions (i.e. excluding periods of rainfall events or snowmelts) in 2022–2023 (Fig. 2a). The section ‘above’ the beaver pond or pond sequence that reflected baseline conditions was defined as 50–100 m upstream from a backwater, and the section ‘below’ was 50–100 m downstream from the last dam. The ‘pond’ sample was taken from the main channel section of the pond (i.e. excluding channel margins and backwaters). It was collected

approximately 1m above the dam, from the middle of the water column. For ~~pond sequences of multiple ponds~~, the representative ‘pond’ sample was collected from the biggest reservoir in the system. Samples were collected between late morning and afternoon, with the sampling at each site being completed within about an hour. A total of 102 samples were collected from nine sites during the seasonal sampling.

Two sites were selected for additional measurements to create the longitudinal stream profiles (Fig. 2b). This sampling was conducted on 10 September 2023 ~~at site 6 (a single in-channel beaver pond created ≤ 3 years ago) and at site 3 (an old overflowing over ten years old beaver pond sequence created ≥ 10 years ago) and at site 6 (a single in-channel young beaver pond)~~. Measurements and water samples in the ‘above’ and ‘below’ sections were taken every 30 m, starting at a distance of 130 m from the ponds. Moreover, 4 locations within the ‘ponds’ were sampled, to represent the front, middle and periphery of the water body.

To analyse the variation of physico-chemical characteristics in a pond’s vertical profile, water samples were collected on 10 July 2024 at two beaver pond sequences, sites 2 and 3, which represented the two different pond types (Fig. 2c). Only in-channel ponds were observed at site 2. By contrast, overflowing stream banks were common at site 3. Measurements and water samples were taken from near the bottom of the water column, from its surface, and from dam outlets. Additionally, on-site measurements alone were taken from the middle of the water column. ~~At site 2, outlet samples were taken from water overflowing the dam, while at site 3 they were taken from leaks in the upper part of the dam and near its bottom. At site 3, outlet samples were taken from leaks in the upper part of the dam and near its bottom, while at site 2 they were taken from water overflowing the dam.~~ In addition to the previously mentioned parameters, this scheme also involved determining the total organic carbon (TOC) concentration ($\text{mg}\cdot\text{L}^{-1}$).

Sampling and in situ measurements were conducted without disturbing turbidity. The basic physico-chemical parameters – T ($^{\circ}\text{C}$), DO ($\text{mg}\cdot\text{L}^{-1}$), SEC ($\mu\text{S}\cdot\text{cm}^{-1}$) and pH – were determined on-site using an ELMETRON CX-401 multifunction meter with the GXZ-3tk multiparameter immersion head. All pH, SEC and DO probes were calibrated before each field study at the laboratory of the Institute of Geography and Spatial Organization Polish Academy of Sciences. Calibration was performed according to the manufacturer’s guidelines using certified analytical standards: pH probe: three-point calibration (pH 4.0, 7.0, and 9.0 buffers); SEC probe: calibration with a $1.541\text{ mS}\cdot\text{cm}^{-1}$ standard solution, selected according to anticipated conductivity of the sampled waters; DO probe: air-saturation calibration (100%) followed by zero-oxygen verification using ~~Na_2SO_3 sodium sulphite solution~~. In addition, 250 ml water samples were collected at each site for laboratory analysis.

The HCO_3^- concentration ($\text{mg}\cdot\text{L}^{-1}$) was determined by titrating the water with a standard solution of hydrochloric acid. The ionic composition ($\text{mg}\cdot\text{L}^{-1}$) was analysed in a Dionex ICS-3000 ion chromatograph with the analytical columns IonPac CS16 $3\times 250\text{ mm}$ and IonPac AS18 $2\times 250\text{ mm}$. Each sample was first filtered through a Whatman GF/D glass microfiber filter. The calibration curve was based on the Dionex certified reference materials (CRM) Combined Six Cation Standard II and Seven

— sformatowano: Czcionka: 10 pkt

— sformatowano: Czcionka: 10 pkt

— sformatowano: Indeks dolny

— sformatowano: Indeks dolny

230 Anion Standard II. The detection limits were 0.4 mg·L⁻¹ for Ca and 0.1 mg·L⁻¹ for the other ions. To ensure the accuracy of the analytical procedure, a certified reference material (CRM: KEIJM-02, GAW/WMO) was analysed. The percent relative error was less than 5.0% for all parameters, except for K⁺ (5.8%) and NH₄⁺ (7.0%). For any ion concentrations below the detection limit, the values were replaced with 75% of the detection limit, which is a common procedure in chemistry (Palarea-Albaladejo and Martín-Fernández, 2013). Concentrations below the detection limit were found only for the NO₃⁻ and NH₄⁺ ions. Across all the analysed water samples (n = 102), the NO₃⁻ and NH₄⁺ concentrations were below the detection limit in 17 and 20 samples, respectively. According to Hites (2019), the inclusion of values below the detection limit in analyses is justified if they do not exceed 20%. This applies in the case of both these ions. In addition, the Vario TOC Cube Analyzer (Elementar) was used to determine the total organic carbon (TOC) concentration (mg·L⁻¹) of the unfiltered water samples. All solutions were prepared with 1% nitric acid (Suprapur). The following concentrations were prepared for calibration: 0 (blank), 1, 10, 50, 100 and 1000 µg·dm⁻³. The Vario TOC Cube Analyzer (Elementar) was used to determine the total organic carbon (TOC) concentration (mg·L⁻¹) of the unfiltered water samples. The percent relative error, as determined by a data quality assessment based on CRM (KEIJM-02, GAW/WMO), was less than 5.0% for all parameters except K⁺ and NH₄⁺. The values in the last two cases were 5.8% for K⁺ and 7.0% for NH₄⁺. The detection limits were 0.4 mg·L⁻¹ for Ca and 0.1 mg·L⁻¹ for the other ions. For any ion concentrations below the detection limit, the values were replaced with 75% of the detection limit, which is a common procedure in chemistry (Palarea-Albaladejo and Martín-Fernández, 2013). Concentrations below the detection limit were found only for the NO₃⁻ and NH₄⁺ ions. Across all the analysed water samples (n = 102), the NO₃⁻ and NH₄⁺ concentrations were below the detection limit in 17 and 20 samples of the samples, respectively. According to Hites (2019), the inclusion of values below the detection limit in analyses is justified if they do not exceed 20%. This applies in the case of both these ions.

235 **2.3 Statistical analysis**

250 To compare the study sites, they were first classified according to the age and type of each beaver pond sequence (Table 1). It should be noted that there was some overlap between the two categorisations, as most of the youngest study sites were characterised by in-channel pond type and all the oldest ponds were overflowing. To assess the influence of beaver dams on physico-chemical water properties, Linear Mixed Model (LMM) was applied to individual parameters. Two separate approaches were employed: one based on raw data, and the other based on differences between the upstream and the pond or downstream sections, expressed in the original measurement units. In the models, ‘sampling location’ (3 categories for raw data: upstream, pond, downstream, and 2 categories for the difference-based analysis: pond and downstream), ‘season’ (4 categories: spring, summer, autumn, winter), ‘pond type’ (2 categories: overflowing, in-channel), and ‘dam age’ (3 categories: young (<3 years), moderate (4–9 years), old (≥10 years)) were treated as fixed effects. Both ‘pond type’ and ‘dam age’ were tested in interaction with ‘location’, to account for potential differences in their effects among sampling sections. Stream identity was included as a random effect to account for repeated measurements collected from the same streams in successive seasons. Effects were considered significant at p < 0.05. For factors showing a significant overall effect, least-squares means (LS means) were examined, and pairwise comparisons were performed to identify differences between factor levels.

- sformatowano: Indeks górny
- sformatowano: Indeks górny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny

The LMM was complemented by a supplementary analysis based on the percentage change (D_c) in the values of the individual physico-chemical parameters of the water in ponds and streams below the beaver dams relative to their values above the ponds. The D_c was calculated using the following formula:

$$D_c = \frac{(Bx - Ax)}{Ax} \cdot 100\%, \quad (1)$$

where Bx is the value of the physico-chemical parameter x in the pond or stream below the dam during a particular sampling session, and Ax is the value of the physico-chemical parameter x in the stream above the dam during the same session.

This additional analysis was introduced to help reveal direction and magnitude of variation in analysed parameters and to identify consistent patterns that may have remained undetected in the LMM framework because of the limited sample size.

For the purpose of calculating the percentage change, temperature values were converted from °C to K, to account for potential disruptive impacts of values close to 0°C on the percentage change in winter. Seasonal and site-to-site variations in D_c were assessed for T and other P physico-chemical water parameters were included in the subsequent statistical analysis if their mean absolute difference $|D_c|$ (for all sampling sites combined) exceeded 15% (DO , H^+ , K^+ , SO_4^{2-} , Cl^- , NO_3^- , and NH_4^+ ; Table A1). The calculation of $|D_c|$ used the following formula (where N is the total number of sampling sessions):

$$|D_c| = \frac{\sum \frac{|Bx - Ax|}{Ax}}{N} \cdot 100\%. \quad (2)$$

This procedure was used to account for the impact of any analytical errors (percent relative errors of the measurements) on the D_c calculations. Thus, only the chemical parameters for which this impact was generally smaller than the measured changes were considered for further analysis. Thus, for each sample, the lowest (D_{cmin}) and highest (D_{cmax}) possible D_c values of a given physico-chemical parameter were calculated, with maximum percent relative errors (+/-) assumed for each measurement (Fig. A13a). For most of the selected chemical parameters, such as DO , Cl^- , K^+ , SO_4^{2-} , and NO_3^- , the majority of the maximum possible differences in D_c (D_{cmin} – D_{cmax}) were less than 10–15% (Fig. A13b). However, these differences were higher for H^+ and NH_4^+ , though still many times smaller than the mean absolute difference $|D_c|$ values (Fig. A13b, Table A1). This allowed for their inclusion in the subsequent analysis. Thus, only the chemical parameters for which the maximum possible differences due to analytical errors were smaller than the measured changes were considered for further analysis.

Seasonal and site-to-site variations in D_c were assessed for T and parameters that met the aforementioned criteria (DO , H^+ , K^+ , SO_4^{2-} , Cl^- , NO_3^- , and NH_4^+ ; Table A1). To compare the study sites, they were first classified according to the age and type of each beaver pond sequence (Table 1). The Mann–Whitney U tests (for two-group comparisons) and the Kruskal–Wallis tests (for multiple-group comparisons) were conducted for each parameter. In addition to the analysis of the entire data set, a separate analysis was performed on the parameters obtained during the spring–summer period (hereafter: warm season). In addition, correlations between the upstream values of the physico-chemical parameters, catchment area, land cover, and land

— sformatowano: Czcionka: Kursywa

— sformatowano: Indeks górny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Czcionka: Kursywa

290 use cover, catchment area, channel slope and channel width were analysed to identify potential causes of the initial differences
between study sites. Moreover, the correlations between the upstream values and D_c were analysed, as this could indicate
potential unreliability of the obtained percentage changes. Results characterised by $|r| > 0.6$ (and $p < 0.05$) were considered as
demonstrating a strong correlation. All analyses were performed using STATISTICA 12.0. The significance level used for all
calculations was $p < 0.05$. Despite statistical significance being obtained, the results of site-to-site comparisons were further
295 verified to exclude those deemed unreliable due to the potential influences of noise and the relationship between the grouping
variables. When comparing the differences between groups based on pond age, the only parameters retained were those for
which there was a clear upward or downward trend in the median difference between groups as age increased. Additionally,
to mitigate the risk of family-wise error for multiple comparisons based on the same dataset, we applied a Bonferroni correction
to the significance threshold ($p < 0.017$) (Armstrong, 2014). If the same parameter was found to be dependent on both pond
300 characteristics (age and type), the result that failed to meet this stricter threshold was excluded, to account for any potential
correlation between the characteristics.

— sformatowano: Czcionka: Kursywa

3 Results

3.1 Physico-chemical background of the studied streams

The physico-chemical properties of the water upstream of beaver ponds stream water at baseline conditions varied between the
305 studied catchments studied (Table 2). Higher SEC and major ion concentrations were recorded in streams draining catchments
underlain by shale-rich bedrock (sites 1, 2, 4, and 6), whereas lower values occurred in streams draining catchments dominated
by sandstones (sites 3 and 7–9). Significantly higher SEC and concentrations of major ions were found in streams that drained
areas with a high proportion of shales in the bedrock (sites 1, 2, 4, and 6). Lower SEC and concentrations of major ions were
found in streams draining catchments dominated by sandstones (sites 3, 7–9). Concentrations of Cl^- , Na^+ and K^+ showed
310 strong correlations with the proportion of artificial surfaces in the studied catchments ($r = 0.85$, 0.78 and 0.61 ,
respectively). Additionally, concentration of Cl^- was correlated with the number of buildings in the catchments ($r = 0.61$). No
strong correlations were found between the parameters of the streamwater above the beaver ponds and their percentage changes
(D_c) in the ponds and the streams below them (Table A2). This allows for the further comparative analyses of the effect of
beaver dams on the physico-chemical parameters of stream water despite their initial variation across the study sites.

— sformatowano: Czcionka: Kursywa

Sformatowano: Normalny, Odstęp Przed: 12 pkt, Po: 12 pkt

Table 2: Input physico-chemical water parameters, measured above beaver ponds (median values).

pH	SEC	DO	Ca ²⁺	Mg ²⁺	Na ⁺	K ⁺	NO ₃ ⁻	NH ₄ ⁺	HCO ₃ ⁻	SO ₄ ²⁻	Cl ⁻
----	-----	----	------------------	------------------	-----------------	----------------	------------------------------	------------------------------	-------------------------------	-------------------------------	-----------------

Study site*	[μS·cm ⁻¹]						[mg·L ⁻¹]					
1	8.2	537.3	9.7	77.5	18.6	18.5	2.7	2.6	0.1	249.2	64.1	14.7
2	8.1	562.7	8.7	76.2	23.0	18.6	1.2	1.3	0.1	266.4	35.2	13.5
3	7.4	272.6	7.9	40.8	7.9	7.6	1.3	1.4	0.2	155.3	28.5	4.0
4	8.3	486.0	9.0	70.6	15.7	28.5	2.9	2.5	0.1	269.1	31.5	34.6
5	8.5	376.2	11.0	61.0	11.5	12.1	0.8	2.8	0.2	205.0	27.8	8.9
6	8.0	410.7	8.4	58.9	7.8	28.5	5.5	4.4	0.1	239.8	27.0	14.7
7	8.4	285.7	10.2	51.2	10.5	5.3	0.9	3.4	0.2	183.7	17.9	4.3
8	7.9	350.0	8.3	67.2	6.3	9.6	0.8	0.3	0.1	251.3	10.3	0.8
9	8.1	303.9	10.2	59.4	6.1	9.5	1.2	0.6	0.2	207.5	24.2	3.5


* number refers to the Fig. 1

320 3.2 The effect of seasonal and site-specific variability of beaver dams on physico-chemical water parameters

325 There were no strong correlations between the percentage change in the physico-chemical parameters and the catchment and stream characteristics (e.g. land use, catchment area, stream width) or the water parameters above beaver ponds. The largest changes in the physico-chemical water parameters obtained within beaver ponds ($|Dc| > 15\%$) were found in H^+ (pH), NO_3^- , NH_4^+ , DO, K^+ and SO_4^{2-} (in descending order). For streams below the dams, the largest changes in the physico-chemical parameters relative to streams above the ponds ($|Dc| > 15\%$) were found in NO_3^- , H^+ (pH), and NH_4^+ , Cl^- , SO_4^{2-} , and K^+ (Fig. 3, Table A1). The large differences in the physico-chemical water parameters ($|Dc| > 15\%$) between the beaver-influenced (pond and downstream) river sections compared to upstream values allowed for the consideration of potential impact of beaver ponds on H^+ (pH), NO_3^- , NH_4^+ , DO, K^+ and SO_4^{2-} (Table A1). Overall, greater differences in the physico-chemical water parameters were observed in the ponds than in the streams below the ponds. However, the directions of the observed changes were not strongly consistent across seasons or study sites (Fig. 3, A2).

330

- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Indeks górny
- sformatowano: Indeks dolny
- sformatowano: Indeks górny

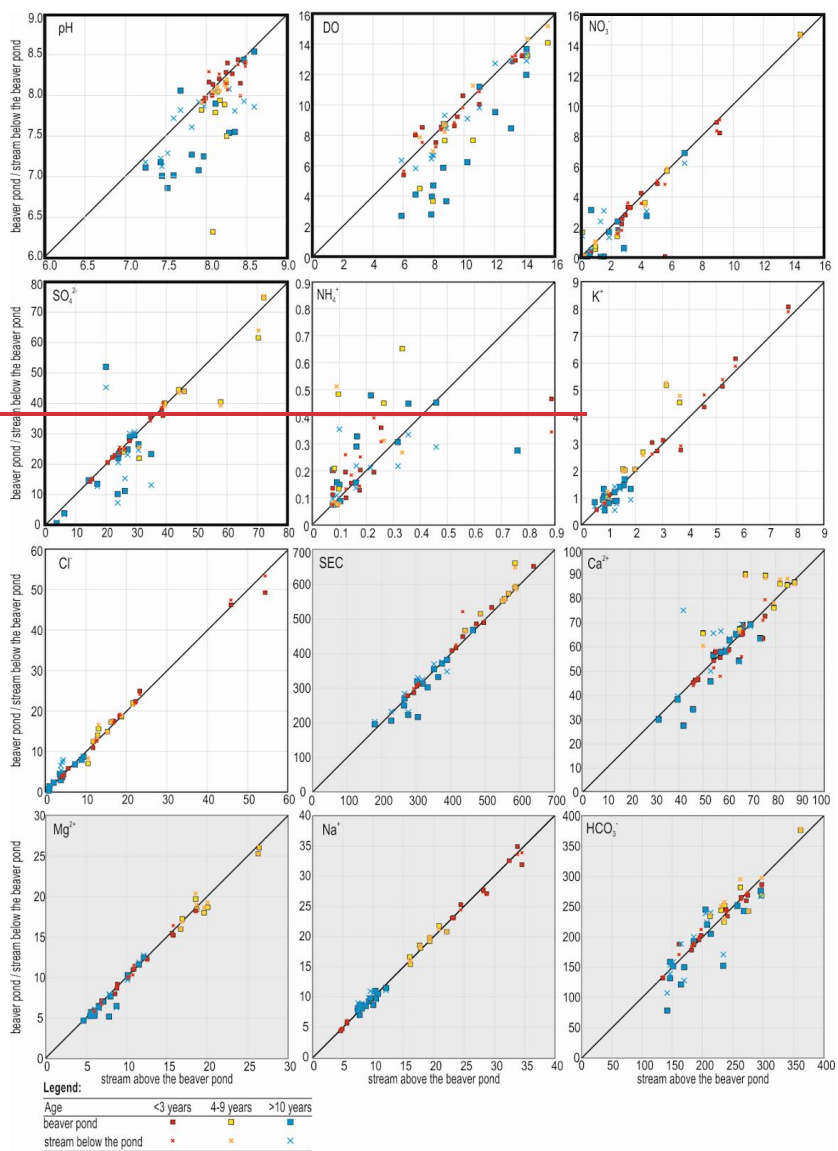

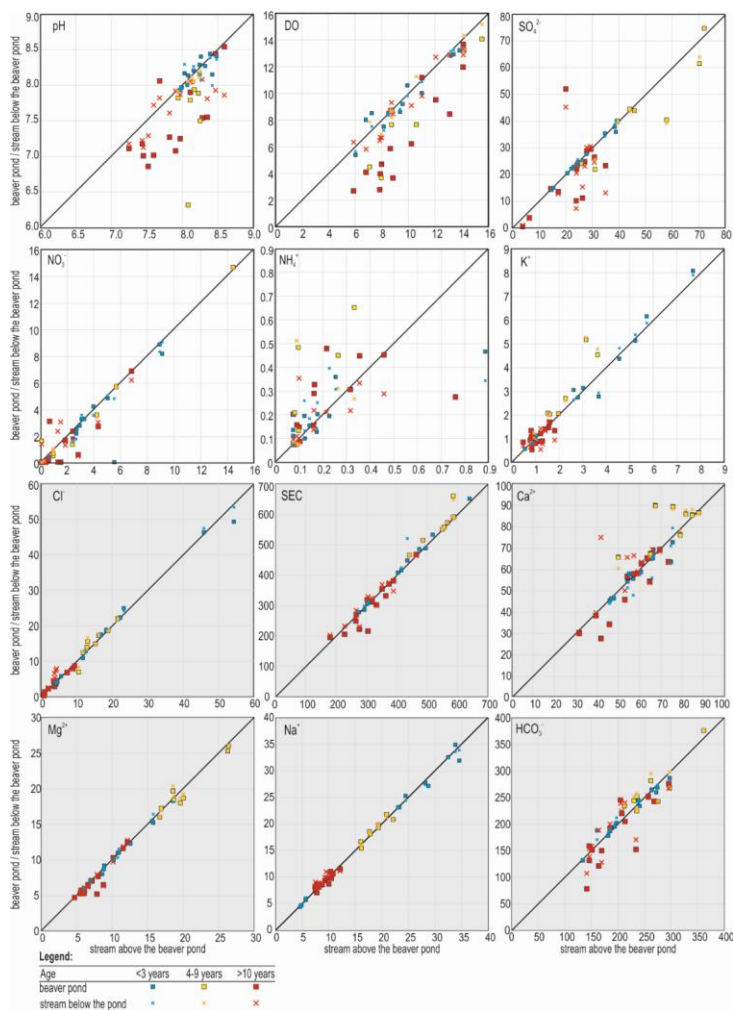


Figure 3: The physico-chemical water parameters, such as pH, SEC [$\mu\text{S}\cdot\text{cm}^{-1}$], major ions, NH_4^+ , NO_3^- , and DO [$\text{mg}\cdot\text{L}^{-1}$], within and below beaver ponds of different ages compared to the upstream inlet values. The graphs with a white background indicate parameters where the $|\frac{\text{DO}_{\text{beaver pond}} - \text{DO}_{\text{stream below the pond}}}{\text{DO}_{\text{stream above the beaver pond}}}| > 15\%$, while the graphs with a grey background highlight parameters where the $|\frac{\text{DO}_{\text{beaver pond}} - \text{DO}_{\text{stream below the pond}}}{\text{DO}_{\text{stream above the beaver pond}}}| < 15\%$. The graphs with

340 **bold borders illustrate parameters that differ significantly based on the beaver dam properties, which will be discussed later in this paper.**

345 The LMM analysis revealed relationships between certain physico-chemical parameters and seasonality, the age of ponds and sampling locations (Table 3). According to the analysis based on the raw values, season significantly affected all the parameters except pH, Ca^{2+} and NH_4^+ , whereas sampling location (i.e. upstream, within the pond, downstream) significantly influenced DO, pH and T. In general, DO and pH values were lower in the ponds than in the streams above and below them, while T was higher in the ponds than in the streams above them. Beaver dam age significantly affected DO and the pH, with generally higher values in young ponds (≤ 3 years) than in ponds of moderate age (4–9 years). Pond type did not significantly affect any parameter in either the raw data or difference-based analyses.

350 Season significantly affected the differences between upstream values of T, Mg^{2+} , K^+ and SO_4^{2-} , and their respective values in the ponds or downstream of the ponds. For example, there was an increase in T and a decrease in SO_4^{2-} in the beaver-influenced stream sections (pond and downstream) compared to upstream values in the warmer part of the year (spring and summer). In contrast, the values for both parameters remained relatively unchanged in autumn and winter. Moreover, a greater increase in K^+ was observed in summer than in spring and winter. The differences in DO within the ponds were affected by dam age, with the highest decreases observed in the old ponds (≥ 10 years). The decreases in DO and pH were greater in the ponds than in the downstream sections. Although the LMM also identified the seasonal effect on Mg^{2+} , this ion was excluded from further discussion because its |Dcl| value was low (less than 15%) and did not exceed the potential relative measurement error.

355 Despite large absolute differences in the values of some parameters (|Dcl|), the direction of the changes was not strongly consistent across seasons or study sites (Fig. 4, A1, and A2). However, distinctly lower pH values and DO concentrations within and below the beaver ponds, compared to the upstream channels, were observed at most study sites during all seasons. Moreover, several patterns in the physico-chemical parameter changes were consistently observed for the majority of the study sites during particular seasons. For example, clear decreases in NO_3^- and SO_4^{2-} concentrations within and below the beaver ponds in comparison to the upstream channels occurred during the spring and summer at most study sites (Fig. 4, A1 and A2).

360 The concentration of NH_4^+ increased distinctly in the ponds during the summer.

Table 3: Statistically significant patterns identified by the LMM for raw data and difference-based data, using least-squares means (LS means) and pairwise comparisons among factor levels ($p < 0.05$). Parameters for which only seasonal effects were detected in the raw data (SEC , Na^+ , NO_3^- , HCO_3^- , Cl^-), as well as parameters for which no significant effect was found (Ca^{2+} , NH_4^+) are not presented.

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks górny

Sformatowano: Odstęp Przed: 0 pkt, Po: 0 pkt

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks dolny

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks dolny

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks dolny

— sformatowano: Czcionka: 9 pkt, Pogrubienie, Indeks górny

— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: 9 pkt

Input data	Parameter	Statistically significant patterns based on LS means and pair-wise comparisons of factor levels ($p < 0.05$)		
		Season	Pond age x sampling location	Sampling location
Raw data	DO	summer < spring < autumn < winter	moderate < young (only in the ponds)	pond < upstream $\approx$ downstream
	T	winter < autumn < spring < summer	:	upstream < pond
	pH	:	moderate < young (only in the ponds)	pond < upstream $\approx$ downstream
	Mg ²⁺	summer < autumn $\approx$ winter $\approx$ spring	:	:
	K ⁺	winter $\approx$ spring < summer < autumn	:	:
	SO ₄ ²⁻	spring $\approx$ summer < autumn $\approx$ winter	:	:
Differences	DO	:	old < young (only in the ponds)	pond < downstream
	T	spring $\approx$ summer > autumn $\approx$ winter	:	:
	pH	:	:	pond < downstream
	Mg ²⁺	summer $\approx$ autumn < winter	:	:
	K ⁺	winter $\approx$ spring < summer	:	:
	SO ₄ ²⁻	summer < autumn $\approx$ winter	:	:

365 ‘-’ lack of statistical significance ($p > 0.05$)

370

The limited number of study sites ($n = 9$) may have prevented the detection of weaker patterns. Analysing the positional measures of percentage changes (D_c) in physico-chemical water parameters in ponds and the streams below them, grouped by the factors indicated by LMM: season (spring/summer versus autumn/winter), pond age and sampling location, reveals additional effects that may occur during particular part of the year. For example, the greatest differences in SO_4^{2-} were found in the old ponds, followed by the moderate ones and then the young ones during spring and summer (Fig. 4, A2). Given the generally low upstream NO_3^- concentrations, the scale of NO_3^- decrease was constrained; nevertheless, the consistent decreases were observed within the ponds in most cases. There were greater differences in the old ponds than in the young ponds in spring and summer. The extremely high outlier value for D_c of NO_3^- disrupts this pattern for moderate ponds (Fig. 4, A2). The concentration of NH_4^+ increased in most studied ponds compared to the streams above them during spring and summer.

— sformatowano: Czcionka: Kursywa

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Czcionka: Kursywa

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

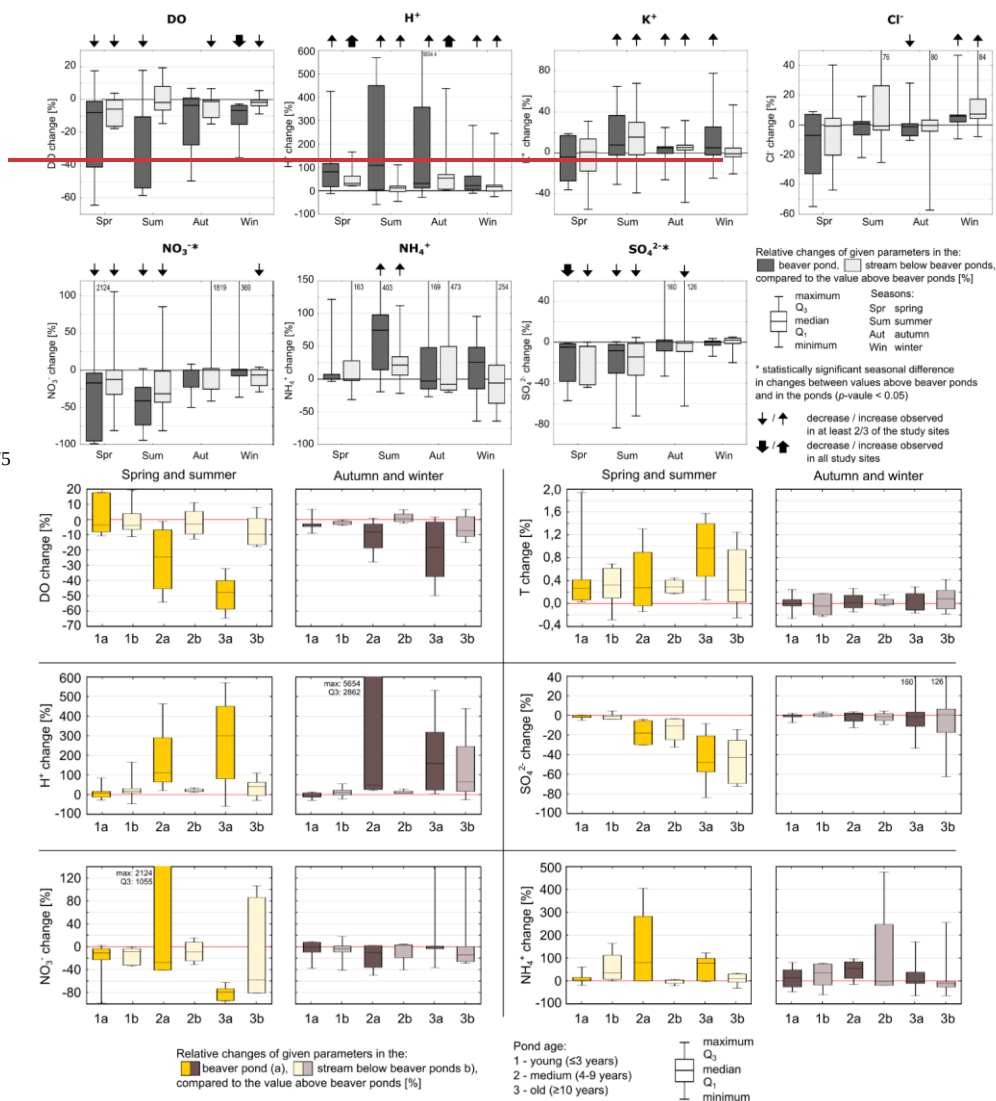


Figure 4: Percentage change (*Dc*) in the selected physico-chemical water parameters within and below beaver ponds in relation to stream water above beaver ponds. ~~Only the parameters for which $|Dc| > 15\%$ are shown.~~

Table 3: Results of the group comparisons (Mann–Whitney U/Kruskal–Wallis tests) of the differences (*Dc*) between inlet values and beaver pond/below the pond in relation to the pond type (i.e. in-channel or overflowing), the age of the ponds (i.e. less than 3 years, 4–9 years, or more than 10 years) and seasons (i.e. spring–summer or autumn–winter). Statistical significance thresholds are explained in the footnote.

			Parameters							
			DO	pH(H ⁺)	T	K ⁺	NO ₃ ⁻	NH ₄ ⁺	SO ₄ ²⁻	Cl ⁻
Pond type	all seasons	pond								
		below		(*)						
	spring and summer	pond			*		*			
		below								
Age of the pond cascade	all seasons	pond	***	***						
		below				(**)				
	spring and summer	pond	***				(*)		*	
		below							*	
Spring-summer/ autumn-winter		pond			***		**		***	
		below			**				**	

*** $p < 0.001$; ** $p < 0.017$ (Bonferroni correction); * $p < 0.05$

(-) differences deemed unreliable based on the verification process.

Among the significant differences in *Dc* between the ponds grouped by age, only changes in DO, pH and SO₄²⁻ showed a clear upward or downward trend (Table 3, Fig. 5). There were more significant differences in *Dc* compared to the upstream sections within the ponds themselves than in the streams below the ponds. While pH was barely modified in the youngest ponds (≤ 3 years old), decreases were observed in the older ponds, with the greatest *Dc* values obtained in ponds older than 10 years. A similar trend was observed in DO. The downward trend in the relative amount of DO with increasing pond age (≤ 3 , 4–9, and ≥ 10 years old) was more prominent during the spring–summer period.

During the spring–summer period, a decrease in SO_4^{2-} compared to the upstream sections was observed both within the beaver ponds and in the downstream channel sections (Table 3, Fig. 5). Young beaver ponds and the streams below them showed the lowest percentage changes (*De*) in SO_4^{2-} concentrations. A moderate decrease of SO_4^{2-} was observed in the moderately old sites, and the highest decrease was noted in sites ≥ 10 years old.

Greater increases in *T* and greater decreases in NO_3^- were noted in overflowing ponds compared to in-channel ponds during the spring–summer period (Table 3, Fig. 5). The identification of a difference in pH changes between the pond types was likely a result of the partial overlap between the two categorisations (type and age). This assumption is based on the *p*-value, which did not exceed the Bonferroni threshold for reducing the risk of a family-wise error.

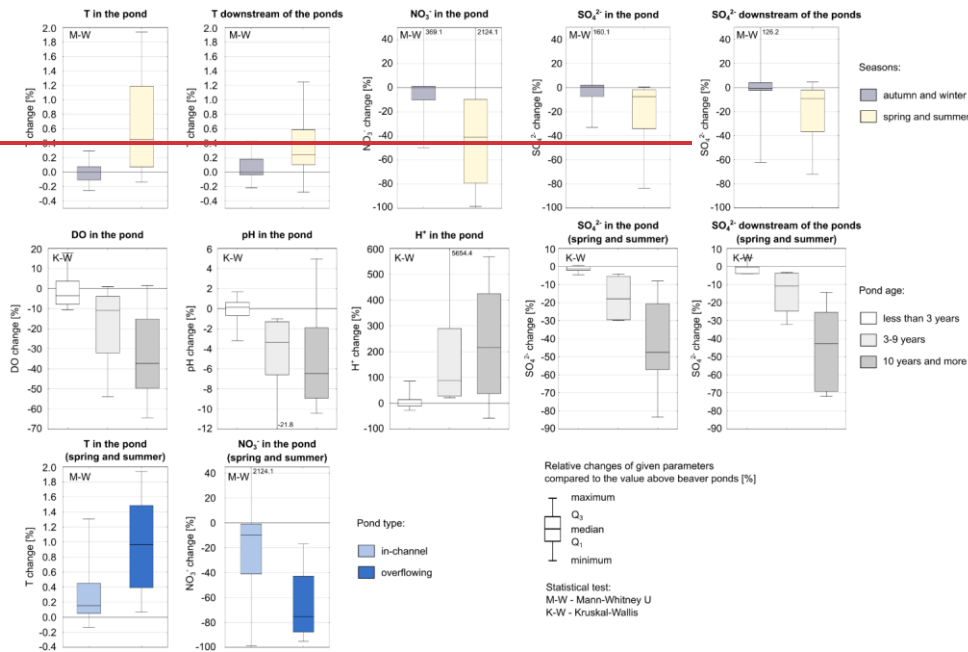


Figure 5: Comparison of *De* [%] for parameters significantly different across the categories of season, age, and type of pond in the Mann–Whitney U/Kruskal–Wallis tests (Table 3). Corresponding values in the measurement units are presented in Fig. A4.

3.3 Variation of physico-chemical parameters in the longitudinal and vertical stream profiles

As demonstrated by the longitudinal profiles (Fig. 56 and B1), the older overflowing beaver pond sequence (site 3) had a greater influence on the physico-chemical parameters of water than the young in-channel single pond (site 6). The greatest differences in the physico-chemical parameters at site 3 were seen between the free-flowing upper sections and the inside of the ponds; these changes tended to be partially neutralised in the stream below the beaver dam. The largest differences observed at site 3 were a decrease in NO_3^- within the ponds (-95.4%) and a decrease in SO_4^{2-} both within (-64.5%) and downstream (-71.5%) of the ponds.

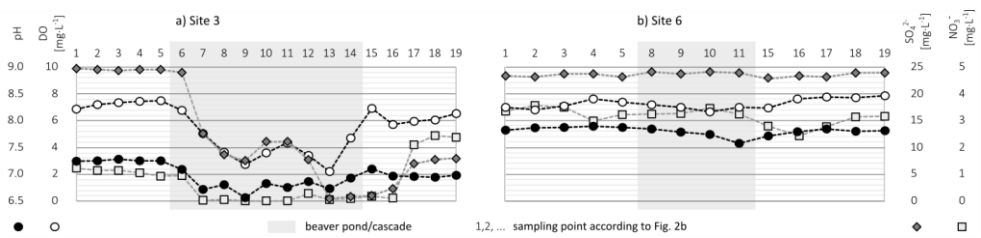


Figure 56: A longitudinal profile of the selected physico-chemical parameters at an overflowing and old site (Site 3 – a), and an in-channel and young site (Site 6 – b) on 10 September 2023.

There were greater vertical variations in physico-chemical parameters in the old overflowing beaver pond (site 3) than in the younger in-channel beaver pond (site 2). DO, pH and T were found to decrease with pond depth in both types of beaver pond; however, the range of variation was greater at site 3 than at site 2 (Fig. 67 and B2). The pH and DO concentrations were lower and the TOC concentrations were higher at the overflowing, old pond (site 3) than at the in-channel, younger pond (site 6). The pH and the concentrations of DO and TOC of the outflow measured near the base of the dam were notably lower than those measured at the top of the dam at site 3. The TOC concentration in the beaver pond at site 3 was found to be more than 13 mg L^{-1} , which was almost three times higher than in the stream flowing into the pond.

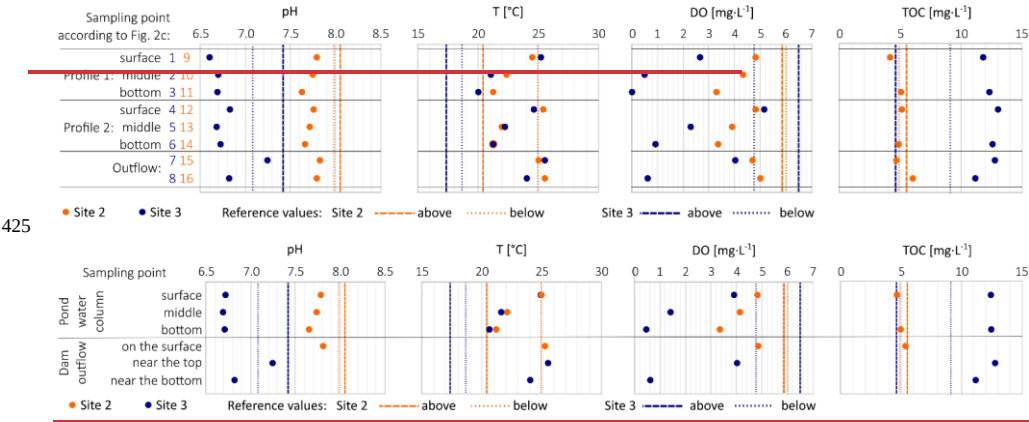


Figure 67: Average values~~Differential~~ of the selected physico-chemical parameters in the vertical profiles of study sites 2 (in-channel, moderately old) and 3 (overflowing, old) on 10 July 2024.

4. Discussion

4.1 Biogeochemical processes controlling physico-chemical water parameters that are triggered by the presence of beaver dams

The creation of beaver dams on streams alters the hydrological conditions of the catchment by flooding part of the valley and forming ponds. Specific biogeochemical processes take place in the newly formed aquatic environments that alter biogeochemical processes and thus the chemical composition of the stream water (Larsen et al., 2021). Our study shows at most study sites a significant decrease in DO concentrations within the beaver ponds compared to the upstream conditions DO concentrations above the ponds. This suggests that DO is consumed during the oxidation of organic matter under the aerobic conditions in the ponds. A beaver-driven decrease in stream DO concentrations was also found by Błędzki et al. (2011) and Stevenson et al. (2022). High TOC concentrations in beaver ponds we studied, compared to the stream water above the ponds, indicates an enrichment of organic matter in the pond water. This matter may be produced locally due to vegetation growth in the beaver ponds, or it may originate from the upper reaches of the streams, the deposition of organic matter that has come from upstream and/or the in situ production of organic matter via the growth of vegetation in the beaver ponds. Increased particulate organic matter deposition in beaver ponds due to reduced stream flow velocity is often reported in the literature (e.g., Pollock et al., 2003; Green and Westbrook, 2009). Briggs et al. (2012, 2013) found that the accumulation of organic matter in beaver ponds generates specific streambed morphologies, which enhance the exchange of stream water and groundwater within the hyporheic zone behind the beaver dams. Furthermore, the high water pressure at the bottom of the

ponds results in the downward movement of pond water, which causes a downwelling flow over the dam structures. This promotes the transport of organic carbon and DO from the water column to the hyporheic zone, fuelling biogeochemical processes.

The oxidation of organic matter in ponds may also have caused the decrease in SO_4^{2-} concentrations at most of the study sites during warm seasons (spring-summer). Under the anoxic conditions that prevail at the bottom of ponds (as measured at site 3 in July 2024; see Fig. 67), as well as in the hyporheic zone, SO_4^{2-} ions are likely to be reduced to H_2S . These reactions are carried out by microorganisms through the microbial sulphate reduction process, where SO_4^{2-} acts as an-specific electron acceptor in the anaerobic oxidation of organic matter under a-relatively low redox potential (Sutton-Grier et al., 2011). The decrease in SO_4^{2-} concentrations in streams with beaver dams has been previously identified, and attributed to the expansion of anoxic conditions (Larsen et al., 2021). According to Naiman et al. (1986; 1994), large accumulations of detritus, in combination with decomposition in expanded wetted areas, result in the development of anaerobic biogeochemical processes.

The decomposition and mineralisation of organic matter in the process of ammonification, under both aerobic and anaerobic conditions, leads to the production of NH_4^+ ions in water (Stefanakis et al., 2014). In our study, the ammonification process was indicated by the-marked increase in NH_4^+ concentrations in most of the beaver ponds studied in spring and summer. The increase in NH_4^+ concentrations in ponds may also be partly explained by the production of this ion through the process of dissimilatory nitrate reduction to ammonium (DNRA) partly be explained by the production of this ion during the denitrification process, as indicated by a marked-decrease in NO_3^- concentrations in the studied ponds. Numerous pathways exist for converting NO_3^- to NH_4^+ under anaerobic conditions within DNRA processes, but all of these lead to the retention of NH_4^+ in the system (Wang et al. 2024). Denitrification, alongside DNRA, could also explain the decrease in NO_3^- concentrations in beaver ponds. Denitrification reduces NO_3^- to gaseous N_2O and N_2 under anoxic conditions in water (Drever, 1997). Denitrification reduces NO_3^- to NH_4^+ or gaseous N_2 under anoxic conditions in water (Drever 1997). Decreased DO concentrations in the studied ponds could positively influence the denitrification processes in beaver impoundments, as suggested in previous studies by Lazar et al. (2015), Wegener et al. (2017) and Dewey et al. (2022). According to Lazar et al. (2015), denitrification in beaver ponds can remove 5–45% of NO_3^- loading at the catchment scale.

The decomposition of organic matter results in the formation of organic acids, and this may have contributed to appears-to-be the-cause-of the significantmarked decrease in water pH in the studied beaver ponds. According to David and Vance (1991), organic acids constitute most of the dissolved organic carbon in streams and lakes. Strong-oOrganic acids with high dissociation capacities significantly reduce water pH (Driscoll et al., 1989). A decrease in stream pH due to the presence of beaver dams is rarely reported in the literature. In fact, beaver dams most often cause isan increase in the stream water pH. For example, in the Appalachian Mountains, USA (Smith et al., 1991; Cirimo and Driscoll, 1993; Cirimo and Driscoll, 1996; Margolis et al., 2001) and the lowlands of Devon, England (Puttock et al., 2017), the pH of the stream water below beaver dams increased due to reduced concentrations of acidic ions such as NO_3^- and SO_4^{2-} . According to Margolis et al. (2001), the decrease in NO_3^- and

— sformatowano: Indeks dolny
— sformatowano: Indeks górny
— sformatowano: Indeks dolny
— sformatowano: Indeks górny
— sformatowano: Indeks dolny
— sformatowano: Indeks górny
— sformatowano: Indeks dolny
— sformatowano: Indeks górny
— sformatowano: Indeks dolny
— sformatowano: Indeks górny
— sformatowano: Indeks dolny
— sformatowano: Indeks górny

~~SO₄²⁻ concentrations is one of the largest contributors to the acid neutralising capacity of beaver ponds.~~ In the streams we studied, pH decreased despite the decrease in acid ion concentrations (i.e. NO₃⁻ and SO₄²⁻) ~~in the ponds and streams below the beaver dams.~~ Furthermore, the streams and beaver ponds studied in the USA and England (Smith et al., 1991; Cirimo and Driscoll, 1993; Cirimo and Driscoll, 1996; Margolis et al., 2001; Puttock et al., 2017) had similar organic carbon concentrations to the streams and ponds in our study. However, the streams that fed the beaver ponds in the USA and England ~~had lower pH were more acidic~~ (< 7 pH) than the streams we studied (> 7 pH). The difference in baseline water pH is likely a key factor in explaining the difference in results, because the intensity of organic matter decomposition increases with increasing pH, and the latter is also associated with better conditions for the growth of the bacteria involved in decomposition (Walse et al., 1998). Higher pH values in the streams that feed the studied beaver ponds likely facilitated the greater decomposition of organic matter, which ~~would be in line with explains~~ the increased production of organic acids in the ponds. ~~Organic acids play an important role as a source of acidity in beaver ponds (Cirimo and Driscoll, 1993). Another process that can decrease the pH of pond water is the production of CO₂ during the aerobic and anaerobic mineralisation of organic matter (Drever, 1997).~~

~~Our studies indicate that the processes of denitrification, decomposition and oxidation of organic matter, which modify the physico-chemical properties of the beaver pond water, determine the physico-chemical properties of the water below the beaver ponds.~~ The water that flows out of the ponds takes on the physico-chemical properties of the pond water. This is evidenced by the similar directions of changes in physico-chemical parameters within and below the beaver ponds compared to the streams above the ponds. However, ~~our studies show that~~ the downstream effect of beaver impoundment depends on the ~~structural properties of the dam structure~~ and, thus, the type of outflow. ~~Due to the vertical physico-chemical stratification of water within the ponds, water flowing out over the top of the dam may have different physico-chemical properties from water flowing out through the lower parts of the dam. Due to the vertical complexity of the water column in the ponds, the water flowing out of the ponds through the bottom of the dams has different physico-chemical properties to the water flowing out through the top of the dams.~~ For instance, the DO concentrations in the water flowing out from the bottom of the dams were lower than in the water flowing out through the top. Decreasing DO with beaver pond depth is consistent with the results reported by Stevenson et al. (2020). Nevertheless, the changes in the physico-chemical parameters in the water below the ponds, regardless of the type of outflows, are smaller than the changes in the ponds compared to the upstream sections. ~~This likely reflects processes typical of flowing water, which tend to shift water properties back towards upstream conditions. This is the result of processes specific to running water, which cause the physico-chemical properties of the pond water to revert to the original properties of the stream water.~~ For example, the deoxygenated water flowing out of the ponds is slowly reoxygenated, aided by the turbulent water flow in the mountainous stream channels. ~~DO concentrations in the streams below the beaver ponds were still lower than in the streams above the ponds, but higher than the DO concentrations in the ponds.~~ Similar decreases in DO within beaver ponds and the subsequent reoxygenation of downstream waters have been observed in previous studies (Smith et al., 1991; Harthun, 2000; Błędzki et al., 2011; Ecke et al., 2017). ~~The return of the stream water to oxic conditions results in the intensification of the nitrification processes, as evidenced by increased NO₃⁻ concentrations and decreased NH₄⁺~~

downstream of the beaver ponds in our study. NO_3^- concentrations below the beaver ponds were still lower than upstream of the ponds, and the NH_4^+ concentrations were still higher, but the differences between the streams above and below the beaver ponds were smaller than the differences between the streams above the ponds and the ponds themselves. The increased DO concentrations in the streams below ponds favour the aerobic oxidation of organic matter, including the oxidation of organic acids. This increases the pH of downstream water compared to pond water. The increase in pH may also be partly due to the release of CO_2 from the water, facilitated by the turbulent flow of streams below the beaver dams (Horgby et al., 2019). The reoxygenation of the water in the streams below the beaver ponds involves a series of biogeochemical processes, such as the aerobic oxidation of organic matter and nitrification, which counterbalance the effects of the ponds. Our longitudinal study showed that the changes in the physico-chemical properties of the water were partially neutralised within a relatively short downstream distance from the ponds (< 100 m).

4.2 Role of seasonality in the beaver dams' impact on the physico-chemical water parameters

The greatest changes in most of the physico-chemical parameters within and below the beaver ponds compared to the streams above the ponds were observed during the warm season (spring and summer). This result can be explained by the greater intensity of the biogeochemical processes that modify the chemical composition of water at higher temperatures. In the winter, the water temperature in the streams and at the surface of the studied ponds was low, and did not exceed 1.5°C. Winter water temperatures in ponds are generally not expected to exceed 4°C, the temperature at which water has the highest density (Vega and Abascal, 2005). The situation is different in the warm season, especially in the summer, when water temperatures in the studied streams and the near-surface layer of the ponds generally exceeded 15°C and sometimes rise above 20°C. Biogeochemical processes in beaver pond water and the sediments in the hyporheic zone, such as organic matter decomposition, denitrification, DNRA, and microbial sulphate reduction, are very slow at low temperatures, compared with in warm conditions (Qu et al., 2022). As a result, there are intensive physico-chemical transformations in the stream water flowing into the ponds in the warm season. The increase in NH_4^+ concentrations and the decrease in NO_3^- concentrations in the studied beaver ponds were particularly prominent in the warm period of the year (summer) due to intensive ammonification (NH_4^+ production), and denitrification and DNRA processes (NO_3^- depletion). This is consistent with the findings of Margolis et al. (2001) and Law et al. (2016): the greatest NO_3^- decrease downstream of beaver ponds occurs in the summer. The NO_3^- ion is one of the most effective electron acceptors (oxidants) in the anaerobic oxidation of organic matter; therefore, NO_3^- is the preferred oxidising agent for anaerobic microbes. The process of NO_3^- reduction (denitrification) under the anaerobic oxidation of organic matter occurs at a relatively high redox potential level (Anderson and Fidel, 2025). However, it should be noted that the decrease in NO_3^- concentrations in the beaver ponds and streams below the ponds in the summer may also be caused by NO_3^- can be partly related to uptake by aquatic vegetation and microorganisms the nitrogen fixation process, which is associated with increased microbial activity in sediments mediated by anaerobic conditions, as well as to uptake by aquatic vegetation (Naiman and Melillo, 1984; Maret et al., 1987; Songster-Alpin and Klotz, 1995). Furthermore, the decrease in SO_4^{2-}

— sformatowano: Indeks dolny

— sformatowano: Indeks górny

545 concentrations in the studied ponds and downstream of the beaver dams was mainly observed during the warm period. This is
also likely due to the high rate of anaerobic oxidation of organic matter during that time. According to Smith et al. (1991),
Cirmo and Driscoll (1993), and Margolis et al. (2001), ~~the intensive~~ anaerobic oxidation of organic matter is facilitated by the
low redox potential characteristic of summer low-flow conditions~~can occur despite the relatively low redox potential of the~~
water during the low-flow conditions of summer. During this period anaerobic microbes would have used even relatively
inefficient oxidants, such as SO_4^{2-} , in the anaerobic oxidation of organic matter, due to the low concentration of NO_3^- (a more
effective oxidant) in the studied waters. The average concentration of NO_3^- in ponds and streams below them was very low
550 during the summer, the average was $1.5 \text{ mg} \cdot \text{L}^{-1}$.

4.3 The effects of beaver dam age ~~and beaver pond flooding extent~~ on the physico-chemical water parameters

Our research suggests that the age of beaver dams ~~and the type of the beaver ponds (i.e. overflowing vs. in-channel)~~ plays an
important roles in altering the chemical composition of stream water (Fig. 78). Previously, the impact of beaver dams on
various physico-chemical water parameters has typically been found to be inconsistent across different study sites. For
555 example, different directions of change in pH were documented by Lizarralde et al. (1996), Harthun (2000) and Čiuldienė et
al. (2020). The beaver pond characteristic proposed in our study may ~~to some extent~~ partly explain those site-to-site differences.
For instance, the magnitudes of the decrease in pH and, DO (based on LMM and the positional measures of the D_c) and SO_4^{2-}
(based on the positional measures of the D_c) concentrations in the studied beaver ponds were found to be positively related to
the age of the beaver pond sequences. These water parameters are influenced mainly by the decomposition and
560 aerobic/anaerobic oxidation of organic matter. According to Gurnell et al. (1998), Meentemeyer and Butler (1999), Bason et
al. (2017) and Puttock et al. (2018), older ponds have greater pools of organic matter deposited on their bottoms. Although the
pond age does not cause the difference directly, it can be used as a proxy for the accumulation of organic-rich sediments over
time and the enhancement of respective biogeochemical processes. ~~Our study shows that the long-term durability of beaver~~
~~ponds increases the extent to which SO_4^{2-} is reduced. The difference may be linked to the anaerobic oxidation of organic~~
565 ~~matter, as indicated by the corresponding differences in DO. The effect of the pond age on SO_4^{2-} persists downstream of the~~
~~beaver dam.~~

— sformatowano: Czcionka: Kursywa

— sformatowano: Czcionka: Kursywa

Changes in physico-chemical water parameters that varied depending on:

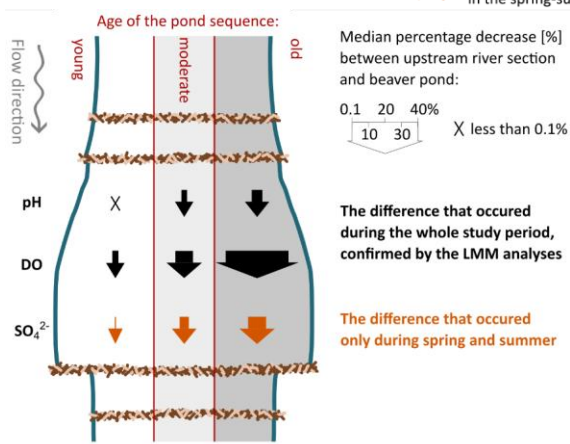
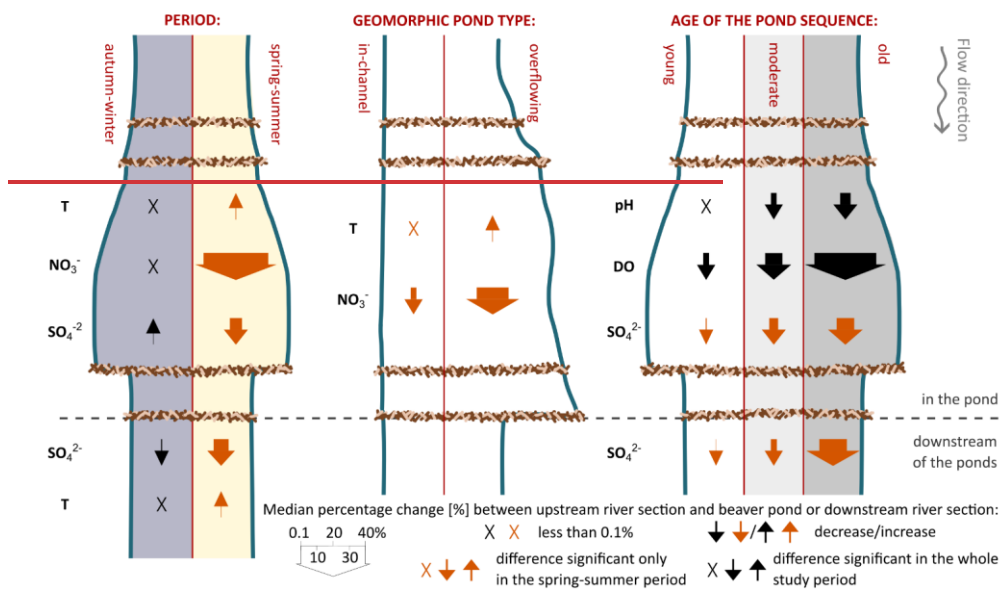


Figure 78: The scheme of the role of seasons and the characteristics of the age of a beaver pond sequence in changes to physico-chemical water properties within and downstream of the beaver ponds. See Figure A4 for the presentation of the differences in measurement units.

Although the significance of pond type was generally lower than that of pond age, the geomorphological context appears to be important in terms of changes in NO_3^- concentration. The decrease in NO_3^- concentration was greater in overflowing ponds than in the ponds restricted to river channels. This difference is in line with the higher temperature increase observed in such ponds, since denitrification rates in aquatic ecosystems generally increase with temperature and DO depletion (de Klein et al., 2017). The observed thermal difference is most likely due to the larger area of open water created by overflowing ponds, as opposed to the more shaded in-channel impoundments. It may also be attributed to the higher proportion of shallow, slow-flowing water at the pond margins, which enhances warming (Majerova et al., 2020). The longer residence time of water in the overflowing ponds may also explain the higher denitrification rates in the water of both the pond and the hyporheic zone where the bottom pond water and groundwater mix (Merrill and Tonjes, 2014). The rate of biogeochemical processes is controlled by residence time, as this is what determines the length of contact between solutes and microbial communities (Briggs et al., 2012). Extended hyporheic zones, which are associated with the formation of overflowing ponds, are probably areas of NO_3^- removal due to denitrification. Furthermore, as demonstrated by Puttock et al. (2018), total nitrogen storage per unit area in beaver pond sediments increases with pond size. This may indicate that the relationship between the overflowing pond type and the decrease in water NO_3^- concentrations is connected to the enhanced mineral nitrogen uptake by vegetation and the accumulation of nitrogen-rich organic sediment at the bottom of territorially expansive ponds. The inundation of the area surrounding the river channel (the riparian zone) reduces flow velocity and increases water residence time (Larsen et al., 2021). This in turn supports the development of aquatic vegetation, which facilitates the attenuation of nitrogen (Murray et al., 2021). Maret et al. (1987) also attributed the greater extent of NO_3^- decrease in pond water to higher sediment loads and seasonal expansion of the beaver pond area.

4.4 Study limitations

The wide spatial scope of the study and the high diversity of beaver-influenced streams introduced certain limitations. The spread of the study sites across a vast area restricted the number of samples collected to one sample per site each season, due to time and cost constraints. In addition, dam failures resulting from floods and their targeted elimination during the research period decreased the planned sample size by half. The remaining study sites may have been affected by continuous dam maintenance by beavers. In the most extreme cases, temporal breaches of the dam may have been overlooked after its reconstruction. The small number of study sites (nine) may have limited the identification of the existing patterns in the effect of beaver dams on the physico-chemical properties of stream water. Therefore, we used the additional analysis of the positional measures, which is suitable even for small statistical samples. Moreover, since the study focused on the base-flow conditions, early spring high flows have been omitted. This probably explains the similarities between the results from the late spring and the summer.

Although a Before–After–Control–Impact (BACI) model would be the most appropriate approach for studying the impact of beavers on the chemical composition of water, it was not possible to use this method in the area concerned, due to the lack of investigations prior to dam construction. Instead, this study employed a Control-Impact (CI) design based on spatial contrasts. In this framework, upstream sections served as control sites, representing the reference conditions, while sections within and below the pond sequences represented the impacted areas. This comparative 'upstream-downstream' approach is a standard field method for assessing hydrochemical gradients generated by beaver dams when 'before' data are unavailable (Green and Westbrook, 2009; Klotz, 2010; Fuller and Peckarsky, 2011; Puttock et al., 2017; Stevenson et al., 2022). It allows for the isolation of local effects caused by damming while minimizing the confounding influence of catchment heterogeneity. Instead, the study focused on spatial and temporal contrasts throughout the year, and used a comparative 'upper-lower river' method, where upstream sections were used as reference sections. This research approach is commonly used in field studies to assess hydrochemical gradients generated by beaver dams, when it is logistically or environmentally impossible to obtain 'before' data on dam construction (Green and Westbrook, 2009; Klotz, 2010; Fuller and Peckarsky, 2011; Puttock et al., 2017; Stevenson et al., 2022). It enables the identification of local hydrological and chemical effects caused by beaver damming, while minimising the confounding influence of catchment heterogeneity. Although this approach lacks independent control sections, as in a full BACI model, it provides robust comparative evidence for evaluating the magnitude and spatial extent of changes induced by beaver activity under natural field conditions. Future research should be more detailed and extensive to enable the application of the BACI model.

As there was no identified relationship between the initial values and the percentage change (ΔC) in the physico-chemical parameters, it was assumed that the observed changes would not differ significantly based on upstream conditions. This allowed various catchments with different land uses and levels of anthropogenic influence to be included in the study. The diversity of the studied streams was also partly managed by including the stream identity as a random factor in the LMM. However, it should be noted that the inclusion of the streams characterised by particularly high concentrations of certain components (e.g. highly anthropogenically modified) may have resulted in different observations.

Although the sample locations were standardised to a certain extent, they may not reflect typical stream or pond conditions. Stream samples are more likely to be well-mixed and representative due to turbulent flow conditions. This is also evidenced by the homogeneity of ~~most of~~ the longitudinal profiles upstream and downstream of beaver ponds for most studied parameters. However, the spatial distribution of the pond samples may be more biased, as it did not cover the full spectrum of hydrological units observed within the ponds (Majerova et al., 2020). Additionally, as the samples were taken from the middle of the water column, they do not represent the surface and bottom water layers, which, according to the vertical sampling scheme, could substantially affect observed physico-chemical parameters. One of the greatest limitations of the study was the absence of field measurements of redox potential in streams and vertical profiles of the beaver ponds. Such measurements would have enabled the direct identification of redox conditions in the studied waters, and thus avoided the need to rely on speculation based on

— sformatowano: Czcionka: Kursywa

the concentration of key redox reaction ions. Direct measurements of redox potential, microbial activity and vegetation cover
635 in future studies would enable empirical assessment of the role of the discussed processes.

~~The age of beaver pond sequences appears. The assessment of the impact of individual characteristics of beaver dam sequences may be constrained by the interconnections between some of the variables. Beaver ponds tend to be more persistent in smaller streams, and the length of beaver occupancy seems to be partly related, to some extent, to their longitudinal and lateral development and flooding extent of the pond sequences. This limits the opportunity to assess the impact of each characteristic separately. Moreover, the analysis would be greatly improved by the use of~~ However, the estimation of mutual correlations was limited by the use of categorical values. Continuous values for the factors representing beaver pond age, if they could not be obtained from the available sources, and the categorisation of the number of ponds was carried out because of the dynamics of this variable during the study period.

5 Conclusions

645 This study addressed the relatively new ecosystem role of beavers in the mountainous environment of the Western Carpathians, where beaver populations have recently recovered after more than a century of absence. We found that beaver dams had a strong impact on the physico-chemical water properties withininside the ponds during warm seasons, including a significantan increase in water temperature and reductionsdecrease in pH and; DO concentrations, as well as noticeable decrease in NO₃⁻ and SO₄²⁻ concentrations. These changes were the result of specific biogeochemical processes occurring in the newly formed
650 aquatic environments of beaver ponds. Although these processes also affected the downstream sections of the streams, in general, they were partially attenuated within a short distance of the dam.

The processes involving NO₃⁻ and SO₄²⁻ decrease were found to be more effective during the warm periodof the yearseasons than during the cold pseasonperiod. Moreover, a larger reduction in NO₃⁻ concentrations occurred in overflowing ponds compared to in-channel ponds. The denitrification process, which is responsible for reducing NO₃⁻ concentration, requires
655 anoxic conditions in the pond water. These are favoured in overflowing ponds during warm seasons due to the greater temperature increases and longer water residence time than in in-channel ponds. The age of the dams was identified as an important factor affecting the decrease in DOdissolved oxygen and pH in beaver ponds (based on LMM and the positional measures of the Dc) and the decrease in SO₄²⁻ and NO₃⁻ within and below the beaver ponds (based on the positional measures of the Dc). These changes were regulated by the decomposition and aerobic/anaerobic oxidation of organic matter, which was
660 more abundant in older ponds. Although much is known about the contribution of beavers to water purification through nitrogen removal, their less-recognised role in sulphate reduction may be equally important from a water management perspective. Finally, the extensiveness andThe persistence of beaver pond complexes may be critical for the effectiveness of these processes.

- sformatowano: Czcionka: Kursywa
- sformatowano: Indeks dolny
- sformatowano: Indeks górny
- sformatowano: Czcionka: Kursywa

Although most of the processes identified in the present study are consistent with previous research, our results are complemented by additional insights. Attention should be drawn to newly emerging issues, such as the widespread decrease in water pH as a result of beaver dams. These results indicate that there is still much to address in future research on the effects of beaver presence. A larger dataset would improve our understanding of the effects of beaver impoundments, especially in streams with varying upstreaminlet conditions, outflow types and topographic characteristics. Likewise, more data from representative mountain streams (including side-channel and main-channel ponds, and various levels of geomorphic beaver activity), as well as comparative data from lowland streams, would be useful. Lastly, further research is needed to identify the spatial extent and temporal persistence of the influence of beaver dams, and to elucidate the thresholds that determine their impact on the ecological properties of streams.

Author contributions (CRediT)

JW: Conceptualization, Project administration, Methodology, Investigation, Formal analysis, Visualization, Writing – original draft, Writing – review and editing

JPS: Methodology, Investigation, Formal analysis, Visualization, Writing – original draft, Writing – review and editing

MKS: Conceptualization, Funding acquisition, Project administration, Methodology, Investigation, Formal analysis, Writing – review and editing, Supervision

EG: Investigation, Writing – review and editing, Supervision

Data availability

The data that support the findings of this study are available at Zenodo open access data repository (<https://doi.org/10.5281/zenodo.17937225>).

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgements

This research was funded in whole by the National Science Centre, Poland (grant number: 2020/39/O/ST10/01354). For the purpose of Open Access, the author has applied a CC-BY public copyright licence to any Author Accepted Manuscript (AAM) version arising from this submission.

The laboratory analyses were carried out at the Center for Research and Analysis at the Jan Kochanowski University in Kielce and at the Hydrological and Chemical Laboratory at the Institute of Geography and Spatial Management, Jagiellonian University in Kraków. We would like to thank all of our supporters for their crucial assistance during the fieldwork and laboratory analyses. We would like to thank the reviewers for their insightful comments, which have significantly improved the manuscript.

References

- Affek, A. N., Jabs-Sobocińska, Z., Wolski, J., Radeloff, V. C.: Pockets of persistence of agricultural land use during the socioeconomic shock of forced post-WWII displacements in the Carpathians, *Land Use Policy*, 131, 106678, <https://doi.org/10.1016/j.landusepol.2023.106678>, 2023.
- Anderson, A., Fidel, R.: Introduction to soil science, 2nd edition, Iowa State University Digital Press, Ames-Iowa, 366 pp., <https://doi.org/10.31274/isudp.2025.201>, 2025.
- ~~Armstrong, R. A.: When to use the Bonferroni correction, *Ophthalmic and Physiol. Optics*, 34, 502-508, <https://doi.org/10.1111/opo.12131>, 2014.~~
- Balejčiková, L., Tall, A., Kandra, B., Pavelková, D.: Relationship of nitrates and nitrites in the water environment with humans and their activity, *Acta Hydrol. Slovaca*, 21, 74-81, <https://doi.org/10.31577/ahs-2020-0021.01.0009>, 2020.
- Bański, J.: The consequences of changes of ownership for agricultural land use in Central European countries following the collapse of the Eastern Bloc, *Land Use Policy*, 66, 120-130, <https://doi.org/10.1016/j.landusepol.2017.04.045>, 2017.
- Bason, C. W., Kroes, D. E., Brinson, M. M.: The effect of beaver ponds on water quality in rural coastal plain streams, *Southeast. Nat.*, 16, 584-602, <https://doi.org/10.1656/058.016.0408>, 2017.
- Błędzki, L. A., Bubier, J. L., Moulton, L. A., Kyker-Snowman, T. D.: Downstream effects of beaver ponds on the water quality of New England first- and second-order streams, *Ecohydrology*, 4, 698-707, <https://doi.org/10.1002/eco.163>, 2011.
- Borzuchowski, J., Olędzki, J. R.: Cyfrowa mapa geomorfologiczna Karpat, *Teledetekcja Środowiska*, 46, 52-71, 2011.
- Brazier, R. E., Puttock, A., Graham, H. A., Auster, R. E., Davies, K. H., Brown, C. M. L.: Beaver: Nature's ecosystem engineers, *WIREs Water*, 8, e1494, <https://doi.org/10.1002/wat2.1494>, 2021.
- Briggs, M. A., Lautz, L. K., McKenzie, J. M., Gordon, R. P., Hare, D. K.: Using high-resolution distributed temperature sensing to quantify spatial and temporal variability in vertical hyporheic flux, *Water Resour. Res.*, 48, W02527, <https://doi.org/10.1029/2011WR011227>, 2012.
- Briggs, M. A., Lautz, L. K., Hare, D. K., González-Pinzón, R.: Relating hyporheic fluxes, residence times, and redox-sensitive biogeochemical processes upstream of beaver dams, *Freshwater Science*, 32 (2), 622-641, <https://doi.org/10.1899/12-110.1>, 2013.
- Burtan, J., Cieszkowski, M., Ślącza, A., Zuchiewicz, W.: Szczegółowa mapa geologiczna Polski 1:50 000, arkusz Męcina (1018, M-34-78-C), Państwowy Instytut Geologiczny, Warszawa, 1994.

Bylak, A., Kochman-Kędziora, N., Kukuła, E., Kukuła, K.: Beaver-related restoration: An opportunity for sandy lowland streams in a human-dominated landscape, *J. Environ. Manage.*, 351, 119799, <https://doi.org/10.1016/j.jenvman.2023.119799>, 2024.

CARPATCLIM Database © European Commission - JRC, 2013.

725 Čánády, A., Krišovský, P., Bajomi, B., Huber, A., Czabán, D., Oleksák, M.: Is new spread of the European beaver in Pannonian basin an evidence of the species recovery?, *European Journal of Ecology*, 2, 44-63, <https://doi.org/10.1515/eje-2016-0015>, 2016.

Central Statistical Office of Poland, Statistical Yearbook of Agriculture, www.stat.gov.pl, 2025.

730 Cirno, C. P., Driscoll, C. T.: Beaver pond biogeochemistry: acid neutralizing capacity generation in a headwater wetland, *Wetlands*, 13, 277-292, 1993.

Cirno, C. P., Driscoll, C. T.: The impacts of a watershed CaCO₃ treatment on stream and wetland biogeochemistry in the Adirondack Mountains, *Biogeochemistry*, 32, 265-297, 1996.

735 Čiuldienė, D., Vigrėcas, E., Belova, O., Aleinikovas, M., Armolaitis, K.: The effect of beaver dams on organic carbon, nutrients and methyl mercury distribution in impounded waterbodies, *Wildlife Biol.*, 2020, 1-8, <https://doi.org/10.1111/wlb.00678>, 2020.

David, M. B., Vance, G. F.: Chemical character and origin of organic acids in streams and seepage lakes of central Maine, *Biogeochemistry*, 12, 17-41, 1991.

~~de Klein, J. J., Overbeek, C. C., Juncher-Jørgensen, C., Veraart, A. J.: Effect of temperature on oxygen profiles and denitrification rates in freshwater sediments, *Wetlands*, 37, 975-983, <https://doi.org/10.1007/s13157-017-0933-1>, 2017.~~

740 Dewey, C., Fox, P. M., Bouskill, N. J., Dwivedi D., Nico P., Fendorf, S.: Beaver dams overshadow climate extremes in controlling riparian hydrology and water quality, *Nat. Commun.*, 13, 6509, <https://doi.org/10.1038/s41467-022-34022-0>, 2022.

Drever, J. I.: *The Geochemistry of Natural Waters: Surface and Groundwater Environments*, 3rd Edition, Prentice Hall, Upper Saddle River, New Jersey, 436 pp., ISBN 9780132727907, 1997.

745 Driscoll, C. T., Fuller, R. D., Schecher, W. D.: The role of organic acids in the acidification of surface waters in the eastern U.S., *Water Air Soil. Poll.*, 43, 21-40, 1989.

Dzięciołowski, R., Gozdziwski, J.: The reintroduction of European beaver, *Castor fiber*, in Poland: a Success Story, in: *Beaver protection, management, and utilization in Europe and North America*, edited by: Busher, P. E., Dzięciołowski, R., Kluwer Academic/Plenum Publishers, New York, 31-35, 1999.

Ecke, F., Levanoni, O., Audet, J., Carlson, P., Eklöf, K., Hartman, G., McKie, B., Ledesma, J., Segersten, J., Truchy, A.,

750 Futter, M.: Meta-analysis of environmental effects of beaver in relation to artificial dams, *Environ. Res. Lett.*, 12, 113002, <https://doi.org/10.1088/1748-9326/aa8979>, 2017.

~~Fairfax, E., Westbrook, C.: The ecology and evolution of beavers: ecosystem engineers that ameliorate climate change. *Annu. Rev. Ecol. Evol. Syst.*, 55, <https://doi.org/10.1146/annurev-ecolsys-102722-122317>, 2024.~~

- Fuller, M. R., Peckarsky, B. L.: Does the morphology of beaver ponds alter downstream ecosystems? *Hydrobiol.*, 668, 35-48, <https://doi.org/10.1007/s10750-011-0611-x>, 2011.
- Gilewska, S., Klimkowa, M., Starkel, L.: The 1:500 000 Geomorphological Map of Poland, *Geographia Polonica*, 48, 7-24, 1982.
- Giriat, D., Gorczyca, E., Sobucki, M.: Beaver ponds' impact on fluvial processes (Beskid Niski Mts., SE Poland), *Sci. Total. Environ.*, 544, 339-353, <https://doi.org/10.1016/j.scitotenv.2015.11.103>, 2016.
- Golonka, J., Waśkowska, A., Ślaczka, A.: The Western Outer Carpathians: Origin and evolution, *J. of Appl. and Reg. Geol./Z. Dt. Ges. Geowiss.*, 170, 229-254, <https://doi.org/10.1127/zdgg/2019/0193>, 2019.
- Gorczyca, E., Krzemień, K., Sobucki, M., Jarzyna, K.: Can beaver impact promote river renaturalization? The example of the Raba River, southern Poland, *Sci. Total. Environ.*, 615, 1048-1060, 2018.
- Green, K. C., Westbrook, C. J.: Changes in riparian area structure, channel hydraulics, and sediment yield following loss of beaver dams, *BC Journal of Ecosystems and Management*, 10, 68-79, <https://doi.org/10.22230/jem.2009v10n1a412>, 2009.
- Gurnell, A. M.: The hydrogeomorphological effects of beaver dam-building activity, *Prog. Phys. Geog.*, 22, 167-189, <https://doi.org/10.1177/030913339802200202>, 1998.
- [Hallberg L., Larsen, A., Ceperley, N., d'Epagnier, R., Brouwers, T. F., Schaeffli, B., Thurnheer, S., Barba, J., Angst, C., Dennis, M., Larsen, J. R.: Beavers can convert stream corridors to persistent carbon sinks, *Commun. Earth and Environ.*, 7, 227, 2026.](#)
- Halley, D. J., Saveljev, A. P., Rosell, F.: Population and distribution of beavers *Castor fiber* and *Castor canadensis* in Eurasia, *Mammal Rev.* 51, 1-24, <https://doi.org/10.1111/mam.12216>, 2021.
- Harthun, M.: Influence of the Damming-up by Beavers (*Castor fiber albus*) on Physical and Chemical Parameters of Highland Brooks (Hesse, Germany), *Limnologia*, 30, 21-35, 2000.
- Hites, R. A.: Correcting for censored environmental measurements, *Environ. Sci. Technol.*, 53, 11059-11060, 2019.
- Holtmeier, F. K.: Keystone Species, in: *Animals' Influence on the Landscape and Ecological Importance: Natives, Newcomers, Homecomers*, Springer, Dordrecht, 295-331 pp., https://doi.org/10.1007/978-94-017-9294-3_4, 2015.
- [Horgby, Å., Segatto, P.L., Bertuzzo, E., Lauerwald, R., Lehner, B., Ulseth, A.J., Vennemann, T.W., Battin, T.J.: Unexpected large evasion fluxes of carbon dioxide from turbulent streams draining the world's mountains. *Nat. Commun.*, 10: 4888, <https://doi.org/10.1038/s41467-019-12905-z>, 2019.](#)
- Jankowski, L. S.: Szczegółowa mapa geologiczna Polski 1:50 000, arkusz Rzepiennik (1020, M-34-79-C), Państwowy Instytut Geologiczny, Warszawa, 1994.
- Jones, C. G., Lawton, J. H., Shachak, M.: Organisms as ecosystem engineers, *OIKOS*, 69, 373-386, <https://doi.org/10.2307/3545850>, 1994.
- Kalvīte, Z., Lībiēte, Z., Kļaviņš, I., Bārdule, A., Bičkovskis, K.: The impact of beaver dam removal on the chemical properties of water in drainage ditches in peatland forests, *Scand. J. Forest. Res.*, 36, 1-14, <https://doi.org/10.1080/02827581.2020.1855364>, 2021.

— sformatowano: Polski

Klotz, R. L.: Influence of beaver ponds on the phosphorus concentration of stream water, *Can. J. Fish. Aquat. Sci.*, 55, 5, <https://doi.org/10.1139/f97-318>, 1998,

Klotz, R. L.: Reduction of high nitrate concentrations in a Central New York State stream impounded by beaver, *Northeast. Nat.*, 17, 349-356, <https://www.jstor.org/stable/40959749>, 2010.

Kolecka, N., Kozak, J., Kaim, D., Dobosz, M., Ostafin, K., Ostapowicz, K., Wężyk, P., Price, B.: Understanding farmland abandonment in the Polish Carpathians, *Appl. Geogr.*, 88, 62-72, <https://doi.org/10.1016/j.apgeog.2017.09.002>, 2017.

Kolecka, N., Kozak, J.: Wall-to-wall parcel-level mapping of agricultural land abandonment in the Polish Carpathians, *Land*, 8, 129, <https://doi.org/10.3390/land8090129>, 2019.

Kopciowski R., Zimnal Z., Chrzastowski., Jankowski L., Szymakowska F.: Szczegółowa mapa geologiczna Polski 1:50 000, arkusz Gorlice (1037, M-34-91-A), Państwowy Instytut Geologiczny, Warszawa, 1997.

Kopciowski R.: Szczegółowa mapa geologiczna Polski 1:50 000, arkusz Zborów (1054, M-34-91-D), Państwowy Instytut Geologiczny, Warszawa, 2000.

Kováčik, M., Bóna, J., Gazdačko, L., Kobulský, J., Maglay, J., Kučera, M.: Geological Map of the Nízke Beskydy Mts. – Western Part, 2011.

Krocak, R., Fidelus-Orzechowska, J., Bucala-Hrabia, A., Bryndal, T.: Land use and land cover changes in small Carpathian catchments between the mid-19th and early 21st centuries and their record on the land surface, *J. Mt. Sci.*, 15, 2561-2578, <https://doi.org/10.1007/s11629-018-5095-y>, 2018.

Larsen, A., Larsen, J. R., Lane, S. N.: Dam builders and their works: Beaver influences on the structure and function of river corridor hydrology, geomorphology, biogeochemistry and ecosystems, *Earth-Sci. Rev.*, 218, 103623, <https://doi.org/10.1016/j.earscirev.2021.103623>, 2021.

Law, A., McLean, F., Willby, N.J.: Habitat engineering by beaver benefits aquatic biodiversity and ecosystem processes in agricultural streams, *Freshwater Biol.* 61, 486–499, <https://doi.org/10.1111/fwb.12721>, 2016.

Lazar, J. G., Addy, K., Gold, A. J., Groffman, P. M., McKinney, R. A., Kellogg, D. Q.: Beaver ponds: Resurgent nitrogen sinks for rural watersheds in the northeastern United States, *J. Environ. Qual.*, 44, 1684–1693, <https://doi.org/10.2134/jeq2014.12.0540>, 2015.

Lazikova, J., Rumanovska, L., Takac, I., Lazikova, Z.: Land fragmentation and efforts to prevent it in Slovak legislation, *Agr. Econ.-Czech.*, 63, 559-568, <https://doi.org/10.17221/180/2016-AGRICECON>, 2017.

Lieskovský, J., Bezák, P., Špulerová, J., Lieskovský, T., Koleda, P., Dobrovodská, M., Bürgi, M., Gimmi, U.: The abandonment of traditional agricultural landscape in Slovakia - Analysis of extent and driving forces, *J. Rural. Stud.*, 37, 75-84, <https://doi.org/10.1016/j.jrurstud.2014.12.007>, 2015.

Lizarralde, M. S., Deferrari, G. A., Alvarez, S. E., Escobar, J. M.: Effects of beaver (*Castor canadensis*) on the nutrient dynamics of the southern beech forests of Tierra del Fuego (Argentina), *Ecología Austral*, 6, 101–105, 1996.

— sformatowano: Angielski (Stany Zjednoczone)

Kod pola został zmieniony

— sformatowano: Angielski (Stany Zjednoczone)

Łajczak, A., Margielewski, W., Rączkowska, Z., Święchowicz, J.: Contemporary geomorphic processes in the Polish Carpathians under changing human impact, Episodes Journal of International Geoscience, 37, 21-32, <https://doi.org/10.18814/epiiugs/2014/v37i1/003>, 2014.

Majerova, M., Neilson, B. T., Schmadel, N. M., Wheaton, J. M., Snow, C. J.: Impacts of beaver dams on hydrologic and temperature regimes in a mountain stream, Hydrol. Earth Syst. Sc., 19, 3541–3556, <https://doi.org/10.5194/hess-19-3541-2015>, 2015.

Majerova, M., Neilson, B. T., Roper, B. B.: Beaver dam influences on streamflow hydraulic properties and thermal regimes, Sci. Total. Environ., 718, 134853, <https://doi.org/10.1016/j.scitotenv.2019.134853>, 2020.

Marciniec, P., Zimnal, Z.: Szczegółowa mapa geologiczna Polski 1:50 000, arkusz Tuchów (1001, M-34-79-A), Państwowy Instytut Geologiczny, Warszawa, 2009.

Maret, T. J., Parker, M., Fannin, T. E.: The effect of beaver ponds on the nonpoint source water quality of a stream in southwestern Wyoming, Water R., 21, 263-268, 1987.

Margielewski, W.: Geological and Geomorphological Settings, in: Recent Landform Evolution, The Carpatho-Balkan-Dinaric Region, edited by: Loczy, D. Stankoviansky, M., Kotarba, A., Springer Dordrecht Heidelberg London New York, -51-53, 2012.

Margolis, B. E., Castro, M. S., Raesly, R. L.: The impact of beaver impoundments on the water chemistry of two Appalachian streams, Can. J. Fish. Aquat. Sci., 58, 2271-2283, <https://doi.org/10.1139/cjfas-58-11-2271>, 2001.

Meentemeyer, R. K., Butler, D. R.: Hydrogeomorphic effects of beaver dams in Glacier National Park, Montana, Phys. Geogr., 20, 436–446, <https://doi.org/10.1080/02723646.1999.10642688>, 1999.

Merill, L., Tonjes, D. J.: A review of the hyporheic zone, stream restoration, and means to enhance denitrification, Technology and Society Faculty Publications, 5, 2014.

Murray, D., Neilson, B. T., Brahney, J.: Source or sink? Quantifying beaver pond influence on non-point source pollutant transport in the Intermountain West, J. Environ. Manage., 285, 112127, <https://doi.org/10.1016/j.jenvman.2021.112127>, 2021.

Naiman, R. J., Melillo, J. M.: Nitrogen budget of a subarctic stream altered by beaver (Castor canadensis), Oecologia, 62, 150-155, 1984.

Naiman, R. J., Melillo, J. M., Hobbie, J. E.: Ecosystem alteration of boreal forest streams by beaver (Castor canadensis), Ecology, 67, 1254-1269, <https://doi.org/10.2307/1938681>, 1986.

Naiman, R. J., Pinay, G., Johnston, C. A., Pastor, J.: Beaver influences on the long-term biogeochemical characteristics of boreal forest drainage networks, Ecology, 75, 905-921, <https://doi.org/10.2307/1939415>, 1994.

Nolet, B. A., Rosell, F.: Comeback of the beaver Castor fiber: an overview of old and new conservation problems, Biol. Conserv., 83, 165-173, [https://doi.org/10.1016/S0006-3207\(97\)00066-9](https://doi.org/10.1016/S0006-3207(97)00066-9), 1998.

Pachinger, K., Hulik, T.: Origin, present conditions, and future prospects of the Slovakian beaver population, in: Beaver protection, management, and utilization in Europe and North America, edited by: Busher, P. E., Dzięciołowski, R., Kluwer Academic/Plenum Publishers, New York, 43-51, 1999.

- sformatowano: Angielski (Stany Zjednoczone)
- sformatowano: Angielski (Stany Zjednoczone)
- sformatowano: Polski
- sformatowano: Polski
- sformatowano: Polski
- sformatowano: Polski

- Palarea-Albaladejo, J, Martín-Fernández, J. A.: Values below detection limit in compositional chemical data, *Anal. Chim. Acta.*, 764, 32-43, <https://doi.org/10.1016/j.aca.2012.12.029>, 2013.
- 855 Pazúr, R., Lieskovský, J., Feranec, J., Ořahel, J.: Spatial determinants of abandonment of large-scale arable lands and managed grasslands in Slovakia during the periods of post-socialist transition and European Union accession, *Appl. Geogr.*, 54, 118-128, <https://doi.org/10.1016/j.apgeog.2014.07.014>, 2014.
- Pekárová, P., Pekár, J., Miklánek, P.: Impact of water sampling frequency on estimating water quality status in the Ondava River, *Ecohydrol. and Hydrobiol.*, 6, 105-113, [https://doi.org/10.1016/S1642-3593\(06\)70132-X](https://doi.org/10.1016/S1642-3593(06)70132-X), 2006.
- 860 Pollock, M. M., Heim, M., Werner, D.: Hydrologic and geomorphic effects of beaver dams and their influence on fishes, *American Fisheries Society Symposium* 37, 213-234, 2003.
- Puttock, A., Graham, H. A., Cunliffe, A. M., Elliott, M., Brazier, R. E.: Eurasian beaver activity increases water storage, attenuates flow and mitigates diffuse pollution from intensively-managed grasslands, *Sci. Total. Environ.*, 576, 430-443, <http://dx.doi.org/10.1016/j.scitotenv.2016.10.122>, 2017.
- 865 Puttock, A., Graham, H. A., Carless, D., Brazier, R. E.: Sediment and nutrient storage in a beaver engineered wetland, *Earth. Surf. Proc. Land.*, 43, 2358-2370, <https://doi.org/10.1002/esp.4398>, 2018.
- Qu, W., Suo, L., Liu R., Liu, M., Zhao, Y., Xia, L., Fan, Y., Zhang, Q., Gao, Z.: Influence of Temperature on Denitrification and Microbial Community Structure and Diversity: A Laboratory Study on Nitrate Removal from Groundwater, *Water*, 14, 436, <https://doi.org/10.3390/w14030436>, 2022.
- 870 Rosell, F., Bozsér, O., Collen, P., Parker, H.: Ecological impact of beavers *Castor fiber* and *Castor canadensis* and their ability to modify ecosystems, *Mammal Rev.*, 35, 248-276, <https://doi.org/10.1111/j.1365-2907.2005.00067.x>, 2005.
- Smith, M. E., Driscoll, C. T., Wyskowski, B. J., Brooks, C. M., Cosentini, C. C.: Modification of stream ecosystem structure and function by beaver (*Castor canadensis*) in the Adirondack Mountains, *Can. J. Zool.*, 69, 55-61, <https://doi.org/10.1139/z91-009>, 1991.
- 875 Siman, C., Velísková, Y.: Consumption of fertilizers in districts of Slovakia in the period 2006–2015, *Acta Agrar. Debreceniensis*, 150, 389-398, <https://doi.org/10.34101/actaagrar/150/1735>, 2018.
- Siwek, J. P.: Environmental and anthropogenic determinants of water chemistry in the Carpathians, in: *Quality of water resources in Poland*, edited by: Zelenáková, M., Kubiak-Wójcicka, K., Negrn A.M., Springer Water, Cham, Switzerland, 297-319, https://doi.org/10.1007/978-3-030-64892-3_13, 2021.
- 880 [Smufer, F., Casas-Ruiz, J. P., St-Pierre, A., del Giorgio, P. A.: Integrating beaver ponds into the carbon emission budget of boreal aquatic networks: a case study at the watershed scale, *Ecosystems*, 26\(6\), 1309-1325, <https://doi.org/10.1007/s10021-023-00835-3>, 2023.](#)
- Solár, J., Tomaškovič, J.: Physicochemical properties of mountain streams in the High and Western Tatras, *Environ. Monit. and Assess.*, 195, 1543, <https://doi.org/10.1007/s10661-023-12158-w>, 2023.
- 885 Songster-Alpin, M.S., Klotz, R.L.: A comparison of electron transport system activity in stream and beaver pond sediments, *Can. J. Fish. Aquat. Sci.*, 52, 1318-1326, <https://doi.org/10.1139/f95-128>, 1995.

Starkel, L.: Ewolucja środowiska przyrodniczego Karpat w okresie działalności człowieka, Problemy Zagospodarowania Ziemi Górskich, 29, 34-46, 1990.

Stefanakis, A., Akrotos, Ch.S., Tsihrintzis V.A.: Vertical Flow Constructed Wetlands. Eco-engineering Systems for Wastewater and Sludge Treatment, 1st Edition, Elsevier, Amsterdam-Oxford-Waltham, 392 pp., ISBN 978-0-12-404612-2, 2014.

Stevenson, J. R., Dunham, J. B., Wondzell, S. M., Taylor, J.: Dammed water quality—Longitudinal stream responses below beaver ponds in the Umpqua River Basin, Oregon, Ecohydrology, 15, e2430, <https://doi.org/10.1002/eco.2430>, 2022.

Sutton-Grier, A. E., Keller, J. K., Koch, R., Gilmour, C., Megonigal, J. P.: Electron donors and acceptors influence anaerobic soil organic matter mineralization in tidal marshes, Soil Biol. Biochem., 43, 1576-1583, <https://doi.org/10.1016/j.soilbio.2011.04.008>, 2011.

Szalai, S., Auer, I., Hiebl, J., Milkovich, J., Radim, T., Stepanek, P., Zahradnicek, P., Bihari, Z., Lakatos, M., Szentimrey, T., Limanowka, D., Kilar, P., Cheval, S., Deak, Gy., Mihic, D., Antolovic, I., Mihajlovic, V., Nejedlik, P., Stastny, P., Mikulova, K., Nabyvanets, I., Skyryk, O., Krakovskaya, S.Vogt, J., Antofie, T., Spinoni, J.: Climate of the Greater Carpathian Region,

Final Technical Report, www.carpatclim-eu.org, 2023.

Ślaczka, A., Kruglov, S., Golonka, J., Oszczytko, N., Popadyuk, I.: Geology and hydrocarbon resources of the Outer Carpathians, Poland, Slovakia, and Ukraine: general geology, in: AAPG Memoir 84, The Carpathians and their foreland: Geology and hydrocarbon resources, edited by: Golonka, J., Picha, F., American Association of Petroleum Geologists, 221-258. <https://doi.org/10.1306/985610M843070>, 2006.

Święchowiec, J., Margielewski, W., Starkel, L., Łajczak, A., Pietrzak, M., Krzemień, K., Gorczyca, E., Bucala-Hrabia, A.: Współczesna ewolucja rzeźby Karpat Zewnętrznych i Podhala, edited by: Kostrzewski, A., Krzemień, K., Migoń, P., Starkel, L., Winowski, M., Zwoliński, Z. Współczesne przemiany rzeźby Polski, 2nd edn. Bogucki Wyd Nauk, Poznań, 97-222, 2021

Thompson, S., Vehkaoja, M., Pellikka, J., Nummi, P.: Ecosystem services provided by beavers *Castor* spp., Mammal Rev., 51, 25-39, <https://doi.org/10.1111/mam.12220>, 2021.

Valachovič, D.: European beaver (*Castor fiber*), in: Mammals of Slovakia: Distribution, Bionomy and Protection, edited by: Krištofik, J., Danko, Š., VEDA—Slovak Academy of Sciences Publishing House, Bratislava, 81-85, ISBN: 978-80-224-1264-3, 2012.

~~Vega, C., Abascal, J. L. F.: Relation between the melting temperature and the temperature of maximum density for the most common models of water, J. Chem. Phys., 123, 144504. <https://doi.org/10.1063/1.2056539>~~

Walse, C., Berg, B., Sverdrup, H.: Review and synthesis of experimental data on organic matter decomposition with respect to the effect of temperature, moisture, and acidity, Environ. Rev., 6, 25-40, <https://doi.org/10.1139/a98-001>, 1998.

~~Wang, C., He, T., Zhang, M., Zheng, C., Yang, L., Yang L.: Review of the mechanisms involved in dissimilatory nitrate reduction to ammonium and the efficacies of these mechanisms in the environment, Environ. Pollut., 345, 123480, <https://doi.org/10.1016/j.envpol.2024.123480>, 2024.~~

- 920 ~~Weber, N., Bouwes, N., Pollock, M. M., Volk, C., Wheaton, J. M., Wathen, G., Wirtz, J., Jordan, C. E.: Alteration of stream temperature by natural and artificial beaver dams, PLoS ONE, 12, e0176313, <https://doi.org/10.1371/journal.pone.0176313>, 2017.~~
- Wegener, P., Covino, T., Wohl, E.: Beaver-mediated lateral hydrologic connectivity, fluvial carbon and nutrient flux, and aquatic ecosystem metabolism, *Water Resour. Res.*, 53, 4606-4623, <https://doi.org/10.1002/2016WR019790>, 2017.
- 925 Wohl, E., Dwire, K., Sutfin, N., Polvi, L., Bazan, R.: Mechanisms of carbon storage in mountainous headwater rivers, *Nat. Commun.*, 3, 1263, <https://doi.org/10.1038/ncomms2274>, 2012
- Wright, J. P., Jones, C. G., Flecker, A. S.: An ecosystem engineer, the beaver, increases species richness at the landscape scale, *Oecologia*, 132, 96-101, <https://doi.org/10.1007/s00442-002-0929-1>, 2002.
- 930 ~~Wróbel, M.: Population of Eurasian beaver (Castor fiber) in Europe, Global Ecology and Conservation, 23, e01046, <https://doi.org/10.1016/j.gecco.2020.e01046>, 2020.~~
- Wróbel, M., Krysztofiak-Kaniewska, A.: Long-term dynamics of and potential management strategies for the beaver (*Castor fiber*) population in Poland, *The European Zoological Journal*, 87, 116-121, <https://doi.org/10.1080/24750263.2020.1727969>, 2020
- Wrzesiński, D.: Identyfikacja cech reżimu odpływu rzek w Polsce na różnych poziomach grupowania, *Badania Fizjograficzne*, 68, 265-278, 2017.
- 935 Żurowski, W.: Bobry w górach, *Przyroda Polska*, 6, 10-11, 1986.
- Żurowski, W., Kasperczyk, B.: Results of beaver reintroduction in some Carpathian mountain streams, *Ochrona Przyrody, Zakład Ochrony Przyrody i Zasobów Naturalnych PAN*, 47, 201-213, 1990.

Appendix A – Variation in percentage changes of physico-chemical parameters at all study sites

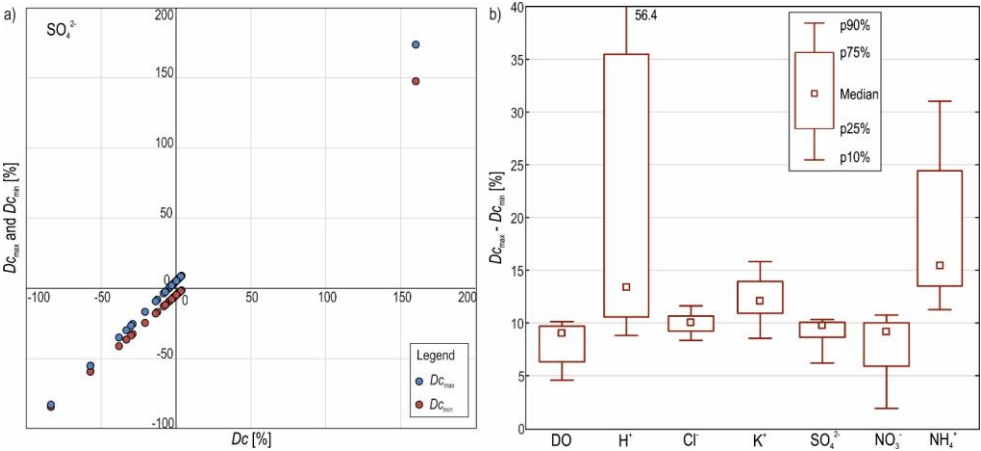
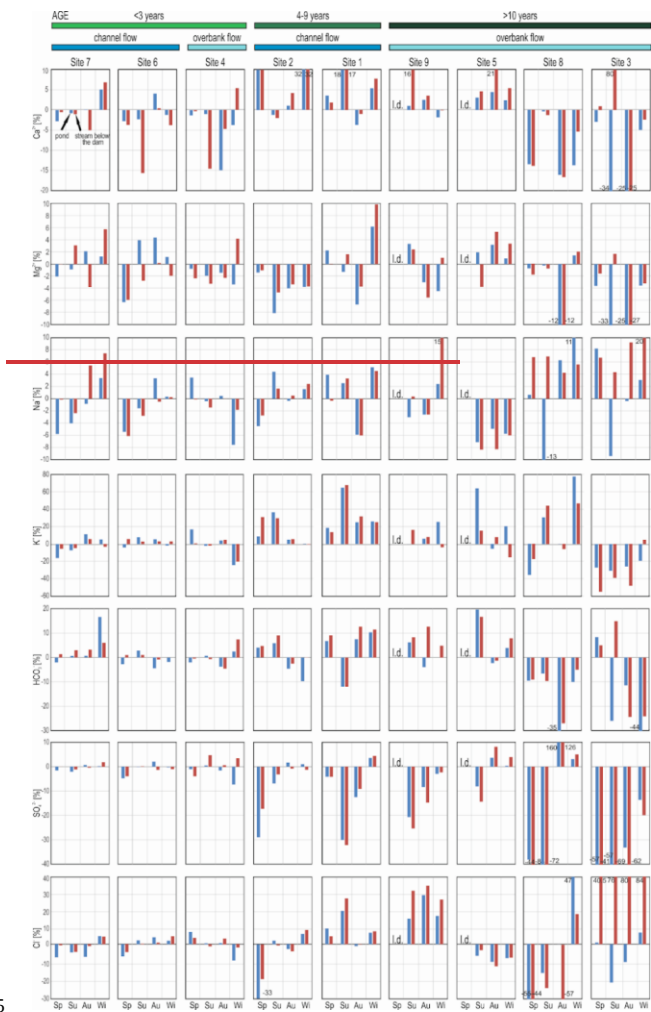


Figure A1. The lowest ($D_{c_{\min}}$) and highest ($D_{c_{\max}}$) possible D_c values, taking into account the percent relative errors of the chemical analysis, using the difference in SO_4^{2-} concentration in pond water and stream water above the ponds as an example (a). The differences between the lowest ($D_{c_{\min}}$) and highest ($D_{c_{\max}}$) possible D_c values for the selected chemical parameters are shown in (b).

Sformatowano: Normalny



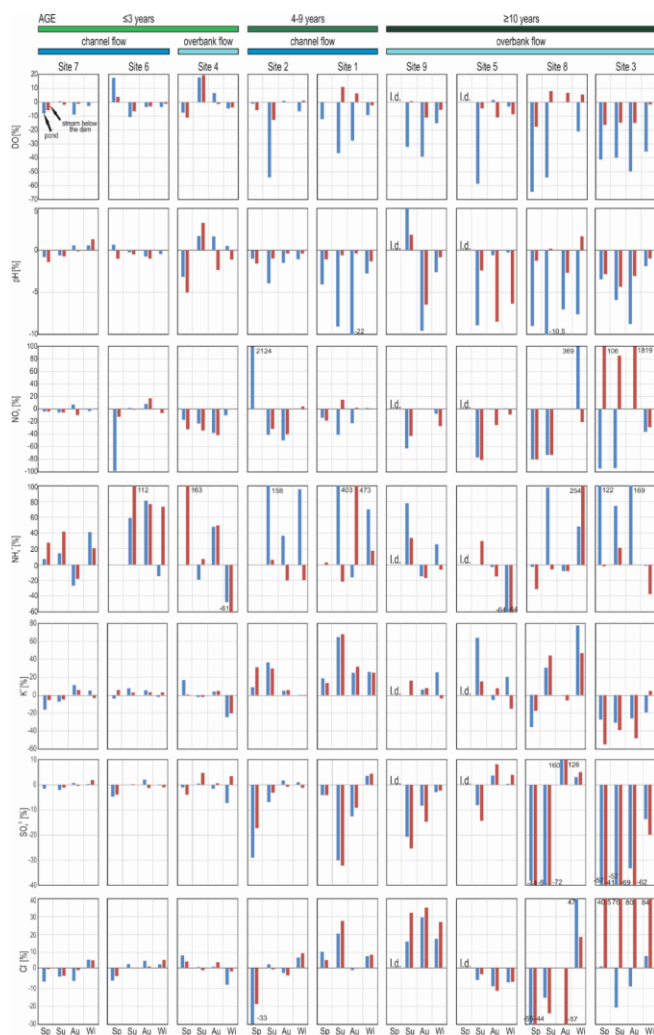


Figure A42: Percentage changes (D_c) in selected physico-chemical parameters main ion concentrations in and below beaver ponds compared to their upstream values (Sp – spring; Su – summer; Au – autumn; Wi – winter; l.d. – lack of data). Only the parameters for which $|D_c| > 15\%$ are shown.

— sformatowano: Czcionka: Kursywa

950

955

Figure A2: Percentage changes (D_c) in pH, and DO, NH_4^+ and NO_3^- concentrations in and below beaver ponds compared to their upstream values (Sp—spring; Su—summer; Au—autumn; Wi—winter; l.d.—lack of data).

— **sformatowano:** Czcionka: 9 pkt, Pogrubienie

Sformatowano: Normalny

Sformatowano: Normalny

Figure A3. The lowest ($D_{c\min}$) and highest ($D_{c\max}$) possible D_c values, taking into account the percent relative errors of the chemical analysis, using the difference in SO_4^{2-} concentration in pond water and stream water above the ponds as an example (a). The differences between the lowest ($D_{c\min}$) and highest ($D_{c\max}$) possible D_c values for the selected chemical parameters are shown in (b).

the beaver dams in relation to values in streams above the beaver dams (n = 34). Average absolute changes ($|\overline{D_c}|$) > 15% are marked in bold.

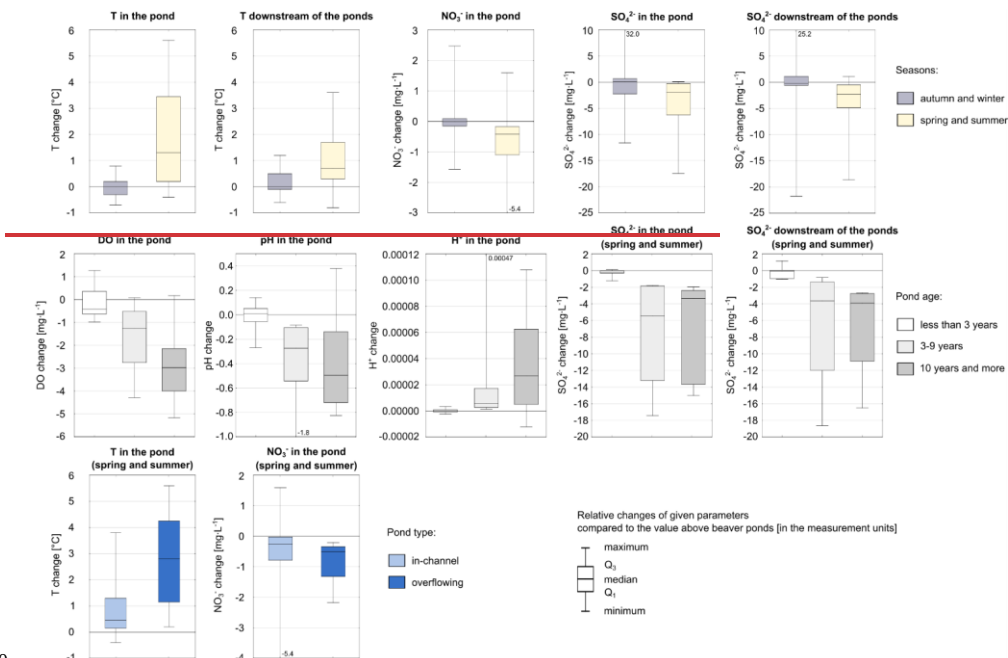


Figure A4: Comparison of the absolute changes of the selected parameters in the ponds/downstream of the beaver ponds (Table 3), across the different seasons, pond-age and type of pond.

965

Table A1: Statistical characteristics of absolute changes ($|Dc|$) of physico-chemical parameters values in ponds and streams below the beaver dams in relation to values in streams above the beaver dams (n = 34). Average absolute changes ($|Dc|$) > 15% are marked in bold.

Parameters	Beaver ponds		Streams below the beaver dams	
	Average value $ Dc $	Standard deviation	Average value $ Dc $	Standard deviation
DO	20.5	19.7	6.6	5.6
SEC	4.4	6.2	4.3	5.0
HCO ₃ ⁻	8.5	9.9	7.7	7.2
Cl ⁻	11.1	12.7	18.8	24.1
SO ₄ ²⁻	17.7	32.1	17.8	28.0
Ca ²⁺	7.8	9.9	10.2	14.8
Mg ²⁺	4.7	6.8	4.0	4.8
Na ⁺	4.2	3.2	4.6	4.4
K ⁺	19.4	19.2	17.5	18.1
NO ₃ ⁻	100.3	363.7	78.8	308.9
NH ₄ ⁺	54.4	76.4	51.1	90.5
H ⁺	294.9	962.6	57.8	90.2

Sformatowano: Interlinia: pojedyncze
— sformatowano: Czcionka: 9 pkt, Pogrubienie

— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie

— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie

— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie
— sformatowano: Czcionka: Nie Pogrubienie

Table A2: Results of the PCA analyses of the differences between inlet values and beaver ponds/streams below beaver ponds (Dc). Factor loadings that exceed 0.5 are marked in bold.

Parameters	PCA factor loadings					
	Beaver pond			Stream below beaver ponds		
	1	2	3	1	2	3
DO	0.05	0.87	-0.12	-0.78	-0.14	0.33
HCO ₃ ⁻	0.54	0.07	0.36	0.06	0.82	0.07
Cl ⁻	0.51	0.01	-0.73	0.67	-0.07	0.54
SO ₄ ²⁻	-0.09	0.63	-0.58	-0.59	-0.18	-0.58
Ca ²⁺	0.71	0.31	0.36	0.33	0.75	0.13
K ⁺	0.81	-0.15	-0.31	-0.69	0.24	0.32
NO ₃ ⁻	0.33	0.36	0.58	0.59	-0.63	0.21
NH ₄ ⁺	0.35	-0.63	-0.14	-0.33	0.10	0.46
H ⁺	0.11	-0.28	0.01	0.41	0.27	-0.60
Eigenvalue	1.97	1.88	1.60	2.60	1.84	1.47
% of expl. variance	0.22	0.21	0.18	0.29	0.20	0.16

970

Table A2: Correlations between upstream values and their respective Dc in the beaver ponds and below the ponds ($p < 0.5$ are marked in bold).

Parameter	Correlation between an upstream value of a given parameter and its respective <i>Dc</i>	
	in the pond	below the pond
<u>DO</u>	<u>0,27</u>	<u>-0,01</u>
<u>SEC</u>	<u>0,37</u>	<u>0,08</u>
<u>T</u>	<u>0,46</u>	<u>0,33</u>
<u>HCO₃⁻</u>	<u>0,08</u>	<u>-0,05</u>
<u>Cl⁻</u>	<u>0,00</u>	<u>-0,13</u>
<u>SO₄²⁻</u>	<u>0,05</u>	<u>0,07</u>
<u>Ca²⁺</u>	<u>0,20</u>	<u>-0,13</u>
<u>Mg²⁺</u>	<u>0,08</u>	<u>0,11</u>
<u>Na⁺</u>	<u>-0,01</u>	<u>-0,41</u>
<u>K⁺</u>	<u>-0,06</u>	<u>0,04</u>
<u>NO₃⁻</u>	<u>-0,16</u>	<u>-0,15</u>
<u>NH₄⁺</u>	<u>-0,30</u>	<u>-0,35</u>
<u>H⁺</u>	<u>-0,04</u>	<u>-0,15</u>

Appendix B – Concentrations of the chemical components in the longitudinal and vertical profiles

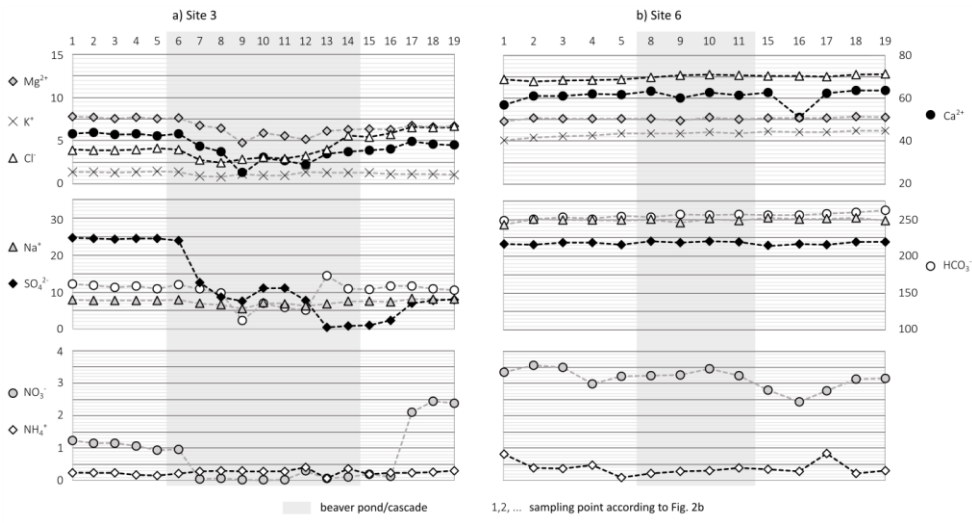


Figure B1: Concentrations of the chemical components of water [$\text{mg}\cdot\text{L}^{-1}$] in the longitudinal stream profiles at study sites 3 (a) and 6 (b) on 10 September 2023.

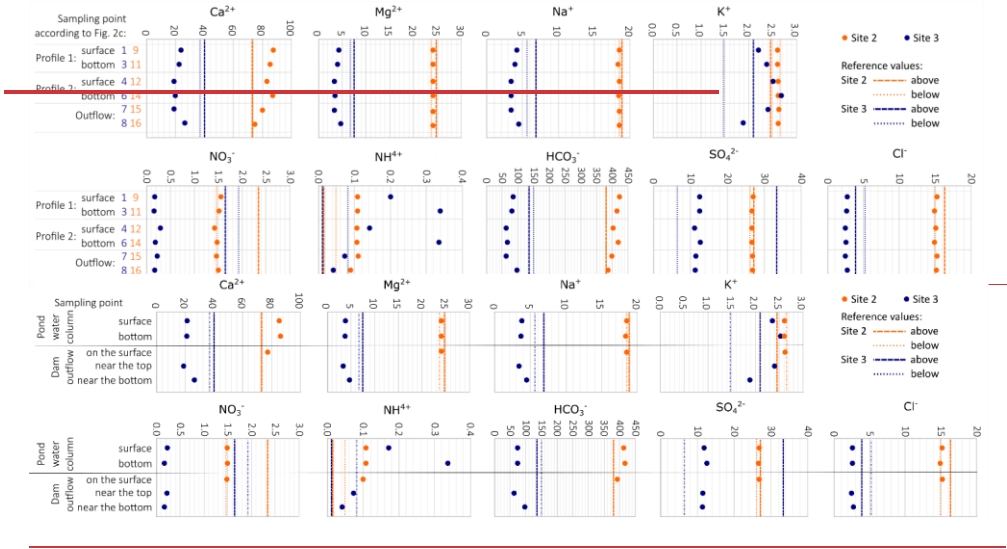


Figure B2: Average C_c concentration of the chemical components of water [mg·L⁻¹] in the vertical profiles of study sites 2 and 3 on 10 July 2024.

Sformatowano: Legenda