Tsunamigenic potential of unstable masses in the Gulf of Pozzuoli, Campi Flegrei, Italy

Filippo Zaniboni[1], Luigi Sabino[2], Cesare Angeli[1], Martina Zanetti[1] and Alberto Armigliato[1]

[1] Department of Physics and Astronomy "A. Righi", Alma Mater Studiorum - University of Bologna, Bologna, 40127, Italy
[2] Department of Mathematics and Physics, University of Campania "L. Vanvitelli", Caserta, 81100, Italy

Correspondence to: Filippo Zaniboni (filippo.zaniboni@unibo.it)

Abstract. Campi Flegrei, one of the most monitored and studied volcanic areas in the world, has recently attracted significant attention due to the reactivation of its peculiar activity, consisting of small earthquakes, geothermal phenomena and slow subsidence/rapid uplift cycles, known as bradyseism. While much of the research and of the attention focuses on potential eruptions or other volcanic-related activities, the potential hazard posed by gravitational instabilities has received little consideration. The interaction of the destabilized masses with water can trigger tsunamis, potentially affecting the whole coastline of the Gulf of Pozzuoli, which lies above the Campi Flegrei caldera. Moving from the limited available geomorphological studies of the area, a set of four landslide-tsunami scenarios (one subaerial and three submarine sources) are reconstructed. These are simulated through a sequence of numerical codes, accounting for all the phases of the tsunami process, providing insights into the distribution of tsunami energy and identifying the most affected coastal stretches. Additionally, the study explores the influence of dispersion effects in the tsunami propagation and the occurrence of resonance effects in some minor inlets of the Gulf, emphasizing the importance of accounting for complex and non-linear coastal processes when treating landslide-generated tsunamis.

1 Introduction

The recent strengthening of the Campi Flegrei activity has raised many concerns about the potential impacts of volcanic-related manifestations on local population and infrastructures. The caldera, located in correspondence of an extremely densely inhabited area in the surroundings of Naples (South Italy), is one of the most active and dangerous in the world. The study of the hazard correlated to the Campi Flegrei activity, concerning the tephra dispersal in case of eruption, has been already treated in the scientific literature (Selva et al., 2021). On this basis, a National Civil Protection plan has been realized in case of emergency (https://mappe.protezionecivile.gov.it/en/risks-maps-and-dashboards/national-planning-phlegraean-fields/). Other considered potential hazards linked to the eruption of the Campi Flegrei caldera are pyroclastic flows (Neri et al., 2015), phreatic explosions (Mayer et al., 2016) and mud flows generated by the interaction between the ash ejected from the volcano and the rain (Isaia et al., 2021). Earthquakes are frequent, though characterized by low magnitude. As an example, according

to the September 2025 INGV - Osservatorio Vesuviano bulletin (https://www.ov.ingv.it/index.php/flegrei-stato-attuale), 423 events have been recorded during the month. Almost 88% of these had magnitude lower than 1, four exceeded $M_d = 2.0$ and the maximum was 4.0.

The interaction of volcanic activity with the sea and the consequent generation of tsunamis received some attention as well: the work by Paris et al. (2019) tested the effects of submarine volcanic explosions in the Gulf of Pozzuoli by means of numerical scenarios and a Probabilistic Tsunami Hazard Analysis (PTHA) methodology. Grezio et al. (2020) attempted a comprehensive approach including earthquakes, submarine landslides and volcanic explosions as potential sources for tsunami generation affecting the Gulf of Naples, implementing them into a PTHA providing hazard curves for different localities along the coasts.

Specifically, gravitational collapses are one of the least considered potential sources of natural hazards in the area. Volcanic activity at Campi Flegrei can induce instability both in the short term, through seismic shaking, and in the long term, due to slope steepening associated with the caldera uplift. The scenarios considered in Grezio et al. (2020) were purely synthetic, without evaluation of geological and morphological evidence, of the sliding dynamics and of possible hydrodynamic effects during the tsunami propagation. In occasion of the 30 June 2025 earthquake (magnitude 4.6), a rock mass detached from the coastal ridge of Punta Pennata, in Bacoli, at the western end of the Gulf of Pozzuoli, provoking some local sea level oscillations (https://en.cronachedellacampania.it/2025/06/terremoto-crollata-una-parete-di-punta-pennata-a-bacoli/), and putting in the spotlight such type of phenomenon.

This work aims to fill these gaps, by assessing the tsunamigenic potential of local submarine and subaerial landslides, evaluating the tsunami distribution patterns and the respective impact on the coasts, at the scale of the Gulf of Pozzuoli basin. The masses generating the waves are selected based on a worst-case credible approach (see e.g. Tonini et al., 2011), which relies upon the present morphology and upon the existing knowledge of the mass transport processes in the area. The tsunami hazard is then assessed through a set of numerical codes, already tested and applied in many other landslide-tsunami cases. This investigation has been preliminarily performed and reported in Sabino (2024): here it is extended including the role of dispersion in the tsunami propagation, since it can have significant influence in the impact of the waves on the coasts.

1.1 Campi Flegrei volcano

Campi Flegrei is a complex volcanic system with a history spanning at least the last 78,000 years (Perrotta et al., 2006), characterized by intense unrest episodes involving ground deformation and seismicity (de Natale et al., 2006), together with explosive eruptions and variable vent locations (Bevilacqua et al., 2015). Seismic studies have revealed a large magmatic sill at depth, potentially connected to the surface through deep fractures (Zollo et al., 2008). The heart of Campi Flegrei is the vast caldera, an almost circular structure with a diameter of about 10 km (marked by the red dashed line in Figure 1) involving the western districts of Naples in its subaerial expression, with a total potentially affected population of more than 360 thousand, living in the cities of Pozzuoli, Bagnoli and Bacoli. The submarine part of the caldera is covered by the Gulf of Pozzuoli, a small, shallow water sub-basin of the wider Gulf of Naples. The landscape of this area has been shaped by several volcanic

events: the caldera was formed by a catastrophic volcanic explosion that occurred approximately 39,000 years ago. This event, an eruption of 100-200 km³ of rock called "Ignimbrite Campana" (Rosi et al., 1983; Perrotta et al. 2006), shaped the region's topography, creating a unique landscape characterized by hills, fumaroles, and hot springs. At the centre of the caldera rises the Solfatara crater, a focal point for the volcanic and geothermal activity in the area. Historical reports from Roman times reveal a general trend of slow subsidence (rate of about 1-2 cm/yr), alternated with occasional episodes of faster uplift (Di Vito et al., 2016; De Vivo et al., 2020), a peculiar behaviour that took the name of "bradyseism". Soil subsidence can lead to coastal flooding, as testified by the submerged park of Baia, where Roman houses and constructions are still visible now at 6-8 m depth. The last significant eruption of Campi Flegrei caldera occurred in 1538, with 0.03 km³ of erupted products that gave rise to the hill of Monte Nuovo in one single night (De Vivo et al., 2001). After that, the floor of the caldera underwent slow and regular subsidence. In more recent times, some episodes of uplift interrupted this phase: 74 cm in 1950-52, 159 cm in 1970-72 and 178 cm in 1982-84 (Del Gaudio et al., 2010), resulting in a maximum rise of about 3.5 meters of the ground in the city of Pozzuoli, with shallow micro-seismicity recorded in response to fluid movement episodes.

At present, bradyseism, which resumed in mid-2023, is still ongoing. The GNSS network has measured, since January 2024, an uplift of more than 33 cm in some stations (see https://www.ov.ingv.it/index.php/monitoraggio-e-infrastrutture/bollettini-web). Seismic activity has been intensifying during this period, although most of the events are characterized by low magnitudes (about 90% of the events had magnitudes less than 1.0, see https://www.ov.ingv.it/index.php/monitoraggio-e-infrastrutture/bollettini-tutti/bollett-mensili-cf), with maximum depths around 4 km, predominantly concentrated within the first 2 km (Danesi et al., 2024).
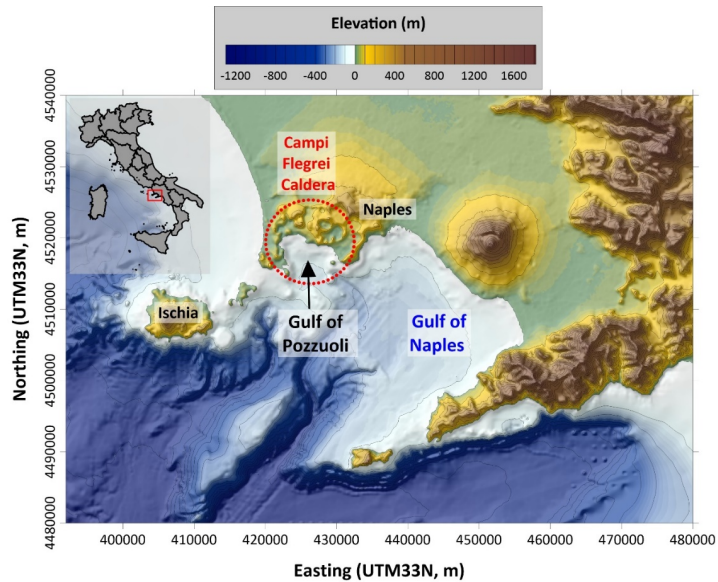
Figure 1. Morphological map of the Gulf of Naples (South Italy). The red-dashed circle delimits approximately the Campi Flegrei caldera, involving a subaerial part (west of Naples) and a submarine portion (Gulf of Pozzuoli).

2 Data and methods

The investigation on the tsunami hazard in the Gulf of Pozzuoli associated to the Campi Flegrei activity, triggering potential instabilities interacting with water, is here performed through numerical methods, which in turn implement approaches that are described in this section. An initial necessary premise concerns the importance of considering the dispersive effects in landslide-tsunami simulations, a task that is usually underestimated but whose effects could be relevant in the analysis of the tsunami impact on the coast.

2.1 Landslide-tsunamis and dispersive effects

Tsunamis are oscillations induced by a perturbation of the equilibrium state involving the whole water body, which can be produced by sudden changes in the sea bottom (earthquakes, submarine landslides, underwater volcanic explosions) or upon the sea surface (subaerial landslides, atmospheric perturbations, cosmogenic tsunamis).

95 In general, in hydrodynamics, each wave is subject to the dispersion relation, linking the phase velocity c to the wave number

96 k (or to its inverse, the wavelength λ): the smaller is the second (i.e., the bigger is the wavelength), the higher is the first. In

97 short, longer oscillations are faster than shorter ones (for a general overview about this topic see for example Saito, 2019).

98 A tsunami can be considered generally as a non-monochromatic wave, resulting from the superposition of different

99 components, each characterized by a specific wavelength, then with its own velocity. When λ is much bigger than the water

100 depth h of the involved basin, the hydrodynamic equations can be significantly simplified by means of the shallow-water (SW)

101 approach, in which tsunamis are treated as "long-waves". This is generally valid for waves generated by earthquakes, since

102 the source has dimensions that is usually much bigger than the typical depth of the sea. When the tsunami trigger is provided

103 by other phenomena, such as landslides, SW is known to neglect important hydrodynamic effects, such as dispersion, that can

104 affect significantly the wave propagation and impact on the coast. It is generally agreed that SW is considered proper when

105 the ratio λ/h is bigger than 20, while for lower values (i.e., for "shorter" waves) a more sophisticated and higher-order version

106 of the hydrodynamic equations should be considered, as for example the Boussinesq approximation (hereafter accounted for

107 as non-hydrostatic approach, NH).

108 A quantification of the dispersive effects on the tsunami propagation was attempted in Glimsdal et al. (2013). A rearrangement

109 of the considerations found in that work leads to the estimation of the ratio between distance and initial signal wavelength for

110 which the dispersion becomes relevant and cannot be neglected anymore. Calling this (non-dimensional) dispersion distance

111 as D, the expression is:

112 $$D = 0.025 \cdot \left(\frac{\lambda}{h}\right)^2 \qquad\qquad (1)$$

113 For "long waves", then, $\lambda/h \approx 20$ and $D \approx 10$: dispersive effects manifest at least at a distance ten times the initial

114 wavelength. Table 1 reports some typical values for wavelengths and water basin depths found respectively for: earthquake-

115 tsunamis (first line), for which generally SW approach is applicable; submarine landslide tsunamis (second line) for which SW

116 is valid only on limited domains; subaerial landslide tsunamis (third line), which can be considered in general as deep-water

117 (DW) waves, for which the NH approach is more suitable.

118 In general, we can see that dispersion affects every tsunami, also the "longer" ones, but it manifests only on very long distances,

119 where probably the perturbation itself has already been damped by other propagation effects. Neglecting dispersion means that

120 the different components of the tsunami travel all together and impact the coast at the same time; conversely, when considering

121 it, the longer components travel much faster than the shorter ones. This provokes an "unpacking" of the tsunami, that is much

122 more evident and effective with increasing distance from the source: in general, then, neglecting dispersion causes an

123 overestimation of the tsunami effects.

124

125 **Table 1. Examples of waves and of computing of respective dispersion distance. λ: initial wavelength; h: water depth; D: dispersion**

126 **distance, computed by Eq. (1); d: distance for which dispersion effects become predominant ($d = D \cdot \lambda$).**

λ (km)	h (m)	λ/h	Wave type	D	d (km)

100	4000	25	SW	15.6	1562.5
5	500	10	Weakly SW	2.5	12.5
1	200	5	DW	0.625	0.625

2.2 Overview on numerical techniques

Landslide-generated tsunamis are highly complex processes. Assessing their impact on the coast through numerical simulations requires numerous approximations and assumptions. The approach adopted here divides the entire process into distinct phases: i) the landslide motion, ii) the transfer of energy from the mass to the water, iii) tsunami propagation, and iv) the wave's impact on the coast. Each phase is treated independently, and back-interactions are not considered: for example, the mass-water interaction, where the wave's propagation can alter the water column and influence the dynamics of the landslide on the seafloor up to 20% (Harbitz et al., 2006), is neglected in this study, since those effects do not affect considerably the tsunami propagation. The phases are addressed sequentially, with the output of one stage serving as the input for the next.

Landslide motion. The movement of the mass along the seafloor triggers the tsunami. Unlike earthquake-generated tsunamis, where the source process can be considered instantaneous relative to the wave's propagation (at least as a first approximation), landslide-tsunamis exhibit a generation phase that evolves in comparable time with the ensuing waves. Thus, it is essential to accurately describe the mass dynamics and the evolution of shape changes. This is achieved using the numerical code UBO-BLOCK (see detailed description in Tinti et al., 1997), which divides the sliding mass into interacting portions. The equation governing the centre of mass (CoM) motion is determined by the forces acting on the mass: gravity, buoyancy, basal friction, surface drag, and an internal interaction force accounting for energy dissipation due to deformation. The last element is crucial, since it accounts for shape changes of the mass during its motion, a factor that influences also the wave generation and that can't be neglected: it is found, in fact, that rigid block approximation for landslide collapses produces an overestimation of the generated tsunamis (see for example the review in Yavari-Ramshe and Ataje-Ashtiani, 2016). The resulting time-series of geometric and dynamic quantities describing the landslide motion is then generated. Applications of UBO-BLOCK to landslide-tsunami events can be retrieved in Tryantafillou et al. (2020), Zaniboni et al. (2021), Gallotti et al. (2021), Gasperini et al. (2022), Gallotti et al. (2023), Zaniboni et al. (2024) and in the references therein.

Tsunamigenic impulse. The next step involves assessing the perturbation to the water column caused by the sliding motion along the seafloor. This disturbance provides the dynamic forcing term for the wave propagation equations, which are not instantaneous but evolve over time. The change in the seafloor due to the landslide is interpolated onto the tsunami grid nodes, with a filter applied to local sea depths that suppresses high frequencies. These tasks are handled by the intermediate code UBO-TSUIMP (details in Tinti et al., 2006).

Tsunami propagation and coastal impact. The final two phases are simulated using the JAGURS code, which solves the fluid dynamics equations using finite difference methods. Tsunami propagation can be modelled using either the shallow-water

161 (SW) equations or a more sophisticated approach that accounts for vertical variations in hydrodynamic quantities,
162 implementing for example the Boussinesq model (NH). The non-hydrostatic method allows the code to capture dispersion
163 effects, which are crucial for landslide-generated tsunamis, as described in Section 1.1. JAGURS supports simulations over
164 computational grids with varying resolutions (using a nested grid approach) and can model coastal inundation. It is also
165 optimized for parallel computing with MPI and OpenMPI coding, enabling the simulation of dispersive effects over large
166 computational domains (see Baba et al., 2015, for further description). While JAGURS is widely used for earthquake-generated
167 tsunamis (Ren et al., 2021; Ehara et al., 2023), for landslide-generated events it requires some adaptations, due to the nature
168 of the phenomenon itself. As previously mentioned, the tsunamigenic impulse for landslide-tsunamis is not instantaneous:
169 then, it must be provided to the code as a sequence of single impulses, one for each time step describing the landslide motion
170 along the sea bottom and producing the perturbation.

171 **2.3 Computational grid**

172 The numerical codes applied here require as input a equally-spaced computational grid, whose definition and assembling needs
173 a compromise among different aspects: the detailed description of the morphology, mainly for the coastal areas, requires a
174 huge number of nodes, that on the contrary needs to be limited basing on the computational resources available. Additionally,
175 landslide-tsunamis are known to affect limited domains, due to the dispersive effects characterizing their oscillations that
176 produce a rapid damping of their amplitude. In the specific case studied here, the morphology of the seabed suggests that the
177 mass instabilities induced by the Campi Flegrei activity have typically small volumes, producing waves that will presumably
178 travel modest distances, with reduced consequences on the coasts. Under all these considerations, the selected tsunami
179 computational domain covers the Pozzuoli Gulf for an area of 12 km x 11 km approximately, with a spatial step of 20 m and
180 a total number of nodes of about 340 thousand. Raw data have been retrieved from the database MaGIC for the coastline and
181 the bathymetry (DPC), and from the database Tinitaly (Tarquini et al., 2023) as concerns the topography.
182 From The morphology, that can be inferred from the general map in Figure 1 and with more detail in Figure 2, it is possible to
183 infer some insights about landslide triggering and the ensuing tsunami propagation: i) the underwater slopes are in general
184 quite gentle, inhibiting high initial acceleration of the sliding masses, one of the most important factors in tsunami genesis
185 (e.g., Lovholt et al., 2015). Only the areas close to the Gulf's mouth opposite sides, i.e., Capo Miseno on the west and Nisida
186 Bank on the east (see Figure 2 for toponyms), show steep submarine gradients. ii) the coastal slope is generally flat, favoring
187 water ingression and tsunami penetration; only the two abovementioned areas (Capo Miseno and Nisida) are characterized by
188 steep coastal profiles, that can also produce rapidly moving collapses into the water. iii) the sea is rather shallow within the
189 Gulf, with maximum depth reaching about 100 m, while it deepens eastward and southward. This will have consequences on
190 the wave propagation in the basin, since, as we have seen, the sea depth deeply influences the tsunami behaviour during the
191 propagation. iv) finally, but not less importantly, at this level of detail it is possible to represent the main piers and harbour
192 structures (well visible at Pozzuoli and Bagnoli, Figure 2), which influence the wave propagation with local effects, such as
193 for example multiple reflections and resonance.

ha eliminato: regularly

ha eliminato: shows some remarkable features as concerns

ha eliminato: -tsunami

197

2.4 Mass instabilities in the Gulf of Pozzuoli and landslide scenarios

The evaluation of the landslide-tsunami hazard in the Gulf of Pozzuoli requires, as a first step, to identify the sources, i.e., masses that have the potential to generate waves, both in submarine and in the subaerial environments. This investigation is here performed through a scenario approach, meaning that those collapses are hypothesized starting from geological and morphological evidence, studying their signatures (scars, slopes, deposits) and the ensuing tsunamis evaluated through the numerical routine previously illustrated. The assumption is that such scenarios represent the range of possible and credible worst events occurring in the area, following the approach called Worst-case Credible Tsunami Hazard Assessment (WCTHA, see Tonini et al., 2011 for description and application), which is suitable to phenomena like landslide-tsunamis, where neither recurrence time are defined nor extensive catalogues of events are available, contrary to the most adopted approach in tsunami science (PTHA, see e.g. Behrens et al., 2021). In the specific case of the Gulf of Pozzuoli, we will see that, lacking detailed bathymetric surveys of the seabed specifically devoted to map and describe such occurrences, the WCTHA is not fully applicable: evidence of past collapses is scarce and a general pattern of the potential mass movements is not defined. Moreover, in a context like the Campi Flegrei, bradiseismic activity, morphology and trigger can change rapidly in time, defining new threshold for "worst-case credible" scenarios. The scenarios that have been individuated, then, must not be considered as detailed reconstruction of past events, but as representative of categories of collapse events that potentially occurred, whose potential hazard is here evaluated through numerical simulations. In the following, as a first step, the search for mass collapse traces in the Gulf of Pozzuoli within the scientific literature is reported.

Recent magnetic surveys in the larger Gulf of Naples evidenced the presence of consistent deposits on the seabed, testifying an intense mass transport activity in the whole area (de Ritis et al., 2024), that could have probably generated tsunamis affecting the area of interest of this study. The focus, though, is here centred on local sources, i.e., potential landslides triggered by the seismic shaking related to the Campi Flegrei caldera, then along the slopes (submarine and subaerial) in the Gulf of Pozzuoli area. As already mentioned, this is a small, shallow water basin, whose detailed stratigraphic and morphological features have been revealed by high-resolution seismic and bathymetric surveys (Aiello et al., 2012; Somma et al., 2016). The area is characterized by numerous seismic units, both volcanic and sedimentary, and by a complex tectonic setting related to the intense Campi Flegrei volcanic activity. The northern part of the basin shows an inner shelf with maximum depth of 50 m, deepening to 100 m with gentle slopes and delimited by a belt of submarine volcanic edifices: starting from East, they are called Miseno Bank, Pentapalummo Bank and Nisida Bank (see Figure 2). The morphological investigations have revealed the presence of deposits in the deeper and flat part of the Gulf, especially around Miseno Bank and in the central part of the basin (areas in light brown, Figure 2; Aiello et al., 2012). The seismic sections reported in the same publication evidence the presence of buried deposits with peculiar characteristics, which have been characterized and denoted as paleo-landslides. Figure 2 reports the profiles along which they have been found: one lies along the transect L69_07 (in red), extending in the E-W direction and showing a potential deposit close to Nisida; the second refers to the line L74_07 (in magenta), running in

230   the N-S direction from Pozzuoli. The morphological evidence close to Miseno Bank and the two buried deposits found in the

231   seismic profiles will be taken as the basis for the submarine landslide scenarios adopted for this investigation.

232

233
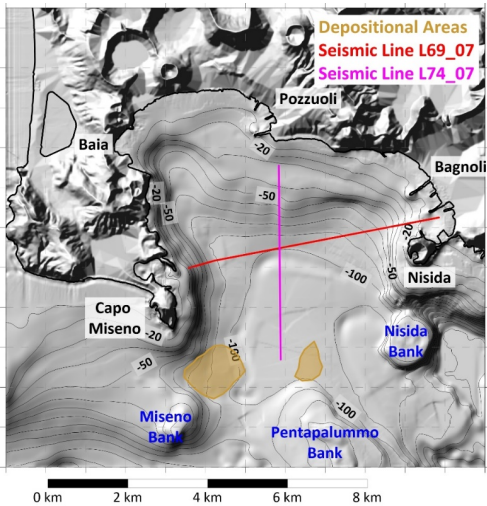
Figure 2. Morphological map of the Gulf of Pozzuoli. Black labels denote the main coastal toponyms, blue ones the submarine volcanic edifices. The brown contours mark the recognized depositional areas; the red and magenta lines report the seismic line called L69_07 and L74_07 respectively. Such features are retrieved from Aiello et al. (2012).

237

238   Regarding subaerial sliding, a comprehensive geodatabase (CAFLAG) documents 2302 landslide events from 1828 to 2017,

239   most of which consists of rock falls affecting volcanic slopes and rainfall-induced slides in pyroclastic deposits (Esposito and

240   Matano, 2023). Landslide hazards affect over 15% of the subaerial Campi Flegrei area, with varying risk levels among towns

241   (Calcaterra and di Martire, 2022). The events of interest here are the ones potentially interacting with water: the candidates are

242   then restricted to collapses along the coastline that are not simple rockfalls (surely generating high waves but only locally,

243   dissipating quickly, as in the case of June 30[th], 2025, previously cited), but more complex body collapses involving a coherent

244   mass impacting the water and moving along the seafloor.

245   Based on all these considerations, a set of four landslide scenarios has been arranged for the numerical simulations. Table 2

246   summarizes their geomorphological characteristics (volume, area, maximum thickness and initial elevation), while Figure 3

247   reports the position of the initial masses for each case. Three of them are submarine and cover different positions over the Gulf

248   of Pozzuoli, while the fourth is subaerial.

249 Scenario 1 (blue contour in Figure 3) is located just south of Capo Miseno, at the western end of the Gulf, and has been
250 reconstructed starting from the deposit shown in brown in Figure 2. The hypothesis is that the mass detached from the seafloor
251 depression between Capo Miseno and the Miseno Bank, with the constraint to obtain a volume comparable to the observed
252 deposit at the toe of the slope: since an accurate estimate of this does not exist, a conservative approach has been adopted
253 basing on the hypothesized boundary and on a reasonable thickness distribution, basing on the seafloor morphology. The
254 volume obtained for this scenario is of almost 3 million m^3.

255 Scenario 2 (in magenta, Figure 3) lies in the central part of the Gulf and has been built based on the buried paleo-landslide
256 recognized in the seismic profile just south of Pozzuoli (magenta line, Figure 2). Its morphology is quite arbitrary, since scarce
257 information exist on this hypothesis. Adopting again a conservative approach, this has been taken similar to Scenario 1, with
258 volume and initial area slightly smaller, though its shape is more elongated in the sliding direction.

259 Scenario 3 (green boundary, Figure 3) is placed in the eastern part of the basin, and recalls a buried paleo-landslide as well,
260 relative to another seismic transect (E-W from Nisida, see Figure 2, red line). This scenario shows a slightly larger volume
261 (around 4 million m^3), a slightly larger initial thickness and moves from shallower water: all these elements suggest a likely
262 higher capability of triggering relevant waves.

263 Scenario 4 (in black, Figure 3) is the only subaerial scenario, and is located along the coastal cliffs of Capo Miseno, at the
264 western end of the Gulf of Pozzuoli. It has been chosen by morphological considerations and recalling the 30 June 2025
265 rockfall, assuming the large coastal subaerial scar of the eastern flank of Capo Miseno - still visible now - originated from a
266 single, sudden collapse. The resulting scenario is quite different from the other cases: volume much smaller (around half
267 million m^3) and much larger initial thickness (maximum of more than 50 m).

268 As mentioned previously, accurate characterisation of geotechnical properties and rheological behaviour of these masses are
269 not available. Since these factors can significantly influence both the landslide dynamics and the ensuing tsunami, this study
270 adopts a set of reasonable assumptions, common to all involved cases. The slides are considered predominantly translational,
271 allowing for elongation during motion and descent toward the deeper, central part of the basin. An exception is Scenario 1,
272 where the presence of a hypothesized depositional area acts as a constraint on the model parameters regulating the dynamics.
273 Although these assumptions are simplified and approximate, and each case would deserve more accurate reconstruction and
274 characterization, they are considered acceptable within the context of WCTHA and for the purposes of this work, aiming at
275 providing a first glance of the potential hazard of landslide-tsunamis in the area.

276
277 **Table 2. Morphological characteristics of the Gulf of Pozzuoli landslide scenarios.**

Scenario	Environment	Volume (10^6 m³)	Area (km²)	Maximum Thickness (m)	Initial maximum elevation (m)
1	Submarine	2.98	0.77	9.47	-49

2	Submarine	2.30	0.56	10.11	-37
3	Submarine	4.12	0.63	12.73	-27
4	Subaerial	0.58	0.03	56.77	126
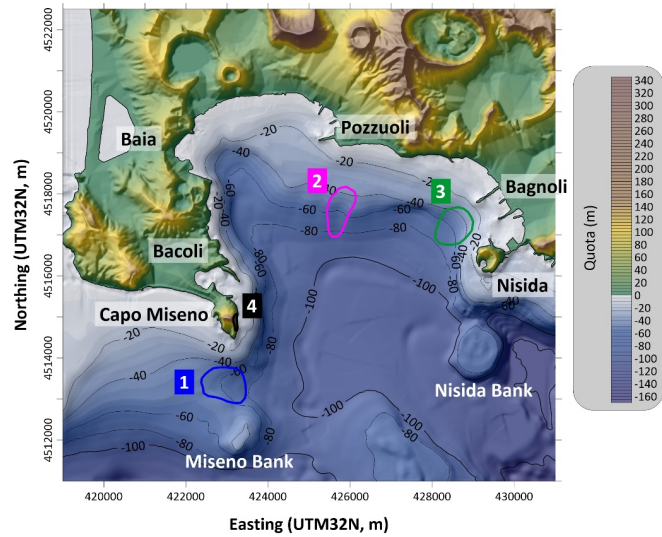
Figure 3. Location of the initial bodies for the four landslide scenarios hypothesized: in blue, Scenario 1, between Capo Miseno and Miseno Bank; in magenta, Scenario 2, south of Pozzuoli; in green, Scenario 3, offshore Bagnoli; in black, Scenario 4, along the cliffs of Capo Miseno.

3 Results

3.1 Landslide simulations

The code UBO-BLOCK has been applied to each of the scenarios described in the previous section. The software requires as input the initial landslide configuration (the undisturbed sliding surface and the upper surface of the mass), the predefined trajectory of the CoM and the lateral boundaries of the surface swept by the sliding motion. In this way it is possible to obtain the time history of the landslide shape changes and of its dynamics, representing the input for the computation of the tsunamigenic impulse.

3.1.1 Scenario 1

The first scenario is submarine, with a volume around 3 million m^3, and is placed south of Capo Miseno. Figure 4A shows the initial thickness distribution (yellow-red scale), and the predefined trajectory for the CoM, that has been determined based on the position of the final deposit found from the geomorphological survey (dashed-blue boundary). Figure 4B reports a section of the landslide, taken along the CoM trajectory: as previously noticed, the slopes are quite gentle, with an average value of 1.5° for this case. In the simulation, the sliding mass settles between 80 and 100 m sea depth (red line, Figure 4B), reaching a maximum velocity of around 5 m/s after 200 seconds (Figure 4C), and decelerating quickly due to low seafloor gradient. Figure 4C reports the Froude number (Fr) evolution in time as well: this dimensionless quantity is computed as the ratio between the horizontal component of the landslide velocity and the tsunami phase velocity in the shallow-water approximation ($\sqrt{gh}$, with g gravitational acceleration and h water depth). When Fr approaches the unity, the velocities of the two quantities are similar, and the mass-wave system reaches resonance condition; for supercritical values ($Fr > 1$) the mass moves faster than the wave: this occurs mainly in shallow water; in the subcritical regime ($Fr < 1$), typical of submarine slides, the wave travels much faster than the slide, which is then unable to "feed" the main tsunami front. In other words, Fr provides an indication of the efficiency of the energy transfer from the sliding mass to the wave. As already mentioned, in this investigation the wave-mass feedback (i.e. the effect of the generated tsunami on the slide motion) is not accounted for. For Scenario 1, Fr attains maximum values around 0.2 corresponding to the velocity peak, accounting then for a poor efficiency in the tsunami generation process.

ha eliminato: , depending on the water depth in a first instance

ha eliminato: one

ha eliminato: measures

321

322
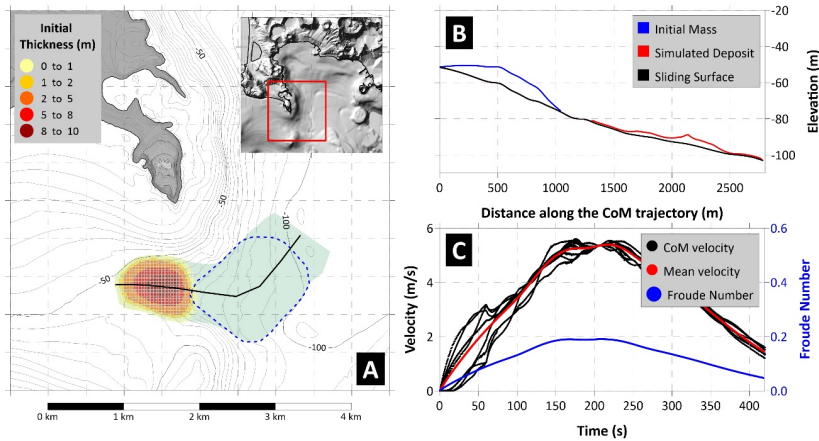
Figure 4. Panel A) Map of the initial sliding mass for Scenario 1, with initial thickness shown by the yellow-red scale. The black line marks the CoM predefined trajectory, defined to fit the observed deposit (dashed-blue boundary). The area swept by the sliding motion is highlighted in green. Panel B) Landslide profile along the CoM trajectory: in black the undisturbed sliding surface; in blue the initial mass; in red the simulated deposit. Panel C) Sliding velocity (red for average, black for each CoM) and Froude Number (in blue) time histories.

3.1.2 Scenario 2

The second scenario is still submarine and is placed in the central part of the Gulf of Pozzuoli, about 1 km offshore from the piers of the homonymous city (Figure 5A). The hypothesized initial mass has been placed along the steeper slope connecting the shallow-water shelf to the deeper sea. The volume is similar to Scenario 1 (see Table 2), and the predefined sliding direction (black line in Figure 5A) mainly extends in the north-south direction. The simulation shows the deposit reaching the sub-horizontal seafloor at about 100 m depth (Figure 5B), with acceleration and deceleration phases almost symmetric, around the peak velocity value of 9 m/s (Figure 5C). The maximum value of Fr is here higher than the previous case (more than 0.3), remaining however largely subcritical and then limiting the build-up of the wave front.

336

337
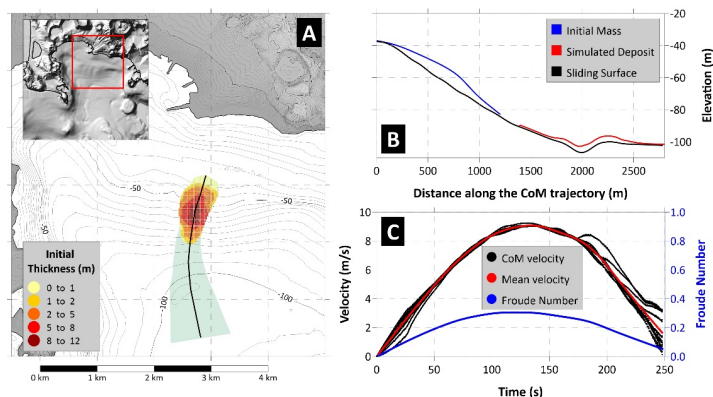
Figure 5. Panel A) Map of the initial sliding mass for Scenario 2, with initial thickness shown by the yellow-red scale. The black line marks the CoM predefined trajectory. The area swept by the sliding motion is highlighted in green. Panel B) Landslide profile along the CoM trajectory: in black the undisturbed sliding surface; in blue the initial mass; in red the simulated deposit. Panel C) Sliding velocity (red for average, black for each CoM) and Froude Number (in blue) time histories.

3.1.3 Scenario 3

The last submarine scenario is located on the eastern side of the basin, just north of the small peninsula of Nisida and few hundreds of meters offshore Bagnoli (Figure 6A). As for the previous cases, the initial thickness is shown by the area in the yellow-red scale, showing that the mass is not distributed uniformly, but with the thicker part placed in deeper water. The sliding motion follows the main bathymetric gradient, south-westward (black line, Figure 6A), stopping at about 100 m depth, where the slope is quite horizontal (Figure 6B). The dynamics is characterized by a shorter acceleration phase, reaching the maximum velocity of almost 9 m/s after around 2 minutes (Figure 6C), followed by a longer deceleration taking 4 minutes before stopping. Similarly to scenario 2, Fr attains maximum values of 0.3, meaning poor efficiency in tsunami generation.

350

351
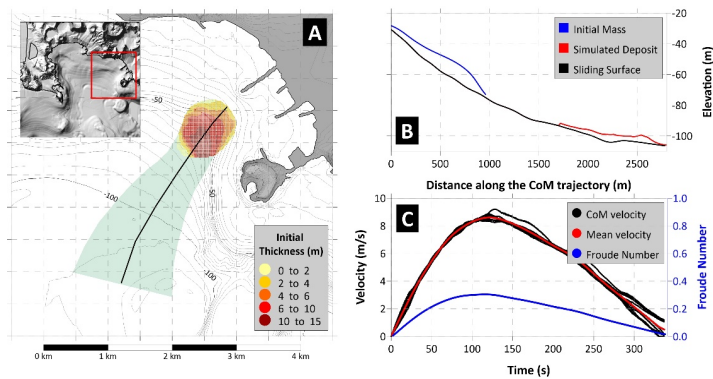
Figure 6. Panel A) Map of the initial sliding mass for Scenario 3, with initial thickness shown by the yellow-red scale. The black line marks the CoM predefined trajectory. The area swept by the sliding motion is highlighted in green. **Panel B)** Landslide profile along the CoM trajectory: in black the undisturbed sliding surface; in blue the initial mass; in red the simulated deposit. **Panel C)** Sliding velocity (red for average, black for each CoM) and Froude Number (in blue) time histories.

3.1.4 Scenario 4

This scenario is the only subaerial one and presents very different morphological features compared to the previously illustrated cases: much smaller volume and initial area (see Table 2), much larger initial thickness, and an aspect ratio (length/width) very different from the submarine cases, as visible from Figure 7A. The initial mass has been hypothesized "filling" the subaerial, coastal scar still visible now along the eastern flank of Capo Miseno. Though purely theoretical, this type of collapse is not unusual in the whole area of the Gulf of Naples, as testified by the June 30[th], 2025 event at Punta Pennata, located close to this area; this scenario can be considered an endmember for this category of landslides.

The simulation shows that the deposit reaches a sub-horizontal area at 70-80 m depth (Figure 7B), with dynamics again different from the previous cases: a sudden acceleration brings the sliding mass at about 23 m/s within 10 seconds (Figure 7C), due to the very steep slope characterizing the first part of the trajectory (black line in Figure 7B); then the submarine shelf in very shallow water provokes an abrupt deceleration, down to 5 m/s, before a second acceleration due to the increasing slope between 20 and 60 m b.s.l., up to 10 m/s. Finally, the slide stops about 2 minutes after the onset. The Froude number crossed the critical value after around 20 seconds, when the mass is decelerating and moving along the shallow water platform offshore Capo Miseno: this configuration turns out to be very efficient in generating the tsunami, since the waves are moving slower than in deep water and they are coupled with the mass motion on the seafloor.

371
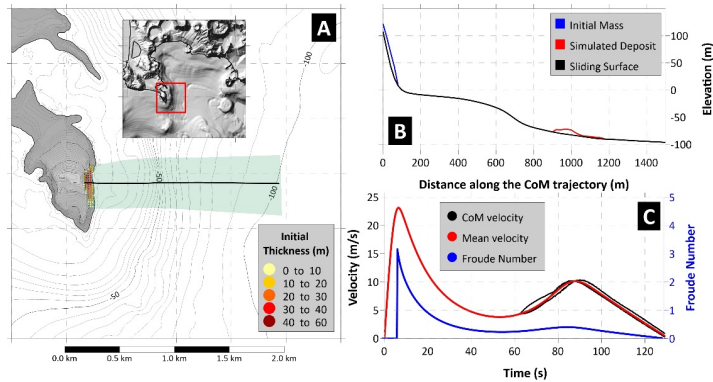
Figure 7. Panel A) Map of the initial sliding mass for Scenario 4, with initial thickness shown by the yellow-red scale. The black line marks the CoM predefined trajectory. The area swept by the sliding motion is highlighted in green. Panel B) Landslide profile along the CoM trajectory: in black the undisturbed sliding surface; in blue the initial mass; in red the simulated deposit. Panel C) Sliding velocity (red for average, black for each CoM) and Froude Number (in blue) time histories.

3.2 Tsunami simulations

As illustrated previously, tsunamis can be significantly affected, during the propagation, by the hydrodynamic effect of dispersion, due to the different phase velocity characterizing its components. This phenomenon is particularly evident for short oscillations, which are more often induced by landslides. It is possible to estimate the distance at which such effects become predominant through Eq. (1), applying it to each of the studied scenarios. The dispersion can be quantified through the ratio λ/h, with λ tsunami wavelength and h sea depth that can be determined as follows:

- λ, the initial wavelength of the tsunami, can be assessed in a first approximation as twice the longitudinal length of the slide, called b. This assumption, adopted in Heidarzadeh et al. (2023), though quite simplistic and rough, provides a first reasonable indication for this quantity.
- Since the focus here goes to the minimum value for the ratio λ/h, delimiting the validity of SW approach, a value representing the maximum depth h for the tsunami propagation inside the Gulf of Pozzuoli is assumed: 105 m. The waves that are in the SW regime for this value, will satisfy this requirement also for shallower water.

Table 3 reports the estimations obtained for the landslide scenarios here adopted: the three submarine cases are in the SW regime, with the dispersion manifesting only for distances larger than the Gulf of Pozzuoli dimension. The subaerial case (Scenario 4) generates waves that are suddenly dominated by the dispersive effects: for this case the use of SW for the propagation on the whole Gulf of Pozzuoli seems not suitable.

392

Table 3. Computation of the dispersion distance for the four scenarios here studied (b landslide length; λ: initial wavelength, assumed to coincide with $2b$; h water depth (fixed at 105 m); D dispersion distance, computed by Eq. (1); d: distance for which dispersion effects become predominant.

Scenario	Environment	b (m)	λ/h	D	d (km)
1	Submarine	1090	20.8	10.7	11.7
2	Submarine	1260	24.0	14.4	18.1
3	Submarine	1010	19.2	9.2	9.3
4	Subaerial	170	3.24	0.26	0.05

ha eliminato: 7
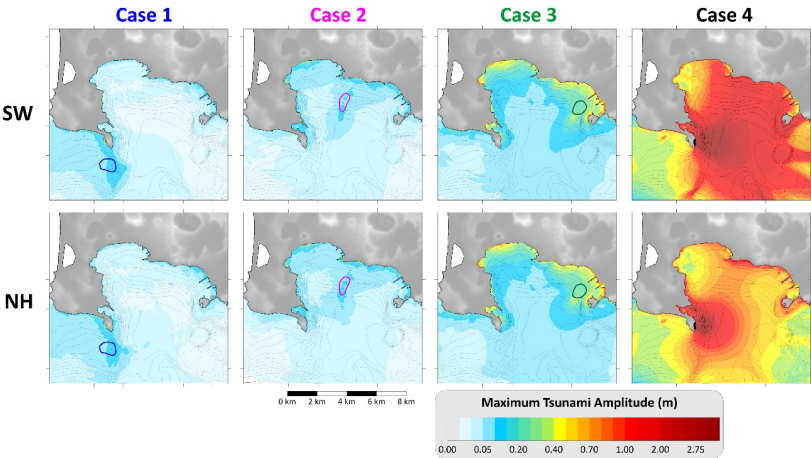
Figure 8. Maximum water amplitude on each node of the computational grid for the four scenarios considered: each of them are simulated through the shallow-water (SW) and the Boussinesq (NH) approach. The coloured boundaries report the initial position of the respective landslide source.

The simulations of the tsunamis generated by the sliding scenarios were performed using the JAGURS software, employing both the SW and the non-hydrostatic (NH) approaches, with the non-linear version of the equations in both cases. The computational grid resolution (20 m) is considered sufficient to investigate most of the tsunami features of interest in this work; grid nesting (meaning higher resolution grid in specific, target areas) is thus not implemented here. This strategy allows to investigate the suitability of the considerations previously made on the effects of dispersion on the tsunami propagation. Figure 8 illustrates the maximum water amplitude on each point of the computational domain for each scenario, comparing

408   the two approaches: SW (upper row of plots) and NH (lower row). For the submarine scenarios (1, 2 and 3) the differences are

409   negligible; for Case 4 (last column) significant differences are evident, with the NH approach showing much more localized

410   effects compared to SW. This confirms the earlier hypothesis that dispersion effects cannot be neglected for sources of this

411   type.

412   From a hazard assessment perspective, the submarine scenarios here treated generate relatively small tsunamis in the Gulf of

413   Pozzuoli. In Cases 1 and 2, the maximum wave amplitudes are on the order of some tens of centimetres. In Case 3, the

414   maximum amplitude exceeds 50 cm along the coastal stretch between Bagnoli and Nisida, which, while not catastrophic, could

415   still cause damages to small boats and generate currents in smaller sub-basins. In contrast, Case 4 produces more significant

416   waves, especially at the local scale. Although the NH simulations show a rapid damping, localized amplifications can be

417   observed in more distant coastal stretches, such as around Pozzuoli (northern coast) and the Nisida peninsula (on the east).

418   Figure 9 depicts the maximum tsunami amplitude along the coast vs the cumulative coastal distance, measured from the eastern

419   extreme of the computational domain and represented with the black labels, in the left plot. The SW-NH simulations are almost

420   indistinguishable for the three submarine scenarios (right plot in Figure 9), with the respective waves amplitude that are almost

421   superimposed. Cases 1 and 2 show limited effects on the coast, while Case 3 generates maximum amplitudes of over 0.5 m

422   between Pozzuoli and Nisida. As previously observed, on the contrary, for the subaerial case (Scenario 4) the dispersive effects

423   play a key role, lowering considerably the maximum amplitude at the coast starting from the Pozzuoli coastal stretch (around

424   20 km of cumulative distance along the coast), with values almost halved at the opposite side of the Gulf. Conversely, the two

425   approaches produce similar waves for coastal stretches closer to the source, since for these the tsunami travels in shallower

426   water and the dispersive effects are then less intense. As already observed, this scenario produces the most impacting tsunami,

427   with peak value close to 5 m in Capo Miseno and local amplifications at Pozzuoli and Nisida with amplitudes of almost 2 m.

428
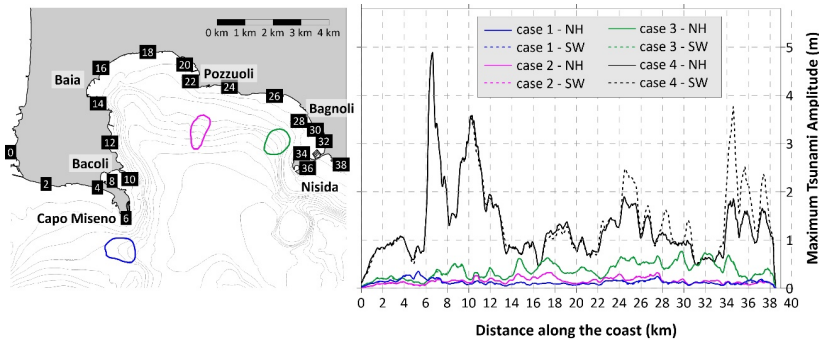
429 **Figure 9. The map on the left reports the initial boundaries of the landslide scenarios. The cumulative distance along the coast is**
430 **measured from the eastern extreme of the computational domain. The plot on the right depicts the maximum water amplitude along**
431 **the coast for the four scenarios, with comparison between NH (continuous lines) and SW (dashed lines).**

432 Figure 10 depicts the sketches of the first minutes of propagation for each scenario: all simulations show the typical feature
433 characterizing landslide-tsunamis, the almost circular shape of the tsunami signal, mimicking a point-like source. This polar
434 symmetry is lost when the wave interacts with shallow water and non-linear effects become predominant. A positive front
435 (yellow-red scale, meaning sea level increase) propagates in the same direction of the sliding motion, while a negative one
436 (cyan-blue scale) moves in the opposite side. For cases 2 and 3, the first manifestation of the tsunami at the coastal stretch
437 close to the source - presumably affected by the larger waves - is a negative signal, meaning that the water withdraws and is
438 followed later by a sea level increase: in terms of early warning this is undoubtedly an advantage, since it can act as a precursor
439 of an upcoming flooding. For case 1 the situation is different, since the slide motion does not have a direction opposite to the
440 dryland: a positive front enters the Gulf of Pozzuoli, while a negative one moves west of Capo Miseno, to the coastal stretch
441 out of the basin. As to case 4, the sliding motion starts in the subaerial environment, resulting into an always positive tsunami
442 front. Notice also the sequence of high frequency waves characterizing this scenario, especially evident in the 3- and 4-minutes
443 sketches (last row of plots), reflecting the smaller spatial dimensions of the tsunami source.

444

445
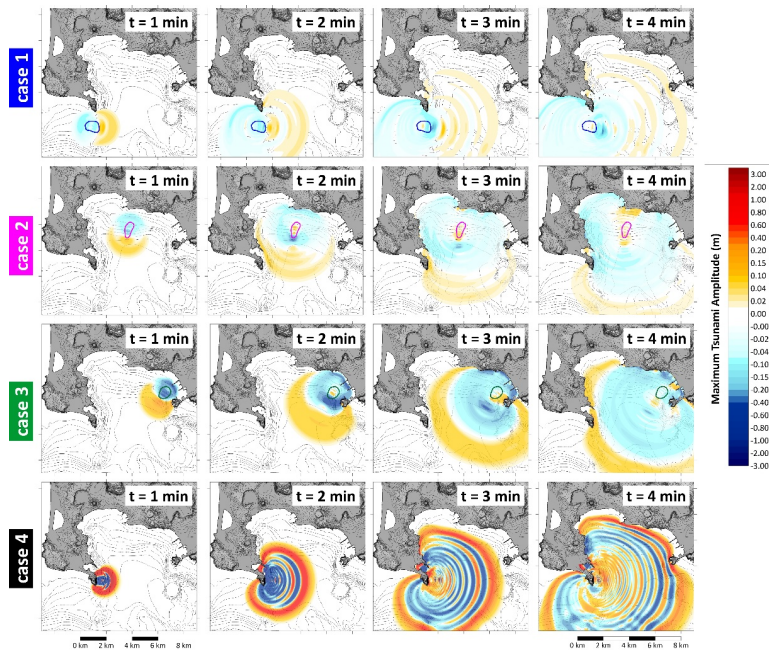
Figure 10. Propagation sketches at 1 minute intervals of the four landslide-tsunami scenarios investigated (NH approach). The yellow-red scale marks the positive values (sea level increase), the cyan-blue scale is for negative ones (sea level sinking). The coloured contours represent the respective initial landslide boundary.

In all cases represented in Figure 10, the tsunami affects most of the Gulf of Pozzuoli coasts within 4 minutes. Figure 11 reports the travel time for each point of the computational domain, providing precious insights from the warning point of view: independently from the initial position, the waves take approximately 3 to 6 minutes to affect all the coasts of the basin. Case 2 is the fastest, also due to its position at the centre of the Gulf. The north-western coastal stretch, on the contrary, is the one reached latest (5 to 6 minutes) in every scenario: the waves are slowed down by the shallow-water shelf that in this area is particularly large, compared to the other areas (as confirmed by the morphology, Figure 4). It is worth to specify that the code JAGURS registers the first positive signal for each computational cell: this explains the anomalous pattern of the tsunami opposite to the slide direction, particularly evident in Case 1 (westward, upper left panel, Figure 11) and Case 2 (northward, upper right panel).
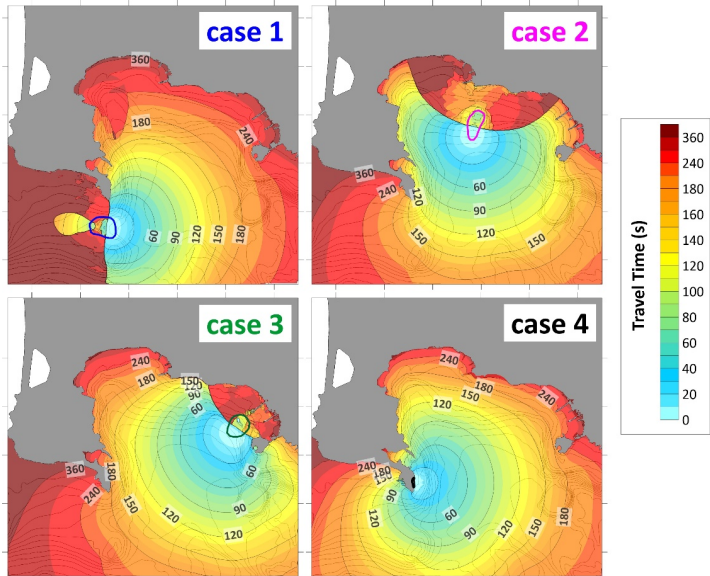
Figure 11. Travel time, in seconds, of the tsunamis generated by the four landslide scenarios here hypothesized. The position of the initial mass is marked by the respective coloured boundaries.

4 Discussion

The numerical simulations illustrated in the previous section provide some precious insights about the tsunami hazard pattern within the Gulf of Pozzuoli. Submarine collapses of the size adopted in this study generate waves that do not represent a threat for coastal population. However, they can damage harbour facilities and small boats, which are present in a great number within the Gulf of Pozzuoli. Conversely, the subaerial scenario produces high waves especially in the near field (almost 5 meters high), which rapidly attenuate with distance thanks to dispersive effects. Some distant coastal stretches are affected by local amplifications, with maximum amplitudes reaching almost 2 m (Pozzuoli, Nisida), highlighting the need to investigate this type of events. In most cases, the tsunami reaches the shoreline in a few minutes with a positive signal, meaning that it manifests as a water level increase. Only in limited coastal stretches, and not for all scenarios, the first signal is negative, i.e., the sea withdraws for some minutes, providing a crucial precursor of an incoming wave in terms of early warning. In a few words, these events can occur totally unannounced, reflecting the definition of "surprise tsunamis" given in Ward (2001). In the following, some specific issues arising from the approach adopted and the simulation results are discussed.

Landslide-tsunami modelling. As shown, the scenarios considered involve heterogeneous contexts, occurring both in subaerial and submarine environment. The use of the same modelling approach for both type of events deserves some discussion. The interaction of a subaerial slide impacting water encompasses all the three phases (solid-liquid-air), resulting in a highly three-dimensional, nonlinear process that is particularly difficult to simulate, especially near the source area. To address this complexity, the phenomenon is typically divided into two main phases: i) the "splash-zone", where such unsteady, complex interactions dominate. The signals generated in this area, though intense and characterized by large amplitude, have high frequency and dissipate quickly (Abadie et al., 2008). Consequently, their effects are confined to a limited area, generally comparable in size to the slide run-out (Walder et al., 2006); ii) the propagation phase, beyond the splash-zone, where a coherent, longer-period signal travels outward. Indeed, the tsunamigenic physical mechanism - whole water column uplift due to the passage of the mass on the seabed – is the same. These oscillations exhibit peculiar characteristics but are broadly analogous to submarine-generated tsunamis, apart from dispersive effects that can be captured by proper modelling. A comprehensive review about this topic is provided by Yavari-Ramshe and Ataje-Ashtiani (2016). In this study, the adopted modelling strategy deliberately neglects the splash-zone effects, assuming they are confined to a very narrow coastal stretch at Capo Miseno. Consequently, the tsunami hazard assessment for the broader Gulf of Pozzuoli could be considered reliable. This assumption is further supported by previous applications of the same numerical routine to other subaerial landslide-generated tsunamis, such as the 1783 Scilla landslide-tsunami (see Zaniboni et al., 2016; Zaniboni et al., 2019).

Landslide scenarios. The scenario approach here adopted is a consequence of the lack of knowledge about the underwater landslide bodies in the Gulf of Pozzuoli, and it is based on a worst-case methodology (WCTHA, Tonini et al., 2011). Geophysical and bathymetric surveys have evidenced the presence of some ancient collapses, buried by the sediments, in the deeper part of the basin at the toe of the slopes, but a general pattern of mass transport processes in the Gulf of Pozzuoli, with recurrence time and volume estimation, does not exist. The sources adopted have been reconstructed based on the pieces of

495 evidence found in the scientific literature and on geomorphological considerations (margin slopes, existing scars, basin depth),
496 assuming that they are representative of the maximum credible occurrences expected in the area with the present morphology
497 and knowledge of the area. As a result, three submarine masses have been reconstructed, with similar volumes (few million
498 m³), thickness (a maximum of about ten meters) and detachment depth (in shallow water, between 30 and 50 m). The fourth
499 case is a coastal subaerial collapse and is characterized by a very different morphology: it can be considered as the endmember
500 of this type of landslide, since no direct evidence exists of bigger collapses interacting with the sea. Specific characteristics of
501 each sliding scenario could not be retrieved from the available geological and geophysical evidence: then, reasonable and
502 standard assumptions have been made for their rheology, hypothesizing for all of them a moderate translational behaviour.
503 These scenarios cover the whole extent of the Gulf, providing then a general idea of the impact expected from the ensuing
504 tsunamis. However, larger collapses cannot be ruled out, especially in case of intensification of the Campi Flegrei volcanic
505 activity providing possible triggers and, in the long term, slope oversteepening.
506 *Dispersion effects*. For tsunamis of non-seismic origin, the effect of dispersion should be always taken into consideration, since
507 it can change consistently the propagation pattern with respect to the classic SW approach. The discrepancy grows with the
508 distance from the source, depending on the wavelength of the initial signal and on the depth of the basin where the perturbation
509 propagates. Eq. (1) provided rough estimates of this distance for the scenarios considered (reported in Table 3), suggesting
510 that for the submarine cases the dispersion is negligible within the Gulf of Pozzuoli domain. Numerical simulations confirmed
511 this hypothesis: the application of the code with (NH) and without (SW) dispersion produced almost identical tsunamis,
512 proving that the simpler and faster approach is sufficient to assess properly the tsunami hazard for these cases. For the subaerial
513 case, on the contrary, the difference is marked, as evidenced in Figure 9 by the maximum amplitudes along the coast. The
514 modelling effort, then, should consider the morphological features of the source generating the tsunami, keeping in mind that
515 subaerial masses collapsing into the sea usually generate shorter perturbations. In these cases, dispersive effects can become
516 relevant even for brief distances, and the application of the SW approach could produce an overestimation of the tsunami
517 impact on the coasts.
518 *Coastal and non-linear phenomena*. From the propagation plots (Figure 10) it is possible to infer some peculiar features of the
519 tsunami close to the coast, where the interaction with shallow water and minor basins can induce non-linear effects. For
520 example, for case 2 a positive signal propagating in the Bacoli Bay - a minor inlet just north of Capo Miseno on the western
521 part of the Gulf (see also Figure 12 for location) - can be noticed, evident especially in the $t = 3$ and 4 minutes sketches. This
522 is visible, while less marked, also for the other scenarios, and suggests the possibility of the excitation of the normal modes of
523 this sub-basin by the tsunami: this phenomenon, known as resonance, can occur for every basin affected by an external
524 perturbation, and is for example the mechanism at the basis of the generation of the meteotsunamis (Vilibic et al., 2016). The
525 morphology of the basin determines the periods of the resonant modes typical of the basin. Rabinovich (2009) obtained a set
526 of simple expressions allowing to estimate them for basic geometries. For example, for an open rectangular basin of length L
527 and uniform depth h, the period T of the fundamental mode is:

528 $$T = \frac{4L}{\sqrt{gh}} \qquad\qquad (2)$$

529 where g is the gravitational acceleration. Focusing on the Bacoli Bay case, Figure 12 reports the marigrams obtained from two

530 virtual tide gauges placed inside the inlet (tg#1, in red) and at its mouth (tg#2, in black), depicting the two respective time

531 histories in the four scenarios considered. The comparison of the signals shows clearly, for Cases 1, 2 and 3, that inside the

532 bay the perturbations behave as standing waves, characterized by regular oscillations lasting for at least 30 minutes (final

533 simulation time) with an approximate period of 200 s and evident amplifications if compared to the oscillations out of the basin

534 (in black). The tsunami generated by Case 3, in particular, is amplified five times with respect to the incoming signal. Assuming

535 for the Bacoli Bay a simplified rectangular geometry $(L \approx 1000\ m,\ h \approx 5\ m)$ and applying Eq. (2), one can estimate the

536 fundamental mode as $T \approx 200\ s$, in full agreement with the features deduced from the virtual tide gauges. Moreover, the

537 subaerial scenario (Case 4) is less subject to the amplification when entering the inlet compared to the other cases, due to the

538 shorter period characterizing its oscillations.

539
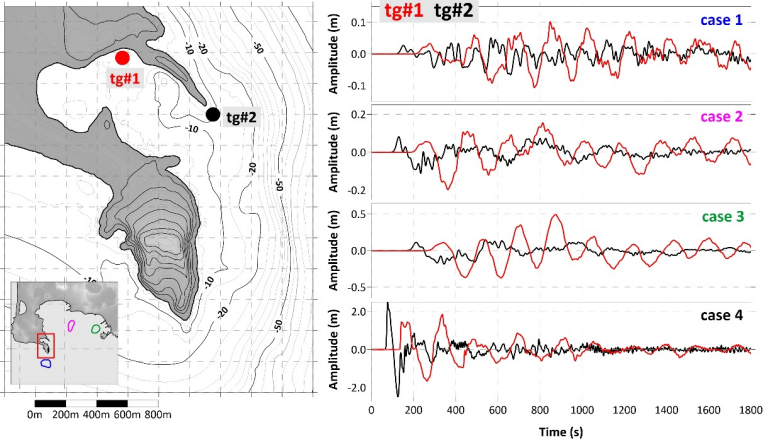
540
541 **Figure 12. Virtual tide gauges at the entrance (in black) and inside (in red) the Bacoli Bay. On the left, their location; on the right,**
542 **the comparison between the marigrams for the scenarios here simulated.**

543 **5 Conclusions**

544 The Gulf of Pozzuoli covers a significant portion of the Campi Flegrei caldera, a region of significant geological and volcanic

545 activity. Intense seismic and volcanic processes have the potential to destabilize large sliding bodies both in the subaerial and

546 in the submarine environment. When these masses interact with the water, they can generate tsunamis that may impact the

547 entire basin's coastline, posing potential risks to local communities, coastal infrastructures, and marine activities.

548 Despite the region being the object of extensive geological and geophysical investigations, a comprehensive understanding of
549 mass transport processes remains limited. A worst-case, scenario-based approach is then adopted, analysing four representative
550 cases, based on the limited geological evidence and on morphological considerations: three submarine bodies, with similar
551 volume (few million m^3, occurring in shallow water) and one subaerial slide (smaller mass, occurring on the coastline). These
552 scenarios are not intended to reproduce actual occurrences, while they aim at quantifying the tsunami hazard associated to
553 events of this entity, providing precious insights into the potential tsunami generation mechanisms and their subsequent impact
554 on coastal areas, as an important basis for possible risk mitigation strategies.
555 The sliding dynamics and the resulting tsunamis are simulated using numerical techniques that account for key hydrodynamic
556 phenomena such as dispersion, nonlinear coastal effects, and resonance.
557 The simulations results indicate that submarine landslides generally produce waves of limited amplitude on the coast, with a
558 maximum height of 0.5 meters, as observed for Case 3. While these tsunamis do not represent a major threat to coastal
559 communities, they could still cause localized damages, for example to small boats moored in the harbours across the Gulf of
560 Pozzuoli. Furthermore, resonance effects in smaller basins, such as harbours, can amplify an incoming wave, preventing its
561 dissipation and resulting in standing wave affecting the coast for long time: simulation outcomes show that in the Bacoli Bay
562 - placed in the western sector of the gulf – the incoming signal is amplified up to five times, with a sequence of regular
563 oscillations with a period of 200 s, affecting the basin for at least 30 minutes, which reflects the normal modes typical of the
564 inlet. This can repeat in every coastal basin, each one characterized by its own geometry and fundamental mode and is worthy
565 of specific and detailed investigation, implementing also nested grids at higher resolution. In contrast, the subaerial slide
566 scenario results in significantly larger waves, exceeding 4 meters close to the source. The tsunami amplitude dampens rapidly
567 with distance, due to dispersion, but in some coastal stretches, Pozzuoli on the north and Nisida on the east, it reaches almost
568 2 meters.
569 The investigation here presented highlights the complex interplay between geological processes, hydrodynamic phenomena,
570 and coastal hazard in the Gulf of Pozzuoli. The results emphasize the need for detailed study and monitoring of potential
571 unstable masses both in the submarine and in the subaerial realm, determining their main features (geotechnical parameters,
572 possible rheology) which can influence deeply the tsunamigenesis. Coastal subaerial events, in particular, can give rise to
573 large tsunamis threatening the whole Gulf of Pozzuoli, enhancing the need for risk management strategies to mitigate the
574 potential impact of tsunamis in this active volcanic region.

575 **Code availability**

576 The numerical codes UBO-BLOCK and UBO-TSUIMP for landslide dynamics and tsunamigenic impulse computation
577 respectively are available upon request to the authors; the code JAGURS can be freely downloaded from the link:
578 https://github.com/jagurs-admin/jagurs.

Data availability

The computational grids have been obtained from the elaboration of raw datasets available online, which have been interpolated and readjusted. They are available under request to the authors.

Author contribution

FZ and AA conceptualized the investigation; FZ, CA and MZ prepared the computational grids and the landslide scenario datasets; FZ and LS performed the simulations; FZ prepared the manuscript, with the contribution from all co-authors; FZ and AA supervised the whole manuscript realization.

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgements

The authors are grateful to Prof. Jacopo Selva, University of Naples, Federico II, for the productive discussion about the potential tsunami sources in the Gulf of Pozzuoli related to the Campi Flegrei activity, and to the editor and the two anonymous reviewers for their constructive and insightful comments, improving considerably the manuscript.

References

Abadie, S., Morichon, D., Grilli, S., Glockner, S.: VOF/Navier-Stokes numerical modeling of surface waves generated by subaerial landslides, La Houille Blanche 1:21–26, doi:10.1051/lhb:2008001, 2008.

Aiello, G., Marsella, E. and Fiore, V. D.: New seismo-stratigraphic and marine magnetic data of the Gulf of Pozzuoli (Naples Bay, Tyrrhenian Sea, Italy): inferences for the tectonic and magmatic events of the Phlegrean Fields volcanic complex (Campania), Mar Geophys Res, 33, 97–125, https://doi.org/10.1007/s11001-012-9150-8, 2012.

Baba, T., Ando, K., Matsuoka, D., Hyodo, M., Hori, T., Takahashi, N., Obayashi, R., Imato, Y., Kitamura, D., Uehara, H., Kato, T. and Saka, R.: Large-scale, highspeed tsunami prediction for the Great Nankai Trough Earthquake on the K computer, Intern Jour of High Per Comp App, 30, doi: 10.1177/1094342015584090, 2015.

Behrens, J., Løvholt, F., Jalayer, F., Lorito, S., Salgado-Gálvez, M. A., Sørensen, M., Abadie, S., Aguirre-Ayerbe, I., Aniel-Quiroga, I., Babeyko, A., Baiguera, M., Basili, R., Belliazzi, S., Grezio, A., Johnson, K., Murphy, S., Paris, R., Rafliana, I.,

De Risi, R., Rossetto, T., Selva, J., Taroni, M., Del Zoppo, M., Armigliato, A., Bureš, V., Cech, P., Cecioni, C., Christodoulides, P., Davies, G., Dias, F., Bayraktar, H. B., González, M., Gritsevich, M., Guillas, S., Harbitz, C. B., Kânoğlu, U., Macías, J., Papadopoulos, G. A., Polet, J., Romano, F., Salamon, A., Scala, A., Stepinac, M., Tappin, D. R., Thio, H. K., Tonini, R., Triantafyllou, I., Ulrich, T., Varini, E., Volpe, M. and Vyhmeister, E.: Probabilistic Tsunami Hazard and Risk Analysis: A Review of Research Gaps, Front. Earth Sci, 9:628772, doi: 10.3389/feart.2021.628772, 2021.

Bevilacqua, A., Isaia, R., Neri, A., Vitale, S., Aspinall, W. P., Bisson, M., Flandoli, F., Baxter, P. J., Bertagnini, A., Esposti Ongaro, T., Iannuzzi, E., Pistolesi, M. and Rosi, M.: Quantifying volcanic hazard at Campi Flegrei caldera (Italy) with uncertainty assessment: 1. Vent opening maps, Journal of Geophysical Research: Solid Earth, 120(4), 2309–2329. https://doi.org/10.1002/2014JB011775, 2015.

Calcaterra, D. and Di Martire, D.: Landslide Hazard and Risk in the Campi Flegrei Caldera, Italy. In: Orsi, G., D'Antonio, M., Civetta, L. (eds) Campi Flegrei. Active Volcanoes of the World, Springer, Berlin, Heidelberg, https://doi.org/10.1007/978-3-642-37060-1_13, 2022.

Danesi, S., Pino, N. A., Carlino, S. and Kilburn, C. R.: Evolution in unrest processes at Campi Flegrei caldera as inferred from local seismicity, Earth and Planetary Science Letters, 626, 118530, doi: https://doi.org/10.1016/j.epsl.2023.118530, 2024.

De Natale, G., Troise, C., Pingue, F., Mastrolorenzo, G., Pappalardo, L., Battaglia, M. and Boschi, E.: The Campi Flegrei caldera: unrest mechanisms and hazards. In Troise, C., De Natale, G., Kilburn C. R. J. (eds), Mechanisms of Activity and Unrest at Large Calderas, Geological Society, London, Special Publications, https://doi.org/10.1144/GSL.SP.2006.269.01.03, 2006.

De Ritis, R., Cocchi, L., Passaro, S. and Chiappini, M.: Giant landslide, hidden caldera structure, magnetic anomalies and tectonics in southern Tyrrhenian Sea (Italy), Geomorphology, 466, 109445, https://doi.org/10.1016/j.geomorph.2024.109445, 2024.

De Vivo, B., Rolandi, G., Gans, P. B., Calvert, A., Bohrson, W. A., Spera, F. J. and Belkin, H. E.: New constraints on the pyroclastic eruptive history of the Campanian volcanic Plain (Italy), Mineralogy and Petrology, 73, 47-65, https://doi.org/10.1007/s007100170010, 2001.

De Vivo, B., Belkin, H. E. and Rolandi, G.: Introduction to Vesuvius, Campi Flegrei, and Campanian Volcanism. In: De Vivo, B., Belkin, H. E., Rolandi, G. (eds) Vesuvius, Campi Flegrei, and Campanian Volcanism, Elsevier, https://doi.org/10.1016/B978-0-12-816454-9.00001-8, 2020.

Del Gaudio, C., Aquini, I., Ricciardi G. P., Ricco, C. and Scandone R.: Unrest episodes at Campi Flegrei: A reconstruction of vertical ground movements during 1905–2009, Journal of Volcanology and Geothermal Research, 195, 10, https://doi.org/10.1016/j.jvolgeores.2010.05.014, 2010.

636 Di Vito, M., Acocella, V., Aiello, G., Barra, D., Battaglia, M., Carandente A., Del Gaudio C., de Vita, S., Ricciardi, G. P.,

637 Ricco, C., Scandone, R. and Terrasi, F.: Magma transfer at Campi Flegrei caldera (Italy) before the 1538 AD eruption, Sci

638 Rep, 6, 32245, https://doi.org/10.1038/srep32245, 2016.

639 DPC (Dipartimento della Protezione Civile - Civil Protection Department, Italy), MaGIC - Marine Geohazards along the Italian

640 Coasts, https://github.com/pcm-dpc/MaGIC, last access 18 May 2023.

641 Ehara, A., Salmanidou, D. M., Heidarzadeh, M. and Guillas, S.: Multi-level emulation of tsunami simulations over Cilacap,

642 South Java, Indonesia, Computational Geosciences, 27(1), 127-142, https://doi.org/10.1007/s10596-022-10183-1, 2023.

643 Esposito, G. and Matano, F.: A geodatabase of historical landslide events occurring in the highly urbanized volcanic area of

644 Campi Flegrei, Italy, Earth Syst. Sci. Data, 15, 1133–1149, https://doi.org/10.5194/essd-15-1133-2023, 2023.

645 Gallotti, G., Zaniboni, F., Arcangeli, D., Angeli, C., Armigliato, A., Cocchi, L., Muccini, F., Zanetti, M., Tinti, S. and Ventura,

646 G.: The tsunamigenic potential of landslide-generated tsunamis on the Vavilov seamount, Journal of Volcanology and

647 Geothermal Research, 434, 107745, https://doi.org/10.1016/j.jvolgeores.2023.107745, 2023.

648 Gallotti, G., Zaniboni, F., Pagnoni, G., Romagnoli, C., Gamberi, F., Marani, M. and Tinti, S.: Tsunamis from prospected mass

649 failure on the Marsili submarine volcano flanks and hints for tsunami hazard evaluation, Bulletin of Volcanology, 83, 2,

650 https://doi.org/10.1007/s00445-020-01425-0, 2021.

651 Gasperini, L., Zaniboni, F., Armigliato, A., Tinti, S., Pagnoni, G., Özeren, M. S., Ligi, M., Natali, F. and Polonia, A.: Tsunami

652 potential source in the eastern Sea of Marmara (NW Turkey), along the North Anatolian Fault system, Landslides, 19, 2295–

653 2310, doi: 10.1007/s10346-022-01929-0, 2022.

654 Glimsdal, S., Pedersen, G., Harbitz, C. B. and Løvholt, F.: Dispersion of tsunamis: does it really matter?, Nat. Hazards Earth

655 Syst. Sci., 13, 1507–1526, doi: 10.5194/nhess-13-1507-2013, 2013.

656 Grezio, A., Cinti, F. R., Costa, A., Faenza, L., Perfetti, P., Pierdominici, S., Pondrelli, S., Sandri, L., Tierz, P., Tonini, R. and

657 Selva, J.: Multisource Bayesian probabilistic tsunami hazard analysis for the Gulf of Naples (Italy), Journal of Geophysical

658 Research: Oceans, 125, 2, https://doi.org/10.1029/2019JC015373, 2020.

659 Harbitz, C.B., Løvholt, F., Pedersen, G. and Masson, D.G.: Mechanisms of tsunami generation by submarine landslides: a

660 short review, Norwegian Journal of Geology, Vol. 86, pp. 255-264, Trondheim 2006, ISSN 029-196X, 2006.

661 Heidarzadeh, M., Gusman, A.R. and Mulia, I.E.: The landslide source of the eastern Mediterranean tsunami on 6 February

662 2023 following the M_w 7.8 Kahramanmaraş (Türkiye) inland earthquake, Geosci. Lett., 10, 50, https://doi.org/10.1186/s40562-

663 023-00304-8, 2023.

664 Isaia, R., Di Giuseppe, M. G., Natale, J., Tramparulo, F. D. A., Troiano, A. and Vitale, S.: Volcano-tectonic setting of the
665 Pisciarelli fumarole field, Campi Flegrei caldera, southern Italy: insights into fluid circulation patterns and hazard scenarios,
666 Tectonics, 40, 5, https://doi.org/10.1029/2020TC006227, 2021.

667 Løvholt, F., Pedersen, G., Harbitz, C. B., Glimsdal, S. and Kim, J.: On the characteristics of landslide tsunamis, Phil. Trans.
668 R. Soc. A, 373: 20140376, doi: 10.1098/rsta.2014.0376, 2015.

669 Mayer, K., Scheu, B., Montanaro, C., Yilmaz, T. I., Isaia, R., Aßbichler, D. and Dingwell, D. B.: Hydrothermal alteration of
670 surficial rocks at Solfatara (Campi Flegrei): Petrophysical properties and implications for phreatic eruption processes, Journal
671 of Volcanology and Geothermal Research, 320, 128-143, https://doi.org/10.1016/j.jvolgeores.2016.04.020, 2016.

672 Neri, A., Bevilacqua, A., Esposti Ongaro, T., Isaia, R., Aspinall, W. P., Bisson, M., Flandoli, F., Baxter P. J., Bertagnini, A.,
673 Iannuzzi, E., Orsucci, S., Pistolesi, M., Rosi, M. and Vitale, S.: Quantifying volcanic hazard at Campi Flegrei caldera (Italy)
674 with uncertainty assessment: 2. Pyroclastic density current invasion maps, Journal of Geophysical Research: Solid Earth, 120,
675 4, 2330-2349, https://doi.org/10.1002/2014JB011776, 2015.

676 Paris, R., Ulvrová, M., Selva, J., Brizuela, B., Costa, A., Grezio, A., Lorito, S. and Tonini, R.: Probabilistic hazard analysis for
677 tsunamis generated by subaqueous volcanic explosions in the Campi Flegrei caldera, Italy. Journal of Volcanology and
678 Geothermal Research, 379, 106-116, https://doi.org/10.1016/j.jvolgeores.2019.05.010, 2019.

679 Perrotta, A., Scarpati, C., Luongo, G. and Morra, V.: The Campi Flegrei caldera boundary in the city of Naples. In: De Vivo,
680 B. (ed.), Developments in Volcanology, Elsevier, Volume 9, 85-96, https://doi.org/10.1016/S1871-644X(06)80019-7, 2006.

681 Rabinovich, B. A.: Seiches and Harbor Oscillations, Handbook of Coastal and Ocean Engineering, 93-236, 2009.

682 Ren, Z., Hou, J., Wang, P. and Wang, Y.: Tsunami resonance and standing waves in Hangzhou Bay, Physics of Fluids, 33, 8,
683 https://doi.org/10.1063/5.0059383, 2021.

684 Rosi, M., Sbrana, A. and Principe, C.: The Phlegraean Fields: structural evolution, volcanic history and eruptive
685 mechanisms, Journal of Volcanology and Geothermal Research, 17, 1-4, 273-288, https://doi.org/10.1016/0377-
686 0273(83)90072-0, 1983.

687 Sabino, L., Analisi della pericolosità da tsunami generati da frana nell'area del Golfo di Pozzuoli e dei Campi Flegrei, Second
688 Level Degree in Physics of the Earth System, discussed on 14 march 2024, 2024 (in italian).

689 Saito, T.: Tsunami Generation and Propagation, 265 - Springer Geophysics, https:// doi. org/ 10.1007/ 978-4- 431- 56850-6,
690 2019.

691 Selva, J., Amato, A., Armigliato, A., Basili, R., Bernardi, F., Brizuela, B., Cerminara, M., de' Micheli Vitturi, M., Di Bucci,
692 D., Di Manna, P., Esposti Ongaro, T., Lacanna, G., Lorito, S., Løvholt, F., Mangione, D., Panunzi, E., Piatanesi, A., Ricciardi,
693 A., Ripepe, M., Romano, F., Santini, M., Scalzo, A., Tonini, R., Volpe, M. and Zaniboni, F.: Tsunami risk management for

crustal earthquakes and non-seismic sources in Italy, Riv. Nuovo Cim., 44, 69–144, https://doi.org/10.1007/s40766-021-00016-9, 2021.

Somma, R., Iuliano, S., Matano, F., Molisso, F., Passaro, S., Sacchi, M., Troise, C. and De Natale, G.: High-resolution morpho-bathymetry of Pozzuoli Bay, southern Italy, Journal of Maps, 12, 2, 222–230, https://doi.org/10.1080/17445647.2014.1001800, 2016.

Tarquini, S., Isola, I., Favalli, M., Battistini, A. and Dotta, G.: TINITALY, a digital elevation model of Italy with a 10 meters cell size (Version 1.1), Istituto Nazionale di Geofisica e Vulcanologia (INGV), https://doi.org/10.13127/tinitaly/1.1, 2023.

Tinti, S., Bortolucci, E. and Vannini, C.: A block-based theoretical model suited to gravitational sliding, Natural Hazards, 16, 1–28, https://doi.org/10.1023/A:1007934804464, 1997.

Tinti, S., Pagnoni, G. and Zaniboni, F.: The landslides and tsunamis of 30th December 2002 in Stromboli analysed through numerical simulations, Bulletin of Volcanology, 68, 462-479, doi: 10.1007/s00445-005-0022-9, 2006.

Tonini, R., Armigliato, A., Pagnoni, G., Zaniboni, F., Tinti, S.: Tsunami hazard for the city of Catania, eastern Sicily, Italy, assessed by means of Worst-case Credible Tsunami Scenario Analysis (WCTSA), Nat. Hazards Earth Syst. Sci., 11, 1217-1232, doi: 10.5194/nhess-11-1217-2011, 2011.

Triantafyllou, I., Zaniboni, F., Armigliato, A., Tinti, S. and Papadopoulos, G. A.: The Large Earthquake (~ M7) and Its Associated Tsunami of 8 November 1905 in Mt. Athos, Northern Greece, Pure Appl. Geophys., 177, 1267–1293, https://doi.org/10.1007/s00024-019-02363-5, 2020.

Vilibić, I., Šepić, J., Rabinovich, A. B. and Monserrat, S.: Modern approaches in meteotsunami research and early warning, Frontiers in Marine Science, 3, 57, https://doi.org/10.3389/fmars.2016.00057, 2016.

Walder, J.S., Watts, P., Waythomas, C.F.: Case study: mapping tsunami hazards associated with debris flow into a reservoir. J Hydraul Eng 132:1–11, doi: 10.1061/(ASCE)0733-9429(2006)132:1(1), 2006.

Ward, S.N.: Landslide tsunami. J. Geophys. Res., 106: 11201-11215. https://doi.org/10.1029/2000JB900450, 2001.

Yavari-Ramshe, S. and Ataie-Ashtiani, B.: Numerical modeling of subaerial and submarine landslide-generated tsunami waves—recent advances and future challenges. Landslides, 13:1325–1368, doi: 10.1007/s10346-016-0734-2, 2016.

Zaniboni, F. and Armigliato, A.: Worst-case tsunami approach applied to Catania (eastern Sicily). In Sørensen, M., Behrens, J., Jalayer, F., Løvholt, F., Lorito, S., Rafliana, I., Salgado, M., Selva, J. (eds), Probabilistic Tsunami Hazard and Risk Analysis, Springer Nature, Switzerland, 2025 (in publication).

Zaniboni, F., Armigliato, A. and Tinti, S.: A numerical investigation of the 1783 landslide-induced catastrophic tsunami in Scilla, Italy. Nat Hazards (2016) 84:S455–S470, doi: 10.1007/s11069-016-2461-3, 2016.

Zaniboni, F., Pagnoni, G., Paparo, M. A., Gauchery, T., Rovere, M., Argnani, A., Armigliato, A. and Tinti S.: Tsunamis From Submarine Collapses Along the Eastern Slope of the Gela Basin Strait of Sicily, Front. Earth Sci. 8, 602171, doi: 10.3389/feart.2020.602171, 2021.

Zaniboni, F., Pagnoni, G., Gallotti, G., Paparo, M.A., Armigliato, A. and Tinti, S.: Assessment of the 1783 Scilla landslide–tsunami's effects on the Calabrian and Sicilian coasts through numerical modelling. Nat. Hazards Earth Syst. Sci., 19, 1585–1600, doi: https://doi.org/10.5194/nhess-19-1585-2019, 2019.

Zaniboni, F., Pagnoni, G., Gallotti, G., Tinti, S. and Armigliato, A.: Landslide-tsunamis along the flanks of Mount Epomeo, Ischia: propagation patterns and coastal hazard for the Campania Coasts, Italy. In Marotta, E., D'Auria, L., Zaniboni, F., Nave, R. (eds), Volcanic Island: from Hazard Assessment to Risk Mitigation, Geological Society, London, Special Publications, 519, https://doi.org/10.1144/SP519-2020-128, 2024.

Zollo, A., Maercklin, N., Vassallo, M., Dello Iacono, D., Virieux, J. and Gasparini, P.: Seismic reflections reveal a massive melt layer feeding Campi Flegrei caldera, Geophysical Research Letters, 35, 12, https://doi.org/10.1029/2008GL034242, 2008.