Spring-water temperature suggests widespread occurrence of Alpine permafrost in pseudo-relict rock glaciers

Luca Carturan[1], Giulia Zuecco[1,2], Angela Andreotti[1], Jacopo Boaga[3], Costanza Morino[1], Mirko Pavoni[3], Roberto Seppi[4], Monica Tolotti[5], Thomas Zanoner[4], Matteo Zumiani[6]

[1]Department of Land, Environment, Agriculture and Forestry, University of Padova, Legnaro, Italy

[2]Department of Chemical Sciences, University of Padova, Padova, Italy

[3]Department of Geosciences, University of Padova, Padova, Italy

[4]Department of Earth and Environmental Sciences, Pavia, Italy

[5]Fondazione Edmund Mach - Istituto Agrario San Michele All'Adige, S. Michele all'Adige, Italy

[6]Geological Service, Autonomous Province of Trento, Trento, Italy

Correspondence to: Luca Carturan (luca.carturan@unipd.it)

Abstract

Runoff originating from ground ice contained in rock glaciers represents a significant water supply for the lowlands. Pseudo-relict rock glaciers host patchy permafrost, but appear to be visually relict, and therefore can be misinterpreted by using standard classification approaches. Permafrost content, spatial distribution and frequency of this type of rock glaciers are poorly known. Therefore, identifying pseudo-relict rock glaciers that might still host permafrost, and potentially ice, is crucial for understanding their hydrological role in a climate change context.

This work analyses rock-glacier spring-water temperature in a 795 km^2 catchment in the Eastern Italian Alps to understand how many rock glaciers classified as relict could have spring-water temperature comparable to active or transitional rock glaciers, as possible evidence of their pseudo-relict nature. Spring-water temperature, often used as auxiliary to other approaches for specific sites, was used for a preliminary estimate of the permafrost presence in 50 rock glaciers classified as relict. In addition, we present electrical resistivity tomography (ERT) results on two relict rock glaciers with opposing spring-water temperature and surface characteristics to constrain spring-water temperature results at local scale.

The results show that about 50% of rock glaciers classified as relict might be pseudo-relict, thus potentially containing permafrost. Both supposedly relict rock glaciers investigated by geophysics contain frozen sediments. The majority of cold springs are mainly associated with rock glaciers with blocky and sparsely vegetated surface, but geophysics suggest that permafrost may also exist in rock glaciers below 2000 m a.s.l., entirely covered by vegetation and with spring-water temperature up to 3.7°C. We estimate that pseudo-relict rock glaciers might contain a significant portion (20%) of all the ice stored in the rock glaciers in the study area. These results highlight the relevance of pseudo-relict rock glaciers in periglacial environments. Even if not a conclusive method, spring-water-temperature analyses can be used to preliminarily distinguish between relict and pseudo-relict rock glaciers in wide regions.

1. Introduction

Timings and magnitude of cryosphere runoff have high climatic sensitivity and are impacted by the current changes of Earth's climate (Engelhardt et al., 2014; Zemp et al., 2015; Carturan et al., 2019). Moreover, a deterioration of the water quality has been reported for springs fed by melting permafrost (Thies et al., 2013; Ilyashuk et al., 2014). Due to glacier decline, in the last decades growing attention has been given to other water reservoirs, such as subsurface ice, including debris-covered glacier ice and, in particular, ground ice stored in periglacial landforms such as rock glaciers and glacial-permafrost composite landforms (e.g., Brighenti et al., 2019; Jones et al., 2019; Schaffer et al., 2019; Seppi et al., 2019; Wagner et al., 2021). Projection of ice loss rates indicates that in the second half of the 21st century more subsurface ice may be preserved than glacier surface ice because of their different response times to atmospheric warming (Haeberli et al., 2017). Subsurface ice is therefore expected to significantly contribute to stream runoff under future climate warming (Janke et al., 2015, 2017).

Jones et al. (2018) assessed the importance of ice contained in rock glaciers at global scale, estimating that 62.02 ± 12.40 Gt of ice is contained in intact rock glaciers. With the adjective 'intact' we refer to the traditional categorization of rock glaciers, which distinguish between intact rock glaciers (containing ice) and relict rock glaciers (not containing ice). According to the most updated classification (RGIK, 2023), rock glaciers should be categorized into active, transitional and relict, referring exclusively to the efficiency of sediment conveyance (expressed by the surface movement) at the time of observation. This classification should not be used to infer any ground ice content.

Even though relict rock glaciers should not contain ice (Haeberli, 1985; Barsch, 1996), more recent studies showed that some relict rock glaciers can preserve permafrost and ice far below the regional lower limit of discontinuous permafrost (e.g., Delaloye, 2004; Strozzi et al., 2004; Lewkowicz et al., 2011; Bollati et al., 2018; Colucci et al., 2019). This evidence raises the question whether a significant fraction of rock glaciers classified as relict is actually to be considered 'pseudo-relict', i.e. *"rock glaciers which appear to be visually relict but still contain patches of permafrost"* (Kellerer-Pirklbauer et al., 2012; Kellerer-Pirklbauer, 2008, 2019). This question is relevant because landforms classified as relict in some regions can be up to an order of magnitude larger and more numerous than active and transitional rock glaciers (e.g., Seppi et al., 2012; Scotti et al., 2013; Kofler et al., 2020), with potentially significant ecological and hydrological impacts (e.g., Brenning, 2005a; Millar and Westfall, 2019; Brighenti et al., 2021; Sannino et al., 2021). According to Jones et al. (2019), identifying and establishing the activity state of rock glaciers is an important initial step in determining their potential hydrological significance.

Previous investigations on the possible permafrost content of relict rock glaciers looked at single case studies or small groups of landforms (e.g., Delaloye, 2004; Kellerer-Pirklbauer et al., 2014; Popescu, 2018; Colucci et al., 2019; Pavoni et al., 2023). Studies considering a larger number of relict rock glaciers, at the regional scale, were mainly focussed on the past distribution of mountain permafrost and on the reconstruction of related paleoclimatic conditions (e.g., Frauenfelder et al., 2001; Seppi et al., 2010; Charton et al., 2021; Dlabáčková et al., 2023).

As a result, the actual distribution, frequency, and ice content of pseudo-relict rock glaciers might be underestimated, with the latter being essential for implementing worldwide estimates of water resources stored in periglacial landforms (e.g., Jones et al., 2018). Detailed geophysical investigation of selected landforms is certainly suitable as a first step towards a better knowledge of pseudo-relict rock glaciers and their ice content. However, due to logistic constraints, this approach cannot be applied to a large number of rock glaciers at the catchment or regional scale. A recent and commendable advance on this topic has been achieved by the proposition of operational guidelines on the InSAR-based

73 kinematic characterization of rock glaciers (Bertone et al., 2022), which can be used for thorough studies of wide areas.
74 However, this approach is not suitable for distinguishing between relict and pseudo-relict rock glaciers, because their
75 surface has no movement or the movement is very slow and in the same range as the uncertainty of the method.

76 A possible way to investigate the presence of permafrost in these landforms over large areas is by analysing spring-water
77 temperature measured downslope of rock glaciers. Haeberli (1975) proposed the monitoring of spring-water temperature
78 in late summer as useful evidence of permafrost, and various authors employed such method as auxiliary permafrost
79 evidence (e.g., Frauenfelder et al., 1998; Scapozza, 2009; Imhof et al., 2000; Strozzi et al., 2004; Cossart et al., 2008).
80 Carturan et al. (2016) demonstrated that this method can be used successfully for mapping permafrost distribution at the
81 catchment scale. All these works are based on the evidence that, in late summer, spring water affected by permafrost has
82 lower temperature compared to those unaffected, with upper thresholds ranging between 0.9 and 1.1°C for probable
83 permafrost, and between 1.8 and 2.2°C for possible permafrost.

84 In this work, we analyse the spatial variability of spring-water temperature in a 795 km^2 catchment located in the Eastern
85 Italian Alps, where 338 rock glaciers were inventoried (Seppi et al., 2012), to better understand permafrost distribution.
86 We hypothesise that a significant portion of rock glaciers classified as relict have spring-water temperature comparable
87 to those of active and transitional rock glaciers, as possible evidence of their permafrost content and of their pseudo-relict
88 nature. The specific objectives of this study are to:

89 i) analyse the influence of topographic and geomorphological factors on spring-water temperature,

90 ii) investigate the main controls on water temperature for springs downslope of rock glaciers, and particularly of relict
91 rock glaciers,

92 iii) investigate via geophysical analyses the presence of permafrost in two rock glaciers selected for their different spring-
93 water temperature and surface characteristics, to constrain spring-water temperature results at local scale,

94 iv) preliminarily estimate and compare the ice content of rock glaciers and glaciers in the study area.

95

96 **2. Study area**

97 Val di Sole is located in the upper part of the Noce River catchment, a tributary of the Adige River, which is the main
98 river system in northeastern Italy (Fig. 1). The catchment is 795 km^2 wide, with elevation ranging between 520 m a.s.l.
99 at the outlet (Mostizzolo) and 3769 m a.s.l. at the summit of Mt. Cevedale, averaging 1705 m a.s.l. (Fig. 1). Metamorphic
100 rocks (mica schists, paragneiss and orthogneiss) prevail in the northern side of the valley, whereas tonalite is found in the
101 southwestern part and dolomites and limestones prevail in the southeastern part (Dal Piaz et al., 2007; Martin et al., 2009;
102 Chiesa et al., 2010, Montrasio et al., 2012).

103
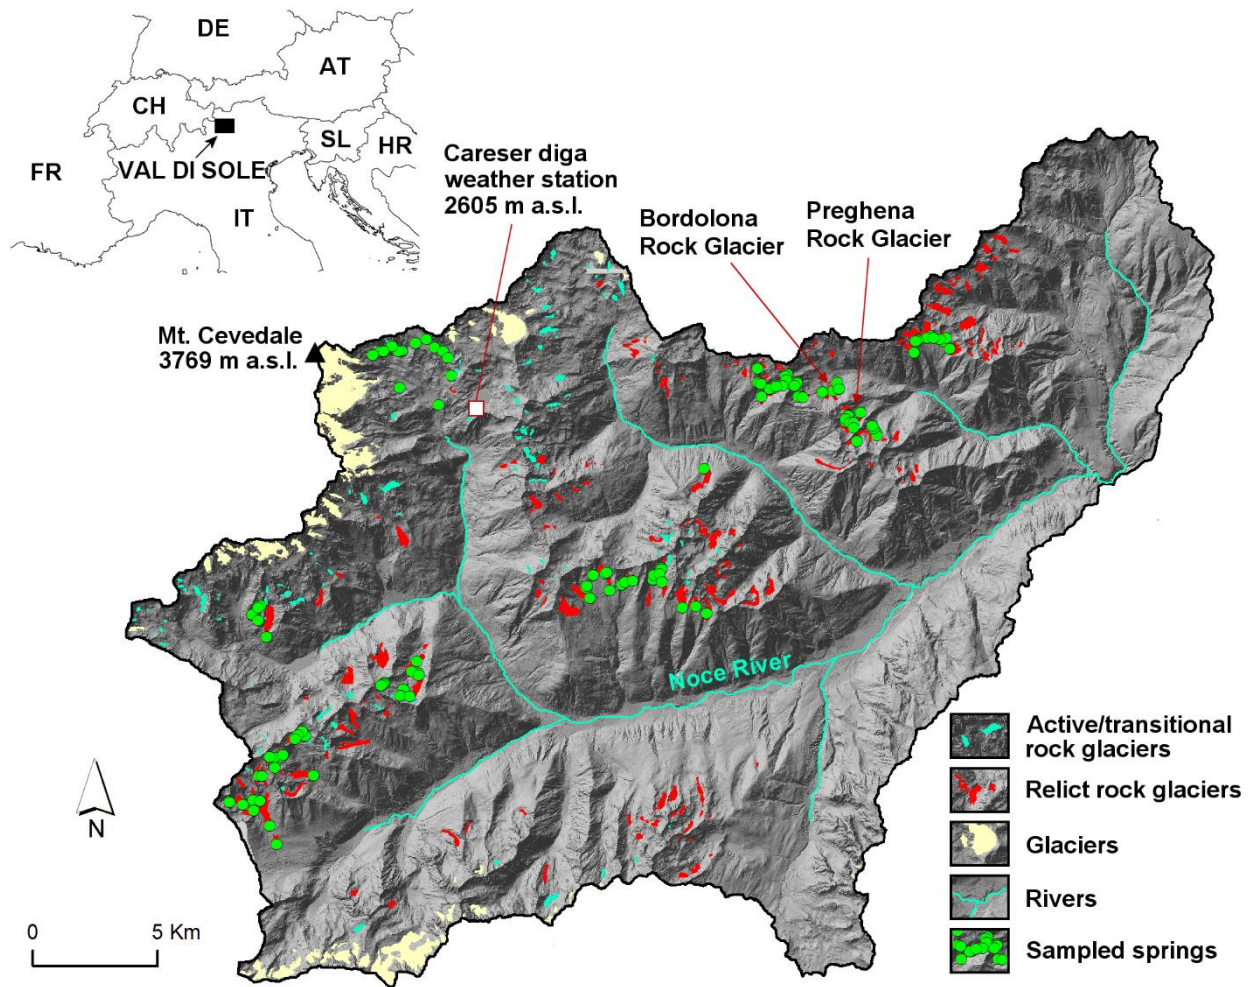
Figure 1: Geographic location of the study area and of sampled springs. The background is the hillshaded Lidar 2014 DEM surveyed by the Provincia Autonoma di Trento (https://siat.provincia.tn.it/stem/).

The catchment includes a glacierised area of 16 km^2 (in 2006, Salvatore et al., 2015). Bare bedrock and debris are found outside the glaciers down to an elevation of 2700 m, which is the lower regional limit of discontinuous permafrost (Boeckli et al., 2012). A discontinuous cover of alpine meadows and shrubs is present between 2200 m and 2700 m, while below 2000-2200 m forests are dominant. The valley bottom is covered by cultivations and settlements.

Val di Sole lies in a transition zone between the "inner dry alpine zone" in the north (Frei and Schär, 1998) and the wetter area under the influence of the Mediterranean Sea in the south. At the valley floor, the mean annual precipitation in the period between 1971 and 2008 is ~900 mm. Precipitation increases with elevation and in the southern part, with a maximum of 1500 mm in the Adamello-Presanella Group (Carturan et al., 2012; Isotta et al., 2014). The mean annual 0°C isotherm is located at 2500 m. The mean annual air temperature variability is dominated by elevation, whereas latitudinal and longitudinal variations are negligible.

Seppi et al. (2012) mapped 338 rock glaciers in Val di Sole. Based on evidence visible in the orthophotos and digital elevation models (DEMs), the largest part of rock glaciers was classified as relict (229, 68% of the total), whereas only 42 of the remaining 109 can be classified as active based on multitemporal high-resolution DEMs, and the other 67 can

121 be considered transitional. Most rock glaciers (302, 89% of the total) are composed of deposits of metamorphic rocks in
122 the orographic left side of the valley.

123

124 **3. Materials and methods**

125 **3.1 Experimental design**

126 We focussed our investigations on the northern part of Val di Sole because it has a rather homogeneous lithology
127 (metamorphic rocks with predominant micaschists) and mean annual precipitation of 1233 mm at 2600 m (Carturan et
128 al., 2016). This was done to minimise the effects of different lithologies and annual precipitation on the spatial variability
129 of spring-water temperature, and to highlight the role of other variables related to their catchment, upslope area or upslope
130 rock glaciers.

131 To obtain statistically meaningful and generalisable results, we designed a sampling scheme for rock-glacier spring-water
132 temperature considering the variability of permafrost-related characteristics in the study area, namely vegetation cover
133 (related to ground temperature and fine debris infill), size (length, area), elevation, slope, aspect, and lithology (Barsch,
134 1996; Haeberli, 1985; Lambiel and Reynard, 2001; Boekli et al., 2012).

135 We inspected these variables, reported for each rock glacier of Val di Sole in the database of Seppi et al. (2012), using a
136 correlation matrix and the principal component analysis. The aim was to evaluate their possible covariance and to optimise
137 the number of variables to be included in the sampling scheme. The analysis revealed high positive covariance between
138 length and area (both related to size). Negative covariance was found between elevation and vegetation cover, and
139 between slope and length/area.

140 Based on these outcomes and considering accessibility of springs, we built a sampling scheme around four variables: i)
141 rock glacier activity, ii) length, iii) mean elevation, and iv) vegetation cover. The last two variables are correlated because
142 active and transitional rock glaciers are at high elevation and almost free from vegetation, and the opposite is true for
143 relict rock glaciers. Vegetation cover is probably one of the few variables that may aid at identifying rock-glacier activity
144 (Ikeda and Matsuoka, 2002; Strozzi et al., 2004, Kofler et al., 2020), and it can vary greatly among rock glaciers at similar
145 elevation. For this reason, we kept both elevation and vegetation, applying a modification to the vegetation-cover
146 classification proposed by Seppi et al. (2012). We distinguish between two classes, namely 'vegetated' and 'non
147 vegetated' for both active/transitional and relict rock glaciers (see Table 1 for threshold values). The vegetation cover was
148 visually estimated in the field and in orthophotos for each rock glacier. Our sampling scheme ensured that at least one
149 rock glacier was sampled for each combination of variables (Table 2). The frequency distribution of rock glacier length
150 and mean elevation was used to identify three terciles, employed for grouping them into short-mid-long rock glaciers and
151 into low-mid-high elevation rock glaciers. Frequency distributions and terciles of active/transitional and relict rock
152 glaciers were calculated separately (Table 2).

153

154

155

156

157 Table 1 - Classification of active/transitional and relict rock glaciers in two different classes of vegetation cover.

Rock glacier category	Vegetation cover class	Meaning
Active/transitional	Vegetated	Vegetation cover >10%
	Non vegetated	Vegetation cover <10%
Relict	Vegetated	Vegetation cover >50%
	Non vegetated	Vegetation cover <50%

158

159

160

161 Table 2: Sampling scheme used for water temperature measurements at rock glaciers springs.

Activity state	Length	Elevation	Vegetation cover	Number of sampled rock glaciers
Active/transitional	Short (<142 m)	Low (<2634 m)	Non vegetated	2
			Vegetated	none
		Mid (>2634 and <2811 m)	Non vegetated	2
			Vegetated	none
		High (>2811 m)	Non vegetated	1
			Vegetated	none
	Mid (>142 and <251 m)	Low (<2596 m)	Non vegetated	1
			Vegetated	none
		Mid (>2596 and <2817 m)	Non vegetated	1
			Vegetated	3
		High (>2817 m)	Non vegetated	2
			Vegetated	none
	Long (>251 m)	Low (<2655 m)	Non vegetated	none
			Vegetated	1
		Mid (>2655 and <2779 m)	Non vegetated	1
			Vegetated	none
		High (>2779 m)	Non vegetated	3
			Vegetated	none
Relict	Short (<180 m)	Low (<2267 m)	Non vegetated	3
			Vegetated	4
		Mid (>2267 and <2453 m)	Non vegetated	1
			Vegetated	2
		High (>2453 m)	Non vegetated	2
			Vegetated	2
		Low (<2255 m)	Non vegetated	3

	Mid (>180 and <340 m)		Vegetated	4
		Mid (>2255 and <2425 m)	Non vegetated	1
			Vegetated	2
		High (>2425 m)	Non vegetated	2
			Vegetated	3
	Long (>340 m)	Low (<2222 m)	Non vegetated	1
			Vegetated	4
		Mid (>2222 and <2388 m)	Non vegetated	3
			Vegetated	5
		High (>2388 m)	Non vegetated	5
			Vegetated	3
			Total:	**67**

3.2 Data collection

Water temperature was measured at 220 springs, 133 of which are located downslope of rock glaciers (multiple springs were often measured downslope of the same rock glacier), 81 are located downslope of other deposits, and 8 are located in bedrock. Springs were sampled from mid-August to mid-October, after the end of the snowmelt. Most springs have been measured once per year from 2018 to 2020, and a small group of them was also measured in 2021. In these four years, the total number of single measurements is 540.

Based on the sampling scheme (Table 2), we measured spring-water temperature at 17 active/transitional rock glaciers and 50 relict rock glaciers, which corresponds to 22% of all rock glaciers existing in the study area. All variables' combinations defined for relict rock glaciers have been sampled, whereas several combinations for active/transitional rock glaciers lack samplings. This was due to the inexistence of single combinations (e.g., there are no short and vegetated active/transitional rock glaciers at low elevation) or to the lack of springs and inaccessibility of some rock glaciers.

Measurements of spring-water temperature were carried out using a WTW Cond3310 (WTW GmbH, Weilheim, Germany) and a Testo 110 (Testo AG, Lenzkirch, Germany). These instruments have both 0.1°C resolution, but the WTW has higher accuracy (±0.1°C) compared to the Testo (±0.2°C), which was used for back-up/validation. Water temperature measurements were carried out shading the spring from direct sunlight and avoiding probe contact with sediments, rocks, and vegetation. The calibration of the two instruments was checked at the beginning and at the end of the annual campaigns using an ice bath. In addition, we assessed runoff by a quick visual estimation (always the same operator) similar to Strobl et al. (2020), who considered average width, mean depth and velocity of the flow downslope of the spring. This approach was used to rule out springs with very low runoff (<0.1 l/s).

3.3 Data analysis

Before proceeding with statistical analyses, we preliminary filtered field data to exclude problematic or redundant measurements. First, we discarded measurements that were clearly affected by very low runoff (<0.1 l/s), responsible of

187 large temperature fluctuations during the day (Seppi, 2006). We then selected one measurement site for each rock glacier
188 and for groups of springs separated less than 10 m from each other. Spring selection was carried out favouring springs
189 with highest runoff, repeated readings in the four years, closest location to rock glacier fronts, and with lowest interannual
190 temperature variability.

191 After this selection, 131 springs were retained. We characterise the springs using different variables (Table 3), namely
192 the topographic characteristics of the catchments draining to the springs, the activity-state, topographic,
193 geomorphological, and vegetation characteristics of rock glaciers, and the topographic, geomorphological, geological,
194 vegetation and permafrost characteristics of the area immediately upslope of the springs. The latter is defined by the
195 intersection of the catchment perimeter with a circular buffer zone with a radius of 100 m (Fig. 2; Carturan et al., 2016).
196 Details on these variables, the methodology and the data sources (e.g., DEMs, orthophotos, geological maps and literature)
197 employed to derive them are listed and described in Table 3.
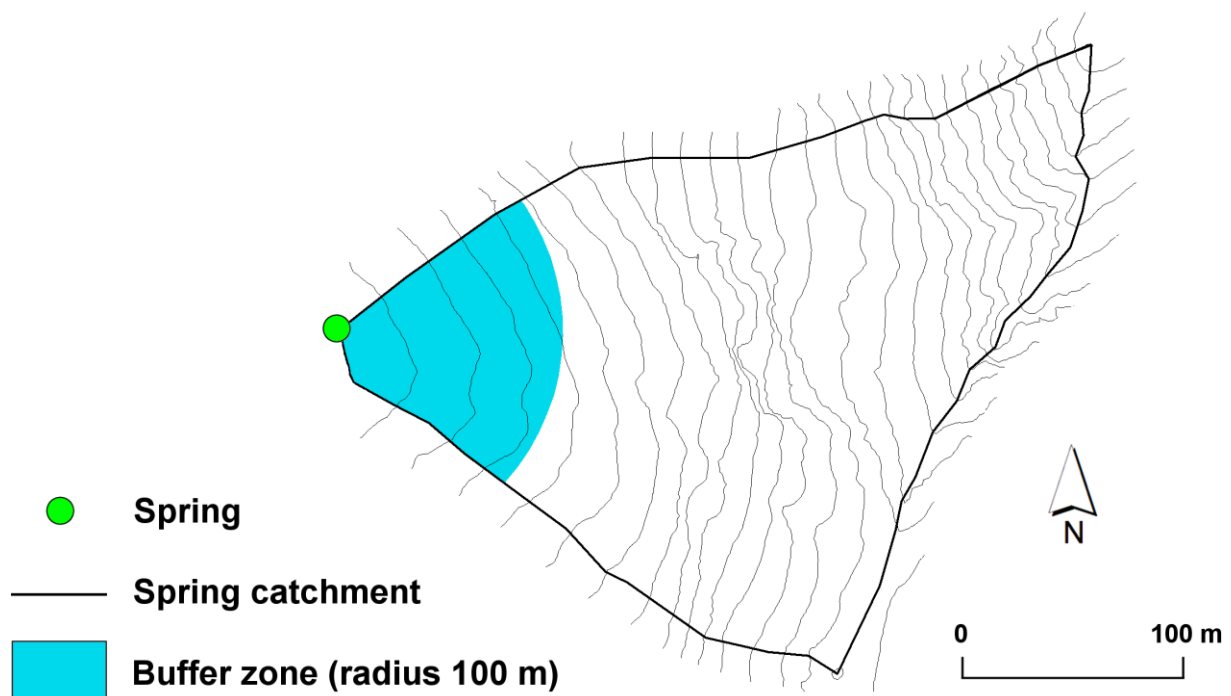
198

199 Figure 2: Delimitation of the spring upslope area, defined by the intersection of a circular buffer zone with a radius of
200 100 m over the catchment perimeter. The methodology was introduced and tested in Carturan et al. (2016).

201

202

203

204

205

206

207

208

209

210

211

212

213

214   Table 3: Quantitative and qualitative variables used for characterizing spring areas and for statistical analyses.

Spatial scale	Variable type	Variable	Classes/acronym	Meaning
Catchment	**Quantitative**	**Minimum elevation (m a.s.l.)[a]**	\	Spring elevation
		Maximum elevation (m a.s.l.)[a]	\	
		Mean elevation (m a.s.l.)[a]	\	Half sum of minimum and maximum elevations
		Planimetric length (m)[a]	\	
	Qualitative	**Mean aspect[a]**	NW-NE	from 315° to 45°
			NE-SE, SW-NW	from 45° to 135° and from 225° to 315°
			SE-SW	from 135° to 225°
Spring upslope area	**Qualitative**	**Geomorphology[b,g]**	ver	Slope deposit (scree slope or debris cone)
			glac	Glacial deposit
			rg	Rock glacier
			pr	Protalus rampart
			rp	Bedrock
			df	Debris flow deposit
			ls	Solifluction lobe
		Lithology[b]	TTP	Sillimanite paragneiss (Tonale Unit)
			TUG	Granate and cyanite paragneiss (Ultimo Unit)
			TUO	Orthogneiss (Ultimo Unit)
			OME	Chlorite e sericite micascists (Peio Unit)
			OMI	Granate and staurolite micascists (Peio Unit)
			OOG	Orthogneiss (Peio Unit)
			TPN	Metapegmatites (Tonale Unit)

			TTM	Marbles (Tonale Unit)
		Vegetation cover[c]	1	0-10% covered by vegetation
			2	10-50% covered by vegetation
			3	50-90% covered by vegetation
			4	90-100% covered by vegetation
		Permafrost evidence[a,c,h]	weqt	winter equilibrium temperature measured by temperature data loggers
			geophys	geophysical investigations (this work)
			snow	perennial snowfields
			movement	surface displacement visible in multi-temporal DEMs
			none	no evidence available
		APIM[d]	Blue	permafrost in nearly all conditions
			Purple	permafrost mostly in cold conditions
			Yellow	permafrost only in very favorable conditions
			White	no permafrost
		Open work deposit[e,g]	Open work	present
			No open work	absent (includes boulder deposits with fine infill and/or widespread vegetation cover)
Rock glacier	**Quantitative**	**Front slope (degrees)[a]**	\	
	Qualitative	**Activity[f,g]**	Active/transitional	Active/transitional rock glacier
			Relict	Relict rock glacier
		Length[a]	Short	Short rock glacier length class (as defined in Sect. 3)
			Mid	Mean rock glacier length class (as defined in Sect. 3)
			Long	Long rock glacier length class (as defined in Sect. 3)
		Elevation[a]	Low	Low rock glacier elevation class (as defined in Sect. 3)
			Mid	Mean rock glacier elevation class (as defined in Sect. 3)
			High	High rock glacier elevation class (as defined in Sect. 3)
		Vegetation cover[c]	Vegetation	Vegetated rock glacier (as defined in Sect. 3, Table 1)
			No vegetation	Non vegetated rock glacier (as defined in Sect. 3, Table 1)

		Front characteristics[g]	I	No vegetation, evidence of recent instability, outcrop of fine material, little or no surface weathering, weathering degree lower than the surface of the rock glacier
			II	Very little or no vegetation (<20%), very little or no fine material, weathering and lichen cover comparable to the surface of the rock glacier
			III	Scarce or discontinuous and cold-adapted vegetation (≤50%), abundant debris, weathering similar to the surface of the rock glacier, cold air draining from voids among blocks
			IV	Completely vegetated, little outcropping debris, without voids and cold air drainage
		Subdued topography[a,g]	y	The lateral and frontal ridges are clearly evident and the central part of the rock glacier is depressed with respect to them (concave contour lines)
			n	Lateral ridges are absent or evident only in the upper part of the rock glacier, from halfway down the morphology is convex or almost flat

215

216 [a] Derived from the 2006 and 2014 LiDAR DEM of the Trento Province (siat.provincia.tn.it)

217 [b] Derived from the 1:10000 geological map of the Trento Province (protezionecivile.tn.it)

218 [c] Derived from the 2014 orthophoto of the Trento Province (siat.provincia.tn.it)

219 [d] Derived from the Boeckli et al. (2012) Alpine Permafrost Index Map

220 [e] Derived from the hillshaded 2014 LiDAR DEM of the Trento Province (siat.provincia.tn.it)

221 [f] Derived from the Seppi et al. (2012) rock glacier inventory

222 [g] Derived from field observations

223 [h] Ground surface temperature data reported in Carturan et al., (2016) and references therein;

224 http://www.protezionecivile.tn.it/.

225

226 We investigated the possible relationship of each variable with the spring-water temperature by means of scatterplots,

227 boxplots, analysis of variance (or Kruskal-Wallis one way analysis of variance on ranks when variances were not

228 homogeneous), Dunn's multiple comparison test, Student's t-test, and regression analysis. We defined spring-water

229 temperature as "the median of all available temperature measurements in the four years", so that we smoothed the

230 interannual variability of water temperature. However, we had also to account for the different number of measurements

231 available for each spring (from one up to four), and in particular for the possible low representativeness of springs

232 measured only once. In this case, there is the possibility of having measured an extreme value, far from the typical

233 conditions of those springs. To evaluate the impact of extreme values, we computed the absolute difference between each

234 single-year spring water measurement and the median of all available measurements at the same spring. The mean of

235 these absolute differences was 0.12°C, the median was 0.05°C, whereas the minimum and the maximum were 0 and

236 0.7°C, respectively, and 89% of values was below 0.3°C. These results indicate a low impact of extreme temperatures

237 and the suitability of using the median of all available measurements (regardless of their number) in statistical analyses.

238 For springs with temperature measured only once, we retained the single value if runoff was >0.1 l/s.

239

3.4 Geophysical investigations

241 Electrical resistivity tomography (ERT) surveys were performed on 13-14 July 2022 at two neighbouring rock glaciers,

242 classified as relict in the inventory of Seppi et al. (2012), to constrain spring-water temperature results at local scale.

243 These rock glaciers were selected considering their different characteristics (spring-water temperature, vegetation cover,

244 elevation) and the easy access. In addition, they have uniform lithology, which minimises the uncertainty in the

245 interpretation of gradients in electrical resistivity. The Preghena Rock Glacier has a mean elevation of 2196 m a.s.l., is

246 mainly free of vegetation (although shrubs and trees are present) and its spring-water temperature ranged between 1.6 and

247 1.8°C throughout the late summer during the measuring period. The Bordolona Rock Glacier has a mean elevation of

248 1967 m a.s.l., is completely covered by vegetation and its spring-water temperature ranged between 3.5 and 3.7°C in the

249 late summer during the measuring period. Both rock glaciers are northeast oriented (Fig. 3).

250
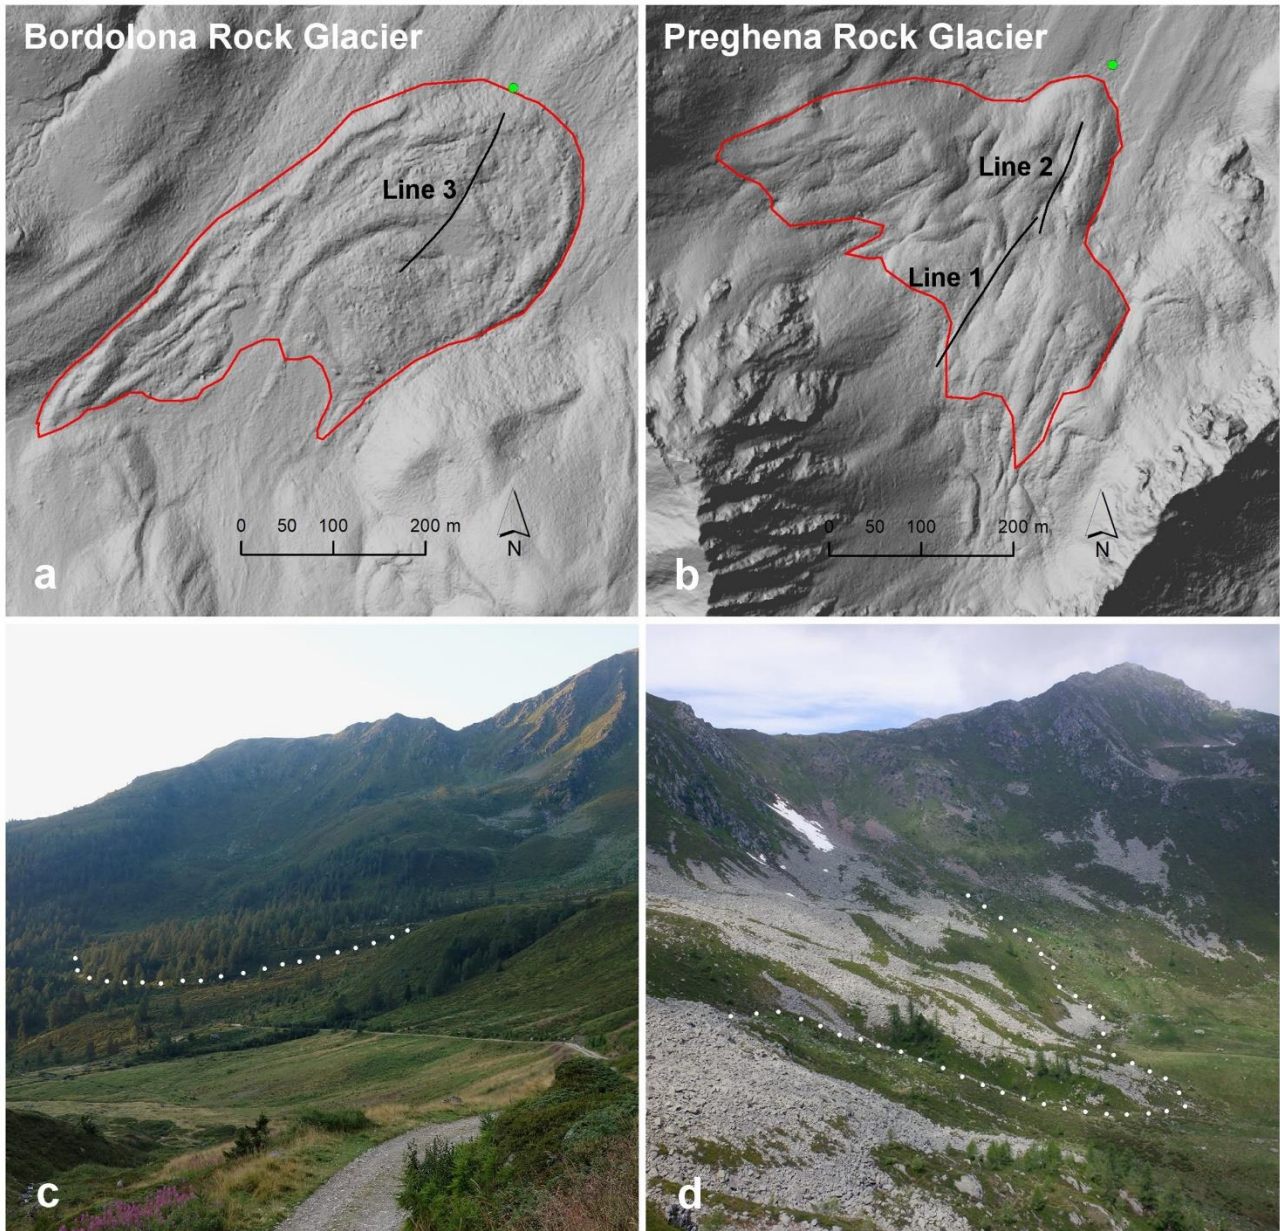
Figure 3: Location of ERT lines (black solid lines) performed on the a) Bordolona and b) Preghena rock glaciers in July 2022. The green dots in a) and b) indicate the sampled springs. The white dots in c) and d) indicate the lower edge of Bordolona and Preghena rock glaciers, respectively.

Geophysical surveys were carried out with a Syscal Pro georesistivimeter (Iris Instruments), using arrays of 72 (Line 1 Preghena and Line 3 Bordolona) or 48 (Line 2 Preghena) electrodes, with 3-meter electrodes spacing (Fig. 3). A total length of 346 and 216 m was investigated at the Preghena and Bordolona rock glaciers, respectively. A dipole-dipole scheme was used, with two different skips of 0 and 4 electrodes. This configuration ensured relatively high resolution at the surface, and at the same time enough penetration depth. Measurements were carried out with a stack of 3 to 6, imposing an acceptable error threshold of 5%. To estimate a more reliable experimental error for the acquired datasets (Binley, 2015), direct and reciprocal measurements were acquired by exchanging injecting and potential dipoles for each quadrupole. To partially overcome the high contact resistances between the electrodes and boulders/debris (Hauck and

264 Kneisell, 2008), the electrodes were inserted between the boulders using sponges soaked with saltwater (Pavoni et al.,
265 2023). Nevertheless, at the blocky surface of the Preghena Rock Glacier the contact resistances remained steadily above
266 10^5 Ωm, due to dry environmental conditions. The organic soil at the Bordolona Rock Glacier guaranteed low contact
267 resistances (<10^4 Ωm).

268 The inversion process of the acquired datasets has been performed with the Python-based software ResIPy (Blanchy et
269 al., 2020), based on the Occam's inversion method (Binley and Kemna, 2005). In each dataset, quadrupoles with a
270 stacking error higher than 5% were removed, and the expected data error was defined using the reciprocal check (Day-
271 Lewis et al., 2008, Pavoni et al., 2023), giving values of 20% and 5% for the Preghena and Bordolona Rock Glacier,
272 respectively.

273

3.5 Calculation of ice storage in the rock glaciers and glaciers

275 In order to estimate and compare the ice content of rock glaciers and glaciers in Val di Sole, we applied an approach
276 similar to the one used by Bolch and Marchenko (2009) in the Northern Tien Shan. For glaciers, we estimated residual
277 volumes in 2022 starting from the 2003 ice thickness estimates provided for each glacier in the study area by Farinotti et
278 al., (2019). We first calculated the bedrock topography subtracting the ice thickness from the glacier surface DEM
279 (Farinotti et al., 2019). Then we calculated the 2022 glacier thickness subtracting the bedrock topography from a glacier
280 surface DEM surveyed in September 2022 by the Province of Trento. We finally obtained the glacier volumes multiplying
281 the average thickness by the glacier area, and converted the ice volume into the water volume equivalent using a mean
282 ice density of 900 kg m^{-3}.

283 For rock glaciers, we calculated the total rock glacier volume multiplying their area A by the average thickness provided
284 by the Brenning (2005b) formulation:

285 $$T = cA^\gamma \tag{1}$$

286 where T is the average thickness of rock glaciers, and c and γ are constants equal to 50 and 0.2, respectively. To account
287 for the different geometry of active/transitional and relict rock glaciers, we assumed that the volumetric ice content of
288 active/transitional rock glaciers averages 50% (Jones et al., 2018, and references therein), and therefore that T_r for (true)
289 relict rock glaciers is half that of active/transitional rock glaciers (i.e., they are composed only of debris and all the ice
290 melted away). For pseudo-relict rock glaciers we tested various hypotheses of percent ice content, ranging between 5%
291 and 20%, calculating the average thickness T_{pr} as follows:

292 $$T_{pr} = T_r + T_{ice} \tag{2}$$

293 where T_{ice} is the average ice thickness, calculated in function of the volumetric percent ice content %$_{ice}$ as:

294 $$T_{ice} = \frac{\%_{ice} \cdot T_r}{(1 - \%_{ice})} \tag{3}$$

295

4. Results

4.1 Spatial variability of spring-water temperature

Water temperature of the 131 springs ranged between 0.0 and 8.5 °C, with a mean of 3.6 °C and a median of 3.4°C (Table 4). The frequency distribution of the spring elevation (i.e., the minimum elevation of catchments) is symmetrical and normally distributed around a sample mean of 2384 m a.s.l. The lowermost spring was sampled at 1698 m a.s.l., and the uppermost spring was sampled at 3039 m a.s.l.

The mean elevation of spring catchments varies between 2104 and 3151 m a.s.l., whereas the maximum elevation ranges between 2241 and 3352 m a.s.l. The mean and maximum elevation average 2539 and 2694 m a.s.l., respectively. Both are also symmetrical around the sample mean and normally distributed.

The planimetric length of spring catchments varies between 83 and 2621 m, with a mean of 610 m. The skewness and kurtosis indicate that the planimetric length is right skewed and leptokurtic.

Table 4: Descriptive statistics for spring-water temperature measurements and quantitative variables relative to spring catchments (as defined in Table 3).

N = 131	Median temperature (T_{Mdn})	Catchment minimum elevation (m)	Catchment maximum elevation (m)	Catchment mean elevation (m)	Catchment planimetric length (m)
Minimum	0.0	1698	2241	2104	83
Median	3.4	2367	2641	2495	539
Maximum	8.5	3039	3352	3151	2621
Range	8.5	1341	1111	1047	2538
Mean	3.6	2384	2694	2539	610
Standard error of the mean	0.2	22.6	21.9	21.0	34.9
Standard deviation	1.8	259.2	251.1	240.8	399.3
Coefficient of variation	0.500	0.109	0.093	0.095	0.655
Skewness	0.392	0.179	0.446	0.419	2.070
Kurtosis	-0.261	-0.328	-0.107	-0.391	6.095

Spring-water temperature is significantly correlated with the mean elevation of the catchments (Fig. 4a) for all three aspect classes defined in Table 3. Linear regressions are significant (p< 0.001) for south ($R^2 = 0.30$) and for east-west facing catchments ($R^2 = 0.35$). For the north facing catchments, there is a low significant relation ($R^2 = 0.25$, p<0.05) between water temperature and elevation. In all three cases, the low R^2 suggests that other factors should affect water temperature, as well. Similar results were obtained using spring elevation rather than mean catchment elevation (Fig. 5).
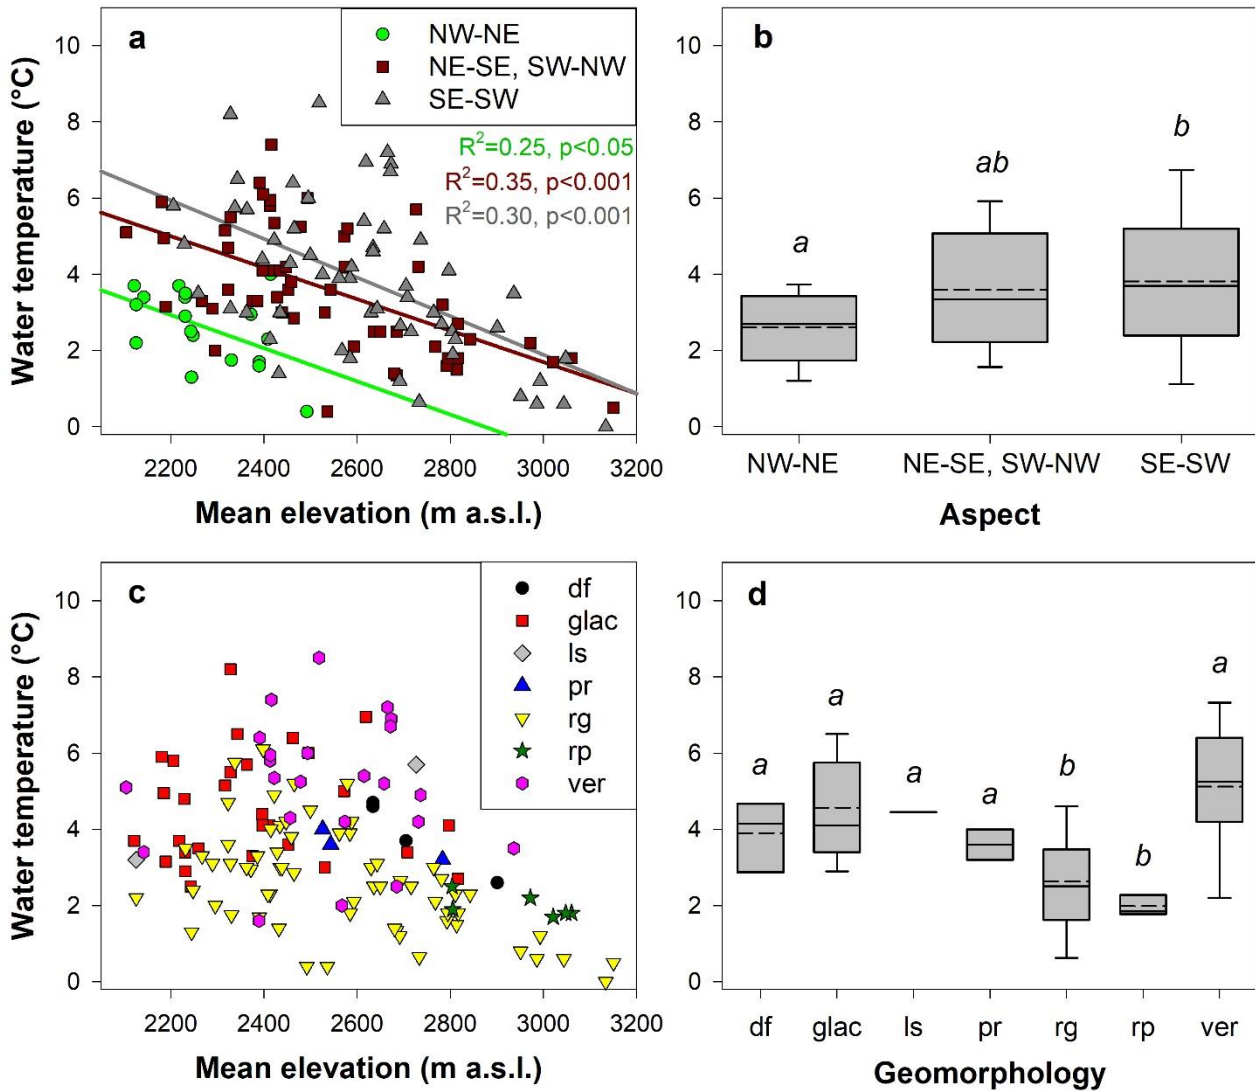
317

318 Figure 4: Relationship between spring-water temperature and a) mean catchment elevation (clustered in three classes of
319 mean catchment aspect), b) mean catchment aspect, c) mean catchment elevation (clustered in seven classes of upslope
320 area geomorphology), and d) upslope area geomorphology. Acronyms and their meanings are reported in Table 3. Boxes
321 in b) and d) indicate the 25[th] and 75[th] percentile, whiskers indicate the 10[th] and 90[th] percentile, whereas the horizontal
322 solid and dashed lines within the box mark the median and the mean, respectively. Different letters above the boxplots
323 indicate groups with significantly different (p<0.05) water temperatures based on Dunn's multiple comparison test
324 (applied after the Kruskal-Wallis test).

325

326

327

328

329
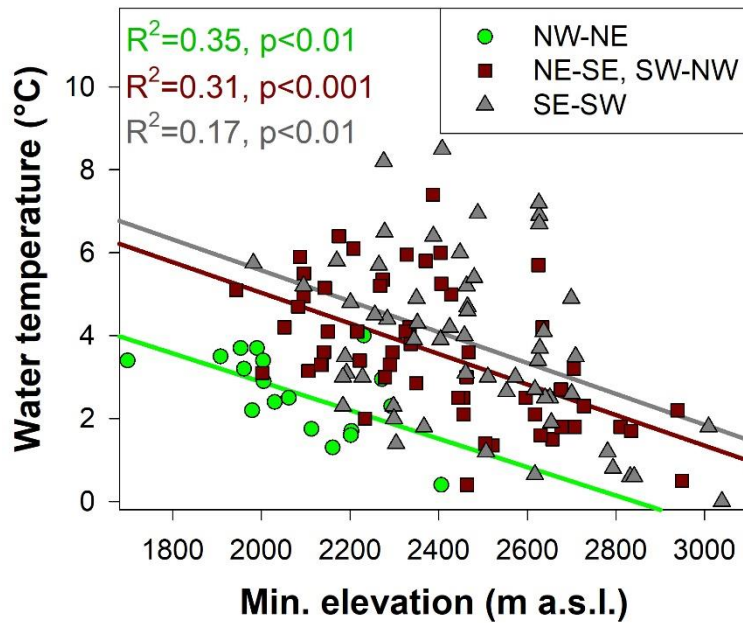
Figure 5: Relationship between spring-water temperature and minimum (spring) elevation, clustered in three classes of mean catchment aspect, as in Fig. 4a.

As expected, there is a negative relationship between water temperature and elevation (Fig. 4a and 5), but also a large overlap of water temperature among the three aspect classes. NW-NE facing catchments have significantly colder springs compared to SE-SW facing catchments (p<0.05, Dunn's multiple comparison test, applied after the Kruskal-Wallis test), whereas catchments facing NE-SE and SW-NW have water temperature that do not differ significantly from the other two classes (Fig. 4b). NW-NE facing catchments show a lower variability in spring-water temperature compared to the other two classes.

Figures 4c and 4d highlight that springs with upslope areas dominated by the presence of rock glaciers (irrespective of their activity) and bedrock outcrops are significantly colder than other springs (p<0.05, Dunn's multiple comparison test, applied after the Kruskal-Wallis test).

4.2 Temperature of springs downslope of rock glaciers

4.2.1 Comparison between active/transitional and relict rock glaciers

The spring-water temperature is significantly different for rock glaciers with different degrees of activity (Fig. 6a). Relict rock glaciers have a much warmer spring temperature compared to active/transitional rock glaciers (Student's t-test, p<0.001), and the variability of water temperature is larger for relict rock glaciers. There is a substantial overlap between the two groups, which extended between 1.2 and 3.0°C. This range of water temperature represents 54% of all springs downslope of rock glaciers (53% of active/transitional rock glaciers and 54% of relict rock glaciers). Almost half of rock glaciers classified as relict has spring-water temperature similar to rock glaciers classified as active/transitional.

The two groups of rock glaciers have significantly different minimum elevations (Fig. 6b, Student's t-test, p<0.001), but there is a wide elevation band, comprised between 2406 and 2630 m a.s.l., where they overlap.
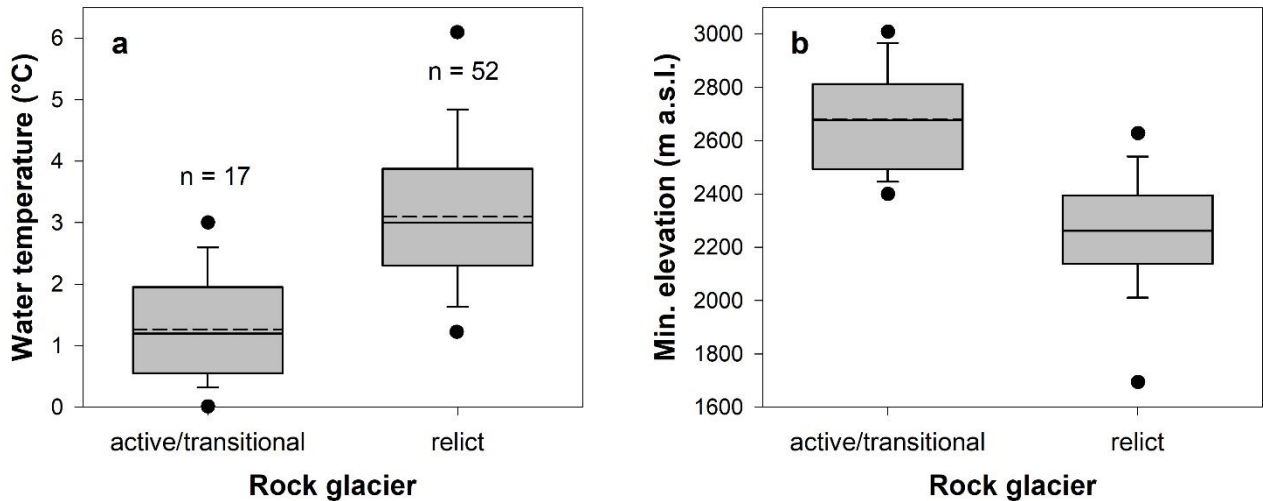
Figure 6: Spring-water temperature (a) and minimum elevation (b) of rock glaciers sampled in the study area. Boxes indicate the 25th and 75th percentile, whiskers indicate the 10th and 90th percentile, whereas the horizontal solid and dashed lines within the box mark the median and the mean, respectively. Maximum and minimum values are represented by dots. Sample size (n) is reported in a).

4.2.2 Spring-water temperature of relict rock glaciers

The relationship between water temperature and the mean catchment elevation is rather weak for springs fed by relict rock glaciers (Fig. 7a). The linear regression is significant (p<0.05) only for catchments facing NE-SE and SW-NW, but the relation is weak ($R^2 = 0.20$). At the same elevation, catchments facing NW-NE have colder springs compared to the other two aspect classes. The spring-water temperature of catchments facing north is similar to that of catchments facing east, south and west located 300-400 m above.

Relict rock glacier springs with open work deposits in their upslope areas are colder than springs without open work deposits (Fig. 7b). For the first group, the water temperature is not related to the mean catchment elevation, whereas for the second group there is a weak but significant relation (p<0.05, $R^2 = 0.15$). Consequently, the difference in water temperature of the two groups increase towards low elevations, which suggest that open work deposits may have a cooling effect particularly marked at elevations <2500 m a.s.l.

Similar considerations can be done for rock glacier front characteristics (Fig. 7c) and for rock glacier vegetation cover (Fig. 7d). Relict rock glaciers with scarce and cold-adapted vegetation cover have colder springs compared to relict rock glaciers with abundant vegetation cover on their bodies and fronts. However, for all classes of rock-glacier front characteristics and vegetation cover (Table 3) there is no significant relation between water temperature and mean catchment elevation.

Despite the large overlap among the analysed classes (Fig. 7), we found a significant effect of vegetation cover (Student's t-test, p<0.001), open work deposits (Student's t-test, p<0.001) and front characteristics (Student's t-test applied to classes III and IV, p<0.01) on the water temperature of springs downslope of relict rock glaciers. We did not detect any significant influence of the mean aspect of the catchment, the mean elevation of rock glaciers, their length, and the presence or absence of a subdued topography on water temperature.
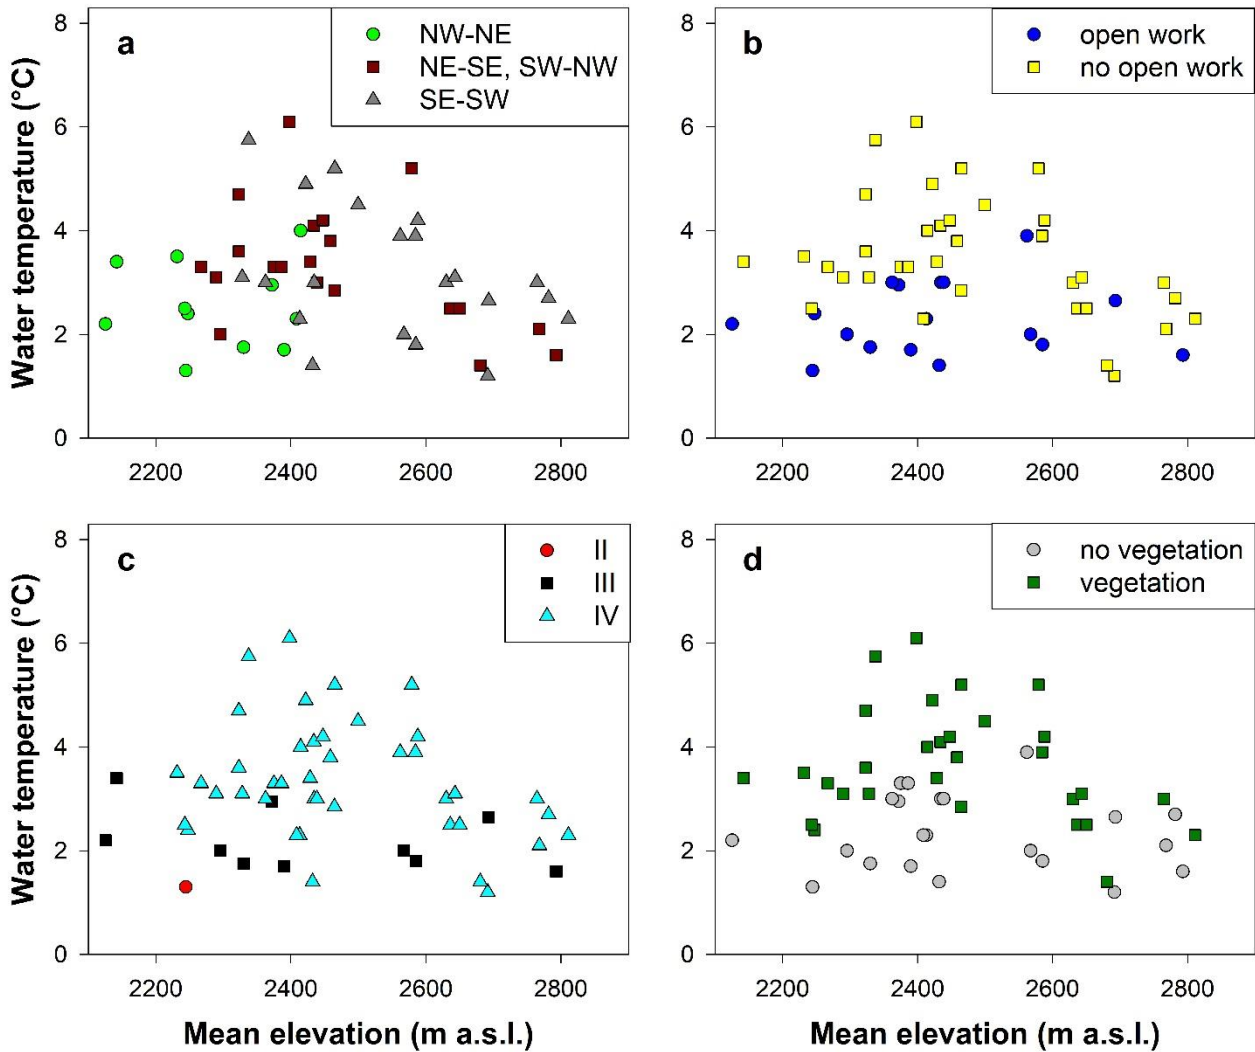
380

381 Figure 7: Relationship between spring-water temperature of relict rock glaciers and mean catchment elevation clustered

382 in a) three classes of mean catchment aspect, b) two classes of open work deposits in the spring upslope area, c) three

383 classes of rock glacier front characteristics, and d) two classes of rock glacier vegetation cover. Classes are described in

384 Table 3.

385

386 **4.3 Geophysical investigations**

387 Figures 8a and b show the inverted resistivity sections obtained for the investigation Lines 1 and 2 acquired on the

388 Preghena Rock Glacier. High values of resistivity ($>8 \cdot 10^4$ Ωm) were found in the uppermost layer, down to about 7-8

389 meters of depth, associated to the dry conditions during ERT soundings and to the air-filled voids among coarse debris

390 and blocks, typical of rock glacier environments. Below this uppermost layer, the resistivity values rapidly decrease ($<10^4$

391 Ωm) indicating a plausible decrease of porosity and grain size in the deposit, and a possible increase in water content.

392 This low resistivity layer develops almost continuously down to the bottom of the models. An increase in resistivity is

393 found at the lower end of line 1 and at the upper end of line 2, in the area where they overlap and at a depth of about 12-

394   13 m, reaching $1.5\text{-}2.0\cdot10^5$ Ωm. This area of increased resistivity can be interpreted as a deep frozen body, providing
395   evidence of probable permafrost inside this rock glacier.

396   Figure 8c shows the inverted resistivity section obtained for the investigation Line 3 acquired on the Bordolona Rock
397   Glacier. In the shallowest layers the resistivity is comprised between $5\cdot10^3$ and 10^4 Ωm, significantly lower than the
398   shallow layer of the Preghena Rock Glacier, even if air-filled voids are common on this rock glacier as well.

399   Below this layer, a sharp increase in resistivity is detected along the entire investigation line, with frequent regions
400   exceeding $2\cdot10^4$ Ωm. The highest resistivity (about $6\cdot10^4$ Ωm) is found towards the upper end of the ERT line, where a
401   younger rock glacier lobe overlies the main body. This high resistivity layer reaches about 15 meters of depth and can be
402   interpreted as a frozen layer. The bottom of the high-resistivity layer, which seems discontinuous in the lower part and
403   more continuous and thicker in the upper part of the ERT line, is highlighted by a strong decrease in resistivity, below
404      $5\cdot10^3$ Ωm. This lowermost layer is probably unfrozen and is characterised by an increase in water content and fine
405   sediments.
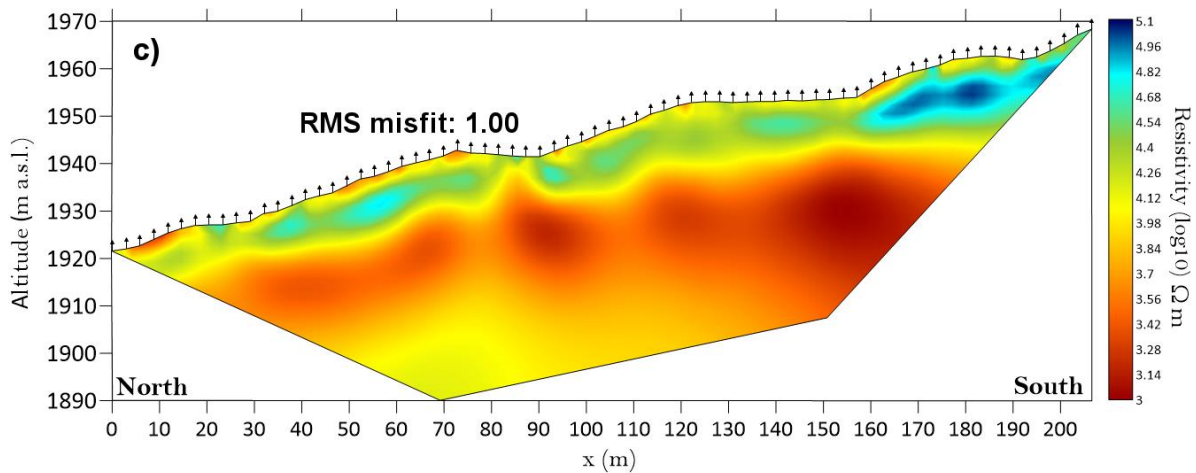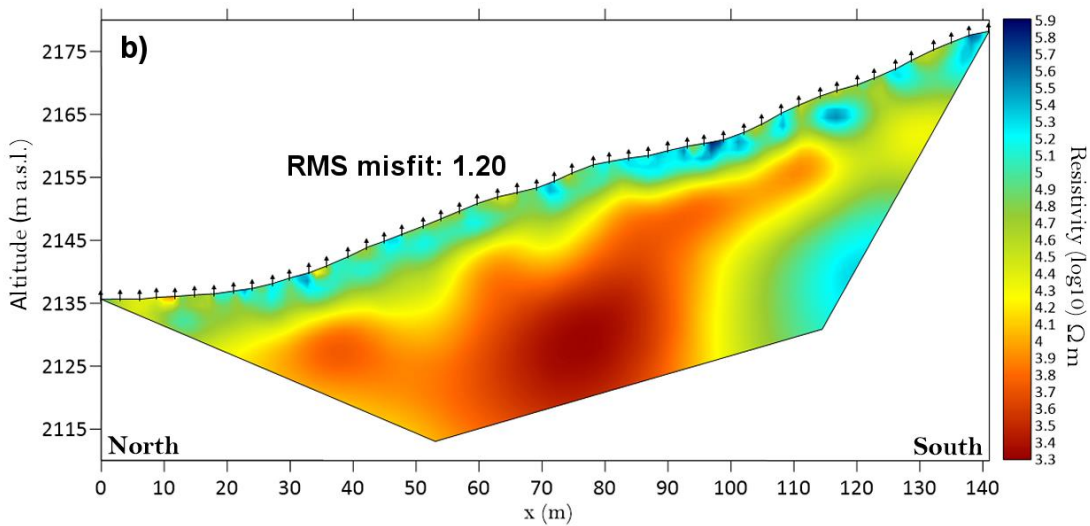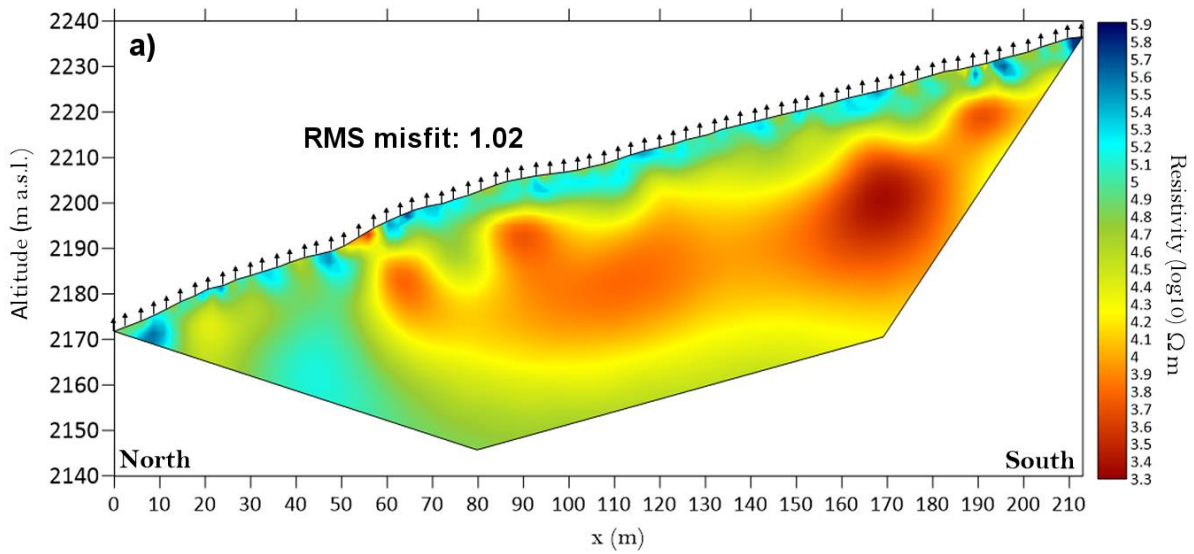
Figure 8: Inverted resistivity section of the investigation Line 1 (a) and 2 (b) on the Preghena Rock Glacier, and of the investigation line 3 (c) on the Bordolona Rock Glacier.

4.4 Ice storage in the rock glaciers and glaciers

411 A total glacier ice volume of 251 x 10^6 m^3, and a corresponding 226 x 10^6 m^3 water volume equivalent was calculated for

412 Val di Sole in 2022. In comparison, the water volume equivalent of active/transitional rock glaciers is 42.7 x 10^6 m^3.

413 A water volume equivalent between 4.4 and 20.9 x 10^6 m^3, averaging 12.7 x 10^6 m^3, can be estimated assuming that

414 50% of the total area of relict rock glaciers contains permafrost (rounded value, based on results reported in Section

415 4.2.1), and that the average ice content ranges between 5% and 20% in volume.

416

417 **5. Discussion**

418 **5.1 Permafrost distribution and spring-water temperature in the study area**

419 Measurements of spring-water temperature collected in this study outside the rock-glacier influence have a high spatial

420 variability and do not show a significant relationship with elevation ($p>0.05$). Among springs outside the rock glacier

421 influence, only those above 2800 m a.s.l. have a water temperature ≤2.2°C, which is the upper limit reported in the

422 literature for 'possible permafrost' (Carturan et al., 2016).

423 This result lines up well with mean annual air temperature (MAAT) indications. Indeed, based on the MAAT of -0.9°C

424 measured between 1961 and 2010 at the Careser Diga weather station (2605 m a.s.l., in the northern part of the Val di

425 Sole), the theoretical lower limit of discontinuous permafrost in Val di Sole, corresponding to a MAAT of -2°C (Haeberli,

426 1985), should be comprised between 2700 and 2800 m a.s.l..

427 Similarly, the alpine permafrost index map (APIM, Boeckli et al., 2012) indicates a lower limit of "permafrost mostly in

428 cold conditions" ranging between 2500 and 2900 m outside rock glaciers and coarse-block deposits, varying upon terrain

429 aspect and averaging 2700 m a.s.l.. Based on the mean elevation of active/transitional rock glaciers in the study area,

430 Seppi et al. (2012) calculated a present-day lower limit of permafrost at 2720 m a.s.l..

431 As expected, springs draining north-facing catchments are significantly colder compared to springs draining south-facing

432 catchments. On average, there is a difference of about 3°C between springs draining catchments at similar elevation and

433 with opposite aspect. On average, the same spring temperature is found 500-600 m higher on south-facing catchments

434 than on north-facing ones (Fig. 5). This result quantifies the influence of terrain exposure on the ground temperature

435 regime and permafrost distribution in the study area, which are direct consequences of shortwave radiation inputs and

436 related effects on snow cover and surface albedo (Boeckli et al., 2012; Wagner et al., 2019; Amschwand et al., 2024).

437 In our study, at all elevations, springs draining rock glaciers are the coldest, irrespective of the rock glacier activity state

438 (Fig. 4c). This is in agreement with findings of studies in the European Alps and in other mountain chains reporting rock-

439 glacier spring-water temperatures, regardless of their activity state. For example, in the Canadian Rockies, spring-water

440 temperature from an inactive rock glacier hosting small portions of permafrost reached a maximum of 2.2 °C, exercising

441 a substantial cooling effect on the creek downstream (Harrington et al., 2018). Interestingly, cold conditions and high

442 daily variability in spring-water temperature in summertime has been recorded in a rock glacier in Norway that shows

443 characteristics favourable to the presence of permafrost, but with minor ice bodies (Lilleøren et al., 2022). In the Austrian

444 Alps, spring-water from a relict rock glacier was monitored for 6 years, showing a mean temperature of 2.2°C, with small

445 seasonal variation (between 1.9 and 2.5 °C) and a decrease of the water temperature after precipitation events, attributed

446 to the potential presence of ice lenses in the lower part of the rock glacier (Winkler et al., 2016).

447 Our results align as well with those of studies reconstructing permafrost distribution by empirical modelling in the Alps
448 and at other mountain locations worldwide. A logistic regression model used in the Dry Andes of Argentina accounting
449 for mean annual air temperature, terrain ruggedness, and potential incoming solar radiation suggests that permafrost may
450 occur in several types of coarse blocky deposits, including rock glaciers, even under unfavourable climatic conditions
451 (Tapia Baldis and Trombotto-Liaudat, 2020). A similar empirical-statistical model applied in the Austrian Alps shows
452 that permafrost can be expected above 2500 m a.s.l. in northerly exposed slopes and above 3000 m a.s.l. in southerly
453 exposed slopes (Schrott et al., 2012), providing an elevation difference of about 500 m between south and north exposures,
454 which agrees well with our spring-water temperature results.

5.2 Rock glacier classification based on spring-water temperature

456 Although springs draining active/transitional rock glaciers are significantly colder than springs draining relict rock
457 glaciers, there is a remarkable ~50% overlap in the water temperature range of the two rock glacier groups (Fig. 6a).
458 Based on published thresholds (Haeberli, 1975; Frauenfelder et al., 1998; Scapozza, 2009, Carturan et al., 2016), 12 out
459 of the 52 relict rock glaciers sampled in Val di Sole (23%) can be included in the 'possible permafrost' category (water
460 temperature between 1±0.2 and 2±0.2 °C), and none of them in the 'probable permafrost' category (water temperature <
461 1±0.2 °C). However, the relatively warm water temperature measured downstream of active/transitional rock glaciers
462 (maximum = 3°C, 90[th] percentile = 2.4°C), and downstream of areas with permafrost evidence (maximum = 3.5°C, 90[th]
463 percentile = 2.2°C), suggest that the upper limit of spring-water temperature for possible permafrost may be higher. Here,
464 the 90[th] percentile accounts for possible misclassification of active/transitional rock glaciers and other issues affecting
465 spring-water temperature measurements (Sect. 5.3).

466 Assuming a (rounded) upper limit of 2.5°C for spring-water temperature with possible permafrost influence leads to
467 include 19 (38%) relict rock glaciers in the possible permafrost category. This estimate looks more conservative than the
468 ~50% obtained by a mere comparison of water temperature ranges of active/transitional and relict rock glaciers (Fig. 6a).
469 These findings might suggest that permafrost in rock glaciers classified as relict is widespread in Val di Sole, and that a
470 large fraction of them is actually pseudo-relict, or transitional landforms, containing patches of permafrost and reaching
471 an elevation below the tree line (2000-2200 m a.s.l.). Compared to the rock glacier classification performed by Seppi et
472 al. (2012), which was based on remote-sensing geomorphometric evidence combined to field observations (topographic
473 surveys and ground surface temperature measurements for few rock glaciers), spring-water temperature suggests the need
474 for a reclassification of a large fraction of rock glaciers categorised as relict into pseudo-relict.

475 Examples of spring-water temperature downstream of rock glaciers in Val di Sole are shown in Fig. 9. Cold springs
476 draining rock glaciers classified as relict are associated to the presence of open work deposits and scarce vegetation cover
477 (Fig. 7 and 9). These two explaining variables are often correlated, because vegetation tend to be scarce over coarse
478 deposits without fine infill among blocks, and vice versa. The relationship between cold spring temperature (as permafrost
479 evidence) and these two surface characteristics was expected in our case study, based on the existing literature (e.g.,
480 Guglielmin, 1997, and references therein). This relationship is statistically significant only for rock glaciers classified as
481 relict, whereas for active/transitional rock glaciers sampled in the study area it does not exist (Fig. A1).

482
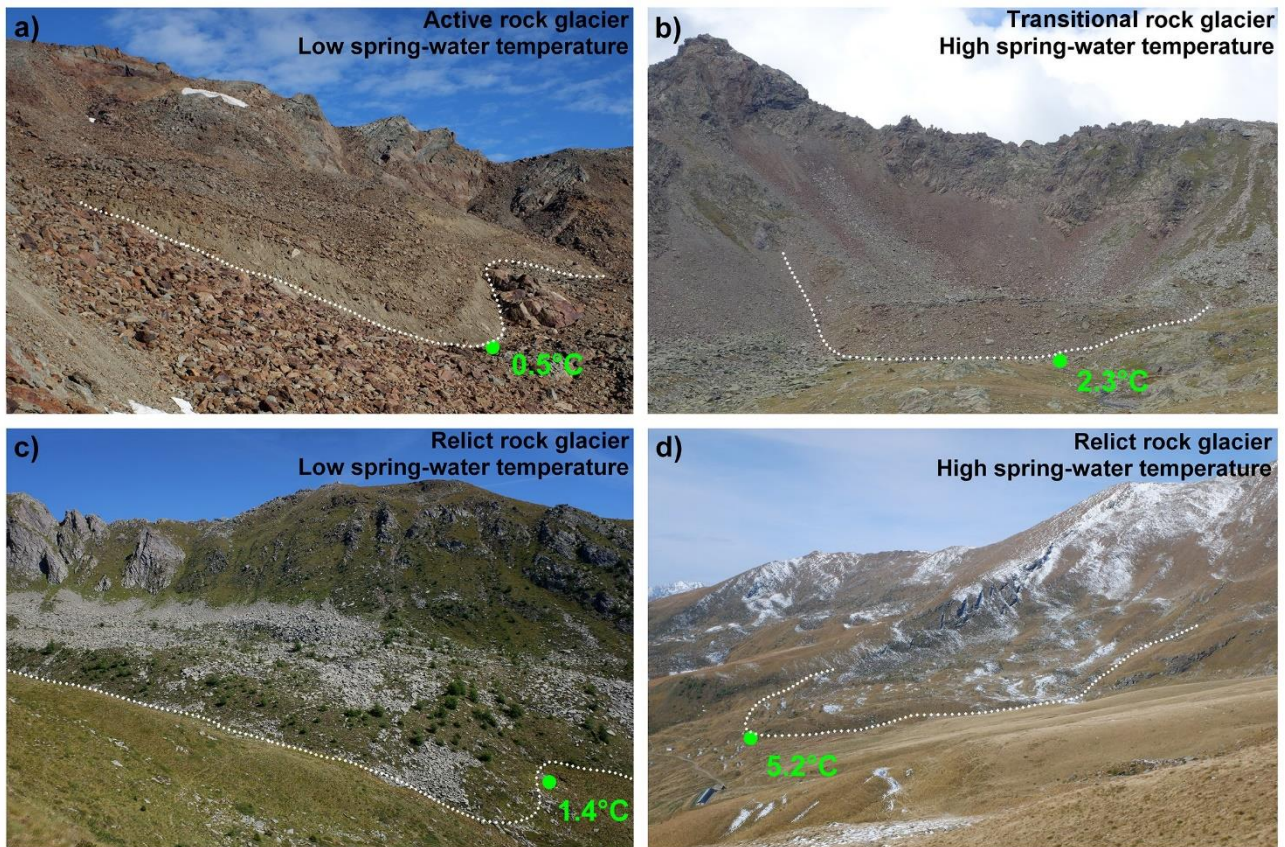
Figure 9: Examples of spring-water temperature downstream of rock glaciers in Val di Sole: a) active rock glacier with cold spring at 2950 m a.s.l.; b) transitional rock glacier with relatively warm spring at 2727 m a.s.l.; c) relict rock glacier with cold spring at 2304 m a.s.l., whose surface is open-work and presents scarce vegetation cover; d) relict rock glacier with warm spring at 2266 m a.s.l., whose surface is entirely covered by vegetation.

The long-term preservation of permafrost within open work blocky deposits results from overcooling and thermal decoupling of the frozen core from the external climate (Harris and Pedersen, 1998; Morard et al., 2008; Jones et al., 2019). The low thermal conductivity in coarse open work deposits brings to lower ground temperatures compared to fine-grain material (Juliussen and Humlum, 2008; Jones et al., 2019). Soil development over the surficial blocks and boulders can prevent these cooling effects (Ikeda and Matsuoka, 2002). However, if fine-grain infilling does not occur, ground cooling effect goes undisturbed. In central Europe, these processes enable the existence of permafrost much below its regional limit and reaching elevations lower than 1000 m a.s.l. (Gude et al., 2003; Delaloye et al., 2003). According to Delaloye and Lambiel (2005), thousand-year-old permafrost might be potentially preserved in these types of deposits.

Open work deposits and/or scarce vegetation cover can be potentially employed to distinguish rock glaciers with or without permafrost, as both can be mapped based on remote-sensing imagery. However, open work deposits and vegetation cover do not enable a full distinction of 'cold' and 'warm' springs affected by relict rock glaciers (Fig. 7b, c and d). Individual non-open-work rock glaciers widely covered by vegetation can have spring-water temperature as low as 1.4°, and rock glaciers almost free of vegetation with blocky surface can have spring-water temperature up to 3.9°C.

Other variables considered in this study, such as aspect, elevation, size and the presence or absence of a subdued topography on rock glaciers (Delaloye et al., 2003; Delaloye, 2004), are not related to spring-water temperature. Figure 7 suggests the existence of a group of cold springs at low elevations on north-facing catchments, even though water

503 temperature is not significantly different from the temperatures of springs in the other two aspect classes. This result
504 might be due to the small sample size of the NW-NE aspect class.

505

506 **5.3 Limitations and uncertainties in the spring-water temperature approach**

507 The results of this study might be affected by limitations in the experimental design, assumptions, and uncertainties. First,
508 the main assumption of this study is that spring-water temperature provides indication of permafrost occurrence at
509 investigated rock glaciers and spring upslope areas, and can be used as a stand-alone pilot method to rapidly explore the
510 activity state of rock glaciers in a wide area. This approach applies spring-water temperature to the catchment scale,
511 beyond its general use as an ancillary method to other techniques such as InSAR analyses, ground surface temperature
512 measurements and/or geophysics.

513 We base our assumption on previously published work and well-known temperature thresholds for permafrost probability
514 categories (e.g., Haeberli, 1975; Frauenfelder et al., 1998; Scapozza, 2009) and on our first successful application at the
515 catchment scale (Carturan et al., 2016). Data collected in Val di Sole are in line with literature thresholds, provided that
516 the 10% largest spring-water temperature values are excluded (Sect. 5.2). Including these extreme values leads to about
517 1.5°C larger temperature thresholds for possible permafrost compared to literature.

518 The reason behind this discrepancy lies in the uncertainty in the classification of rock glacier activity, which was based
519 on vegetation and geomorphological characteristics, assessed mainly from remote-sensing images (Seppi et al., 2012). In
520 the wide elevation band where active/transitional and relict rock glaciers coexist (minimum elevation between 2406 and
521 2630 m), landforms with similar vegetation cover and surface geomorphology have been classified based on the authors'
522 experience and judgement, implying a certain degree of subjectivity.

523 The distinction between active/transitional and relict rock glaciers is a theoretical concept, and there is a continuum
524 between transitional and (true) relict rock glaciers (Kääb, 2013). In absence of other evidence, this continuum hampers to
525 distinguish unambiguously transitional and relict landforms, in particular if they have similar surface characteristics. In
526 addition, the mentioned transition is a dynamic concept, which depends on the characteristics of individual landforms,
527 their topo-climatic setting, and their response to climatic variations (Kääb, 2013).

528 Another source of uncertainty is related to the distance between the permafrost body and the measured springs. Water
529 temperature is a non-conservative tracer, and if the main permafrost body is distant (e.g., more than one hundred meters)
530 from the rock glacier front, or if permafrost is patchy and not in contact with groundwater paths, water temperature can
531 be largely influenced by unfrozen sediments and/or mixing with other water sources (e.g., Kellerer-Pirklbauer et al.,
532 2017). This is the case of the Bordolona Rock Glacier (Fig. 8c), where the rather warm spring-water temperature (3.5-
533 3.7°C) would have led to exclude the occurrence of permafrost in absence of geophysical evidence.

534 For smaller distances, we have checked the impact of spring location downstream of rock glacier fronts at three
535 measurement sites, where the same stream emerged briefly at the rock glacier front and a few tens meters downstream.
536 Measurements confirmed that there was negligible warming (from 0.0 to 0.1°C) of the water downstream of the rock
537 glacier front, at least as long as the water remained below the surface.

538 Seasonal ice formed in the topmost ground layer during winter and spring, in areas without permafrost, might cool down
539 spring-water temperature leading to false-positives in permafrost detection. We think that making measurements in late
540 summer, as proposed by the literature (e.g. Haeberli, 1975), prevents this seasonal ice from affecting spring-water

541 temperature measurements, or at least strongly minimizes its effect. Possible influence from seasonal ground ice formation

542 should be largest after cool/short summer seasons, but this was not the case in the study period.

543 Depending on the measurement time, which was between 8.00 and 18.00 CET, any variation of temperature during the

544 day might also influence the results. Hourly records of spring-water temperature collected by Seppi (2006) lead us to

545 exclude significant variation of spring-water temperature during the day, at least for springs with runoff higher than 0.1

546 l/s.

547 Several authors are cautious when discussing about cold springs downslope of relict rock glaciers. For example, Winkler

548 et al. (2016) do not exclude the presence of remaining ice lenses inside the relict Schöneben Rock Glacier (Niedere Tauern

549 Range, Austria), as a possible explanation for the rapid cooling of the spring water after recharge events, during

550 summertime. However, the authors mention the cold thermal regime beneath coarse blocky materials as a possible

551 explanation, which does not necessarily imply permafrost occurrence, and conclude that additional research is required

552 for the identification of the cooling source.

553 We agree that additional research is required to confirm inference from spring-water temperature. With this study we add

554 that spring-water temperature can be as high as 1.8°C for rock glaciers where permafrost occurrence is confirmed by

555 geophysics or ground surface temperature measurements, and can exceed 3.5°C where the permafrost body is far from

556 the rock glacier front and spring, such as at the Bordolona Rock Glacier. Even if the collected data seem to suggest that

557 temperature thresholds might be slightly higher than those reported in the literature, further investigations are necessary

558 for better constraining them and for defining their range of uncertainty. Based on the evidence discussed in this section,

559 a warm bias might prevail over a possible cold bias in our spring water data, leading to false-negatives in permafrost

560 detection. For this reason, the frequency of pseudo-relict reported in Section 5.2 can be considered rather conservative.

561 A last source of uncertainty is represented by the sampling design adopted for Val di Sole, with its particular topographic

562 and geological characteristics. The dominant southward aspect of the investigated rock glaciers, and their spatial

563 clustering, can explain the lack of correlation between water temperature and the aspect of rock glaciers. We tried to

564 minimise the spatial clustering of measured springs, visiting as many headwater catchments as possible, and taking

565 measurements at the largest number of springs on each catchment. However, due to logistic constraints and inherent

566 characteristics of the study area, a certain degree of spatial clustering was unavoidable. For this reason, the role of terrain

567 aspect as a possible controlling factor on spring-water temperature requires additional investigation.

568

569 **5.4 Geophysics**

570 The inverted resistivity sections obtained for the Preghena Rock Glacier (Fig. 8a and b) show results compatible with the

571 presence of permafrost patches. Even considering the high contact resistance due to the dry weather conditions preceding

572 the survey, and the location of the high resistivity body in the areas known to be the least sensitive of the model (the bed

573 and margins, Binley, 2015), we observe that the obtained resistivity values are typical of frozen materials (Hauck and

574 Kneisel, 2008). The high resistive area is highlighted by both ERT lines in the overlapping area (x<70 m in Line 1 and

575 x>100 m in Line2, Fig. 8). The data error of 20% applied in the inversion process was defined using the reciprocal

576 analysis, which minimise possible inversion artifacts compared to the more commonly used stacking error (Binley, 2015).

577 This result agrees with the low temperature of the Preghena Rock Glacier spring, which fluctuates between 1.6 and 1.8°C

578 throughout summer, and it suggests that this rock glacier should be classified as a pseudo-relict rock glacier.

In the Bordolona Rock Glacier (Fig. 8c), the frozen layer looks discontinuous in the lower section of the ERT Line, and more continuous and thicker in the upper part, where a younger lobe superposes the main body of the rock glacier. The different resistivity detected in the lower and upper sections of the ERT line can be related to a different percent ice content in the frozen layers, and/or a different temperature of the ice (Hilbich et al., 2008). These results suggest the probable presence of permafrost also inside the Bordolona Rock Glacier, which was considered a 'true' relict rock glacier due to its abundant vegetation cover, spring-water temperature above 3°C, and low mean elevation. Based on geophysical investigations, the Bordolona Rock Glacier too should be classified as a pseudo-relict rock glacier.

The acquired data were of lower quality at the Preghena Rock Glacier, due to the high contact resistance. More conclusive results should be obtained by repeating the geophysical surveys under moister wetter conditions, especially at the Preghena Rock Glacier, and possibly coupling ERT to seismic refraction measurements in order to obtain a reliable estimate of the percent ice content inside these rock glaciers (Hauck et al., 2008Hauck et al., and 2011, Wagner et al., 2019, Pavoni et al. 2023).

5.5 Ice storage in the rock glaciers and glaciers of Val di Sole

Calculations of the ice contained in the pseudo-relict rock glaciers of the study area assumed that 50% of the total area of relict rock glaciers contains permafrost (Section 4.2.1) and that the average ice content ranges between 5% and 20% in volume. This range is a first hypothesis based on the few geophysical data available at pseudo-relict rock glaciers (Delaloye, 2004; Colucci et al., 2019; Pavoni et al., 2023; this work). To our knowledge, the amount of ice in pseudo-relict rock glaciers has yet to be quantified.

Even if preliminary and affected by significant uncertainty, these estimates provide an order of magnitude of water stored as ice in the rock glaciers of Val di Sole. The water equivalent ratio for rock glacier ice versus glacier ice averages 1:4.1 and ranges between 1:3.6 and 1:4.8, considering minimum and maximum estimates reported above. Importantly, based on these calculations, 23% of the total rock glacier water volume would be stored inside pseudo-relict rock glaciers. Even assuming the lower bound of percent ice content (5%), pseudo-relict rock glaciers would contribute to a significant 9% of the total rock glacier water volume.

Based on the more conservative estimate reported in Section 5.2 for the frequency of pseudo-relict rock glaciers (38% instead of 50% of the total area covered by rock glaciers classified as relict), the water equivalent ratio for rock glacier ice versus glacier ice would average 1:4.3 and would range between 1:3.9 and 1:4.9, with 18% of the total rock glacier water volume stored inside pseudo-relict rock glaciers. Even if a little smaller, these numbers do not change significantly the meaning of the results.

The obtained water equivalent ratio of rock glacier ice versus glacier ice, (between 1:4 and 1:5), is in the higherst range of values reported in the literature for mountain regions where both glaciers and rock glaciers exist. Other studies in the European Alps (e.g., Barsch, 1977; Wagner et al., 2021) found ratios varying between 1:01 and 1:83, depending on catchment glacierization. A much larger range was reported for the Andes, comprised between 1:228 and 8.3:1. The largest ratios were found in arid regions of the Andean mountain range (Brenning, 2005; Azócar and Brenning, 2010; Rangecroft et al., 2015; Janke et al., 2017). Bolch and Marchenko (2009) reported ratios between 1:67 and 1:10 for the Northern Tien Shan, between Kazakhstan and Kyrgyzstan.

616 In Val di Sole, the ice volume of rock glaciers is already of the same order of magnitude of the ice contained in glaciers.
617 Considering that permafrost thaw rates are an order of magnitude or two slower compared to glacier ice (Hock et al.,
618 2019; Haeberli et al., 2017), and that about 3% of the glacier ice volume is depleted each year in the study area (Carturan
619 and De Blasi, 2021), the calculated ratio is expected to approach the unity within 2 or 3 decades.

620

6. Concluding remarks

622 We have surveyed spring-water temperature in an area of 795 km^2 in Val di Sole, to understand the influence of
623 topographic and geomorphological factors, and to test if it can be used to preliminary differentiate active/transitional and
624 relict rock glaciers. Spring-water temperature measurements enabled to characterise a large number of rock glaciers, and
625 to provide a first estimate of the frequency of pseudo-relict rock glaciers in this area. Overall, our results point to a
626 significant hydrological importance of rock glaciers classified as relict in the study area, which is expected to increase in
627 the future due to atmospheric warming.

628 In general, we have found that the spatial variability of spring-water temperature is controlled by elevation, aspect and
629 the presence of rock glaciers in the upslope area. Compared to other landforms in the upslope area, rock glaciers have
630 colder springs, irrespective of their activity state.

631 The spring-water temperature of rock glaciers classified so far as relict is higher and with larger spatial variability
632 compared to active/transitional rock glaciers. However, there is a remarkable ~50% (38% excluding extremes) overlap in
633 the spring temperature range of the two rock glacier groups. Relict rock glaciers tend to have colder springs if their surface
634 is blocky and scarcely covered by (cold-adapted) vegetation.

635 The spring-water temperature data suggest that one third of rock glaciers classified as relict might be actually pseudo-
636 relict, thus containing permafrost. The exact percentage cannot be derived unambiguously from spring-water temperature
637 because i) other evidence is required to confirm inference from water temperature, ii) there is uncertainty in the
638 classification of the activity state of rock glaciers, iii) there is geophysical evidence that rock glaciers containing
639 permafrost may have 'warm' springs (up to 3.7°C), and consequently iv) there is uncertainty in the definition of the
640 thresholds for differentiate among absent/possible/probable permafrost categories. We recommend further investigations
641 to reduce this uncertainty, for example performing geophysics on rock glaciers with a larger variability in surface
642 characteristics, activity, settings, and/or analysing the time temporal variability of spring-water temperature.

643 Despite these uncertainties, our study shows that rock-glacier spring-water temperature can provide a pilot approach to
644 estimate the spatial distribution of permafrost in vast areas, and an auxiliary element to the classification of rock glaciers,
645 whose permafrost content might otherwise go underestimated. This method can be applied in other mountainous regions,
646 with the possible exception of arid/semi-arid regions where the presence of springs is scarce.

647 Geophysics applied to two rock glaciers classified as relict enabled to detect the presence of permafrost. While the blocky
648 Preghena Rock Glacier, whose spring temperature was < 1.8°C throughout the summer, was expected to contain
649 permafrost, its occurrence in the Bordolona Rock Glacier was not expected, because it is entirely covered by dense
650 vegetation and its spring temperature reached 3.7°C in late summer.

651 Preliminary calculations of water resources stored as ice inside the rock glaciers of Val di Sole reveal that they amount to
652 ~24% of the water volume equivalent stored in glaciers, which are disappearing very fast. Remarkably, 20% of the total
653 rock glacier water volume is stored inside rock glaciers classified as relict.

654 This study highlights the need for additional investigations and improved understanding of these periglacial landforms.
655 In particular, the possible presence of permafrost in a large fraction of rock glaciers classified as relict poses critical
656 questions regarding the origin, preservation, current behaviour, seasonal dynamics, and future evolution of this
657 permafrost. Thorough study of pseudo-relict rock glaciers is required for understanding the evolution between active,
658 transitional and relict landforms, which is important in view of current and projected climate change.

659

660

661

662

663

664 **Appendix A**

665
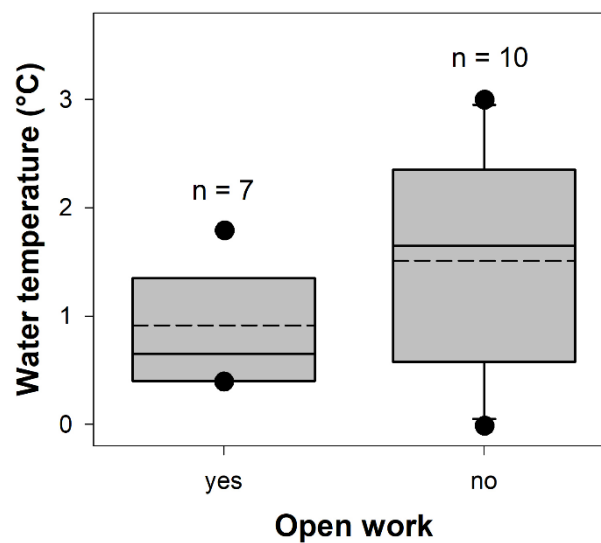
666

667 Figure A1: Spring-water temperature for intact rock glaciers with and without open work deposits on their surface. Boxes
668 indicate the 25th and 75th percentile, whiskers indicate the 10th and 90th percentile, whereas the horizontal solid and dashed
669 lines within the box mark the median and the mean, respectively. Maximum and minimum values are represented by dots.
670 Sample size (n) is reported above the boxplots.

671

672

673 **Data availability**

~~Data are available from the corresponding author upon reasonable request.~~The spring-water temperature dataset used in this work is freely available ~~at~~by the ~~researchdata.cab.unipd.it~~Research Data Unipd repository (~~DOI: 10.25430/researchdata.cab.unipd.it.00001366~~Carturan, 2024).

Author contributions

LC designed the methodological approach and carried out the sampling campaigns with the support of AA, RS, MT, TZ and GZ. MP and JB carried out the geophysical surveys in cooperation with LC, CM and MZ and interpreted the results. GZ, LC and AA performed the statistical analyses of the dataset. LC prepared the first draft of the manuscript with contributions from GZ, MP and CM. All authors contributed to the editing of the manuscript.

Competing interests

The contact author has declared that none of the authors has any competing interests.

Acknowledgments

The authors acknowledge the editor and reviewers for their comments and suggestions.

Financial support

This study was carried out within the RETURN Extended Partnership and received funding from the European Union Next-Generation EU (National Recovery and Resilience Plan – NRRP, Mission 4, Component 2, Investment 1.3 – D.D. 1243 2/8/2022, PE0000005)~~,.~~ ~~LC, GZ, JB and RS also acknowledge the support of~~and the project PRIN 2022 "SUBSURFICE – Ecohydrological and environmental significance of subsurface ice in alpine catchments" (code: 2022AL7WKC, CUP: C53D23002020006), which received funding from the European Union Next-Generation EU (National Recovery and Resilience Plan – NRRP, Mission 4, Component 2, Investment 1.1 – D. D. 104 2/2/2022). This manuscript reflects only the authors' views and opinions; neither the European Union nor the European Commission can be considered responsible for them.

References

Amschwand, D., Scherler, M., Hoelzle, M., Krummenacher, B., Haberkorn, A., Kienholz, C., and Gubler, H.: Surface heat fluxes at coarse blocky Murtèl rock glacier (Engadine, eastern Swiss Alps), The Cryosphere, 18, 2103–2139, https://doi.org/10.5194/tc-18-2103-2024, 2024.

Azócar, G.F. and Brenning, A.: Hydrological and geomorphological significance of rock glaciers in the dry Andes, Chile (27°–33°S). Permafr. Periglac. Process. 21 (1), 42–53. https://doi.org/10.1002/ppp.669, 2010.

Barsch, D.: Eine Abschätzung von Schuttproduktion und Schutttransport imBereich aktiver Blockgletscher der Schweizer Alpen [An estimate of debris production and transport in the area of active rock glaciers in the Swiss Alps]. In: Wirthmann, A. (Ed.), Hangformen und Hangprozesse. Z. Geomorph. N. F. 28, 148–160, 1977.

Barsch, D.: Rockglaciers: indicators for the present and former geoecology in high mountain environments, Springer Berlin Heidelberg, Berlin, Heidelberg, 218 pp., https://doi.org/10.2307/3060377, 1996.

Bertone, A., Barboux, C., Bodin, X., Bolch, T., Brardinoni, F., Caduff, R., Christiansen, H. H., Darrow, M. M., Delaloye, R., Etzelmüller, B., Humlum, O., Lambiel, C., Lilleøren, K. S., Mair, V., Pellegrinon, G., Rouyet, L., Ruiz, L., and Strozzi, T.: Incorporating InSAR kinematics into rock glacier inventories: insights from 11 regions worldwide, The Cryosphere, 16, 2769–2792, https://doi.org/10.5194/tc-16-2769-2022, 2022.

Binley, A.: Tools and Techniques: Electrical Methods, in: Treatise on Geophysics: Second Edition, vol. 11, Elsevier, 233–259, https://doi.org/10.1016/B978-0-444-53802-4.00192-5, 2015.

Binley, A. and Kemna, A.: DC Resistivity and Induced Polarization Methods, in: Hydrogeophysics, Springer Netherlands, Dordrecht, 129–156, https://doi.org/10.1007/1-4020-3102-5_5, 2005.

Blanchy, G., Saneiyan, S., Boyd, J., McLachlan, P., and Binley, A.: ResIPy, an intuitive open source software for complex geoelectrical inversion/modeling, Comput. Geosci., 137, 104423, https://doi.org/10.1016/j.cageo.2020.104423, 2020.

Boeckli, L., Brenning, A., Gruber, S., and Noetzli, J.: Permafrost distribution in the European Alps: Calculation and evaluation of an index map and summary statistics, Cryosphere, 6, 807–820, https://doi.org/10.5194/tc-6-807-2012, 2012.

Bolch, T. and Marchenko, S.: Significance of glaciers, rockglaciers and ice-rich permafrost in the Northern Tien Shan as water towers under climate change conditions. In: Braun, Ludwig N; Hagg, Wilfried; Severskiy, Igor V; Young, Gordon. Assessment of Snow, Glacier and Water Resources in Asia: Selected papers from the Workshop in Almaty, Kazakhstan, 2006. Koblenz: IHP UNESCO, 132-144, 2009.

Bollati, I. M., Cerrato, R., Lenz, B. C., Vezzola, L., Giaccone, E., Viani, C., Zanoner, T., Azzoni, R. S., Masseroli, A., Pellegrini, M., Scapozza, C., Zerboni, A., and Guglielmin, M.: Geomorphological map of the Val Viola Pass (Italy-Switzerland), Geogr. Fis. e Din. Quat., 41, 105–114, https://doi.org/10.4461/GFDQ.2018.41.16, 2018.

Brenning, A.: Geomorphological, hydrological and climatic significance of rock glaciers in the Andes of Central Chile (33–35 S). Permafr. Periglac. Process., 16(3), 231-240, https://doi.org/10.1002/ppp.528, 2005a.

Brenning, A.: Climatic and geomorphological controls of rock glaciers in the Andes of Central Chile: combining statistical modelling and field mapping, Ph.D thesis, Humboldt-Universität zu Berlin, Mathematisch-Naturwissenschaftliche Fakultät II, 2005b.

Brighenti, S., Tolotti, M., Bruno, M. C., Engel, M., Wharton, G., Cerasino, L., Mair, V., and Bertoldi, W.: After the peak water: the increasing influence of rock glaciers on alpine river systems, Hydrol. Process., 33, 2804–2823, https://doi.org/10.1002/hyp.13533, 2019.

Brighenti, S., Hotaling, S., Finn, D. S., Fountain, A. G., Hayashi, M., Herbst, D., Saros, J. E., Tronstad, L. M., and Millar, C. I.: Rock glaciers and related cold rocky landforms: Overlooked climate refugia for mountain biodiversity, Glob. Chang. Biol., 27, 1504–1517, https://doi.org/10.1111/gcb.15510, 2021.

741 Carturan, L.: Spring-water temperature from rock glaciers in the Val di Sole catchment (Easter Italian Alps) [Dataset].
742 Centro di Ateneo per le Biblioteche dell'Università degli Studi di Padova,
743 https://doi.org/10.25430/RESEARCHDATA.CAB.UNIPD.IT.00001366, 2024.

744 Carturan, L. and De Blasi, F.: Elaborazione di modelli digitali del terreno con finalità di analisi multi-temporale delle
745 variazioni glaciali in trentino - relazione finale [Processing of digital terrain models with the purpose of multi-temporal
746 analysis of the glacial variations in Trentino - final report], 2021.

747 Carturan, L., Fontana, G. D., and Borga, M.: Estimation of winter precipitation in a high-altitude catchment of the Eastern
748 Italian Alps: Validation by means of glacier mass balance observations, Geogr. Fis. e Din. Quat., 35, 37–48,
749 https://doi.org/10.4461/GFDQ.2012.35.4, 2012.

750 Carturan, L., Zuecco, G., Seppi, R., Zanoner, T., Borga, M., Carton, A., and Dalla Fontana, G.: Catchment-Scale
751 Permafrost Mapping using Spring Water Characteristics, Permafr. Periglac. Process., 27, 253–270,
752 https://doi.org/10.1002/ppp.1875, 2016.

753 Carturan, L., De Blasi, F., Cazorzi, F., Zoccatelli, D., Bonato, P., Borga, M., and Dalla Fontana, G.: Relevance and Scale
754 Dependence of Hydrological Changes in Glacierized Catchments: Insights from Historical Data Series in the Eastern
755 Italian Alps, Water, 11, 89, https://doi.org/10.3390/w11010089, 2019.

756 Charton, J., Verfaillie, D., Jomelli, V., and Francou, B.: Early Holocene rock glacier stabilisation at col du Lautaret
757 (French Alps): Palaeoclimatic implications, Geomorphology, 394, 107962,
758 https://doi.org/10.1016/j.geomorph.2021.107962, 2021.

759 Chen, J. and Ohmura, A.: Estimation of Alpine glacier water resources and their change since the 1870s, IAHS publ, 193,
760 127–135, 1990.

761 Chiesa, S., Micheli, P., Cariboni, M., Tognini, P., Motta, D., Longhin, M., Zambotti, G., Marcato, E., and Ferrario, A.:
762 Note illustrative della Carta Geologica d'Italia alla scala 1:50.000, Foglio 41 Ponte di Legno., Servizio Geologico d'Italia,
763 ISPRA, 160 pp., 2010.

764 Colucci, R. R., Forte, E., Žebre, M., Maset, E., Zanettini, C., and Guglielmin, M.: Is that a relict rock glacier?,
765 Geomorphology, 330, 177–189, https://doi.org/10.1016/j.geomorph.2019.02.002, 2019.

766 Cossart, E., Perrier, R., Schwarz, M., and Houee, S.: Mapping permafrost at a regional scale: interpolation of field data
767 by GIS application in the Upper Durance catchment (Southern French Alps), GeoFocus, 205–224, 2008.

768 Dal Piaz, G., Castellarin, A., Martin, S., Selli, L., Carton, A., Pellegrini, G., Casolari, E., Daminato, F., Montresor, L.,
769 Picotti, V., Prosser, G., Santuliana, E., and Cantelli, L.: Note Illustrative Della Carta Geologica Alla Scala 1:50.000,
770 Foglio 042 - Malè, Servizio Geologico d'Italia, ISPRA, 143 pp., 2007.

771 Day-Lewis, F. D., Johnson, C. D., Singha, K., and Lane, J. W. J.: Best practices in electrical resistivity imaging: Data
772 collection and processing, and application to data from Corinna, Maine, EPA report, Boston, MA, 2008.

773 Delaloye, R.: Contribution à l'étude du pergélisol de montagne en zone marginale, 244 pp., 2004.

774 Delaloye, R., and Lambiel, C.: Evidence of winter ascending air circulation throughout talus slopes and rock glaciers
775 situated in the lower belt of alpine discontinuous permafrost (Swiss Alps). Norsk Geografisk Tidsskrift-Norwegian
776 Journal of Geography, 59(2), 194-203, 2005.

777 Delaloye, R., Reynard, E., Lambiel, C., Marescot, L., and Monnet, R.: Thermal anomaly in a cold scree slope (Creux du
778 Van, Switzerland), in: Proceedings of the Eighth International Conference of Permafrost, Zürich, Switzerland., 175–180,
779 2003.

780 Dlabáčková, T., Engel, Z., Uxa, T., Braucher, R., and Team, A.: 10Be exposure ages and paleoenvironmental significance
781 of rock glaciers in the Western Tatra Mts., Western Carpathians, Quat. Sci. Rev., 312, 108147,
782 https://doi.org/10.1016/j.quascirev.2023.108147, 2023.

783 Engelhardt, M., Schuler, T. V., and Andreassen, L. M.: Contribution of snow and glacier melt to discharge for highly
784 glacierised catchments in Norway, Hydrol. Earth Syst. Sci., 18, 511–523, https://doi.org/10.5194/hess-18-511-2014,
785 2014.

786 Frauenfelder, R., Allgöwer, B., Haeberli, W., and Hoelzle, M.: Permafrost Investigations With GIS - A Case Study in the
787 Fletschhorn Area , Wallis , Swiss Alps, in: Seventh International Conference on Permafrost, 291–295, 1998.

788 Frauenfelder, R., Haeberli, W., Hoelzle, M., and Maisch, M.: Using relict rockglaciers in GIS-based modelling to
789 reconstruct Younger Dryas permafrost distribution patterns in the Err-Julier area, Swiss Alps, Nor. Geogr. Tidsskr., 55,
790 195–202, https://doi.org/10.1080/00291950152746522, 2001.

791 Frei, C., and Schär, C.: A precipitation climatology of the Alps from high-resolution rain-gauge observations. Int. J.
792 Climatol., 18(8), 873-900, https://doi.org/10.1002/(SICI)1097-0088(19980630)18:8<873::AID-JOC255>3.0.CO;2-9,
793 1998.

794 Gude, M., Dietrich, S., Mausbacher, R., Hauck, C., Molenda, R., Ruzicka, V., and Zacharda, M.: Probable occurrence of
795 sporadic permafrost in non-alpine scree slopes in central Europe, in: Proceedings 8th International Conference on
796 Permafrost, 331–336, 2003.

797 Guglielmin, M.: Il permafrost alpino: concetti, morfologia e metodi di individuazione (con tre indagini esemplificate in
798 alta Valtellina) / di Mauro Guglielmin ; con contributi di Adalberto Notarpietro, Centro di studio per la geodinamica
799 alpina e quaternaria, Milano, 1997.

800 Haeberli, W.: Untersuchungen Zur Verbreitung Von Permafrost Zwischen Flueelapass Und Piz Grialetsch
801 (Graubuenden)., Versuchsanstalt für Wasserbau, Hydrologie und Glaziologie an der ETH, 1975.

802 Haeberli, W.: Creep of Mountain Permafrost: Internal Structure and Flow of Alpine Rock Glaciers., 1985.

803 Haeberli, W., Schaub, Y., and Huggel, C.: Increasing risks related to landslides from degrading permafrost into new lakes
804 in de-glaciating mountain ranges, Geomorphology, 293, 405–417, https://doi.org/10.1016/j.geomorph.2016.02.009,
805 2017.

806 Harrington, J. S., Mozil, A., Hayashi, M. and Bentley, L. R.: Groundwater flow and storage processes in an inactive rock
807 glacier, Hydrol. Process., 32(20), 3070-3088, https://doi.org/10.1002/hyp.13248, 2018.

Harris, S. A. and Pedersen, D. E.: Thermal regimes beneath coarse blocky materials, Permafr. Periglac. Process., 9, 107–120, https://doi.org/10.1002/(SICI)1099-1530(199804/06)9:2<107::AID-PPP277>3.0.CO;2-G, 1998.

Hauck, C. and Kneisel, C.: Applied Geophysics in Periglacial Environments, edited by: Hauck, C. and Kneisel, C., Cambridge University Press, 1–248 pp., https://doi.org/10.1017/CBO9780511535628, 2008.

Hauck, C., Bach, M. and Hilbich, C.: A 4-phase model to quantity subsurface ice water content in permafrost regions based on geophysical data sets. Proceedings of the 9th International Conference on Permafrost, Fairbanks, Alasha, 2008, 6pp.

Hauck, C., Böttcher, M., and Maurer, H.: A new model for estimating subsurface ice content based on combined electrical and seismic data sets, The Cryosphere, 5, 453–468, https://doi.org/10.5194/tc-5-453-2011, 2011.

Hilbich, C., Hauck, C., Hoelzle, M., Scherler, M., Schudel, L., Völksch, I., Vonder Mühll, D., and Mäusbacher, R.: Monitoring mountain permafrost evolution using electrical resistivity tomography: A 7-year study of seasonal, annual, and long-term variations at Schilthorn, Swiss Alps, J. Geophys. Res. Earth Surf., 113, F01S90, https://doi.org/10.1029/2007JF000799, 2008.

Hock, R., Rasul, G., Adler, C., Cáceres, B., Gruber, S., Hirabayashi, Y., Jackson, M., Kääb, A., Kang, S., Kutuzov, S., Milner, A., Molau, U., Morin, S., Orlove, B. and Steltzer, H.: High mountain areas. In: Pörtner, H.-O., Roberts, D.C., Masson-Delmotte, V., Zhai, P., Tignor, M., Poloczanska, E., Mintenbeck, K., Alegría, A., Nicolai, M., Okem, A., Petzold, J., Rama, B., Weyer, N.M. (Eds.), IPCC Special Report on the Ocean and Cryosphere in a Changing Climate, Cambridge University Press, Cambridge, UK and New York, NY, USA, 131–202, https://doi.org/10.1017/9781009157964.004, 2019.

Ikeda, A. and Matsuoka, N.: Degradation of talus-derived rock glaciers in the Upper Engadin, Swiss Alps. Permafr. Periglac. Process., 13, 145–161, https://doi.org/10.1002/ppp.413, 2002.

Ilyashuk, B. P., Ilyashuk, E. A., Psenner, R., Tessadri, R., and Koinig, K. A.: Rock glacier outflows may adversely affect lakes: Lessons from the past and present of two neighboring water bodies in a crystalline-rock watershed, Environ. Sci. Technol., 48, 6192–6200, https://doi.org/10.1021/es500180c, 2014.

Imhof, M., Pierrehumbert, G., Haeberli, W., and Kienholz, H.: Permafrost investigation in the Schilthorn Massif, Bernese Alps, Switzerland, Permafr. Periglac. Process., 11, 189–206, https://doi.org/10.1002/1099-1530(200007/09)11:3<189::AID-PPP348>3.0.CO;2-N, 2000.

Isotta, F. A., Frei, C., Weilguni, V., Perčec Tadić, M., Lassègues, P., Rudolf, B., Pavan, V., Cacciamani, C., Antolini, G., Ratto, S. M., Munari, M., Micheletti, S., Bonati, V., Lussana, C., Ronchi, C., Panettieri, E., Marigo, G., and Vertačnik, G.: The climate of daily precipitation in the Alps: Development and analysis of a high-resolution grid dataset from pan-Alpine rain-gauge data, Int. J. Climatol., 34, 1657–1675, https://doi.org/10.1002/joc.3794, 2014.

Janke, J. R., Bellisario, A. C., and Ferrando, F. A.: Classification of debris-covered glaciers and rock glaciers in the Andes of central Chile, Geomorphology, 241, 98–121, https://doi.org/10.1016/j.geomorph.2015.03.034, 2015.

Janke, J. R., Ng, S., and Bellisario, A.: An inventory and estimate of water stored in firn fields, glaciers, debris-covered glaciers, and rock glaciers in the Aconcagua River Basin, Chile, Geomorphology, 296, 142–152, https://doi.org/10.1016/j.geomorph.2017.09.002, 2017.

Jones, D. B., Harrison, S., Anderson, K., and Betts, R. A.: Mountain rock glaciers contain globally significant water stores, Sci. Rep., 8, 2834, https://doi.org/10.1038/s41598-018-21244-w, 2018.

Jones, D. B., Harrison, S., Anderson, K., and Whalley, W. B.: Rock glaciers and mountain hydrology: A review, Earth-Science Rev., 193, 66–90, https://doi.org/10.1016/j.earscirev.2019.04.001, 2019.

Juliussen, H. and Humlum, O.: Thermal regime of openwork block fields on the mountains Elgåhogna and Sølen, Central-Eastern Norway. Permafr. Periglac. Process., 19 (1), 1-18, https://doi.org/10.1002/ppp.607-, 2008.

Kääb, A.: Rock glaciers and protalus forms. In Encyclopedia of Quaternary Science, 2nd Edition, Volume 3, SA Elias (editor-in chief). Elsevier: Amsterdam; 535–541, 2013.

Kellerer-Pirklbauer, A.: Aspects of glacial, paraglacial and periglacial processes and landforms of the Tauern Range, Austria. Doctoral Thesis, University of Graz, 2008.

Kellerer-Pirklbauer, A.: Long-term monitoring of sporadic permafrost at the eastern margin of the European Alps (Hochreichart, Seckauer Tauern range, Austria), Permafr. Periglac. Process., 30, 260–277, https://doi.org/10.1002/ppp.2021, 2019.

Kellerer-Pirklbauer, A., Lieb, G. K., and Kleinferchner, H.: A new rock glacier inventory of the eastern European Alps, Austrian J. Earth Sci., 105, 78–93, 2012.

Kellerer-Pirklbauer, A., Pauritsch, M., Morawetz, R., and Kuehnast, B.: Thickness and internal structure of relict rock glaciers – a challenge for geophysics : Examples from two rock glaciers in the Eastern Alps, in: EGU General Assembly Conference Abstracts, 12581, 2014.

Kellerer-Pirklbauer, A., Lieb, G. K., and Kaufmann, V.: The dösen rock glacier in central Austria: A key site for multidisciplinary long-term rock glacier monitoring in the eastern alps, Austrian J. Earth Sci., 110, 10–17738, https://doi.org/10.17738/ajes.2017.0013, 2017.

Kofler, C., Steger, S., Mair, V., Zebisch, M., Comiti, F. and Schneiderbauer, S.: An inventory-driven rock glacier status model (intact vs. relict) for South Tyrol, Eastern Italian Alps. Geomorphology, 350, 106887, https://doi.org/10.1016/j.geomorph.2019.106887, 2020.

Lambiel, C. and Reynard, E.: Regional modelling of present, past and future potential distribution of discontinuous permafrost based on a rock glacier inventory in the Bagnes-Hérémence area (Western Swiss Alps), Nor. Geogr. Tidsskr. - Nor. J. Geogr., 55, 219–223, https://doi.org/10.1080/00291950152746559, 2001.

Lewkowicz, A. G., Etzelmüller, B., and Smith, S. L.: Characteristics of Discontinuous Permafrost based on Ground Temperature Measurements and Electrical Resistivity Tomography, Southern Yukon, Canada, Permafr. Periglac. Process., 22, 320–342, https://doi.org/10.1002/ppp.703, 2011.

Lilleøren, K. S., Etzelmüller, B., Rouyet, L., Eiken, T., Slinde, G., and Hilbich, C.: Transitional rock glaciers at sea level in northern Norway, Earth Surf. Dynam., 10, 975–996, https://doi.org/10.5194/esurf-10-975-2022, 2022.Millar, C.I. and Westfall, R.D.: Geographic, hydrological, and climatic significance of rock glaciers in the Great Basin, USA. Arct. Antarct. Alp. Res., 51(1), 232-249, https://doi.org/10.1080/15230430.2019.1618666, 2019.

878 Martin, S., Montresor, L., Mair, V., Pellegrini, G., Avanzini, M., Fellin, G., Gambiullara, R., Tumiati, S., Santuliana, E.,
879 Monopoli, B., Gaspari, D., Sapigni, M., and Surian, N.: Note illustrative della Carta Geologica d'Italia alla scala 1:50.000,
880 Foglio 025 Rabbi., Servizio Geologico d'Italia, ISPRA, 187 pp., 2009.

881 Montrasio A, Berra F, Cariboni M, Ceriani M, Deichmann N, Ferliga C, Gregnanin A, Guerra S, Guglielmin M, Jadoul
882 F, Longhin M, Mair V, Mazzoccola D, Sciesa E, and Zappone A: Note illustrative della Carta Geologica d'Italia alla scala
883 1:50.000 - Foglio 024 Bormio., Servizio Geologico d'Italia, ISPRA, 150 pp., 2012.

884 Morard, S., Delaloye, R., and Dorthe, J.: Seasonal thermal regime of a mid-latitude ventilated debris accumulation, in:
885 Proceedings of the 9th International Conference on Permafrost, Fairbanks, Alaska, 1233–1238, 2008.

886 Pavoni, M., Boaga, J., Carrera, A., Zuecco, G., Carturan, L., and Zumiani, M.: Brief communication: Mountain permafrost
887 acts as an aquitard during an infiltration experiment monitored with electrical resistivity tomography time-lapse
888 measurements, Cryosph., 17, 1601–1607, https://doi.org/10.5194/tc-17-1601-2023, 2023.

889 Popescu, R.: Permafrost investigations in Iezer Mountains, Southern Carpathians, Rev. Geomorfol., 20, 102–122,
890 https://doi.org/10.21094/rg.2018.033, 2018.

891 Rangecroft, S., Harrison, S. and Anderson, K.: Rock glaciers as water stores in the Bolivian Andes: an assessment of their
892 hydrological importance. Arct. Antarct. Alp. Res. 47 (1), 89–98, https://doi.org/10.1657/AAAR0014-029, 2015.

893 RGIK: Guidelines for inventorying rock glaciers: baseline and practical concepts (version 1.0). IPA Action Group Rock
894 glacier inventories and kinematics, 25 pp, DOI: 10.51363/unifr.srr.2023.002, 2023.

895 Scotti, R., Brardinoni, F., Alberti, S., Frattini, P. and Crosta, G.B.: A regional inventory of rock glaciers and protalus
896 ramparts in the central Italian Alps. Geomorphology, 186, 136-149, https://doi.org/10.1016/j.geomorph.2012.12.028,
897 2013.

898 Salvatore, M. C., Zanoner, T., Baroni, C., Carton, A., Banchieri, F. A., Viani, C., Giardino, M., and Perotti, L.: The state
899 of Italian glaciers: A snapshot of the 2006-2007 hydrological period, Geogr. Fis. e Din. Quat., 38, 175–198,
900 https://doi.org/10.4461/GFDQ.2015.38.16, 2015.

901 Sannino, C., Borruso, L., Mezzasoma, A., Battistel, D., Ponti, S., Turchetti, B., Buzzini, P. and Guglielmin, M.: Abiotic
902 factors affecting the bacterial and fungal diversity of permafrost in a rock glacier in the Stelvio Pass (Italian Central *Alps).*
903 Appl. Soil Ecol., 166, 104079, https://doi.org/10.1016/j.apsoil.2021.104079, 2021.

904 Scapozza, C.: Contributo dei metodi termici alla prospezione del permafrost montano : esempi dal massiccio della Cima
905 di Gana Bianca (Val Blenio , Svizzera), Boll. della Soc. Ticin. di Sci. Nat., 66, 55–66, 2009.

906 Schaffer, N., MacDonell, S., Réveillet, M., Yáñez, E. and Valois, R.: Rock glaciers as a water resource in a changing
907 climate in the semiarid Chilean Andes. Reg. Environ. Change, 19, 1263-1279, https://doi.org/10.1007/s10113-018-01459-
908 3, 2019.

909 Schrott, L., Otto, J. C., and Keller, F.: Modelling alpine permafrost distribution in the Hohe Tauern region, Austria.
910 Austrian J. Earth Sci., 105(2), 2012.

911 Seppi, R.: I rock glaciers delle Alpi Centrali come indicatori ambientali (Gruppo Adamello-Presanella e settore orientale
912 del Gruppo Ortles-Cevedale) - Rock glaciers of the Central Alps as environmental indicators (Adamello-Presanella Group
913 and eastern sector of the Ortles-Cevedale Group). Phd Thesis, 199 pp., doi: 10.13140/RG.2.1.1186.5682, 2006.

914 Seppi, R., Carton, A., and Baroni, C.: Rock glacier relitti e antica distribuzione del permafrost nel Gruppo Adamello
915 Presanella (Alpi Centrali), Alp. Mediterr. Quat., 23, 137–144, 2010.

916 Seppi, R., Carton, A., Zumiani, M., Dall'Amico, M., Zampedri, G., and Rigon, R.: Inventory, distribution and topographic
917 features of rock glaciers in the southern region of the Eastern Italian Alps (Trentino), Geogr. Fis. e Din. Quat., 35, 185–
918 197, https://doi.org/10.4461/GFDQ.2012.35.17, 2012.

919 Seppi, R., Carturan, L., Carton, A., Zanoner, T., Zumiani, M., Cazorzi, F., Bertone, A., Baroni, C., and Salvatore, M. C.:
920 Decoupled kinematics of two neighbouring permafrost creeping landforms in the Eastern Italian Alps, Earth Surf. Process.
921 Landforms, 44, 2703–2719, https://doi.org/10.1002/esp.4698, 2019.

922 Slangen, A. B. A. and van de Wal, R. S. W.: An assessment of uncertainties in using volume-area modelling for computing
923 the twenty-first century glacier contribution to sea-level change, Cryosph., 5, 673–686, https://doi.org/10.5194/tc-5-673-
924 2011, 2011.

925 Strobl, B., Etter, S., van Meerveld, I., and Seibert, J.: Accuracy of crowdsourced streamflow and stream level class
926 estimates. Hydrolog. Sci. J., 65(5), 823-841, https://doi.org/10.1080/02626667.2019.1578966, 2020.

927 Strozzi, T., Kääb, A., and Frauenfelder, R.: Detecting and quantifying mountain permafrost creep from in situ inventory,
928 space-borne radar interferometry and airborne digital photogrammetry, Int. J. Remote Sens., 25, 2919–2931,
929 https://doi.org/10.1080/0143116042000192330, 2004.

930 Tapia-Baldis, C. and Trombotto-Liaudat, D.: Permafrost model in coarse-blocky deposits for the Dry Andes, Argentina
931 (28– 33∘ S), Cuadernos de Investigación Geográfica, 46, 33–58, https://doi.org/10.18172/cig.3802, 2020.

932 Thies, H., Nickus, U., Tolotti, M., Tessadri, R., and Krainer, K.: Evidence of rock glacier melt impacts on water chemistry
933 and diatoms in high mountain streams, Cold Reg. Sci. Technol., 96, 77–85,
934 https://doi.org/10.1016/j.coldregions.2013.06.006, 2013.

935 Wagner, T., Pauritsch, M., and Winkler, G.: Impact of relict rock glaciers on spring and stream flow of alpine watersheds:
936 examples of the Niedere Tauern Range, Eastern Alps (Austria), Aust. J. Earth Sci., 109, 84–98. doi:
937 10.17738/ajes.2016.0006, 2016.

938 Wagner, T., Pauritsch, M., Mayaud, C., Kellerer-Pirklbauer, A., Thalheim, F., & Winkler, G.: Controlling factors of
939 microclimate in blocky surface layers of two nearby relict rock glaciers (Niedere Tauern Range, Austria). Geogr. Ann.
940 A, 101(4), 310–333, https://doi.org/10.1080/04353676.2019.1670950, 2019.

941 Wagner, T., Kainz, S., Helfricht, K., Fischer, A., Avian, M., Krainer, K., and Winkler, G.: Assessment of liquid and solid
942 water storage in rock glaciers versus glacier ice in the Austrian Alps, Sci. Total Environ., 800, 149593,
943 https://doi.org/10.1016/j.scitotenv.2021.149593, 2021.

944 Winkler, G., Wagner, T., Pauritsch, M., Birk, S., Kellerer-Pirklbauer, A., Benischke, R., Leis, A., Morawetz, R.,
945 Schreilechner, M. G., and Hergarten, S.: Identification and assessment of groundwater flow and storage components of

946   the relict Schöneben Rock Glacier, Niedere Tauern Range, Eastern Alps (Austria), Hydrogeol. J., 24, 937–953,

947   https://doi.org/10.1007/s10040-015-1348-9, 2016.

948   Zemp, M., Frey, H., Gärtner-Roer, I., Nussbaumer, S. U., Hoelzle, M., Paul, F., Haeberli, W., Denzinger, F., Ahlstrøm,

949   A. P., Anderson, B., Bajracharya, S., Baroni, C., Braun, L. N., Cáceres, B. E., Casassa, G., Cobos, G., Dávila, L. R.,

950   Delgado Granados, H., Demuth, M. N., Espizua, L., Fischer, A., Fujita, K., Gadek, B., Ghazanfar, A., Ove Hagen, J.,

951   Holmlund, P., Karimi, N., Li, Z., Pelto, M., Pitte, P., Popovnin, V. V., Portocarrero, C. A., Prinz, R., Sangewar, C. V.,

952   Severskiy, I., Sigurđsson, O., Soruco, A., Usubaliev, R., and Vincent, C.: Historically unprecedented global glacier

953   decline in the early 21st century, J. Glaciol., 61, 745–762, https://doi.org/10.3189/2015JoG15J017, 2015.

954

955

956

957