



## Potential of satellite-derived hydro-meteorological information for landslide hazard assessment thresholds in Rwanda

Judith Uwihirwe<sup>1, 2</sup>, Alessia Riveros<sup>1, 3</sup>, Hellen Wanjala<sup>4</sup>, Jaap Schellekens<sup>4</sup>, Frederiek Sperna Weiland<sup>3</sup>, Markus Hrachowitz<sup>1</sup>, Thom A. Bogaard<sup>1</sup>

5 <sup>1</sup>Section Water Resources, Department of Water Management, Faculty of Civil Engineering and Geosciences, Delft University of Technology, PO Box 5048, 2600 GA, Delft, The Netherlands

<sup>2</sup>Department of Irrigation and Drainage, School of Agricultural Engineering, College of Agriculture Animal Sciences and Veterinary Medicine, University of Rwanda, PO Box 210, Musanze, Rwanda

<sup>3</sup>Deltares, PO Box 177, 2600 MH Delft

10 <sup>4</sup>Planet Labs, PBC, Wilhelminastraat 43A, 2011 VK Haarlem, The Netherlands

*Correspondence to:* Judith Uwihirwe ([uwihirwejudith@yahoo.fr](mailto:uwihirwejudith@yahoo.fr))

**Abstract.** Satellite and hydrological model-based technologies provide estimates of rainfall and soil moisture over larger spatial scales and now cover multiple decades, sufficient to explore their value for the development of landslide early warning system in data scarce regions. In this study, we used statistical metrics to compare gauge-based to satellite-based precipitation products and assess their performance in landslide hazard assessment and warning in Rwanda. Similarly, the value of high resolution satellite and hydrological model-derived soil moisture was compared to in situ soil moisture observations at Rwanda weather station sites. Based on statistical indicators, the NASA GPM-based IMERG rainfall product showed the highest skill to reproduce the main spatiotemporal precipitation patterns at the studies sites in Rwanda. Similarly, the satellite and model-derived soil moisture time series broadly reproduce the most important trends of in situ soil moisture observations. We evaluated two categories of landslide meteorological triggering conditions from IMERG satellite precipitation. First, the maximum rainfall amount during a multiple day rainfall event. Second, the cumulative rainfall over the past few day(s). For each category, the antecedent soil moisture recorded at three levels of soil depth, top 5 cm by satellite-based technologies as well as top 50 cm and 2 m through modelling approaches, was included in the statistical models to assess its potential for landslide hazard assessment and warning capabilities. The results reveal the cumulative 3 day rainfall  $R_{D3}$  as the most effective predictor for landslide triggering. This was indicated not only by its highest discriminatory power to distinguish landslide from no landslide conditions (AUC ~0.72) but also the resulting true positive alarms TPR of ~80 %. The modelled antecedent soil moisture in the 50 cm root zone  $Se_{root(t-3)}$  was the most informative hydrological variable for landslide hazard assessment (AUC ~0.74 and TPR of 84 %). The hydro-meteorological threshold models that incorporate the  $Se_{root(t-3)}$  and  $R_{D3}$  following the cause-trigger concept in a bilinear framework reveal promising results with improved landslide warning capabilities in terms of reduced rate of false alarms by ~20 % at the expense of a minor reduction of true alarms by ~8 %.

15  
20  
25  
30



## 1 Introduction

35 Landslides are one of the most prevalent hazards in mountainous regions of the world associated with high rates of fatalities, injuries and economic loss globally (Froude and Petley, 2018; Haque et al., 2016; Kirschbaum et al., 2015; Petley, 2012). According to a recent estimate (Froude and Petley, 2018), precipitation-induced landslides were responsible for a global total of ~55000 deaths over the 13 year period from 2004 to 2016. In landslide prone regions, much effort is therefore put on the implementation of prevention and protection measures to control the most sensitive factors. Landslide early warning systems (LEWS) are used as non-structural and cost effective mitigation measures adopted to minimize landslides harms, loss of life and properties (Calvello et al., 2020; Glade and Nadim, 2014). However, the global landslide research indicated a bias in geographical distribution of LEWS and landslide research with a major gap in Africa (Gariano and Guzzetti, 2016; Guzzetti et al., 2020; Kirschbaum et al., 2015, 2010). According to Guzzetti et al. (2020), there are no LEWS in African countries despite the high number of fatal landslides recorded and the high landslide susceptibility (Broeckx et al., 2018; Kirschbaum et al., 2015). Previous landslide susceptibility analysis, revealed countries along the East African Rift region to be highly susceptible to landslides (Broeckx et al., 2018) despite that often only the most severe landslides are reported and thus a large number is missing. The East African Rift (EAR) was thus identified as a major hotspot of hazardous landslides in Africa with high rate of population exposure (Depicker et al., 2020, 2021a; Monsieurs et al., 2018a). On the long term, this is due to the active continental rifting caused by the persistent divergence of the Victoria and Nubia microplates (Glerum et al., 2020) while on the short term it is controlled by the interactions of prolonged and intense rainstorms in the region with hydrogeological and landscape processes. Rwanda is among the tropical countries located in the western branch of the East African Rift, threatened by landslide hazards (Bizimana and Sönmez, 2015; Nsengiyumva et al., 2018; Nsengiyumva and Valentino, 2020). About 43% of its surface area is classified as having moderate to very high susceptibility to landslides with 49% of local population exposed to landslide risks (Nsengiyumva et al., 2018). The long term landslide predisposing factors in Rwanda, include its pronounced topographic profile, the inherent geological and lithological units, weathering process, earthquakes, demographic pressure and related anthropogenic activities such as deforestation, agriculture expansion, and slope incision through roads construction activities (Bizimana and Sönmez, 2015; Depicker et al., 2015, 2021; Moeyersons, 1989; Monsieurs et al., 2018; Nsengiyumva et al., 2018; Valentino et al., 2021). The development of mining sites and the connected feeder roads also change the nature of natural hillslope through excavation and thus exacerbating landslide susceptibility and risks of slope failures. In addition, urban expansion pushes settlements, industry and infrastructure into hazardous areas that are naturally unstable, thereby further increasing the number of elements at landslide risks. The short-term landslide triggering factors include prolonged and intense rains in addition to the hydrological process that predispose slopes to near failure. In the past 15 years period from January 2006 to May 2021, the landslide inventory in Rwanda indicated about 425 landslide death (~0.6 % of the global landslide death) and about 2000 injuries induced by the above normal hydrological and meteorological factors (Uwihirwe, 2021). The lack of LEWS is one of the important factors for the increasing number of landslide victims in




Rwanda. The development of a robust LEWS hinges on the availability of hydro-meteorological data with sufficient spatio-temporal resolution and an accurate landslide inventory, both of which are scarce. Recently, numerous river catchments in Rwanda have been equipped with groundwater monitoring wells, river water level gauges, soil moisture sensors as well as the automated weather stations. However, the available data records are frequently of insufficient length to build historical time series that overlap with the time periods of landslide inventories and that could be incorporated into landslide hazard assessment thresholds. As a first step towards LEWS development in Africa, Monsieurs et al. (2018a, 2019) used the Landslide Inventory for the central section of the Western branch of the East African Rift (LIWEAR) to define the landslide susceptibility–rainfall and antecedent soil moisture thresholds in the East African Rift region. In Rwanda, Uwihirwe et al. (2020) used a statistical approach to define gauge-based precipitation thresholds along with estimates of antecedent precipitation indices. Furthermore, Uwihirwe et al., (2021) incorporated regional groundwater level measurements extended with a transfer function noise model to define the landslide hydro-meteorological thresholds for regional landslide hazard assessment. So far, these studies relied exclusively on in situ observed precipitation and hydrological data constrained by the sparsely distributed recording equipment with point scale resolution and gaps in the data record. There is a concern about the omission and/or overgeneralisation of information on the pre-wetting hydrological conditions at the locations of the landslide due to the sparsely distributed hydrological recording equipment (Uwihirwe et al., 2021). These pre-wetting conditions regulate the disposition of a slope to near failure (Bogaard and Greco, 2018; Sidle et al., 2019). Including this information in a LEWS may thus be a promising opportunity to decrease the rate of both false and missed alarms (Bogaard and Greco, 2018; Peres et al., 2018). Similar to other hydrological variables, soil moisture exhibits high spatial variability particularly in tropical areas (Dewitte et al., 2021; Kirschbaum et al., 2012; Sekaranom et al., 2020). This spatial variability is hardly covered by on site monitoring equipment due to the sparse observation networks, themselves providing point scale observations only. Alternative ways of incorporating such hydrological state information into landslide hydro-meteorological thresholds have been attempted and include the use of soil moisture estimates from satellite products (Marino et al., 2020; Thomas et al., 2020; Zhuo et al., 2019) as well as from distributed hydrological models (Mostbauer et al., 2018; Prenner et al., 2018, 2019; Wang et al., 2019; Zhao et al., 2020). In this study, we aimed to explore the usefulness of combining soil moisture from satellite products and from a distributed hydrological model with satellite-based precipitation for the estimation of landslide hazard assessment thresholds in Rwanda. We specifically i) investigated the suitability of various satellite precipitation products as substitute for rainfall data from a sparsely distributed gauge network in Rwanda, ii) evaluated the added value of satellite and model-derived soil moisture information recorded at various soil depth and iii) assessed the potential of incorporating such information in empirical landslide hazard assessment threshold models and the warning capabilities in Rwanda.

## 2 Study area

Rwanda is an evergreen landlocked country geographically located between 1°–3° S and 28°–31° E in the great lakes region of central east Africa with a total area of 26,338 km<sup>2</sup>. It is topographically and geomorphologically characterised by angular hills,



95 rounded hills and headlands, mountains and volcanoes (Fig. 3) with elevation in the north western regions reaching up to about 4500m and steep slope reaching up to 55 % (Fig. 1 and Fig. 2). The subtropical highland climate, with a long-term mean annual rainfall  $>1200 \text{ mm year}^{-1}$  in the north western highland regions and  $< 1000 \text{ mm year}^{-1}$  in the eastern Savanah region (Fig. 1) and a mean annual temperature of about  $19 \text{ }^\circ\text{C}$ , prevails in the country. The north western region of the country is located in a tectonic region with a seismically active volcanic chain and earthquakes being among the possible landslide triggers in  
100 Rwanda. The hydrology is characterized by dense networks of lakes and rivers while the hydro-geology consists mainly of fractured aquifers of granite-gneisses, schist, mica schists and complex aquifers in volcanic rocks of the north and south western parts of the country (Fig. 4). The main hydro-geological units in the landslide area include low and semipermeable fractured schist and mica schist and permeable fractured granites. The weathering products of granites are generally coarse-grained and tend to develop and preserve open joint systems that increase their permeability and thus prone to landslide  
105 hazards. The weathering product of schists include clay minerals that tend to fill up the fractures and thus slowing the permeability. However, mica schists are renowned as unstable due to rapid weathering, easy splitting along the joints and bedding planes and loss of strength induced by the high content of mica.

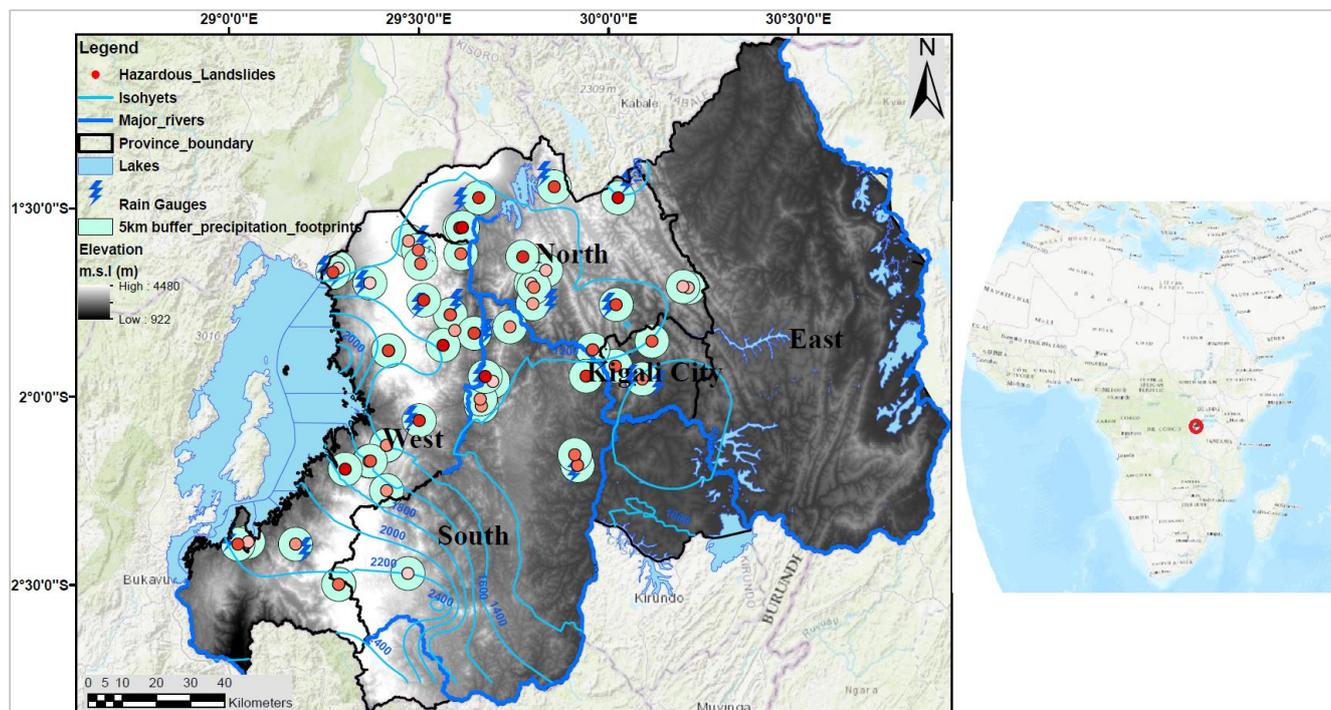

110 **Figure 1.** Location of Rwanda in Africa, elevation, spatial and temporal distribution of hazardous landslides with light to dark red dots indicating old to new landslides recorded from 2007–2019, rain gauges and rainfall distributions indicated by isohyets (sky blue lines)



### 3 Methods and data

#### 3.1 Landslide inventory

115 The inventory for this study, contains landslides recorded from 2007 to 2019. It was accessed from a previous study in Rwanda  
(Uwihirwe et al., 2021) and was further extended and updated through compilation of additional rainfall-induced landslides as  
reported from local newspapers, blogs and government technical reports. This landslide inventory was compiled with respect  
to the methodology adopted by Bach et al. (2010), Kirschbaum et al. (2015); and Monsieus et al. (2018c). Between 2007 and  
2019, the inventory includes 55 accurately dated landslides, 32 of which are located in the catchments modelled for this study  
120 (Kivu, Nyabarongo upper and Mukungwa (Fig. 4). However, it is important to note that this inventory is likely to miss the  
non-hazardous landslides which are less reported upon than hazardous landslides that led to fatalities/injuries and considerable  
damages. The inventory provides the location of each recorded landslide but with a varying spatial accuracy of 5 to 25 km  
depending on the smallest administrative unit recorded by the landslide event reporters. Therefore, a buffer zone of 5km,  
equivalent to the frequently recorded accuracy, was used around each landslide (Fig. 2) to support the choice of the landslide  
125 representative rain gauge. The same areal buffer was used as a footprint to avail the areal satellite precipitation and soil moisture  
as detailed in Sect. 3.2 and Sect. 3.3.

#### 3.2 Precipitation products and performance evaluation


##### 3.2.1 Gauge-based precipitation and selection of landslide representative data

130 We accessed daily precipitation data from 19 rain gauges operated by the Rwanda Meteorology Agency. These rain gauges  
were selected based on their location within the defined buffer of 5km around each landslide location (Fig. 2). Once two or  
more rain gauges fall within the same buffer zone, the gauges are weighted (Melillo et al., 2018) to select the most  
representative rain gauge following Eq. (1):

$$135 \quad W = \frac{E^2}{d^2D}, \quad (1)$$

The weight (W) is estimated based on the cumulative rainfall event volume (E) until the landslide day, the distance between  
rain gauge and landslide (d), and duration D (days). A similar procedure was used to select the representative rain gauge for  
landslides located far (>5 km) from any rain gauge. The selected gauge-based precipitation was used as benchmarks to assess  
the suitability of satellite precipitation products.

140

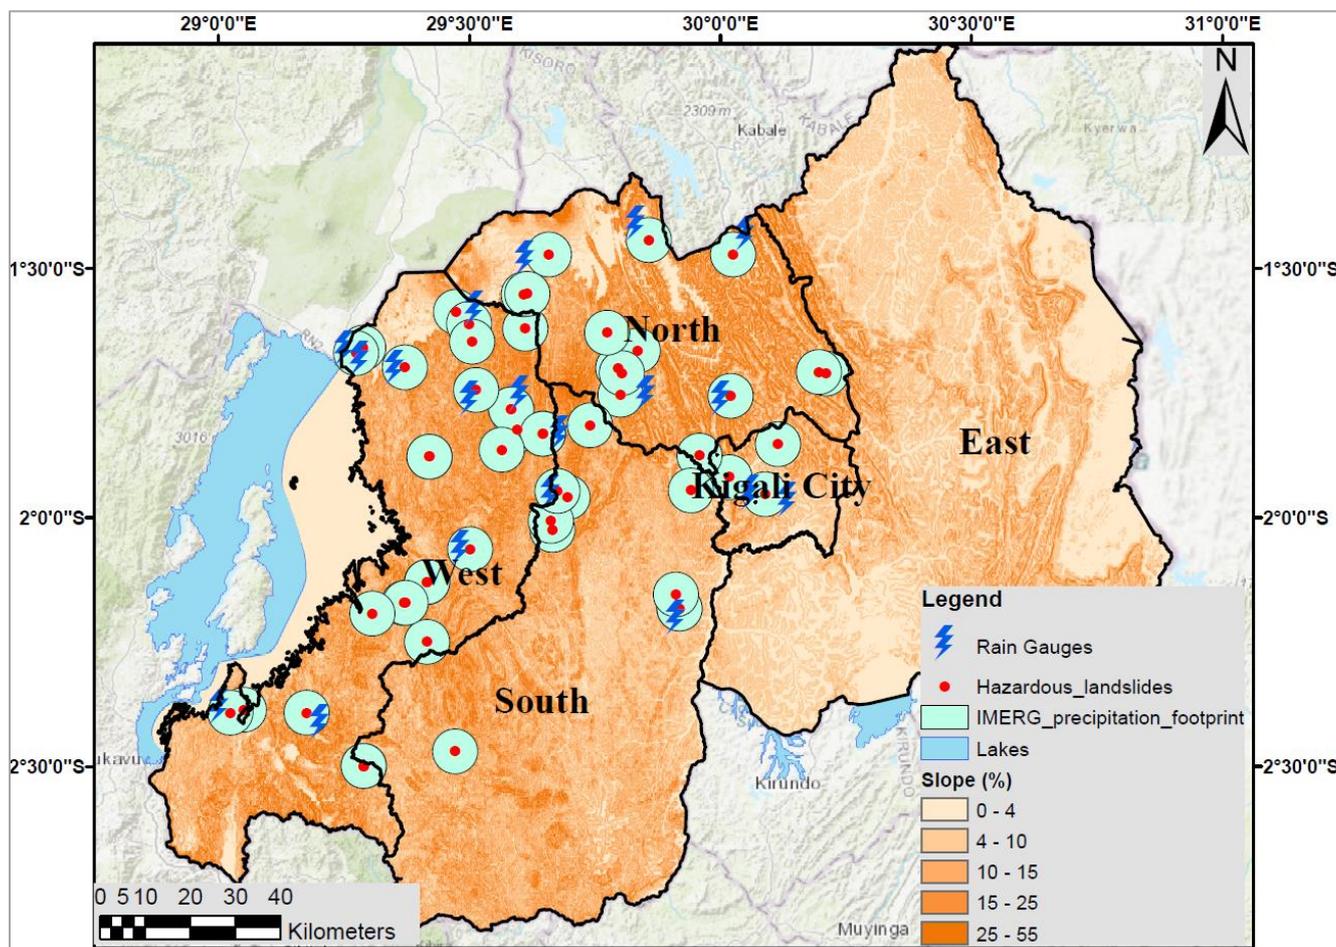

**Figure 2.** Landslide representative rain gauges and precipitation footprint of 5km buffer around each landslide

### 3.1.1. Satellite precipitation products and suitability analysis for LEWS in Rwanda

145 With the gauge-based precipitation data as reference, we assessed the performance of seven satellite precipitation products summarized in Table 1. These satellite precipitation products were preliminary selected for analysis based on the criteria that their dataset i) at least partially overlap with the landslide inventory period (2007–2019), ii) has at least daily temporal resolution, and iii) is available on Google Earth Engine (GEE).



**Table 1.** Pre-selected precipitation products and short description

Satellite reanalysis products	Resolution		Period	Data source description	References
	Spatial	Temporal			
TRMM 3B42 v7	0.25°	Daily	1998–2019	Passive microwave (PMW) from a variety of low Earth orbit satellites, infrared (IR) data and precipitation gauge supplied by the Global Precipitation Climatology Centre (GPCC)	(Huffman et al., 2010)
CHIRPS	0.05°	Daily	1981–present	Geostationary thermal infrared (IR); microwave satellite estimates and the in situ precipitation observations	(Funk et al., 2015)
PERSIANN CDR	0.25°	Daily	1983–present	GridSat-B1 infrared data and bias-adjusted using the Global Precipitation Climatology Project (GPCP) monthly product and accumulated to the daily scale	(Ashouri et al., 2015)
GLDAS 2.1	0.25°	3 hourly	2000–present	Geostationary satellite infrared (IR) cloud-top temperature measurements and microwave observation techniques	(Rodell et al., 2004)
CFSv2	0.2°	6 hourly	1979–present	Satellite observations in the infrared and microwave channels and gauge observations	(Saha et al., 2014)
IMERG_GPM	0.1°	30 min	2014–present	Passive Microwave from various low Earth orbit satellites, Infrared from geosynchronous Earth orbit satellites and gauges precipitation (successor of TRMM)	(Huffman et al., 2020)
ERA5	0.25°	3 hourly	1979–present	This is a non-satellite but re-analysis product. precipitation is generated employing a convection scheme along with the large-scale cloud scheme that have been upgraded with an improved representation of mixed-phase clouds, and prognostic variables for precipitating rain and snow.	(Hersbach et al., 2020)

Among the pre-selected satellite products, we have chosen the most suitable product for landslide hazard assessment in Rwanda based on the relative comparison with gauge-based precipitation. This was achieved using a number of statistical approaches that include: i) the use of statistical metrics of goodness of fit, ii) rainfall frequency indicators, and iii) intensity comparisons. The statistical metrics of goodness of fit include the root mean square error RMSE, Pearson correlation CC, and the long-term relative bias RB computed with Eq. (2) to Eq. (4):

$$RMSE = \sqrt{\frac{\sum_{i=1}^n (Y_i - X_i)^2}{n}}, \quad (2)$$

$$CC = \frac{\sum_{i=1}^n (X_i - X_{mean})(Y_i - Y_{mean})}{\sqrt{\sum_{i=1}^n (X_i - X_{mean})^2} \sqrt{\sum_{i=1}^n (Y_i - Y_{mean})^2}}, \quad (3)$$

$$RB = \frac{Y_{mean} - X_{mean}}{Y_{mean} + X_{mean}}, \quad (4)$$

Where  $Y_i$  is the rain gauge observation at date  $i$ ,  $X_i$  is the satellite estimate at the same date  $i$ ,  $n$  is the total number of data pairs for each precipitation product considered,  $Y_{mean}$  and  $X_{mean}$  are the mean rainfall from rain gauge and satellite products respectively.



170 The rainfall frequency indicators specify the frequency of rainy days based on the predefined threshold indices (Joshi et al.,  
2014; Tank et al., 2009). We used five rainfall threshold indices that reflect the number of rainy days with  $>X$  mm of rain  
( $R_{Dx}$ ). The predefined indices are  $R_{D0}$ ,  $R_{D10}$ ,  $R_{D20}$ ,  $R_{D30}$ , and  $R_{D50}$  indicating the number of rainy days with  $>0$  mm as rainy  
days,  $>10$  mm as heavy rainy days,  $>20$  mm as very heavy rainy days,  $>30$  mm as even heavier rainy days, and  $>50$  mm as  
extremely heavy rainy days respectively. With intensity comparison, we compared the cumulative 30 day rainfall from the  
satellite precipitation products to the cumulative 30 day precipitation from rain gauges using scatter plots.

175

### 3.3 Soil moisture products and data acquisition


#### 3.3.1 In situ soil moisture data from automatic weather stations

180 In situ soil moisture data, collected from the automatic weather stations (AWSs) equipped with soil moisture sensors, were  
accessed from the Rwanda Meteorological Agency for six AWSs as shown in Fig. 3. The AWSs recorded the soil moisture at  
20 cm depth with a temporal resolution of 5-10 minutes from July 2018 to December 2019. Because the analysis focuses on a  
daily time-scale, we computed and used the daily average soil moisture time series recorded from July 2018 to December  
2019. The in situ AWSs soil moisture data were used as a benchmark to comparatively get an insight on the quality of other  
sources of soil moisture products that include satellite and model-derived soil moisture estimates described in Sect. 3.3.2 and  
Sect. 3.3.3.

185

#### 3.3.2 Satellite soil moisture and variable of interest

We used a satellite-derived near surface soil moisture product provided by Planet, formerly VanderSat (VdS). The product  
relies on the Land Parameter Retrieval Model (LPRM) (De Jeu et al., 2014; Owe et al., 2001, 2008) to estimate the near surface  
soil moisture by combining raw data from the Advanced Microwave Scanning Radiometer 2 (AMSR-2), and Soil Moisture  
190 Active Passive (SMAP) (Bouaziz et al., 2020). The satellite product estimates volumetric soil water content ( $m^3m^{-3}$ ) of the  
upper 5cm of soil downscaled from a spatial resolution of  $25\text{ km}\times 25\text{ km}$  to  $100\text{ m}\times 100\text{ m}$ . From VdS, we accessed daily soil  
water content estimates from the top 5 cm of soil ( $\theta_{top}$ ) for the 2007-2019 period for each of the defined region of interest  
(ROIs) equivalent to the 5 km buffers shown in Fig. 3.

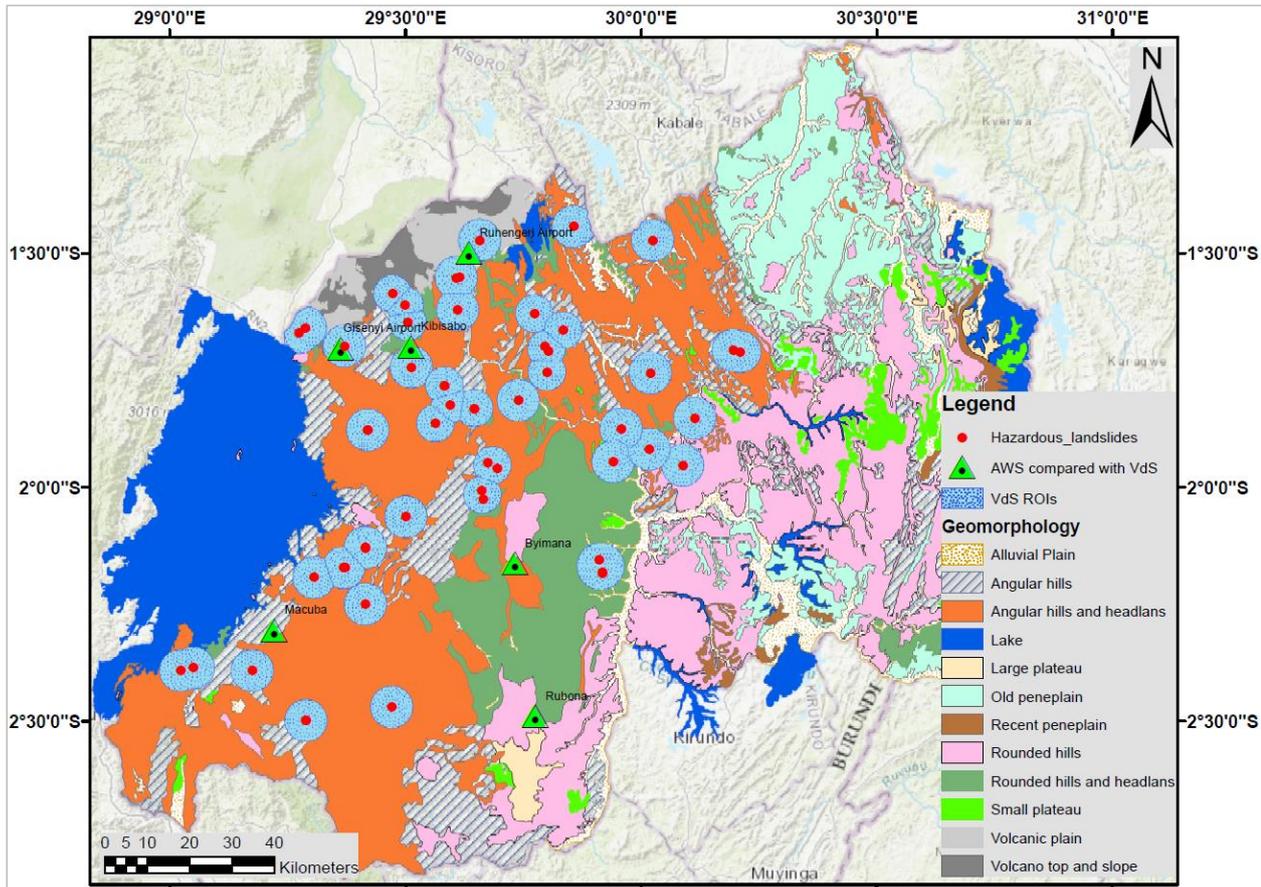

195 **Figure 3.** Geomorphology of Rwanda, landslide representative AWSs (Automated weather stations) with soil moisture sensors; landslides in red dots and 5 km buffer zones indicating the Research Area of Interest (ROIs) for areal soil moisture acquisition

### 3.3.3 Hydrological model-derived soil moisture and variables of interest

200 We also used the soil moisture derived from the Wflow\_sbm, a distributed hydrological model that uses the conceptual bucket model approach to estimate soil water content (Imhoff et al., 2020). With Wflow\_sbm, the soil is considered as a bucket with a depth ( $Z$ ) divided into 2 zones: the unsaturated store  $U$  and the saturated store  $S$ . The interface between  $U$  and  $S$  is a pseudo water table located at depth  $Z_w$ . The values of unsaturated storage  $U$  and saturated storage  $S$  are computed as in Eq. (5) and Eq. (6):


$$U = (\theta_s - \theta_r)Z_w - U_d, \tag{5}$$

205  $S = (\theta_s - \theta_r)(Z - Z_w), \tag{6}$

Where  $\theta_s$ ,  $\theta_r$  are saturated and residual water content respectively and  $U_d$  is the soil water deficit



The unsaturated store  $U$  was the variable of interest and was subdivided into 2 variables: the water content in the root zone  $\theta_{root}[-]$  representing the unsaturated soil water storage of the top 50 cm and the part of the soil water capacity occupied  $\theta_{uz}[-]$  representing the unsaturated soil water storage of the upper 2 m. For this study, the model area consisted of three catchments (Kivu, Upper Nyabarongo and Mukungwa) as highlighted in Fig. 4. We obtained time series of  $\theta_{root}[-]$  and  $\theta_{uz}[-]$  for 2007–2019, overlapping with the landslide inventory period, from a wflow\_sbm simulation based on ERA5 re-analysis meteorological data. To increase the comparability with the satellite-based soil moisture, the same ROIs represented by the buffers of 5 km around each landslide location were used to interpolate the unsaturated water storage time series for each ROIs located in the model catchment. Similarly, only the AWSs located in the model catchment (Fig. 4) were used for the comparative performance evaluation of the model-derived soil moisture products.

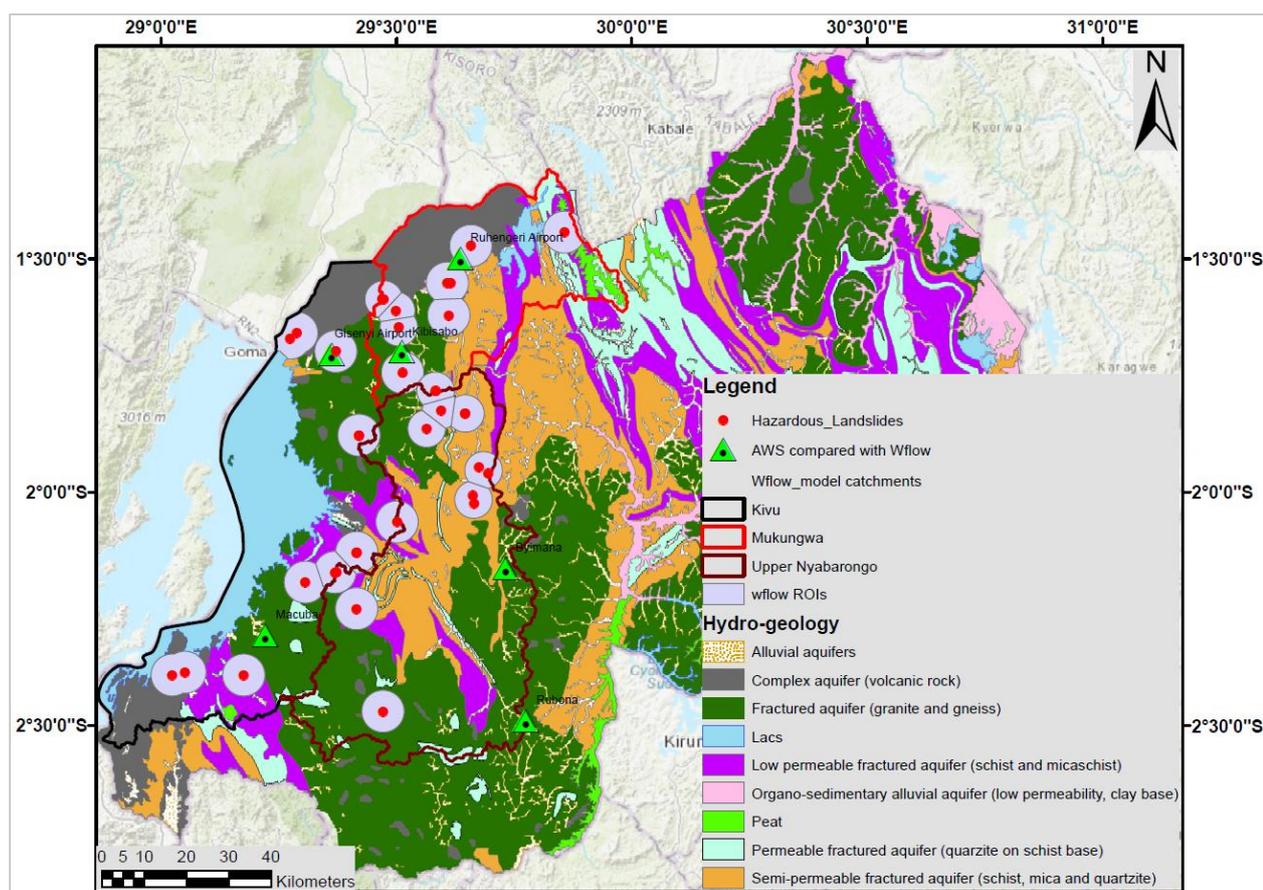

**Figure 4.** Wflow model catchments (Kivu, upper Nyabarongo and Mukungwa) and hydrogeology; landslides in red dots and 5km buffers indicating the Research Area of Interest (ROIs) for areal soil moisture acquisition from the Wflow model, Automated weather stations (AWSs) with soil moisture sensors for comparative performance evaluation of the Wflow modelled soil moisture



### 3.4 Landslide hazard assessment and thresholds definition

#### 3.4.1 Landslide meteorological and hydrological conditions and test variables

The daily rainfall data from the best performing satellite product were used to define the landslide meteorological triggering conditions. We used two categories of landslide triggering conditions. The first category defined a landslide trigger as the maximum probable rainfall event (MPRE) during which or slightly after its end, one or more landslides occurred. The MPREs were defined as individual periods of rainy days interrupted by dry periods of at least two days. Given the constraint of overestimation of the number of rainy days with 0–10 mm by satellites (Pavez, 2021), a rainy day was objectively referred to as the day with  $\geq 10 \text{ mm d}^{-1}$  while a dry day was referred to as the day with  $< 10 \text{ mm d}^{-1}$ . This threshold was objectively selected using the rainfall frequency indicator metric explained in Sect. 3.2.2. The landslide predictor variables in this category were therefore the rainfall event volume (E), event duration (D) and event intensity (E/D). The rainfall event volume E (mm) was computed as the cumulative rainfall during each MPRE of duration D (days). The duration D equivalent to MPRE is the individual periods of days with recorded rain interrupted by inter event time (IET) of at least two dry days. The event intensity E/D is the ratio of event rainfall volume E and event duration D. The second category defined a landslide trigger as the recent cumulative rainfall  $R_{Dx}$  at the end of which one or more landslides occurred. This category considers the moving window total cumulative rainfall over the last three days ( $R_{D3}$ ), two days ( $R_{D2}$ ), and one day ( $R_{D1}$ ) at the end of which, one or more landslides occurred. While MPREs time series are interrupted by the IETs, the  $R_{D3}$ ,  $R_{D2}$  and  $R_{D1}$  for each day during the 2007–2019 study period were computed regardless of a rainy or dry day and thus resulting into longer time series and more data points compared to the MPREs time series. The time series of the defined meteorological triggering conditions from each category and for all precipitation foot prints were compiled in a single dataset for further statistical analysis. To provide a normalized comparison of the soil wetness, we transformed the satellite- and model-derived water content  $\theta$  to effective soil moisture  $Se$  to define the landslide predisposing hydrological conditions using Eq. (7):

$$Se = \frac{\theta - \theta_{min}}{\theta_{max} - \theta_{min}}, \quad (7)$$

Where  $Se$  stands for the effective soil moisture [-],  $\theta$  is the actual soil moisture,  $\theta_{max}$  and  $\theta_{min}$  are the maximum and minimum values of the recorded or modelled soil water content.

The tested hydrological conditions include therefore, the near surface soil moisture  $Se_{top}$ , representing the soil moisture of the upper 5 cm of soil, provided by the satellite techniques (VdS), the  $Se_{root}$  representing the root zone soil moisture of the upper 50 cm, acquired through modelling approach (Wflow), and  $Se_{uz}$  representing the soil moisture estimates from the upper 2 m of soil, obtained through modelling approach (Wflow). To assess the contribution of the pre-wetting state of the soil prior to the landslide triggering conditions, we have considered the antecedent soil moisture i.e. recorded or modelled prior to the start of



the triggering meteorological conditions. The antecedent soil moisture referred to the time interval before the start of each of the defined categories of the meteorological triggering conditions. We have therefore used the  $Se_{top(t-x)}$ ,  $Se_{root(t-x)}$ ,  $Se_{uz(t-x)}$  with  $t$  (date) and  $x$  (days) expressing the end time and the duration of the triggering conditions respectively. However, due to the transient duration of the MPRES,  $x$  was hypothetically represented by a value of 1 standing for one entire MPRE while values of 1, 2, 3 represent the duration (days) of the triggering  $R_{Dx}$  conditions. A binary classification of the defined hydrological and meteorological conditions was undertaken to classify the landslide and no-landslide conditions. The meteorological or hydrological conditions are referred to as landslide conditions i.e. positive class, when at least one landslide occurs during its course or slightly after its end while they are referred to as no-landslide conditions i.e. negative class when no landslide occurred during its course or slightly after its end.

### 3.4.2 Discriminatory power of the landslide test variables and optimum thresholds for landslide initiation

The landslide test variables which include the predisposing hydrological conditions  $Se_{top(t-1)}$ ,  $Se_{top(t-2)}$ ,  $Se_{top(t-3)}$ ,  $Se_{root(t-1)}$ ,  $Se_{root(t-2)}$ ,  $Se_{root(t-3)}$ ,  $Se_{uz(t-1)}$ ,  $Se_{uz(t-2)}$ , and  $Se_{uz(t-3)}$  as well as the triggering meteorological conditions  $E$ ,  $D$ ,  $E/D$ ,  $R_{D1}$ ,  $R_{D2}$ , and  $R_{D3}$  were tested for their relevance on landslide occurrence. We used a receiver operating characteristic (ROC) and the area under the curve (AUC) metrics to evaluate the discriminatory power of each of the landslide test variables. The ROC curve is defined as a graphical plot indicating the performance of the test variable at all threshold levels by providing the trade-off between the true positive rate (TPR) and false positive rate (FPR) at each level. The AUC is a statistical metric that indicate the discriminatory power of the test variable i.e. the capacity of the test variable to correctly distinguish positive from negative classes i.e. landslide from no landslide conditions. It compares also the test variable to a random guess (AUC=0.5) and thereby indicates the statistical significance where the perfect test variable would have an AUC equal to unity. The rate of correctly (TPR) and incorrectly predicted landslides corresponding to each cut off on the ROC curves are computed using Eq. (8) and Eq. (9):

$$TPR = \frac{TP}{TP+FN}, \quad (8)$$

$$FPR = \frac{FP}{FP+TN}, \quad (9)$$

$$FNR = \frac{FN}{FN+TP} \quad (10)$$

$$TNR = \frac{TN}{TN+FP} \quad (11)$$



280 Where TP are true positives or true alarms i.e. outcomes with correctly predicted landslides, FN are false negatives or missed  
alarms i.e. the number of landslides that occurred in reality but were not predicted, FP are false positives or false alarms i.e.  
predictions of landslide occurrence while in reality there was no landslide reported, and TN are true negatives i.e. correct  
predictions of no-landslide occurrence.

285 Since the ROC curve only indicates all possible thresholds and their relative balance between TPR and FPR, one is free to  
choose the optimum threshold depending on whether to maximize the TPR or minimize the FPR. However, according to  
Postance and Hillier (2017), the optimum threshold is the one that maximizes the TPR while minimizing the FPR. Therefore,  
that optimum threshold level above which landslide are high likely to occur have been defined using two statistical metrics i.e.  
the maximum true skill statistic (TSS) and minimum radial distance (Rad). The TSS is expressed as a balance between the  
TPR and FPR as indicated in Eq. (12):

290

$$TSS = TPR - FPR, \quad (12)$$

Where the maximum value of *TSS* indicates the optimum threshold for landslide initiation. For a perfect threshold, the *TSS*  
reaches a unity indicating a zero false positive rate (FPR). The radial distance (Rad) shows the relative distance from the  
defined threshold level on the curve to the perfect model or point whose TPR is a unit and zero FPR and is computed with Eq.  
295 (13):

$$Rad = \sqrt{(FPR)^2 + (TPR - 1)^2}, \quad (13)$$

### 3.4.3 Landslide hydro-meteorological thresholds and warning capabilities

300 The optimum thresholds defined based on the maximum *TSS* and or minimum *Rad* were plotted in 1D threshold space here  
referred to as single variable threshold line beyond which landslide are high likely to occur. We also followed cause–trigger  
concept (Bogaard and Greco, 2018) that reflect the hydro-meteorological thresholds and hypothetically plotted the optimum  
thresholds of the landslide predisposing hydrological variables i.e the antecedent soil moisture on the x-axis and the  
meteorological triggering variables on the y-axis of a two dimensional 2D space here referred to as bilinear thresholds. The  
305 bilinear threshold models made of hydrological and meteorological variables are plotted in x, y pairs i.e antecedent soil  
moisture versus E/D or  $R_{Dx}$ ). Furthermore, the bilinear threshold from a traditional landslide prediction model event–duration  
E–D, that exclusively rely on precipitation, has been also defined to serve as a benchmark for comparative performance  
evaluation.



## 310 4 Results and discussion

### 315 4.1 Performance of Satellite precipitation products

The suitability of satellite precipitation products in the study region was assessed using three statistical indicators as summarized in Table 2, Table 3 and Fig. 4. From the statistical measures of fits (RMSE, CC, RB), it is generally observed that IMERG is consistently more suitable while ERA-5 was found to be the least suitable product as compared to other satellite precipitation products. The evaluation based on frequency indicators is summarised in Table 3. These indicators give an overview on whether a given satellite product would overestimate or underestimate the observed gauge precipitation based on the predefined threshold indices. IMERG\_GPM displays the highest skill to estimate all ranges of rainfall from heavy to extremely heavy rainy days as recorded by the on-site gauges. CHIRPS and TRMM 3B42 v7 provide good estimates of precipitation with quite similar number of rainy days ( $R_{D0}=1250$ ) to gauge-based rainfall ( $R_{D0}=1256$ days). However, these satellites drastically underestimate the number of heavy to extreme heavy rainfall ( $R_{D20}$ ,  $R_{D30}$  and  $R_{D50}$ ) which are the root cause of landslide hazards. For example, TRMM and CHIRPS estimated  $R_{D20}=84$  and 101 days respectively out of 134 days estimated by rain gauge. The products PERSIANN CDR, GLDAS 2.1, CFSv2 and ERA-5 overestimated low rainy days while under estimating the number of heavy to extremely heavy rainy days as shown in Table 3.

325 The suitability of satellite products was also assessed using intensity comparison indicated by the density of the scatter points around 1:1 line as shown in Fig. 3. The scatter plots compare 30day cumulative rainfall from satellite precipitation products versus rain gauges. The scatter plots reveal that GLDAS, CFSv2 and ERA-5 tend to overestimate rainfall while underestimations are noticed from PERSIANN CDR as compared to the in situ gauge rainfall. Based on the closeness of scatter points to the 1:1 line, CHIRPS and IMERG exhibit a higher resemblance to gauge data (Pearson correlation  $R=0.67$  and  $0.60$  respectively) than other satellite products and could thus be used as alternative to gauge-based precipitation. Overall, IMERG shows rainfall pattern that are most consistent with available gauge observations in Rwanda despite the over estimation of the number of rainy days with less than 10 mm ( $R_{D10}$ ). According to Kimani et al. (2017), the overestimation of rainfall in areas with elevation  $>2500$  m and underestimation in areas with elevation  $<2500$  m was observed before and is attributed to satellite inherent challenges to retrieve orographic rainfall. To overcome this constraint,  $10 \text{ mm d}^{-1}$  has been considered as a threshold to define a satellite-based rainy day and thus being relevant for landslide hazard assessment in Rwanda conditions. Other researchers in the regions also found CHIRPS and TRMM to be comparable to gauge-based precipitation in east Africa (Kimani et al., 2017; Monsieurs et al., 2018b). Monsieurs et al. (2018b) found the areal-averaged TMPA rainfall estimates, the predecessor of IMERG, to be more suitable for assessing landslide hazard threshold than the sparsely distributed gauge data with limited representativeness in the context of high rainfall variability of the east African rift.

340




**Table 2.** Performance of Satellite precipitation products based on statistical metrics

Metrics	TRMM 3B42 v7	CHIRPS	PERSIANN CDR	GLDAS 2.1	CFSv2	IMERG	ERA 5
RMSE (mm)	8.17	8.53	7.42	8.55	10.58	8.18	12.60
CC (-)	0.31	0.27	0.25	0.24	0.17	0.35	0.22
RB (-)	-0.08	-0.01	-0.15	0.03	0.11	0.02	0.29

**Table 3.** Performance of Satellite precipitation products based on rainfall frequency indicators

Indices	Description	Gauge	TRMM 3B42 v7	CHIRPS	PERSIANN CDR	GLDAS 2.1	CFSv2	IMERG	ERA 5
R <sub>D0</sub>	Rainy days >0 mm	1259	1691	1256	2732	3086	2835	2842	3520
R <sub>D10</sub>	Heavy rainy days >10 mm	397	307	424	138	377	617	383	879
R <sub>D20</sub>	Very Heavy rainy days >20 mm	132	87	101	9	79	199	126	250
R <sub>D30</sub>	Even heavier rainfall days >30 mm	49	29	25	0	22	84	42	78
R <sub>D50</sub>	Extremely heavy rainfall >50 mm	9	4	3	0	2	22	6	21

345

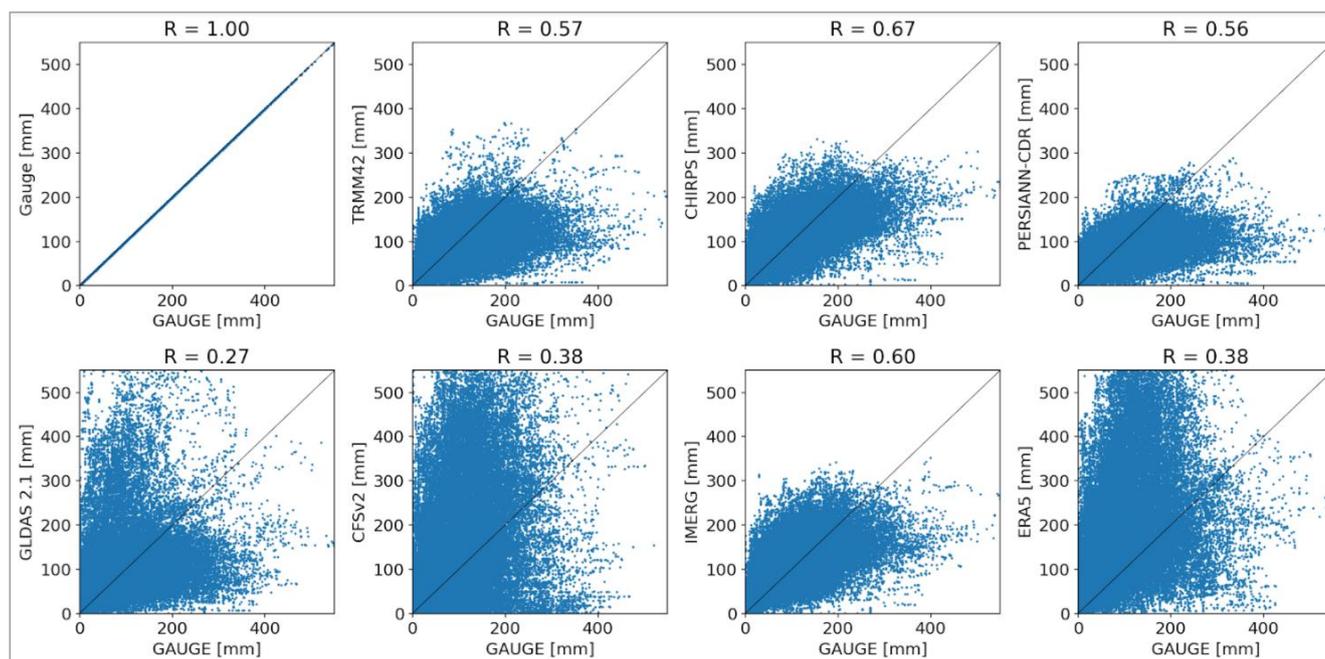

**Figure 5.** Intensity comparison between satellite-based and gauge-based precipitation based on the cumulative 30 day rainfall

## 350 4.2 Prospective of satellite and model-derived information in landslide hazard assessment

### 4.2.1 Mean soil moisture response to rainfall and landslide events


Figure 6 indicates the temporal dynamics of the satellite estimates  $Se_{top}$  and the model-derived soil moisture time series  $Se_{root}$  and  $Se_{uz}$  compared to in situ soil moisture observations from the automatic weather station AWS. Regardless of the difference in measuring depth (5 cm, 50 cm & 2 m), the time response to precipitation and overestimation of soil moisture, the satellite



355  $Se_{top}$  and model-derived soil moisture time series  $Se_{root}$  and  $Se_{uz}$  broadly reproduce the most important temporal variation as recorded by in situ soil moisture sensors (Fig. 6 and Fig. A1). This indicates their usefulness for landslide hazards assessment as an alternative to the sparse in situ AWSs. The spatial averaging of soil moisture across all research areas of interest (ROIs) was undertaken to have an insight on the critical ranges of soil moisture that induce landslides in Rwandan conditions. The spatially averaged  $Se_{top}$ ,  $Se_{root}$  and  $Se_{uz}$  soil moisture dynamics and the linked landslide hazards are presented in Fig. 6. The

360 average  $Se_{top}$ ,  $Se_{root}$  and  $Se_{uz}$  of all ROIs, indicate general similarities in terms of landslide predisposing but also reveal systematic differences between response time influenced by the soil moisture recording depth. For example, it is obvious that the  $Se_{top}$  (5 cm) responds faster than  $Se_{root}$  (50 cm) and  $Se_{uz}$  (2 m). It is clear that the majority of landslides occurs when the soil moisture levels positively deviate from the long-term mean up to a critical level for landslide initiation. It is also evident that the critical level for landslides occurrence is a function of the prior rainfall received and the time lag between rainfall and

365 soil moisture responses.

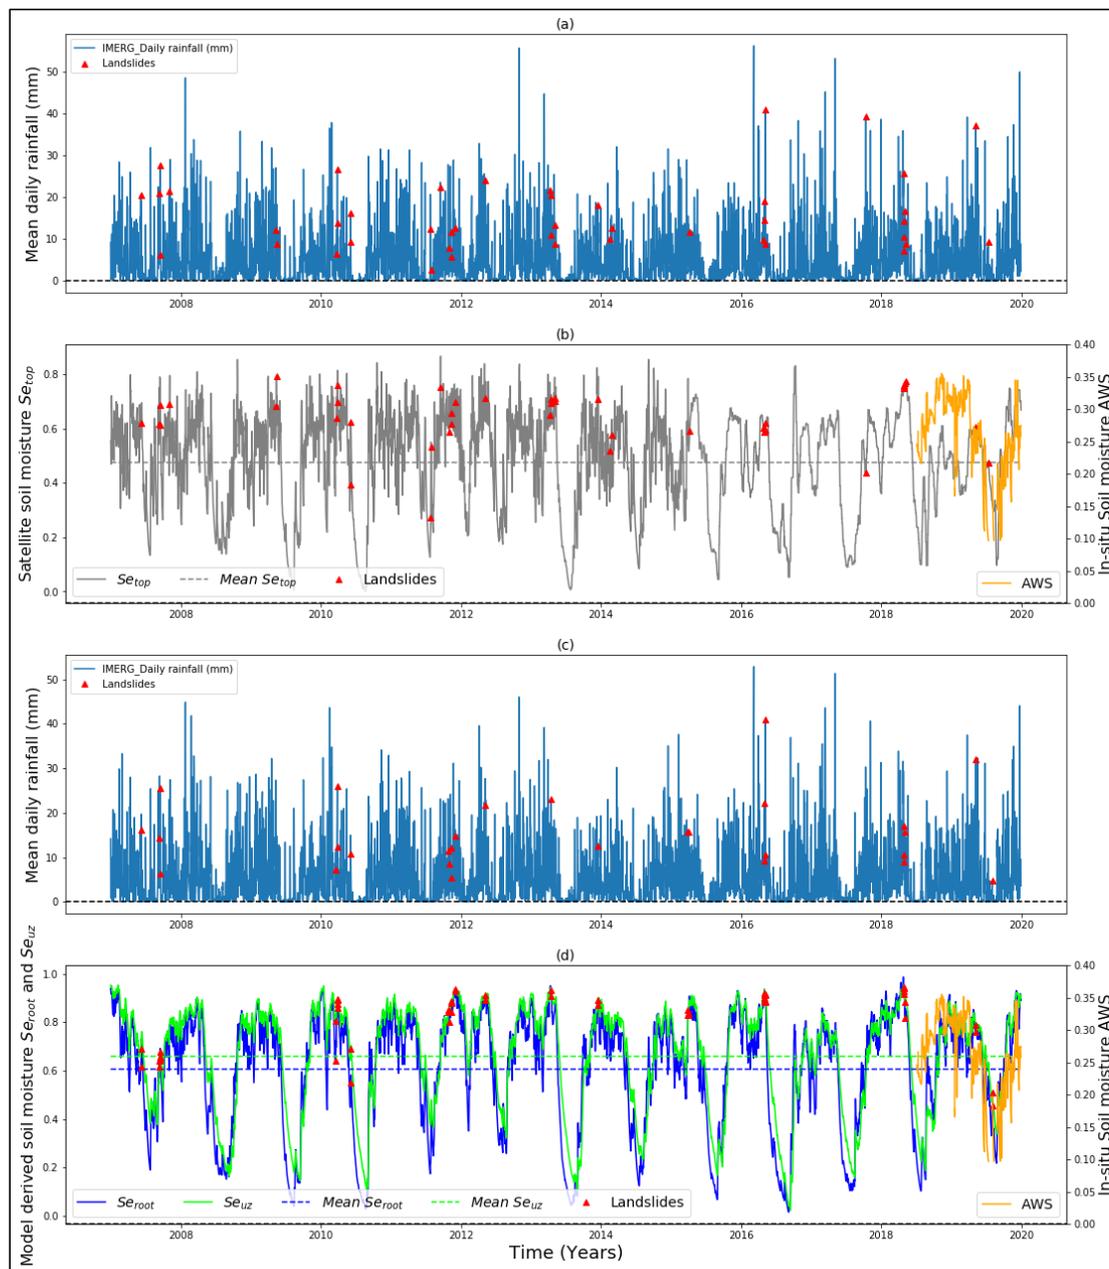

370 **Figure 6.** Satellite and model-derived information and landslide activities (a) GPM based IMERG precipitation [mm] spatially averaged over all landslide precipitation foot prints (b) satellite derived soil moisture  $Se_{top}$  [-] spatially averaged over all landslide ROIs and in situ soil moisture AWS [-] on secondary y-axis; (c) GPM based IMERG precipitation [mm] spatially averaged over the landslide precipitation foot prints located in the modelled catchments, (d) modelled soil moisture at the root zone top 50 cm  $Se_{root}$  [-], modelled soil moisture top 2 m  $Se_{uz}$  [-] and in situ soil moisture AWS [-] on secondary y-axis. The dashed horizontal lines represent the long term mean soil moisture and the red triangles stand for the landslide events



#### 375 4.2.2 Single variable landslide meteorological and hydrological thresholds and prediction capabilities

Figure 7 and Table 4 show the derived landslide meteorological and hydrological thresholds and their predictive capabilities in terms of true positive rate TPR and false positive rate FPR. The discriminatory power of each of the tested variables was evaluated with a receiver operating characteristic (ROC) curve and the area under the curve (AUC) statistical metrics as shown in Fig. 7. Among the tested landslide triggering meteorological variables E, D, E/D,  $R_{D1}$ ,  $R_{D2}$ , and  $R_{D3}$ , the cumulative 3 day  
380 rainfall  $R_{D3}$  and event rainfall volume E showed the highest discriminatory power with AUC ~ 0.72 and hence the highest impact on landslide initiation. However, the event rainfall intensity, i.e. E normalised over the event duration D as E/D indicated low capability (AUC~0.53) to distinguish landslides from no landslides. This stresses the importance of using the recent cumulative rainfall with a fixed duration and thus highlighting the highest impact of  $R_{D3}$  on landslide initiation process and its relevance on landslide hazard assessment and prediction compared to E that need to be normalised. Contrarily to the  
385 gauge-based cumulative rainfall thresholds (Uwihirwe et al., 2020), the satellite based cumulative rainfall on the day of landslide  $R_{D1}$  was not impactful to landslide initiation (AUC=0.35–0.38). This may be due to the inaccuracies between the landslide occurrence and the reporting time, and additionally also due to the satellite revisiting time and or period which may introduce inaccuracies in timing.


390 Figure 7c and d indicate that the wetness state of soil prior to the cumulative rainfall  $R_{Dx}$  have the most significant impact on landslide occurrence as indicated by their AUC=0.7–0.76. Contrarily, Fig. 7a and b show that the wetness state of the soil prior to the landslide triggering event E has no significant impact on landslide occurrence (AUC=0.65–0.67). This is to say that the antecedent soil moisture conditions prior to the longer triggering rainfall event E are not relevant for landslide initiation in the study area conditions. Among other factors, the duration of the triggering condition plays a major role in determining the  
395 relevance of the antecedent soil moisture on landslide occurrence. The shorter the duration of the triggering conditions, the higher the relevance of the antecedent soil moisture on landslides initiation. Highly permeable soils are less sensitive to antecedent soil moisture conditions because of the high gravity driven drainage and or deep percolation. With a tropical climate, evaporation process may also rapidly take away the antecedent soil moisture content of the top soil due to the longer timescale of the inter-event time IET and the landslide triggering event E.

400

The thresholds definition metrics, TSS and Rad, resulted in quite comparable landslide thresholds as summarised in Table 4. Moreover, it was noticed that the defined satellite precipitation thresholds are more similar to the ones defined using gauge based precipitation. For example, the optimum landslide threshold event rainfall volume E defined from satellite precipitation varied between 44mm and 61mm (Table 4) while gauge-based threshold E varied from 46mm to 67mm (Uwihirwe et al.,  
405 2021). Similarly but with a quite minor difference, the defined satellite-based E/D thresholds 16–17.5mm $d^{-1}$  seemed quite similar to gauge-based thresholds ~7–13mm $d^{-1}$  found in Uwihirwe et al. (2020 and 2021). Nevertheless, the single variable



threshold E/D being the most informative, showed quite low prediction capability in terms of TPR~56–60 % with elevated rate of false positive FPR ~ 43–54 % i.e. incorrect predictions of landslide and thus being less effective for a robust early warning system development. Contrarily, the single variable thresholds defined from the cumulative 3 day rainfall  $R_{D3}$  410 outperforms other tested triggering conditions with highest prediction capability in terms of true positive rate TPR=79–81 %. The same holds for the soil moisture in the root zone (50 cm deep)  $Se_{root}$  that consistently showed the highest performance. Nevertheless, despite the high true positive rate from these single variables thresholds, the resulting elevated rate of false positives FPR=36–42 % still constrain their use for the development of a robust landslide early warning system. It has to be noted that the threshold defined from the antecedent soil moisture specifies the critical levels below which the impact of pre- 415 wetting state of the soil is considered unimportant for landslide occurrence. On the contrary, once these thresholds are exceeded, the pre-wetting state of the soil has significant impact on landslide occurrence and has to be considered while defining the landslide hydro-meteorological threshold models.

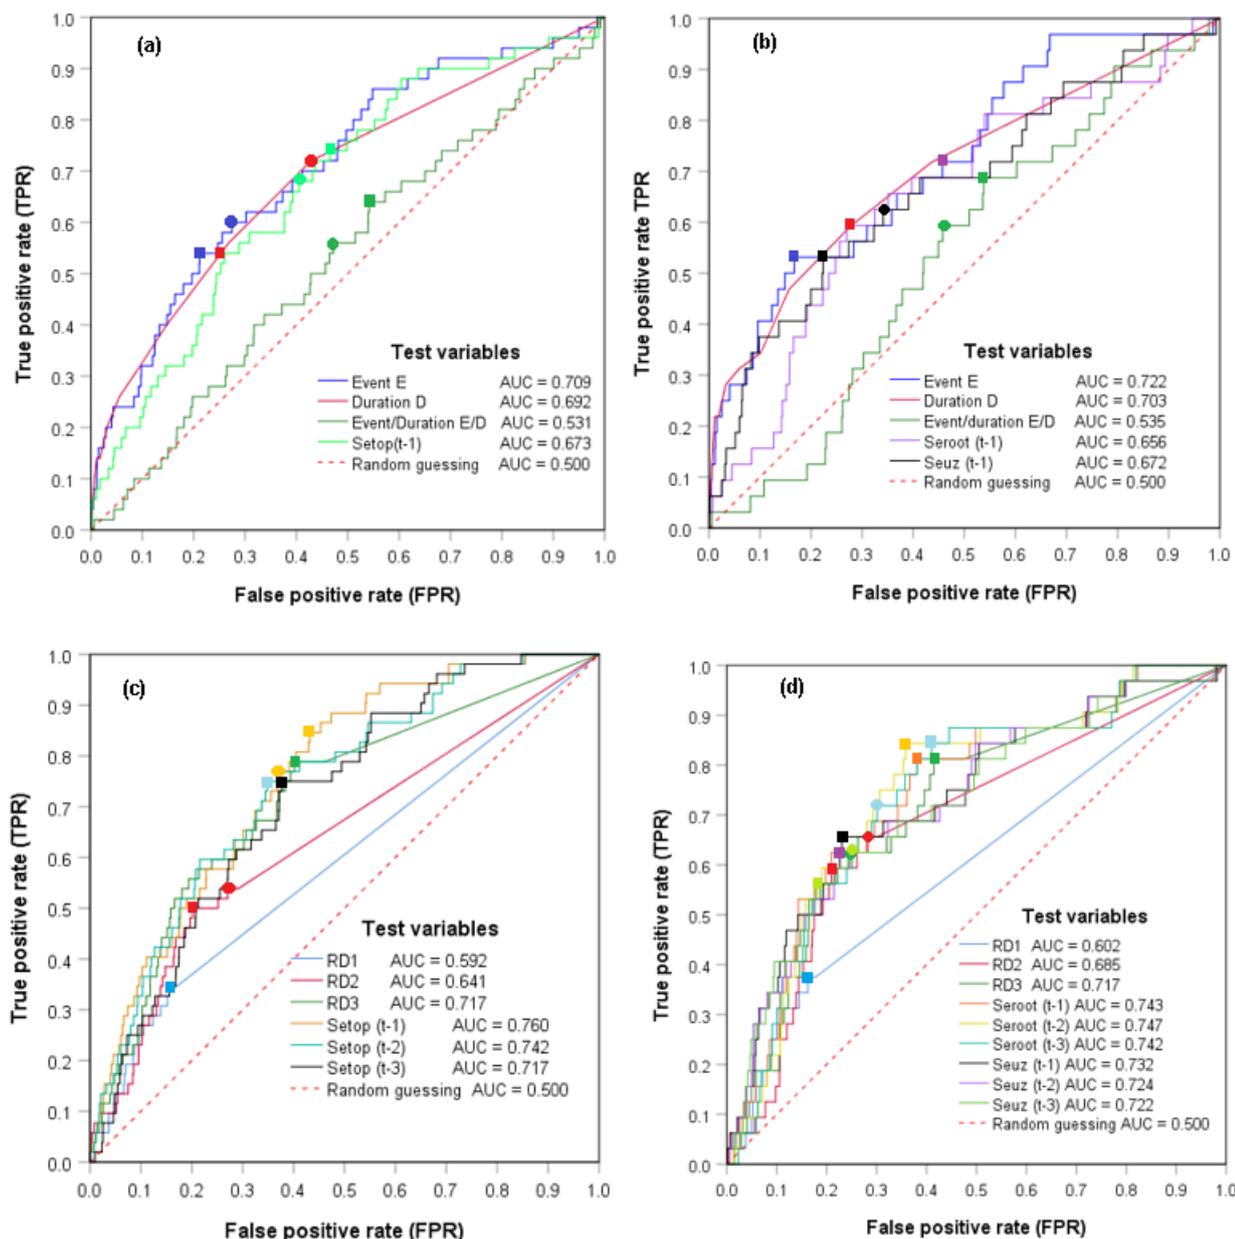

420

**Figure 7.** Receiver operating characteristics ROC curves, area under the curves AUC and optimum landslide thresholds defined by the true skill statistic TSS (square shaped marker) and radial distance Rad (cycle shaped marker) using: a) Event rainfall and satellite (VdS) based-top 5 cm soil moisture  $Se_{top}$  from all ROIs b) Event rainfall and modelled root zone soil moisture of the top 50 cm  $Se_{root}$  and top 2 m  $Se_{uz}$  from ROIs located in the Wflow model catchment c) Cumulative 1, 2 and 3 day rainfall ( $R_{Dx}$ ) and satellite (VdS) based-top 5 cm soil moisture  $Se_{top}$  from all ROIs and d) cumulative 1, 2 and 3 day rainfall ( $R_{Dx}$ ) and modelled root zone soil moisture of the top 50 cm  $Se_{root}$  and top 2 m  $Se_{uz}$  from ROIs located in the Wflow model catchment

425



**Table 4.** Event based variable thresholds and prediction capabilities

Variable	Maximum True skill statistics (TSS)					Minimum radial distance (Rad)				
	Threshold	TPR	FPR	TSS	Rad	Threshold	TPR	FPR	TSS	Rad
Event E (mm) <sup>a</sup>	53.1	0.54	0.21	0.33	0.51	44.9	0.60	0.27	0.33	0.49
Duration D (d) <sup>b</sup>	2.5	0.56	0.27	0.29	0.52	1.5	0.72	0.43	0.29	0.51
Event/Duration E/D (mm d <sup>-1</sup> ) <sup>c</sup>	16.1	0.64	0.54	0.10	0.65	17.3	0.56	0.47	0.09	0.65
Se <sub>top(t-1)</sub>	0.56	0.72	0.44	0.28	0.52	0.57	0.68	0.41	0.27	0.52
Event E (mm) <sup>d</sup>	60.7	0.53	0.17	0.36	0.50	60.7	0.53	0.17	0.36	0.50
Duration D (d) <sup>e</sup>	2.5	0.59	0.28	0.32	0.49	2.5	0.59	0.28	0.32	0.49
Event/Duration E/D (mm d <sup>-1</sup> ) <sup>f</sup>	16.1	0.69	0.54	0.15	0.62	17.5	0.59	0.46	0.14	0.61
Se <sub>root(t-1)</sub>	0.56	0.72	0.44	0.28	0.52	0.56	0.72	0.44	0.28	0.52
Se <sub>uz(t-1)</sub>	0.91	0.53	0.22	0.31	0.52	0.87	0.63	0.34	0.28	0.51

a b c Event rainfall volume, duration and intensity defined from all landslide representative precipitation foot prints, d e f Event rainfall volume, duration and intensity defined using precipitation foot prints located in the modelled catchments (Kivu, Nyabarongo upper and Mukungwa)

430

**Table 5.** Cumulative rainfall based-variable thresholds and prediction capabilities

Variable	Maximum True skill statistics (TSS)						Minimum radial distance (Rad)					
	Threshold	TPR	FPR	FNR	TNR	TSS	Rad	Threshold	TPR	FPR	TSS	Rad
R <sub>D1</sub> (mmd <sup>-1</sup> ) <sup>a</sup>	10.90	0.35	0.16	0.65	0.84	0.19	0.67	10.90	0.35	0.16	0.19	0.67
R <sub>D2</sub> (mmd <sup>-2</sup> ) <sup>b</sup>	14.70	0.50	0.20	0.50	0.80	0.30	0.54	10.90	0.54	0.27	0.27	0.53
R <sub>D3</sub> (mm) <sup>c</sup>	15.05	0.79	0.40	0.21	0.60	0.39	0.45	15.05	0.79	0.40	0.39	0.45
Se <sub>top(t-1)</sub>	0.53	0.85	0.43	0.15	0.57	0.41	0.46	0.56	0.77	0.37	0.40	0.44
Se <sub>top(t-2)</sub>	0.57	0.75	0.35	0.25	0.65	0.40	0.43	0.57	0.75	0.35	0.40	0.43
Se <sub>top(t-3)</sub>	0.56	0.75	0.38	0.25	0.62	0.37	0.50	0.56	0.75	0.38	0.37	0.50
R <sub>D1</sub> (mmd <sup>-1</sup> ) <sup>d</sup>	10.90	0.38	0.16	0.62	0.84	0.21	0.64	10.90	0.38	0.16	0.21	0.64
R <sub>D2</sub> (mmd <sup>-2</sup> ) <sup>e</sup>	14.70	0.59	0.21	0.41	0.79	0.38	0.45	10.90	0.67	0.28	0.38	0.44
R <sub>D3</sub> (mm) <sup>f</sup>	15.05	0.81	0.42	0.19	0.58	0.40	0.46	35.70	0.63	0.25	0.38	0.45
Se <sub>root(t-1)</sub>	0.75	0.81	0.38	0.19	0.62	0.43	0.43	0.75	0.81	0.38	0.43	0.43
Se <sub>root(t-2)</sub>	0.76	0.84	0.36	0.16	0.64	0.49	0.39	0.76	0.84	0.36	0.49	0.39
Se <sub>root(t-3)</sub>	0.72	0.84	0.41	0.16	0.59	0.43	0.44	0.79	0.72	0.30	0.42	0.41
Se <sub>UZ, (t-1)</sub>	0.90	0.66	0.23	0.34	0.77	0.43	0.41	0.90	0.66	0.23	0.43	0.41
Se <sub>UZ, (t-2)</sub>	0.89	0.63	0.25	0.37	0.75	0.38	0.45	0.89	0.63	0.25	0.38	0.45
Se <sub>UZ, (t-3)</sub>	0.92	0.56	0.18	0.44	0.82	0.38	0.47	0.89	0.63	0.24	0.38	0.45

a b c Cumulative 1, 2, and 3day rainfall defined from all landslides representative precipitation foot prints, d e f Cumulative 1, 2, and 3day rainfall volume defined using precipitation foot prints located in the model catchments (Kivu, Nyabarongo upper and Mukungwa)

435

### 4.2.3 Landslide hydro-meteorological thresholds and implication for warning

With respect to the high rate of false positives resulting from the single variable thresholds, we have tested whether the incorporation of antecedent soil moisture information to the triggering rainfall conditions improves the landslide prediction capability. The optimum single variable hydrological and meteorological thresholds have been combined into hydro-meteorological thresholds following the cause-trigger concept in a bilinear framework as shown in Fig. 8 and Fig. 9. Figure 8 illustrates the first category of landslide hydro-meteorological thresholds defined based on the maximum possible rainfall event E combined with different variables of antecedent soil moisture. The derived thresholds resulted into quite elevated rate of false alarms FPR once used as single variable thresholds (single lines). In contrast, the combination of hydro-meteorological thresholds in a bilinear framework provide an improvement in terms of reduced rate of false alarms by about 30 % [Se<sub>top(t-1)</sub>–


440



445 E/D], 13 % [ $Se_{root(t-1)}-E/D$ ], and 35 % [ $Se_{uz(t-1)}-E/D$ ] respectively as compared to the ones obtained from the exclusive use of  
single variable precipitation based E/D thresholds. The intention of adopting the bilinear hydro-meteorological threshold in  
spite of precipitation thresholds is to minimize the rate of incorrect prediction of landslides FPR while improving or at least  
keeping unchanged the rate of true alarms TPR. This was only achieved by using the bilinear hydro-meteorological thresholds  
defined using antecedent soil moisture at the root zone [ $Se_{root(t-1)}-E/D$ ] that performs better (TPR=66 %) than the traditional  
450 precipitation threshold E-D (TPR=50 %). However, this category still suffers from the low landslide warning capability (max  
TPR=66 %) and is thus not satisfactory for a robust early warning system development. The lower performance was attributed  
to the timescale of the triggering events. Apparently, the effect of the antecedent soil moisture lasts for a limited period of time  
and subsequently decays towards zero and below.


455 The inter-event time IET and the timescale of the rainfall events E are not constant and vary in durations with high probability  
to be too long and thus implying the decay of the antecedent soil moisture and hence negligible contribution to landslide  
induction. Consequently, the incorporation of the wetness state of the soil prior to the landslide triggering events E did not lead  
to a significant improvement of the landslide prediction in Rwanda conditions. We therefore explored other landslide hydro-  
meteorological thresholds that use the triggering meteorological conditions with short and constant timescale as shown in Fig.  
460 9. These consider the cumulative one, two and three day rainfall  $R_{D1}$ ,  $R_{D2}$ , and  $R_{D3}$  while extending the timescale of the  
predisposing conditions up to one, two or three days prior to the landslide triggering conditions. Figure 9 portrays the optimum  
bilinear hydro-meteorological threshold models defined from this second category. The 3day cumulative rainfall  $R_{D3}$  was the  
most impactful trigger of landslide with an optimum threshold  $\sim 15.1 \text{ mmd}^{-3}$  defined by both TSS & Rad and resulted into 79–  
81 % of TPR much higher than predicted by the first category. Similarly, the antecedent soil moisture threshold  $Se_{root(t-3)}$  was  
465 able to predict  $\sim 84$  % of landslides. However, this true prediction i.e true alarms is also associated with high rate of false alarms  
 $\sim 40$ – $42$  %. The combination into hydro-meteorological thresholds [ $Se_{root(t-3)}-R_{D3}$ ] decreased the rate of false alarms up to  $\sim 22$   
% with about 72 % of true alarms (Fig. 9b) and thus being more satisfactory than other hydro-meteorological threshold models  
and much better than the traditional E-D model (TPR $\sim 50$  %) that exclusively relies on precipitation.

470

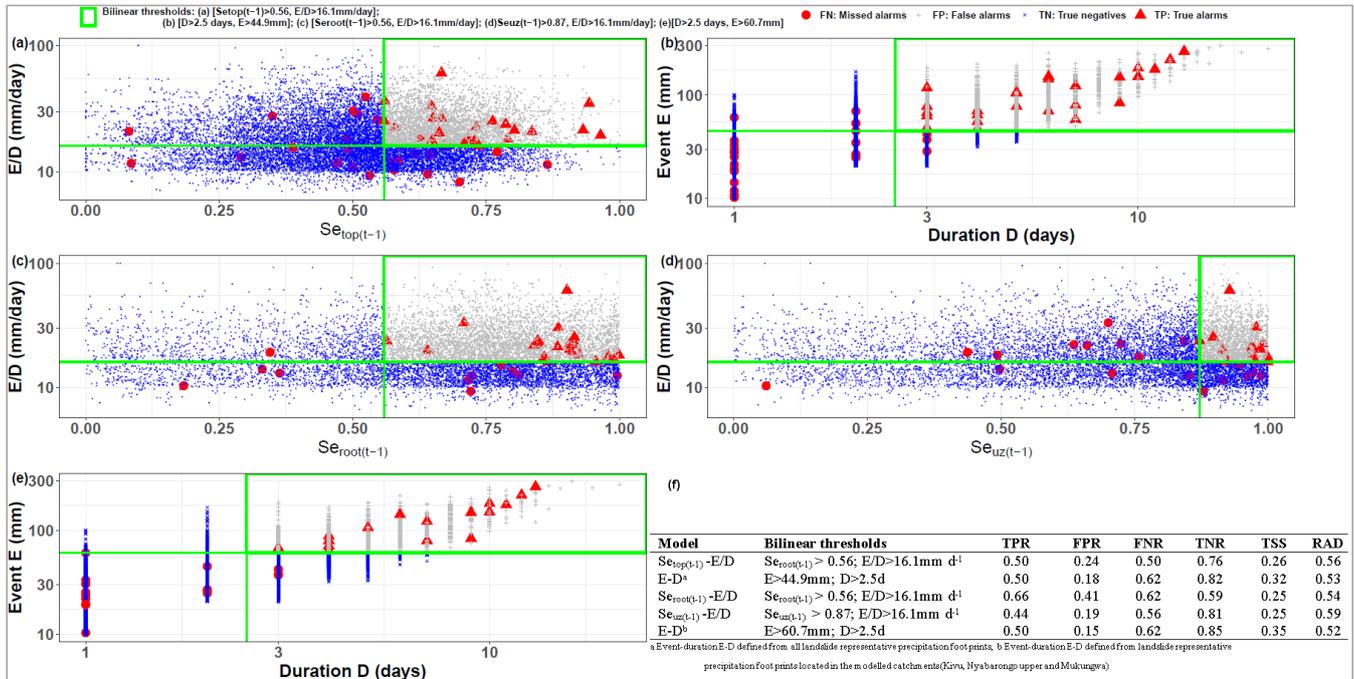

475

**Figure 8.** Landslide hydro-meteorological thresholds and prediction capabilities: (a) Event intensity-Antecedent 5cm top soil moisture thresholds [ $Se_{top,t-1} > 0.56; E/D > 16.1 \text{ mm d}^{-1}$ ] (b) Event-duration E-D thresholds [ $D > 2.5$  days;  $E > 44.9$  mm] defined using precipitation foot prints from all landslide locations; (c) Event intensity-Antecedent 50 cm top soil moisture threshold [ $Se_{root,(t-1)} > 0.56- E/D > 16.1 \text{ mm d}^{-1}$ ]; (d) Event intensity-Antecedent 2 m top soil moisture threshold [ $Se_{root,(t-1)} > 0.84; E/D > 16.1 \text{ mm d}^{-1}$ ]; (e) Event-duration E-D thresholds [ $E > 60.7$  mm;  $D > 2.5$  days] defined using precipitation foot prints and landslides located in Wflow modelled catchments; (f) Bilinear threshold values and prediction capabilities

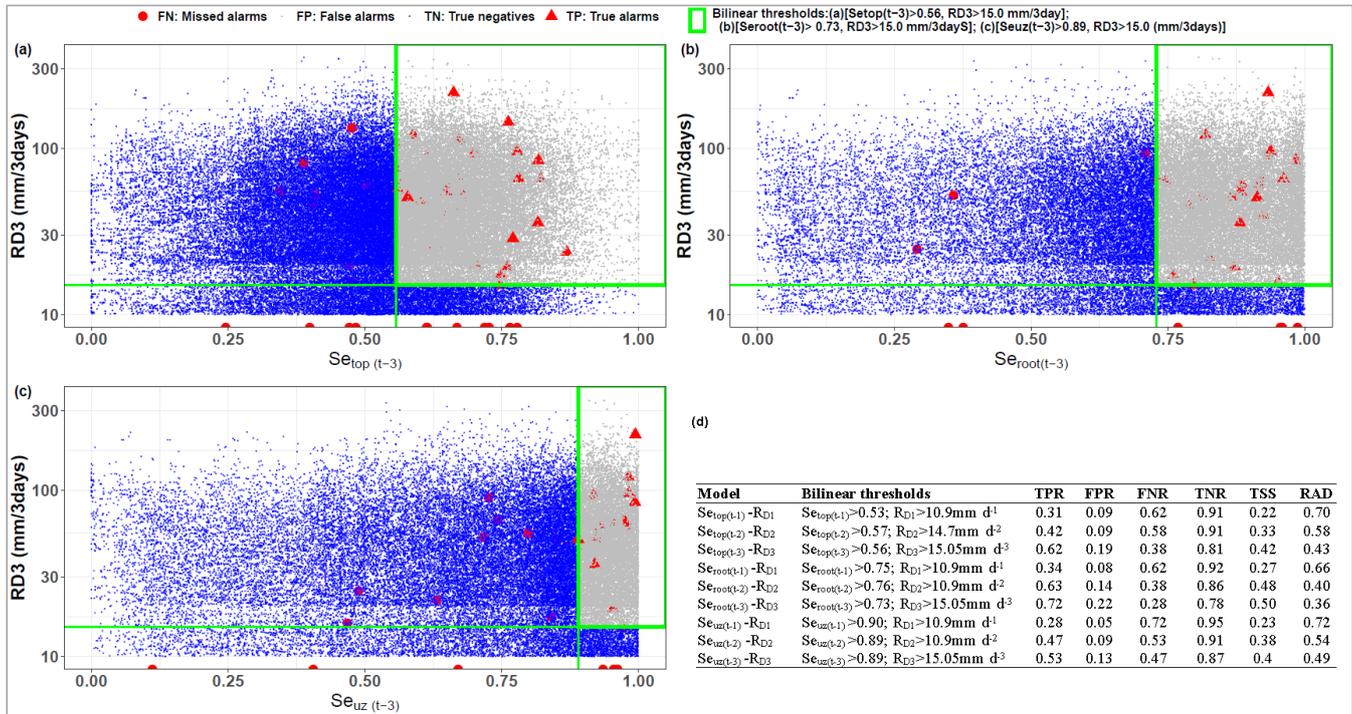

480

**Figure 9.** Landslide hydro-meteorological thresholds and prediction capabilities: (a) Cumulative 3 day rainfall  $R_{D3}$  and antecedent 5 cm top soil moisture thresholds  $Se_{top(t-1)}$  [ $Se_{top(t-3)} > 0.73; R_{D3} > 15 \text{ mm d}^{-3}$ ] defined using precipitation foot prints from all landslide locations; (b) Cumulative 3 day rainfall  $R_{D3}$  and antecedent soil moisture of the root zone  $Se_{root(t-3)}$  [ $Se_{root(t-3)} > 0.73; R_{D3} > 15 \text{ mm d}^{-3}$ ]; (c) Cumulative 3 day rainfall  $R_{D3}$  and antecedent soil moisture of the top 2 m  $Se_{uz(t-3)}$  [ $Se_{uz(t-3)} > 0.89; R_{D3} > 15 \text{ mm d}^{-3}$ ] defined from the Wflow model catchment (d) Bilinear hydro-meteorological threshold values and prediction capabilities

485

#### 4.2.4 Prospective of the satellite-based hydro-meteorological thresholds, advances and limitations

490

This study reveals the high capability of the NASA GPM-based IMERG product to reproduce rainfall patterns which are consistent with the gauge-based precipitation and thus more suitable for landslide hazard assessment thresholds than sparsely distributed rain gauges in Rwanda. However, this research also points out that IMERG satellite-based product overestimates the number of rainy days whose daily rainfall is between 0–10 mm and thus the mean annual totals. This may not only lead to differences between satellite- and gauge-based landslide thresholds defined under same locations but also to the statistical bias especially when probabilistic methods are used for landslide threshold definition. To address this constraint and be able to exploit the usefulness of IMERG precipitation in landslide hazards assessment thresholds, we objectively used 10 mm as a threshold to define a rainy day for IMERG precipitation data. This threshold was defined based on the frequency indicator

495



metric. For gauge based rainfall, 2 mm is generally considered as a threshold to define a rainy day and have been defined based on the mean daily potential evaporation (Marino et al., 2020; Peres et al., 2018).

500 Although the threshold definition of a rainy day (10 mm) may have led to the omission of some rainfall information and thus shortening the event duration  $D$ , this approach improved the similarities between the satellite-based and gauge-based landslide hazard assessment thresholds. However, the defined satellite-based event/duration  $E/D$  thresholds  $16-17.5 \text{ mm d}^{-1}$  were quite higher than previously defined gauge based-thresholds  $\sim 7-13 \text{ mm d}^{-1}$ . Contrarily the defined thresholds from the recent cumulative 2 and 3 day rainfall were much smaller than defined from gauge based data (Uwihirwe et al., 2020, 2021). These differences are probably due to the predefined threshold (10 mm) that probably omits some rainy days. This also led to  
505 shortened event duration  $D$  and hence slightly higher  $E/D$ . Nevertheless, the landslide triggering conditions defined based on the  $E/D$  reveals poor discriminatory power to distinguish landslide from no landslides ( $AUC \sim 0.53$ ) and thus not impactful on landslide initiation. The linked landslide thresholds also underperform in terms of landslide prediction capabilities measured by the resulting low rate of true positives  $TPR \sim 56-69 \%$ . Similarly, the landslide hydro-meteorological thresholds that included the rainfall event  $E/D$  as a trigger resulted into poor landslide warning performance  $TPR \text{ max } \sim 66 \%$ .

510 The poor performance of the rainfall event-based thresholds concept is due to uncertainties from multiple sources. We hypothetically used the rainfall events as landslide triggering conditions, defined as individual periods of continuous rain interrupted by at least two dry day periods referred to as inter-event time (IET). Nevertheless, this definition needs further exploration to be standardised to avoid uncertainties. According to Adams et al. (1987); Hong et al. (2017), the IET is defined as the minimum period of time that separates two consecutive rainfall events and is considered as the period for which the  
515 effects of the antecedent soil moisture or precipitation index may last. This is to say that the antecedent soil moisture and or antecedent precipitation index have no significant effect on landslide initiations once the rainfall events and IETs are well defined. However, the IET, the period during which the effect of antecedent soil moisture becomes null, depends on a number of site-specific factors (soil properties, land use/ land cover, potential evaporation etc.) and is thus difficult to be standardized. Another drawback associated with the use of rainfall event concept may be linked to the transient timescales of the triggering  
520 events that bring about difficulties to fix the appropriate time to give an alert or an early landslide warning to the threatened community.

Beholding the constraints associated with IET, rainy day and rainfall events definition, we explored the shorter scaled triggering rainfall conditions that include the cumulated rainfall with constant duration 1, 2, 3 days ( $R_{D1}$ ,  $R_{D2}$ ,  $R_{D3}$ ). The cumulative 3 day rainfall  $R_{D3}$  showed the highest impact on landslide initiation  $AUC \sim 0.72$  and true positive alarms  $TPR \sim 79-81 \%$ . Although the meteorological trigger-based thresholds  $R_{D3}$ , have resulted into high rate of true alarms, they lack the  
525 concrete physical significance and are also challenging for a robust landslide early warning system due to the linked high level of erroneous alarms i.e false positives  $FPR \sim 40-42 \%$ . To account for the pre-wetting state of the soil, the antecedent soil



moisture conditions have been considered. These antecedent soil moisture conditions from the top 5 cm, 50 cm and 2 m,  $Se_{top}$ ,  $Se_{root}$ ,  $Se_{uz}$  respectively showed significant impact on landslide predisposal  $AUC=0.71-0.76$ . Moreover, with exception to the  $Se_{uz}$ , the hydrological landslide thresholds 0.56 [ $Se_{top}$ ], 0.73 [ $Se_{root}$ ] defined from these soil moisture conditions revealed high landslide warning capability with true alarms  $TPR \sim 75-85\%$ . These hydrological thresholds indicate the critical pre-wetting state above which any additional amount of rainfall  $> 11-15mm$  is highly likely to trigger landslides. We therefore combined both landslide hydrological predisposing and meteorological triggering conditions following the cause-trigger concept into bilinear hydro-meteorological thresholds framework. This approach improved the landslide prediction capabilities in terms of reduced rate of false alarms ( $FPR \sim 22\%$ ) and increased true alarms ( $TPR \sim 72\%$ ) as compared to the approaches that consider the maximum probable rainfall event (max  $TPR \sim 66\%$  and  $FPR \sim 41\%$ ). In other words, once combined with the pre-wetting hydrological conditions, the cumulative few days rainfall have significant impact on landslide initiation and warning as compared to the longer and no constant triggering conditions. Furthermore, the incorporation of the antecedent wetness state of the terrain not only improved the landslide warning capabilities but also provide accurate insights into landslide alert time as compared to the use of transient time scale associated with the rainfall event concept.

Among the tested pre-wetting conditions, the incorporation of the antecedent soil moisture modelled at the root zone  $Se_{root}$  was the most impactful for landslide initiation and thus the most useful in landslide hazard assessment thresholds in Rwanda. The finer spatial resolution of the hydrological model-derived soil moisture together with the consideration of the specific climate and hydrogeological characteristics of the model catchments could be a possible explanation of the positive impact of soil moisture assimilated at the root zone. This could also be explained by the less exposure of the root zone to the solar heat and evaporation processes as compared to the near surface  $Se_{top}$ . The probable less prone to the gravity driven drainage and deep percolation due to the soil texture, vegetation and organic matter at the root zone could also be an explanation. Moreover, the soil depth involved in shallow (0.5–2 m) and deep landslides ( $>2$  m) (Greco et al., 2018) is much thicker than  $Se_{top}$  (5cm) currently measured by the satellite based soil moisture technologies and this is more captured by the hydrological modelling approaches (Wflow). An overestimation of soil moisture by satellite (VdS) and the distributed hydrological model (Wflow) was also noted and attributed to the similar overestimation of satellite-based precipitation, an important element in soil moisture estimation. Therefore, more reliable algorithms that addresses the reliance between the satellite and in situ based information could thus improve the performance and enhance data accuracy needed for landslide hazard assessment.

The adopted bilinear threshold framework, indicating the distribution of data points in a 2D space, reflects the relationship between the landslide causal and triggering conditions. We objectively used the bilinear thresholds framework because the majority of positive classes were clustered in upper right corner of the 2D threshold space. Although, this format proved to be suitable for landslide hydro-meteorological thresholds definition (Mirus et al., 2018a; Thomas et al., 2019; Uwahirwe et al., 2020, 2021), it is clear that for meteorological threshold model E–D, the commonly used power law function would have



560 resulted into high rate of true alarms at the expense of a very high rate of false alarms. However, the adopted bilinear framework is in line with the goal of the hydro-meteorological cause-trigger based thresholds concept that prioritize the minimization of false alarms while at least keeping unchanged the rate of true alarms. Additionally, in some cases, single variable thresholds lead to high prediction capabilities in terms of elevated rate of true alarms and with quite low rate of false alarms and could be adopted especially for hydrologically based thresholds that consider the long-term wetting process of the soil until the landslide day.

565 Despite the good performance of soil moisture as landslide hydro-meteorological threshold, the incorporation of pre-wetting state of soil in landslide hazard assessment thresholds using groundwater levels,  $h_{(t-1)}-E/D$  (TPR=54–64 % and FPR=6–11 %) (Uwihirwe et al., 2021) with low rate of false alarms, performed higher than using root zone soil moisture  $Se_{root(t-1)}-E/D$  (TPR=66 % and FPR=44 %) due to the elevated rate of false alarms.

## 570 5 Conclusion

This research aimed to evaluate the potential of satellite-based measurements of precipitation and soil moisture as well as hydrological model-derived soil moisture information for landslide initiation thresholds in Rwanda. The GPM-based IMERG rainfall product was found to be a good spatially distributed source of rainfall data for landslide hazard assessment especially in data scarce areas like Rwanda. The satellite and model-derived soil moisture time series broadly reproduce the most important trends of the in situ soil moisture. Regardless of different depths of data records and slightly overestimation of soil moisture by satellite and model-derived techniques, it was concluded that they follow the in situ observed temporal variation and are thus potentially useful for landslide hazard assessment. The purpose of incorporating the antecedent soil moisture in landslide hazard assessment was to account for the physical effect of the pre-wetness state of soil, responsible for the predisposal of the slopes to near failure, prior to the landslide triggering conditions. Two categories of landslide triggering conditions have been considered to assess the potential value of including the antecedent soil moisture information. The category that considers the cumulative 3 day rainfall was the most impactful and thus more useful for landslide hazard assessment in Rwanda rather than the rainfall event-based trigger. Although the area under the curve (AUC=0.71–0.76) statistical metric indicated the significant impact of all tested antecedent soil moisture variables prior to the triggering conditions, the antecedent soil moisture modelled from the root zone  $Se_{root}$  performed best. Similarly, the hydro-meteorological thresholds that incorporate the antecedent soil moisture  $Se_{root}$  and the recent 3 day cumulative rainfall  $R_{D3}$  [ $Se_{root(t-3)}-R_{D3}$ ] outperforms other threshold models with high rate of true alarms (72 %) and low rate of false alarms (20 %) and thus very useful for landslide hazard assessment and early warning system development in Rwanda.

**Data availability.** The landslide inventory used for this research can be accessed at <https://doi.org/10.4121/15040446.v1>



590 **Competing interests.** The authors declare that they have no conflict of interest

**Author contributions.** JU collected the in situ data, conducted the statistical analysis, conceptualise and prepared the manuscript storyline. ARP collected and prepared data from satellite precipitation products, organised the soil moisture data and conducted some statistical analysis. HW and JS prepared and availed the high resolution satellite-based soil moisture data. FSW actively participated in hydrological modelling of soil moisture, highly contributed to the correction and perfection of the manuscript. MS corrected the manuscript storyline, shaped the discussion and contributed to the perfection of the manuscript. TAB initiated the research idea, proposed the research approaches, created the research network and collaboration, verified the data preparation and statistical analysis, shaped the manuscript storyline and contributed to the perfection of the manuscript.

**Acknowledgements.** We are so thankful to Dr. Elise Monsieur, Dr. Arthur Depicker and Dr. Olivier Dewitte for sharing part of the Landslide Inventory for Rwanda as part of the central section of the Western branch of the East African Rift (LIWEAR) project. We are thankful to the Rwanda meteorological agency for offering access to the in situ meteorological and hydrological datasets used for validation of other source of data.

## References

- 605 Adams, B. B. J., Asce, M., Fraser, H. G. and Hanafy, M. S.: Meteorological data analysis for drainage system design, *Environ. Eng.*, 112(5), 827–848, 1987.
- Ashouri, H., Lin Hsu, K., Sorooshian, S., Braithwaite, D. K., Knapp, K. R., Cecil, D. L., Nelson, B. R. and Prat, O. P.: Daily Precipitation Climate Data Record from Multisatellite Observations for Hydrological and Climate Studies, *Am. Meteorol. Soc.*, (January), 69–84, doi:10.1175/BAMS-D-13-00068.1, 2015.
- 610 Bizimana, H. and Sönmez, O.: Landslide Occurrences in The Hilly Areas of Rwanda , Their Causes and Protection Measures, *Disaster Science and Engineering*, (December), 1-7, 1(1), 2015.
- Bogaard, T. and Greco, R.: Invited perspectives: Hydrological perspectives on precipitation intensity-duration thresholds for landslide initiation: proposing hydro-meteorological thresholds, *Nat. Hazards Earth Syst. Sci.*, 18(1), 31–39, doi:10.5194/nhess-18-31-2018, 2018.
- 615 Bouaziz, L. J. E., Steele-dunne, S. C. and Schellekens, J.: Improved Understanding of the Link Between Catchment-Scale Vegetation Accessible Storage and Satellite-Derived Soil Water Index, *Water Resour. Res.*, 1–22, doi:10.1029/2019WR026365, 2020.
- Broeckx, J., Vanmaercke, M., Duchateau, R. and Poesen, J.: Earth-Science Reviews A data-based landslide susceptibility map of Africa, *Earth-Science Rev.*, 185(October 2017), 102–121, doi:10.1016/j.earscirev.2018.05.002, 2018.
- 620 Calvello, M., Devoli, G., Freeborough, K., Gariano, S. L., Guzzetti, F., Stähli, Kirschbaum, D., Nakaya, J. and Robbins, M.: LandAware: a new international network on Landslide Early Warning Systems, *Landslide*, (1), 2699–2702, doi:10.1007/s10346-020-01548-7, 2020.
- Ciavolella, M., Bogaard, T., Gargano, R. and Greco, R.: Is there Predictive Power in Hydrological Catchment Information for Regional Landslide Hazard Assessment?, *Procedia Earth Planet. Sci.*, 16, 195–203, doi:10.1016/j.proeps.2016.10.021, 2016.
- 625 Depicker, A., Jacobs, L., Mboga, N., Rompaey, A. Van, Lennert, M., Wolff, E., Kervyn, F., Michellier, C., Dewitte, O. and Govers, G.: population and forest-cover changes in the Kivu Rift, , doi:10.1038/s41893-021-00757-9, 2015.
- Depicker, A., Jacobs, L., Delvaux, D., Havenith, H. B., Maki Mateso, J. C., Govers, G. and Dewitte, O.: The added value of a regional landslide susceptibility assessment: The western branch of the East African Rift, *Geomorphology*, 353, 106886, doi:10.1016/j.geomorph.2019.106886, 2020.



- 630 Depicker, A., Jacobs, L., Mboga, N., Smets, B., Van Rompaey, A., Lennert, M., Wolff, E., Kervyn, F., Michellier, C., Dewitte, O. and Govers, G.: Historical dynamics of landslide risk from population and forest-cover changes in the Kivu Rift, *Nat. Sustain.*, 4(11), 965–974, doi:10.1038/s41893-021-00757-9, 2021a.  
Depicker, A., Govers, G., Jacobs, L., Campforts, B., Uwihirwe, J. and Dewitte, O.: Interactions between deforestation, landscape rejuvenation, and shallow landslides in the North Tanganyika – Kivu rift region, Africa, , 445–462, 2021b.
- 635 Dewitte, O., Depicker, A., Moeyersons, J. and Dille, A.: Mass Movements in Tropical Climates, 2nd ed., Elsevier Inc., 2021.  
Froude, M. J. and Petley, D. N.: Global fatal landslide occurrence from 2004 to 2016, *Nat. Hazards Earth Syst. Sci.*, 18(8), 2161–2181, doi:10.5194/nhess-18-2161-2018, 2018.  
Funk, C., Peterson, P., Landsfeld, M., Pedreros, D., Verdin, J., Shukla, S., Husak, G., Rowland, J., Harrison, L., Hoell, A. and Michaelson, J.: The climate hazards infrared precipitation with stations — a new environmental record for monitoring extremes, , 1–21, doi:10.1038/sdata.2015.66, 2015.
- 640 Gariano, S. L. and Guzzetti, F.: Landslides in a changing climate, *Earth-Science Rev.*, 162, 227–252, doi:10.1016/J.EARSCIREV.2016.08.011, 2016.  
Glade, T. and Nadim, F.: Early warning systems for natural hazards and risks, *Nat Hazards*, 70(123), 1669–1671, doi:10.1007/s11069-013-1000-8, 2014.
- 645 Glerum, A., Brune, S., Stamps, D. S. and Strecker, M. R.: Victoria continental microplate dynamics controlled by the lithospheric strength distribution of the East African Rift, *Nat. Commun.*, 11(1), 1–15, doi:10.1038/s41467-020-16176-x, 2020.  
Greco, R., Marino, P., Santonastaso, G. F. and Damiano, E.: Interaction between perched epikarst aquifer and unsaturated soil cover in the initiation of shallow landslides in pyroclastic soils, *Water (Switzerland)*, 10(7), doi:10.3390/w10070948, 2018.
- 650 Guzzetti, F., Gariano, S. L., Peruccacci, S., Brunetti, M. T., Marchesini, I., Rossi, M. and Melillo, M.: Geographical landslide early warning systems, *Earth-Science Rev.*, 200(September 2019), 102973, doi:10.1016/j.earscirev.2019.102973, 2020.  
Haque, U., Blum, P., da Silva, P. F., Andersen, P., Pilz, J., Chalov, S. R., Malet, J. P., Auflič, M. J., Andres, N., Poyiadji, E., Lamas, P. C., Zhang, W., Peshevski, I., Pétursson, H. G., Kurt, T., Dobrev, N., García-Davalillo, J. C., Halkia, M., Ferri, S., Gaprindashvili, G., Engström, J. and Keellings, D.: Fatal landslides in Europe, *Landslides*, 13(6), 1545–1554, doi:10.1007/s10346-016-0689-3, 2016.
- Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Nicolas, J., Peubey, C., Radu, R., Bonavita, M., Dee, D., Dragani, R., Flemming, J., Forbes, R., Geer, A., Hogan, R. J., Janisková, H. M., Keeley, S., Laloyaux, P., Cristina, P. L. and Thépaut, J.: The ERA5 global reanalysis, (June), 1999–2049, doi:10.1002/qj.3803, 2020.
- 660 Hong, M., Kim, J. and Jeong, S.: Rainfall intensity-duration thresholds for landslide prediction in South Korea by considering the effects of antecedent rainfall, *Landslides*, 10.1007/s11069-017-0892-x, 2017.  
Hong, Y., Alder, R. and Huffman, G.: Evaluation of the potential of NASA multi-satellite precipitation analysis in global landslide hazard assessment, *Geophys. Res. Lett.*, 33(22), 1–5, doi:10.1029/2006GL028010, 2006.  
Huffman, G. J., Adler, R. F., Bolvin, D. T. and Nelkin, E. J.: The TRMM multi-satellite precipitation analysis (TMPA), in *Satellite rainfall applications for surface hydrology*, pp. 3–22, Springer., 2010.
- 665 Huffman, G. J., Gsfc, N., Bolvin, D. T., Braithwaite, D., Hsu, K., Joyce, R., Kidd, C., Nelkin, E. J., Sorooshian, S. and Tan, J.: Algorithm Theoretical Basis Document ( ATBD ) Version 06 NASA Global Precipitation Measurement ( GPM ) Integrated Multi-satellitE Retrievals for GPM ( IMERG ), (January), 2020.  
Imhoff, R. O., van Verseveld, W. J., van Osnabrugge, B. and Weerts, A. H.: Scaling Point-Scale ( Pedo ) transfer Functions to Seamless Large-Domain Parameter Estimates for High-Resolution Distributed Hydrologic Modeling : An Example for the Rhine River, *Water Resour. Res.*, 1–28, doi:10.1029/2019WR026807, 2020.
- 670 De Jeu, R. A. M., Holmes, T. R. H., Parinussa, R. M. and Owe, M.: A spatially coherent global soil moisture product with improved temporal resolution, *J. Hydrol.*, 516, 284–296, doi:10.1016/j.jhydrol.2014.02.015, 2014.  
Joshi, S., Kumar, K., Joshi, V. and Pande, B.: Rainfall variability and indices of extreme rainfall -analysis and perception study for two stations over Central Himalaya, India, *Nat. Hazards*, 72(2), 361–374, doi:10.1007/s11069-013-1012-4, 2014.
- 675 Kimani, M. W., Hoedjes, J. C. B. and Su, Z.: An assessment of satellite-derived rainfall products relative to ground observations over East Africa, *Remote Sens.*, 9(5), doi:10.3390/rs9050430, 2017.  
Kirschbaum, D., Adler, R., Adler, D., Peters-Lidard, C. and Huffman, G.: Global Distribution of Extreme Precipitation and



- High-Impact Landslides in 2010 Relative to Previous Years, *Hydrometeorology*, 3, 1536–1551, doi:10.1175/JHM-D-12-02.1, 2012.
- 680 Kirschbaum, D., Stanley, T. and Zhou, Y.: Spatial and temporal analysis of a global landslide catalog, *Geomorphology*, 249, 4–15, doi:10.1016/j.geomorph.2015.03.016, 2015.
- Kirschbaum, D. B., Adler, R., Yang, A. E., Ae, H., Ae, S. H., Lerner-Lam, A., Kirschbaum, D. B., Lerner-Lam, Á. A., Adler, R., Hong, Y. and Hill, S.: A global landslide catalog for hazard applications: method, results, and limitations, , 52, 561–575, doi:10.1007/s11069-009-9401-4, 2010.
- 685 Marino, P., Peres, D. J., Cancelliere, A., Greco, R. and Bogaard, T. A.: Soil moisture information can improve shallow landslide forecasting using the hydrometeorological threshold approach, *Landslides*, (April), doi:10.1007/s10346-020-01420-8, 2020.
- Melillo, M., Brunetti, M. T., Peruccacci, S., Gariano, S. L., Roccati, A. and Guzzetti, F.: A tool for the automatic calculation of rainfall thresholds for landslide occurrence, *Environ. Model. Softw.*, 105, 230–243, doi:10.1016/j.envsoft.2018.03.024, 2018.
- 690 Mirus, B., Morphew, M. and Smith, J.: Developing Hydro-Meteorological Thresholds for Shallow Landslide Initiation and Early Warning, *Water*, 10(9), 1274, doi:10.3390/w10091274, 2018.
- Moeyersons, J.: A possible causal relationship between creep and sliding on Rwaza Hill, southern Rwanda, *Earth Surf. Process. Landforms*, 14(6), 597–614, doi:10.1002/esp.3290140615, 1989.
- 695 Monsieurs, E., Dewitte, O. and Demoulin, A.: A susceptibility-based rainfall threshold approach for landslide occurrence, *Nat. Hazards Earth Syst. Sci. Discuss.*, (November), 1–25, doi:10.5194/nhess-2018-316, 2018a.
- Monsieurs, E., Kirschbaum, D. B., Tan, J., Maki Mateso, J.-C., Jacobs, L., Plisnier, P.-D., Thiery, W., Umutoni, A., Musoni, D., Bibentyo, T. M., Ganza, G. B., Mawe, G. I., Bagalwa, L., Kankurize, C., Michellier, C., Stanley, T., Kervyn, F., Kervyn, M., Demoulin, A. and Dewitte, O.: Evaluating TMPA Rainfall over the Sparsely Gauged East African Rift, *J. Hydrometeorol.*, 19(9), doi:10.1175/JHM-D-18-0103.1, 2018b.
- 700 Monsieurs, E., Liesbet, J., Michellier, C., Tchangabo, B. J., Ganza, B. G., Bibentyo, M. T., Kervyn, M., Mateso, M. J.-C., Nkurunziza, P., Ndayisenga, A., Buzera, K. C., Nahimana, L., Wim, T., Demoulin, A., Kervyn, M. and Dewitte, O.: Landslide inventory for hazard assessment in a data-poor context: a regional-scale approach in a tropical African environment, *Landslides*, DOI 10.1007/s10346-018-1008-y, 2018c.
- 705 Monsieurs, E., Dewitte, O., Depicker, A. and Demoulin, A.: Towards a Transferable Antecedent Rainfall—Susceptibility Threshold Approach for Landsliding, *Water* 2019, Vol. 11, Page 2202, 11(11), 2202, doi:10.3390/W11112202, 2019.
- Mostbauer, K., Kaitna, R., Prenner, D. and Hrachowitz, M.: The temporally varying roles of rainfall, snowmelt and soil moisture for debris flow initiation in a snow-dominated system, *Hydrol. Earth Syst. Sci.*, 22(6), 3493–3513, doi:10.5194/hess-22-3493-2018, 2018.
- 710 Nsengiyumva, J. B. and Valentino, R.: Predicting landslide susceptibility and risks using GIS-based machine learning simulations, case of upper Nyabarongo catchment, *Geomatics, Nat. Hazards Risk*, 11(1), 1250–1277, doi:10.1080/19475705.2020.1785555, 2020.
- Nsengiyumva, J. B., Luo, G., Nahayo, L., Huang, X. and Cai, P.: Landslide susceptibility assessment using spatial multi-criteria evaluation model in Rwanda, *Int. J. Environ. Res. Public Health*, 15(2), doi:10.3390/ijerph15020243, 2018.
- 715 Owe, M., De Jeu, R. and Walker, J.: A methodology for surface soil moisture and vegetation optical depth retrieval using the microwave polarization difference index, *IEEE Trans. Geosci. Remote Sens.*, 39(8), 1643–1654, doi:10.1109/36.942542, 2001.
- Owe, M., de Jeu, R. and Holmes, T.: Multisensor historical climatology of satellite-derived global land surface moisture, *J. Geophys. Res. Earth Surf.*, 113(1), 1–17, doi:10.1029/2007JF000769, 2008.
- 720 Pavez, A. R.: The Potential of Satellite and Model Derived Variables for Rainfall-Induced Landslide Initiation Thresholds in Rwanda, Delft University of Technology. [online] Available from: <http://resolver.tudelft.nl/uuid:f0c57c4f-2597-44a6-a41a-1b6a5d75d155>, 2021.
- Peres, D. J., Cancelliere, A., Greco, R. and Bogaard, T. A.: Influence of uncertain identification of triggering rainfall on the assessment of landslide early warning thresholds, *Nat. Hazards Earth Syst. Sci. Discuss.*, 1–28, doi:10.5194/nhess-2017-328, 2018.
- 725



- Petley, D.: Global patterns of loss of life from landslides, *Geology*, 40(10), 927–930, doi:10.1130/G33217.1, 2012.
- Postance, B. and Hillier, J.: Comparing threshold definition techniques for rainfall-induced landslides : A national assessment using radar rainfall, *Earth Surf. Process. Landforms*, 560(August 2017), 553–560, doi:10.1002/esp.4202, 2017.
- 730 Prenner, D., Kaitna, R., Mostbauer, K. and Hrachowitz, M.: The Value of Using Multiple Hydro-meteorological Variables to Predict Temporal Debris Flow Susceptibility in an Alpine Environment, *Water Resour. Res.*, 54(9), 6822–6843, doi:10.1029/2018WR022985, 2018.
- Prenner, D., Hrachowitz, M. and Kaitna, R.: Trigger characteristics of torrential flows from high to low alpine regions in Austria, *Sci. Total Environ.*, 658, 958–972, doi:10.1016/j.scitotenv.2018.12.206, 2019.
- 735 Rodell, M., Houser, P. R., Gottschalck, J., Cosgrove, B., Radakovich, J., Walker, J. P., Lohmann, D. and Toll, D.: THE GLOBAL LAND DATA ASSIMILATION SYSTEM, *Am. Meteorol. Soc.*, (March), 2004.
- Saha, S., Moorthi, S., Wu, X., Wang, J., Nadiga, S., Tripp, P., Behringer, D., Hou, Y.-T., Chuang, H. and Iredell, M.: The NCEP climate forecast system version 2, *J. Clim.*, 27(6), 2185–2208, 2014.
- Sekaranom, A. B., Suarna, U. and Nurjani, E.: Climate extremes over the maritime continent and their associations with Madden-Julian Oscillation, *IOP Conf. Ser. Earth Environ. Sci.*, 451(1), doi:10.1088/1755-1315/451/1/012006, 2020.
- 740 Sidle, R. C., Greco, R. and Bogaard, T.: Overview of landslide hydrology, *Water (Switzerland)*, 11(1), 11–13, doi:10.3390/w11010148, 2019.
- Tank, A., Zwiers, F. and Zhang, X.: Guidelines on Analysis of extremes in a changing climate, *World Meteorol. Organ.*, (72) [online] Available from: [http://www.wmo.int/pages/prog/wcp/wcdmp/wcdmp\\_series/documents/WCDMP\\_72\\_TD\\_1500\\_en\\_\\_1.pdf](http://www.wmo.int/pages/prog/wcp/wcdmp/wcdmp_series/documents/WCDMP_72_TD_1500_en__1.pdf), 2009.
- 745 Thomas, M. A., Collins, B. D. and Mirus, B. B.: Assessing the Feasibility of Satellite-Based Thresholds for Hydrologically Driven Landsliding, *Water Resour. Res.*, 55(11), 9006–9023, doi:10.1029/2019WR025577, 2019.
- Thomas, M. A., Mirus, B. B. and Smith, J. B.: Hillslopes in humid-tropical climates aren't always wet: Implications for hydrologic response and landslide initiation in Puerto Rico, (February), 1–12, doi:10.1002/hyp.13885, 2020.
- 750 Uwihirwe, J., Hrachowitz, M. and Bogaard, T. A.: Landslide precipitation thresholds in Rwanda, *Landslides*, (December 2019), doi:10.1007/s10346-020-01457-9, 2020.
- Uwihirwe, J., Hrachowitz, M. and Bogaard, T.: Integration of observed and model derived groundwater levels in landslide threshold models in Rwanda, *Nat. Hazards Earth Syst. Sci.*, (August), 1–24, 2021.
- Valentino, R., Sobio, Y., Mizero, J. and Nsengiyumva, F.: Unstable road cut slopes and design of retaining structures in the Rwandan context, *Arab. J. Geosci.*, 2021.
- 755 Wang, S., Zhang, K., van Beek, L. P. H., Tian, X. and Bogaard, T. A.: Physically-based landslide prediction over a large region: Scaling low-resolution hydrological model results for high-resolution slope stability assessment, *Environ. Model. Softw.*, 1675(June), 104607, doi:10.1016/j.envsoft.2019.104607, 2019.
- Zhao, B., Dai, Q., Han, D., Zhang, J., Zhuo, L. and Berti, M.: Application of hydrological model simulations in landslide predictions, *Landslides*, 17(4), 877–891, doi:10.1007/s10346-019-01296-3, 2020.
- 760 Zhuo, L., Dai, Q., Han, D., Chen, N., Zhao, B. and Berti, M.: Evaluation of Remotely Sensed Soil Moisture for Landslide Hazard Assessment, *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.*, 12(1), 162–173, doi:10.1109/JSTARS.2018.2883361, 2019.

765

770



### Appendix A

775

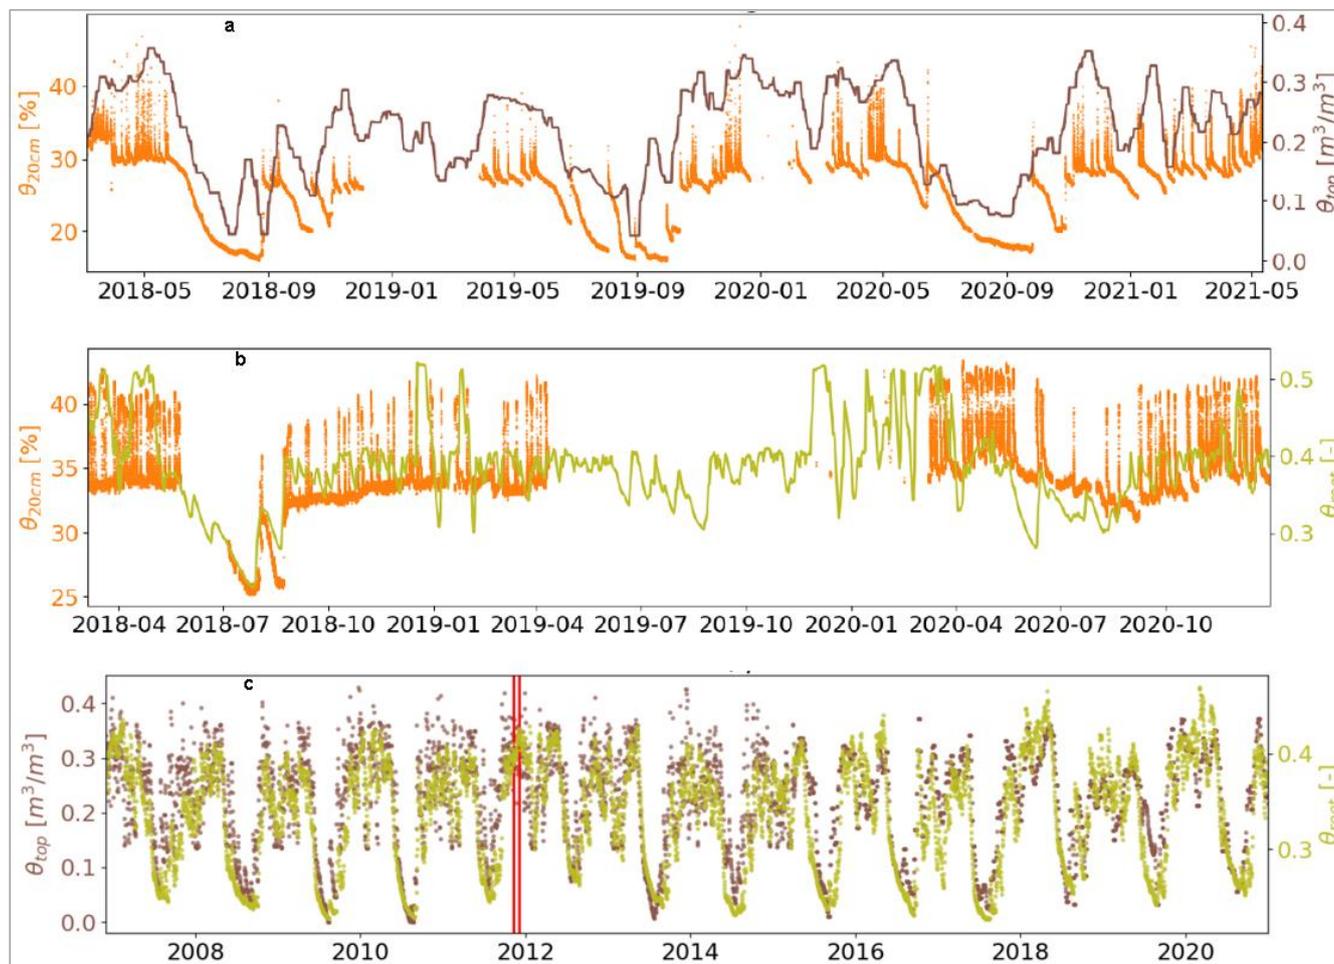


Figure A1. Selected examples of satellite and model-derived soil moisture compared to in situ recorded soil moisture at 20 cm soil depth (AWS): a)  $\theta_{top}$  and in situ  $\theta_{20cm}$  soil moisture time series at Gacurabwenge station; b) model-derived soil moisture in the root zone  $\theta_{root}$  and in situ soil moisture  $\theta_{20cm}$  at Kibisabo station; c) satellite derived  $\theta_{top}$  and model-derived soil moisture in the root zone  $\theta_{root}$  with vertical red lines indicate the timing of the landslide occurrence time

780