On the role of trans-lithospheric faults in the long-term seismotectonic segmentation of active margins: a case study in the Andes

Gonzalo Yanez C.[1], Jose Piquer R.[2], Orlando Rivera H.[3]

[1] Pontificia Universidad Católica de Chile, Av. Vicuña Mackenna 4860, Macl, Santiago, Chile, gyaneza@ uc.cl

[2] Instituto de Ciencias de la Tierra, Universidad Austral de Chile, jose.piquer@uach.cl

[3] Minera Peñoles de Chile, orlando_rivera@penoles.com.mx

Correspondence to: Gonzalo Yanez C. (gyaneza@ uc.cl)

Abstract. Plate coupling play a fundamental role in the way in which seismic energy is released during the seismic cycle. This process includes quasi-instantaneous release during megathrust earthquakes and long-term creep. Both mechanisms can coexist in a given subducting margin, defining a seismotectonic segmentation in which seismically active segments are separated by zones in which ruptures stop, classified for simplicity as asperities and barrier, respectively. The spatiotemporal stability of this segmentation has been a matter of debate in the seismological community for decades. At this regard, we explore in this paper the potential role of the interaction between geological heterogeneities in the overriding plate and fluids released from the subducting slab towards the subduction channel. As a case study, we take the convergence between the Nazca and South American plates between 18°-40° S, given its relatively simple convergence style and the availability of a high-quality instrumental and historical record. We postulate that trans-lithospheric faults striking at a high angle with respect to the trench behave as large fluid sinks that create the appropriate conditions for the development of barriers and promote the growth of highly coupled asperity domains in their periphery. We tested this hypothesis against key short- and long-term observations in the study area, seismological, geodetic, and geological, obtaining consistent results. If the spatial distribution of asperities is controlled by the geology of the overriding plate, seismic risk assessment could be established with better confidence.

1   Introduction

Subduction margins accommodate short-term (years to tens of years) and long-term (thousands to millions of years) deformation. The most evident effects of these two deformational behaviours are earthquakes (short-term) and mountain-building (long-term) (e.g. Avouac, 2007). The concept of the seismic cycle, introduced by Fedotov (1968) and further elaborated by Mogi (1977, 1985), identifies two stages: a long inter-seismic period (several tens of years), followed by a short co-seismic period (minutes at most) where the elastic energy stored

34   during the previous stage is released as an earthquake. For earthquake magnitudes in the range of Mw 7.5–9.5,

35   the observed mean slip displacement varies from 0.8–10 meters (Thingbaijam et al., 2017). Even though the

36   maximum mean slip in megathrust events is 10 meters, the zones of maximum slip, equated to asperities (e.g.,

37   Aki, 1984, Lay & Bileck 2007, Lay 2015) can reach 20–40 meters in wavelength patches in the range of 20–

38   100 kilometres (see, e.g., http://equake-rc.info/srcmod/). However, the release of elastic energy during the

39   seismic cycle only accounts for 90-95% of the deformation accumulated interseismically in convergent margins;

40   the remaining 5–10% produces permanent deformation in the overriding plate, expressed as crustal shortening

41   and mountain building (e.g. Yañez and Cembrano, 2004). This long-term process lasts for hundreds to

42   thousands of seismic cycles (time windows of millions of years). Therefore, both phenomena — earthquakes

43   and mountain building — are extreme responses to the same process: the convergence between oceanic and

44   continental plates.

45 The concepts of asperities and barriers were proposed by Lay et al. (1982) and Aki (1984) to describe the

46 process during the occurrence of an earthquake and intimately related to the concept of plate coupling More

47 recent studies (e.g. Bileck and Lay, 2007) propose a more complex mechanism at the subduction plate contact,

48 in which domains of unstable stick-slip state coexist with other domains in a conditionally stable stick-slip state,

49 and zones that develop aseismic slip/stable behaviour. These three states — unstable, conditionally stable, and

50 stable stick-slip behaviour — represent different slip modes that can be represented as asperities and barriers in

51 the old nomenclature (Scholz, 1990). However, the conceptualization of Bileck and Lay (2007) proposes an

52 along-dip (depth) distribution of the different slip behaviours: (1) aseismic-stable at depths of 5–10 kilometres,

53 (2) mostly conditionally stable at depths of 10–15 kilometres, and (3) unstable stick-slip behaviour (Brace and

54 Byerlee (1966) and Burridge and Knopoff (1967)) at depths of 15–25 kilometres. Recent studies on exhumed

55 subduction domains in California (Platt et al., 2018) corroborate this along-dip transition from seismic zone to

56 transition zone. One interesting characteristic of these domains is that unstable domains are generally

57 surrounded by conditionally stable domains and aseismic domains in their outermost periphery.

58 To date, there is no clear evidence on whether the geological/tectonic process(es) control to some extent these

59 seismogeneic behaviours and/or their stability across several seismic cycles or geological time frames. Potential

60 candidates already proposed include: (1) the roughness of the subducting plate (aseismic ridges, fracture zones,

61 horst/graben structures, etc.) (e.g. Bilek et al., 2003, Wang and Bilek, 2011; Gersen et al., 2015; Philibosian and

62 Meltzner, 2020; Molina et al., 2021); (2) fluid-controlled overpressure (Peacock, 1990; Safer and Tobin, 2011;

63 Safer, 2017; Menant et al., 2019); (3) the shape of the subducting plate (e.g. Gutscher et al., 1999); (4) the

64 geology of the overriding plate (i.e Kimura et al., 2018; Philibosian and Meltzner, 2020; Molina et al., 2021),

65 among others, including various combinations of these different possible factors.

66 The role of fluids released from the subducting slab has emerged as a first-order factor in the plate-coupling

67 processes at subduction margins. Direct observations (e.g., Saffer and Tobin, 2011; Tsuji et al., 2014, Moreno

68 et al., 2014) and numerical modelling (Menant et al., 2019) demonstrate that fluids released from the subducting

69 oceanic crust and subduction channel define segments at the plate-coupling zone with distinct pore pressure

70 characteristics. Overpressure domains are associated with zones of weak coupling, and strong coupling is

71 observed in the case of zones showing low pore pressure behaviour. The first type of domain is in direct

72 association with creep zones or slow slip events, while the other one is in direct association with locked zones,
73 or in the seismological nomenclature, the barrier and asperity domains, respectively. Seismic imaging of the
74 forearc wedge (e.g. Tsuji et al., 2014) and numerical modelling also show that fluids percolate upwards in the
75 zones of maximum overpressure, including the emplacement of serpentinite bodies along weak zones or faults.
76
77 In this paper, we propose a causal relationship between the presence of trans-lithospheric faults (TLF) in the
78 overriding plate and seismic segmentation, involving the control of TLF on the movement/storage/release of
79 overpressure fluids along and across the subduction zone. We use the Central Southern Andes as a case study,
80 as it is one of the most active seismogenic sites worldwide, is well studied, and has a relatively simple
81 subduction geometry (Hayes, 2018). In addition, recent structural and geophysical mapping has revealed the
82 role of TLF in the tectono-magmatic evolution of the continental margin of this region (e.g. Yañez et al., 1988,
83 Santibáñez et al., 2019; Cembrano and Lara, 2009; Melnick and Echtler, 2006; Yañez and Rivera, 2019; Piquer
84 at al., 2019, 2021a). We aim to demonstrate that the interaction between these TLF and the fluid circulating
85 through the subduction channel provides a simple first-order explanation for the Andean seismotectonic
86 organization through a long-lived geological control.

87 **2 Data and methods**

88 **2.1   Tectonic background**
89 The Nazca-South American plate convergence is a subduction-type margin that has been active in this segment
90 of the Andes since at least the Cretaceous without the accretion of new terrains (Mpodozis and Ramos, 1990).
91 Since 15 Ma, the convergence has been slightly oblique (E10°N) at a velocity of around 6.5 cm/yr (Angermann
92 et al., 1999). The age of the oceanic plate varies between 0 Ma at the triple junction of Taitao (44°S) to 45 Ma
93 at the Orocline bending of Bolivia (18°S) (Figure 1). A flat slab segment is located between 28°S and 33°S
94 latitude, affecting the development of an asthenospheric wedge landward and inhibiting the occurrence of active
95 volcanism since the last 5 Ma (Kay and Mpodozis, 2002). However, the Wadati-Benioff plane is roughly
96 homogenous in dip along the plate coupling between the Nazca and South American plates (Slab 2.0, Hayes,
97 2018). The roughness of the Nazca plate is affected by a progressively older oceanic crust northward, with some
98 fracture zones offsetting the plate, the subduction of a triple junction with an active spreading centre (now at
99 Taitao Peninsula), some episodic magmatic activity along the Juan Fernandez Ridge (33°S, Yáñez et al., 2001),
100 and eventually a smaller ridge at 20°S (Perdida Ridge, Cahill and Isacks, 1992). Overall, these features can be
101 described as minor obstacles to the subduction of a relatively young oceanic plate underneath a continental plate
102 in a highly coupled convergence margin (Section 2.5).
103
104 **2.2   Compilation of trans-lithospheric faults in the Andean active margin and their role as long-lived**
105 **high-permeability domains**

106 Trans-lithospheric faults (TLF) correspond to long-lived, high-angle fault systems, which have been identified
107 in several segments of the Andean margin, based on geological mapping (e.g. Santibañez et al. 2019; Cembrano
108 and Lara, 2009; Melnick and Echtler, 2006; Piquer et al., 2021a; Farrar et al., 2023; Wiemer et al., 2023), crustal
109 seismicity (e.g. Talwani, 2014,), a combination of indirect geophysical techniques (Yañez et al., 1998), or a
110 combination of all of these (Yañez and Rivera, 2019; Piquer et al., 2019; Pearce et al., 2020). The geometry and
111 depth extension of TLF is unknown, but based on their control of the continental-scale magmatic and
112 hydrothermal processes and their surface traces in the order of hundreds of kms, we consider that they involve,
113 exclusively, the whole lithosphere.

114   In Table 1 we present a synthesis of the current status of knowledge regarding TLF definition and the major
115 geological/geophysical evidences that described them. The number assigned in each case is used later on in
116 Figure 1 as an identificatory.

117 Detailed structural mapping in various segments of the Andean margin has provided direct geological evidence
118 for the presence of TLF. They are manifested in the field as networks of individual high-angle faults, defining
119 deformation zones with widths of up to several kilometres, and lengths in the order of hundreds of kilometres,
120 being possible to follow their trace across the entire continental margin (Lanza et al., 2013; Yáñez and Rivera,
121 2019; Piquer et al., 2021a). These fault networks correspond to the expression at the present-day surface of a
122 pre-existing TLF, as a result of its vertical propagation through Mesozoic and Cenozoic igneous and
123 sedimentary rocks (McCuaig and Hronsky, 2014; Piquer et al., 2019). Field observations also show that,
124 consistent with their high dip angle (commonly >60° and in several cases sub-vertical, although individual fault
125 segments can dip at slightly lower angles), TLF tend to be reactivated as basin-bounding faults during
126 extensional episodes, and are thus associated with violent changes in the stratigraphic record (Piquer et al.,
127 2015, 2021a; Yáñez and Rivera, 2019). They also control the distribution of exhumed basement blocks (Yáñez
128 and Rivera, 2019).

129 The geological record demonstrates that TLF are long-lived structures, which have played a major role in the
130 long-term evolution of the Chilean continental margin, being reactivated with different kinematics under
131 varying tectonic regimes. It is likely that several TLF were originated in the Proterozoic and the Palaeozoic
132 (Yáñez and Rivera, 2019); there is strong geological evidence suggesting the present-day TLF architecture was
133 already in place by the Permo-Triassic, a period in which these structures acted as master and transfer faults for
134 intra-continental rift systems (Niemeyer et al., 2004; Sagripanti et al., 2014; Espinoza et al., 2019). Syn-tectonic
135 emplacement of magma along TLF has been documented at least since the Jurassic (Creixell et al., 2011).

136 Geophysical support for the TLF architecture in the continental margin is provided by the geometry of magnetic
137 and gravimetric anomalies (Piquer et al., 2019; Yáñez and Rivera, 2019) and also by magnetotelluric data
138 (Pearce et al., 2020) and seismic tomography (Yáñez and Rivera, 2019). Evidence of seismic activity in some
139 of these TLF has been recorded, for example, a precursory event to the 9.3 Mw 1960 Valdivia Earthquake
140 (Lanalhue fault, Melnick et al., 2009), and the coseismic rebound associated with the 8.8 Mw 2010 Maule
141 earthquake (Pichilemu fault, e.g. Farías et al, 2011; Aron et al., 2013). Additionally, researchers have
142 documented a strong spatial relationship between a TLF and a major seismic swarm (Valparaíso seismic
143 sequence of 2017, Nealy et al., 2017) at the subduction megathrust (Piquer et al., 2021a).

144   Regarding the role of TLF as long-lived high-permeability domains, Yañez and Rivera (2019) postulated that

145   they represent weak lithospheric domains that favour fluid flow and the emplacement of different types of ore

146   deposits over large time periods (tens of millions of years), beginning with stratabound and IOCG-type deposits

147   in the Jurassic. A similar conclusion has been reached by Farrar et al. (2023) for the emplacement of porphyry

148   copper deposits of various ages, and by Wiemer et al. (2023) for gold-rich superclusters of various types of

149   mineral deposits. The strong relationship between the locations of TLF and those of giant ore deposits at specific

150   metallogenic belts has been discussed more specifically in the Andes of Northern (e.g., Chernicoff et al., 2002)

151   and Central Chile (e.g., Piquer et al., 2016) and neighbouring regions in Argentina. Similarly, there is a well-

152   established relationship between the locations of TLF and volcanic/geothermal activity in the Andes of Southern

153   Chile (e.g., Cembrano and Lara, 2009). Moreover, high Vp/Vs ratios that were documented during the

154   Pichilemu seismic sequence following the 2010 Maule earthquake have been interpreted as strong evidence of

155   fluid migration (Farías et al., 2011, Calle-Gardella et al., 2021).

156   Various authors have discussed how the type of magmatic-hydrothermal product and fluid flow regime varies

157   depending on the orientation of a specific high-angle fault system (in several cases, a TLF) relative to the

158   predominant stress tensor (Lara et al., 2006; Cembrano and Lara, 2009; Roquer et al., 2017; Piquer et al.,

159   2021b). Of particular relevance is the orientation of the fault system relative to the maximum stress ($\sigma1$); if the

160   fault system is sub-parallel or strikes at a low angle relative to $\sigma1$, it is well-oriented for opening and reactivation

161   respectively, allowing the rapid ascent of magma and hydrothermal fluids through different crustal segments.

162   On the other hand, if the fault system is sub-perpendicular or strikes at a high angle relative to $\sigma1$, it would be

163   poorly oriented or misoriented for reactivation and would promote the storage of magma and hydrothermal

164   fluids at depth (e.g. Cembrano and Lara, 2009; Stanton-Yonge et al., 2016; Piquer et al., 2021b). In the latter

165   case, a requirement for fault reactivation and the release of the accumulated fluids is that supra-lithostatic fluid

166   pressures are achieved; once this occurs, the fault system would allow the discharge of the accumulated fluids

167   towards upper crustal levels and would act as a fluid pump ("fault-valve behaviour"), concentrating fluids in

168   the fractured areas within the fault system and leading to the depletion of fluids in the surrounding regions

169   (Sibson, 1990, 2020; Cox, 2016). These fluid discharge events cause seismic swarms (Cox, 2016), which

170   concentrate at the base of the high-angle fault system (Sibson, 2020).

171   Figure 1 presents the main array of NW- and NE-striking TLF observed in the Andean margin; their seaward

172   trend has been extrapolated following the observed trend in the continental lithosphere, in particular south of

173   36□S, following the trace of submarine canyons.

174

175   Table 1: Main Trans-Lithospheric Faults of the Chilean Andes (17-42°S Latitude)

176

LSS_ID	LSS_NAME	REFERENCES	GEOLOGICAL EVIDENCES
1	Visviri	(15), (22)	(L)(TLS)(SC)(GVA), Antofalla Basement (T)
2	Arica	(15), (21), (22)	Arequipa Massif (T), ETL NW Arica (TLS)
3	Camarones	(22)	(TLS)(GVA)(SDGU)
4	Iquique	(22)	(TLS)(GVA)(SDGU)
5	Calama	(1), (2), (8), (20), (21), (22), (24)	Comache (F), Calama-Olacapato-El Toro (L)(FS)(VA), Solá (F), Chorrillos (F), ETL NW Calama (TLS)
6	Mejillones-Llullaillaco	(8), (10), (21), (22), (29), (35)	Archibarca (L)(VA), Cataclasitas de Sierra de Varas (DZ), ETL NW Mejillones (TLS), Socompa (FS)
7	Agua Verde-Exploradora	(8), (22)	Culampajá (L)
8	Antofagasta-Conchi	(22), (27), (28), (30)	Antofagasta-Calama (L)(PMG)(TR)(STMH)
9	Taltal-Potrerillos	(8), (22)	Taltal (L)(TLS)(SDGU)(VA)(STMH)
10	Chañaral	(8), (22)	(TLS)(GVA)(SDGU)
11	Copiapó	(22)	(TLS)(SDGU)
12	Vallenar	(22)	(TLS)(SDGU)
13	Domeyko	(22), (36)	(TLS)(GVA)(SDGU), Cruzadero (F)
14	Vicuña	(22)	(TLS)(GVA)(SDGU)
15	Andacollo	(22)	(TLS)(GVA)(SDGU)(STMH)
16	Punitaqui-Los Pelambres	(22)	(TLS)(GVA)(SDGU)(MA)(STMH)
17	El Potro	(22)	(TLS)(SDGU)
18	Illapel	(22)	(TLS)(GVA)(SDGU)
19	Almendrillo	(22)	(TLS)(GVA)(SDGU)
20	La Ligua-Los Andes	(21), (22), (31)	(TLS)(GVA)(SDGU)(SC)(MA), Río Blanco-Los Bronces (FS)(STMH)
21	Valparaíso-Volcán Maipo	(3), (5), (7), (19), (21), (22), (23), (26)	Piuquencillo (F)(FS)(STMH), Melipilla (F)(MA), Marga-Marga (FS), Valparaíso-Curacaví (FS)(STMH), Concón (MDS), Cartagena (MDS), El Tabo (MDS)
22	Pichilemu	(9), (17), (22), (23), (24), (25)	Pichilemu (ATS), Teno (FS)(SC)(STMH), Planchón-Peteroa (LLBS)(SC)
23	Laguna del Maule	(32), (33)	Río Maule (F)(VA)(SDGU)(STMH)
24	Iloca-Rio Melado	(34)	Laguna Fea (FS)(VA)(STMH)
25	Aconcagua-San Antonio	(4), (6), (22), (23), (31)	Puangue (F), Estero Chacabuco (F), Estero Colina (F), El Salto (FS)(STMH)
26	Volcán Quizapu	(33)	(VA)(MDS)
27	Parral-Bullileo	This study	(VA)(SDGU)
28	San Carlos-Nevados de Chillán	(12), (17), (18)	Chillán (AZ), Nevados de Chillán-Tromen (LLBS), Cortaderas (L)
29	Lanalhue-Volcán Villarrica	(11), (14), (16), (17), (24)	Morguilla (FLS), Lanalhue (F)(FS), Villarrica-Quetrupillán-Lanín (LLBS)
30	Tirúa-Pitrufquén	(11), (16)	Mocha-Villarrica (FS)
31	Rio Calle Calle-Lago Ranco	(13), (17)	Carrán-Los Venados (LLBS), Futrono (F)
32	Puerto Saavedra-Volcán Callaqui	(18)	Copahue-Callaqui (AZ)
33	Osorno-Volcán Calbuco	This study	(VA)
34	Ancud-Volcán Michimahuida	(17)	Michimahuida (LLBS)
35	Cucao-Chaitén	(17)	Chaitén (LLBS)
36	Chacao-Osorno-Puntiagudo	(17)	(VA)

Abbreviations: (ATS) Andean Transverse System; (AZ) Accommodation Zone; (DZ) Deformation Zone; (F) Fault; (FLS) Fault-line Scarp; (FS) Fault System; (GVA) Gravimetric Anomaly; (L) Lineament; (LLBS) Long-Lived Basement Structures; (LLTF) Long-Lived Transverse Fault; (MA) Magnetic Anomaly; (MDS) Mafic Dike Swarm; (PMG) Paleomagnetism; (SC) Seismic Cluster; (SDGU) Structural Discontinuity of Geological Units; (T) Terrane; (TLS) Translithospheric Structures; (TR) Tectonic Rotations; (STMH) Syn-Tectonic Magmatic-Hydrothermal Centers; (VA) Volcano Alignment.
Reference Keys: (1) Salfity, 1985; (2) Marrett et al., 1994; (3) Gana et al., 1996; (4) Wall et al., 1996; (5) Yáñez et al., 1998; (6) Wall et al., 1999; (7) Rivera & Cembrano, 2000; (8) Chernicoff et al., 2002; (9) Sernageomin, 2003; (10) Niemeyer et al., 2004; (11) Haberland et al., 2006; (12) Ramos & Kay, 2006; (13) Lara et al., 2006; (14) Glodny et al., 2008; (15) Ramos, 2008; (16) Melnick et al., 2009; (17) Cembrano & Lara, 2009; (18) Radic, 2010; (19) Creixell et al., 2011; (20) Lanza et al., 2013; (21) Rivera, 2017; (22) Yáñez & Rivera, 2019; (23) Piquer et al., 2019; (24) Santibáñez et al., 2019; (25) Pearce et al., 2020; (26) Piquer et al., 2021a; (27) Arriagada et al., 2003; (28) Peña, 2010; (29) Richards et al., 2013; (30) Palacios et al., 2007; (31) Piquer et al., 2015; (32) Kohler, 2016; (33) Fischer, 2021; (34) Torres, 2021; (35) Farrar et al., 2023; (36) Giambiagi et al., 2017.

177

178

179

180
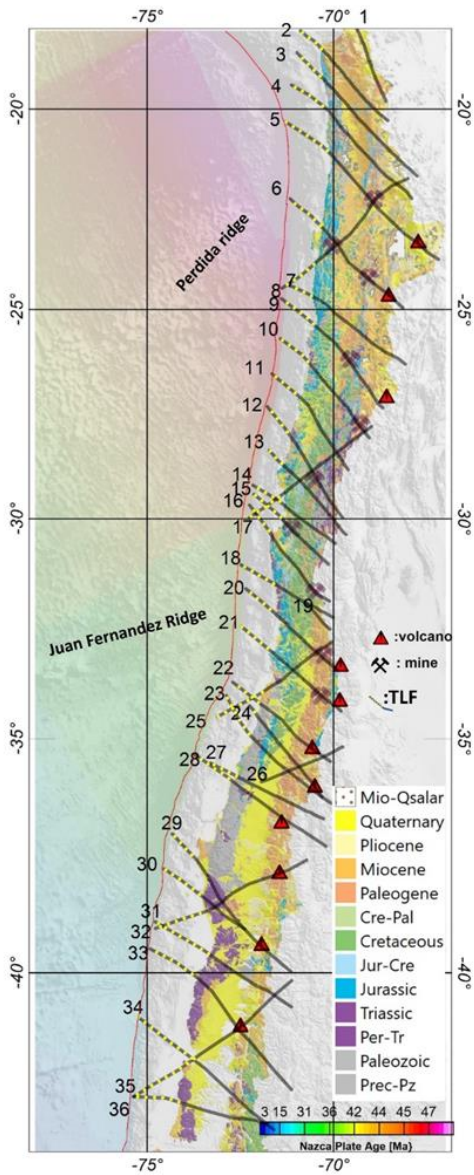
Figure 1: The spatial distribution of trans-lithospheric faults (TLF) over the regional geology of the Chilean continental margin (from SERNAGEOMIN, 2003). The traces of the TLF's are based on the models of Yáñez and Rivera (2019) and Piquer et al. (2019) in Northern and Central Chile, and after the model of Melnick and Echtler (2006) in Southern Chile. Also shown are the locations of the main ore deposits (from north to south, Chuquicamata, Mantos Blancos, Escondida, Salvador, Cerro Casale, El Indio, Andacollo, Los Pelambres, Río Blanco-Los Bronces and El Teniente), and active volcanoes (from north to south, Láscar, Llullaillaco, Ojos del Salado, Tupungatito, Maipo, Planchón-Peteroa, Laguna del Maule, Chillán, Callaqui, Villarrica and Osorno) to show their correspondence with the TLF array. TLF are extended until the trench, following their main trend and the canyons trace to the south of 36□S, using segmented red lines to highlight the uncertainty of this offshore extension. In the seaward side of the figure, the age map of Müller et al. (2019) is included with the bathymetry of the seafloor

191

2.3   Historic seismicity and Slip solutions during the last 50 years Trans-lithospheric faults (TLF)
correspond

The historic seismic record in the region is short, extending from the start of the Spanish Colonization in the region (present territories of Perú and Chile, circa 1500 ac). Compilations of historic seismicity and subsequent interpretation to assess the magnitude and longitudinal extension of the events have been provided in Ruiz and Madariaga (2018) and Scholz and Campos (2012), among others. Figure 2, panel A, includes all the historic events described by these authors, as well as events above 7 Mw from the USGS catalogue. As noted by several authors (Ruiz and Madariaga, 2018, and references therein), there is evidence of seismo-tectonic segmentation in the historic record. For the present analysis, we define seven domains from north to south; the boundary between domains is defined by a region of roughly 100-200 kilometres that represents the uncertainty in the rupture length of the major events. We consider wider boundaries for the cases of lacking information, in particular in the northern area where the historic record is scarce. Domain I, in the northernmost part of the study region, shows a sequence of events close to magnitude 8 Mw and separated by 100–150 years. Domain II has no large events (above 8 Mw) in the historic record, instead having a series of intermediate events of magnitude 7–7.7 Mw between 1960 and 2020. Domain III has two events with magnitudes in the range 8.3–8.5 Mw separated by almost 10 years, but with a current seismic gap of 100 years. Domain IV is less than 200 kilometres in length and includes a series of seismic events of magnitude 8 Mw or above. According to Ruiz and Madariaga (2018), the three major events in this domain show relatively consistent recurrence times (60–80 years) and magnitudes (8–8.4 Mw), namely, the earthquakes of 2015 (Illapel, 8.3 Mw), 1943, and 1880. Domain V is also relatively small, about 300 km, and includes regular events of around magnitude 8 Mw, including the Valparaiso 1985 8 Mw event and the 1906 8.4 Mw event. Domain VI, VII and VIII include part of the Maule 2010 8.8 Mw and Concepción 1835 8.6 Mw events, but are defined as such based on some less than 8 Mw events, Domain X, the southernmost domain, is dominated by the giant events of Valdivia 1960, 9.5 Mw, and 1737, 9.0 Mw.

Adequate seismic coverage is available since 1985 in Chile. In this period, six large earthquakes have been recorded: Valparaiso 1985, 8.0 Mw (Comte et al., 1986; Mendoza et al., 1994); Antofagasta 1995, 8.0 Mw (Ruegg et al.; 1996, Delouis et al., 1997; Pritchard et al., 2002 and Chlieh et al., 2004); Tocopilla 2007, 7.8 Mw (Schurr et al., 2012); Maule 2010, 8.8 Mw (Delouis et al., 2010; Lay et al., 2010; Vigny et al., 2011; Koper et al., 2012; Ruiz et al., 2012; Moreno et al., 2012; Lorito et al., 2011; Lin et al., 2013; Yue et al., 2014); Iquique 2014, 8.2 Mw (Ruiz et al., 2014; Hayes et al., 2014; Schurr et al., 2014; Lay et al., 2014), and Illapel 2015, 8.3 Mw (Melgar et al., 2016; Heidarzadeh et al., 2016; Li et al.,2016; Lee et al., 2016; Satake and Heidarzadeh, 2017). Given the large size of the Valdivia 1960 earthquake (9.5 Mw), we also include slip estimates for this event based on surface deformation data (Barrientos and Ward, 1990). The slip distribution of these events ranges from 1 meter (e.g. Tocopilla 2007, Antofagasta 1995), several meters (e.g. Illapel 2015, Iquique 2014), and more than 10 meters (Valdivia 1960, Maule 2010); however, in Figure 2, panel B, we normalize the slip

227 distribution with respect to the corresponding maximum slip in each case, plotting over the slab surface to

228 highlight its spatial distribution. This approach aims to highlight the zones of maximum slip in each case and

229 to appreciate their spatial and temporal distribution, under the working hypothesis that they represent the zones

230 of maximum slip and are most likely a good proxy to identify asperities in the plate contact zone. These

231 maximum slip zones are generally distributed between the TLF network (Figure 2).

232
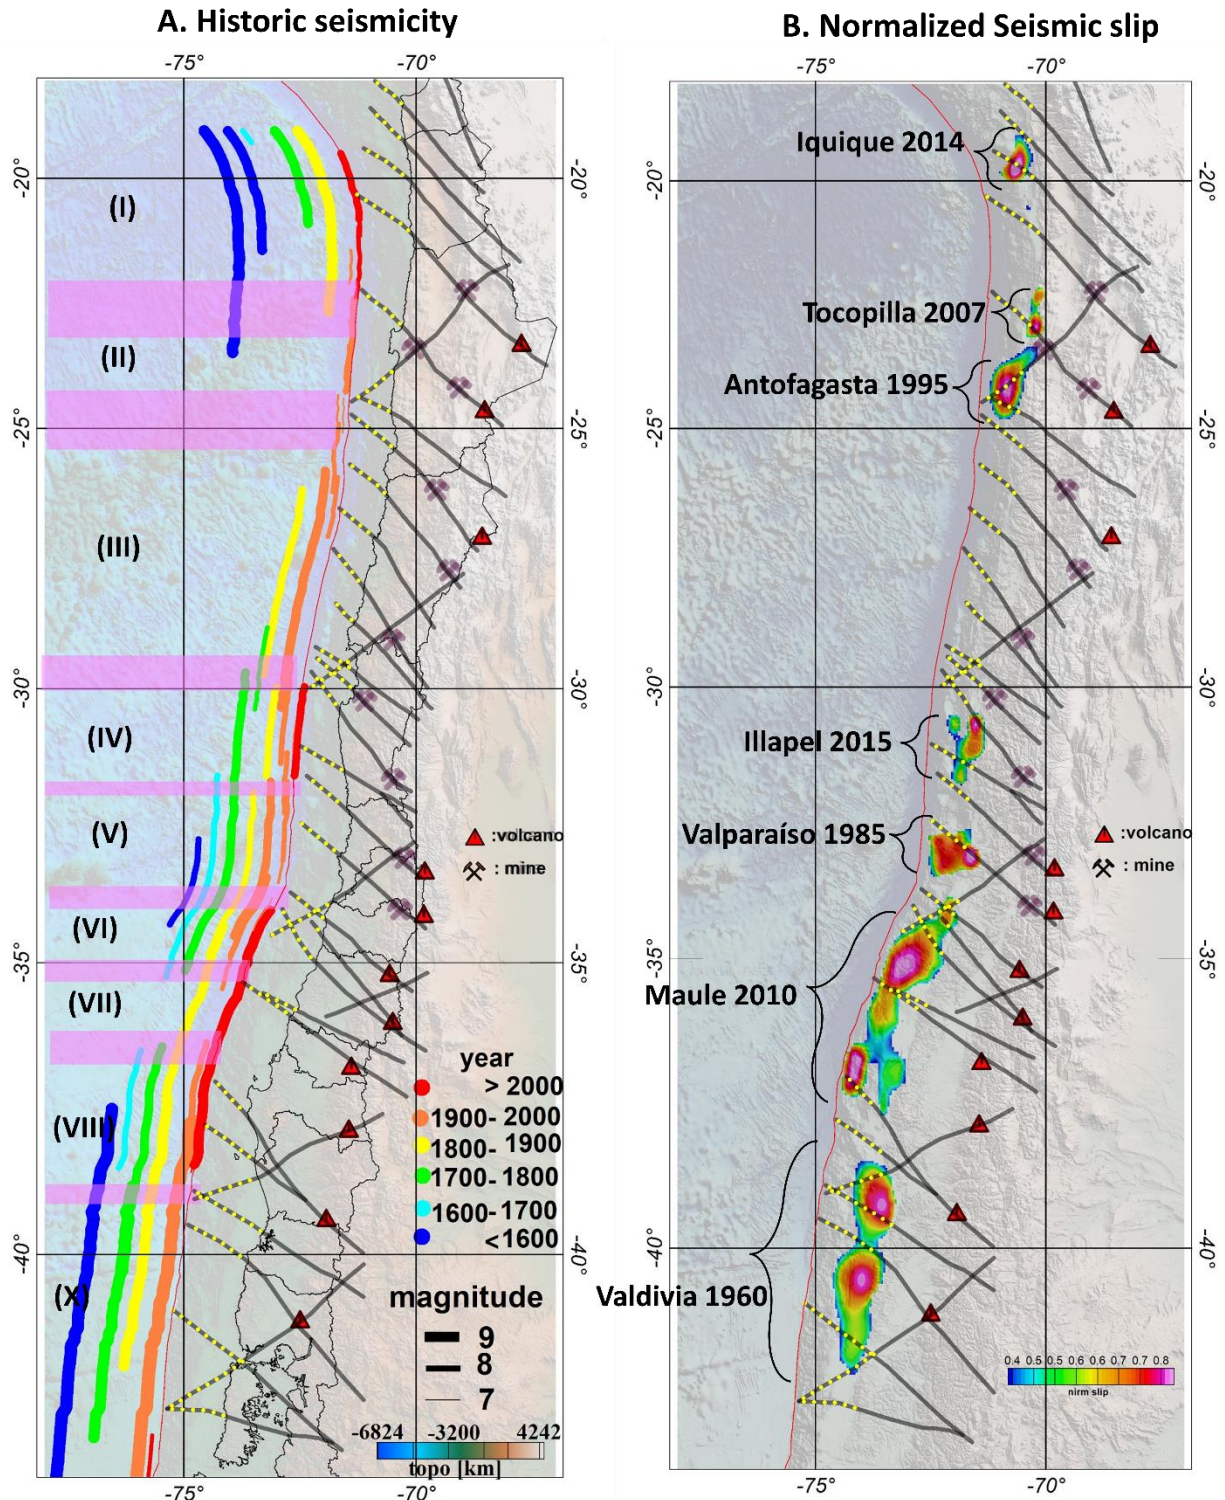
Figure 2: Panel A: historical seismicity from the years 1450 to 2020 (for a full description of each event, see Table A.1 of the supplementary material). The lateral extent of each event indicates the NS estimate of the event name; the colour scale corresponds to the year window of each event; the Mw magnitude in represented by the width of the line. Seismo-tectonic segmentation is indicated by pink semi-transparent ribbons, which are extended downwards to the lower panels. Panel B: zones of maximum slip in the megathrust events registered at the margin of Chile since 1960, colour code represents a normalized slip to the maximum slip in each event.

2.4   Cumulative seismic spatial distribution in the last 20 years

The seismic activity, apart from its spatiotemporal distribution around megathrust events (occasionally with foreshocks and normally with a hyperbolic distribution of aftershocks in time (Omori's law), shows some clustering (denominated in general as seismic swarms), that may be triggered by aseismic creep events (Forsyth et al., 2003; Roland and McGuire, 2009) associated with the presence of fluids in the fault zone. In the Andean plate convergence margin, recent studies also show examples of seismic swarm distribution attributable to fluid pore-pressure processes (e.g. Poli et al., 2017, Pasten-Araya et al., 2018). To contextualise the spatial distribution of this seismicity, we compute a normalised seismic density distribution along the margin for the last 20 years in which the seismic network is complete above magnitude 3 Mw. We exclude most of the seismicity associated with major thrust events in this period, filtering out the events at distances of less than 200 kilometres from the rupture zone in a temporal window of 200 days. We acknowledge that this 20-year time window is too short to obtain a broad and complete picture of the distribution of swarms along the margin. However, as swarms normally last for just a few weeks or 1–2 months at most, the cases observed in this time window provide insights into their spatial distribution. The data used in this analysis were obtained from the database of the National Seismological Centre (CNS in Spanish). We selected data attributable to the seismogenic plate contact within a 10-kilometre-thick volume following the slab 2.0 Wadati-Benioff plane (Hayes 2018). The seismic density distribution is shown in Figure 3A, panel A, we can see that seismicity tends to cluster in the vicinity of the seaward projection of the TLF.

2.5   Distance from the trench to the shelf brake

Saillard et al. (2016), show that peninsulas along subduction zones cost lines present a long-term permanent coastal uplift that can be associated with creep and aseismic slip domains. Thus, distance from the trench to the coast (DTC) constitutes a proxy to separate seismotectonic segmentation due to the weak plate coupling. The physics behind this proposal lies in the dragging force that subduction force induces on the overriding plate, thus with less traction (weak plate coupling in the long term), the fore-arc region close to the trench should be shallower than the surroundings. To gain a broader perspective of the peninsula's distribution, Figure 3B contours the distance to the shelf brake, which is probably a better proxy for a potential uplifted domain in the coastal region. As shown in this figure, the DTC presents variations along the trench. We identify domains of short DTC associated with peninsulas in the region near to: Arauco; Valparaíso; Tongoy; Punta de Choros; and Mejillones. Based on geological and geochronological evidence in three of these peninsulas (Mejillones, Tongoy, and Arauco), Saillard et al. (2016) determined uplift rates in the range of 0.6–2 meters per thousand years in the associated terraces. These terraces have been continuously uplifting for at least the last 0-5–0.8 Myr, indicating a long-term process compared to the seismic cycle of less than 500 years. Using this evidence, in addition to the inter-seismic GPS coupling, Saillard et al. (2016) infer that these peninsula zones are associated with weak plate coupling where deformation is mostly accommodated by creep. Again, qualitatively speaking, there is a tendency to find peninsula distribution where TLF tend to concentrate in the coastal region.

279
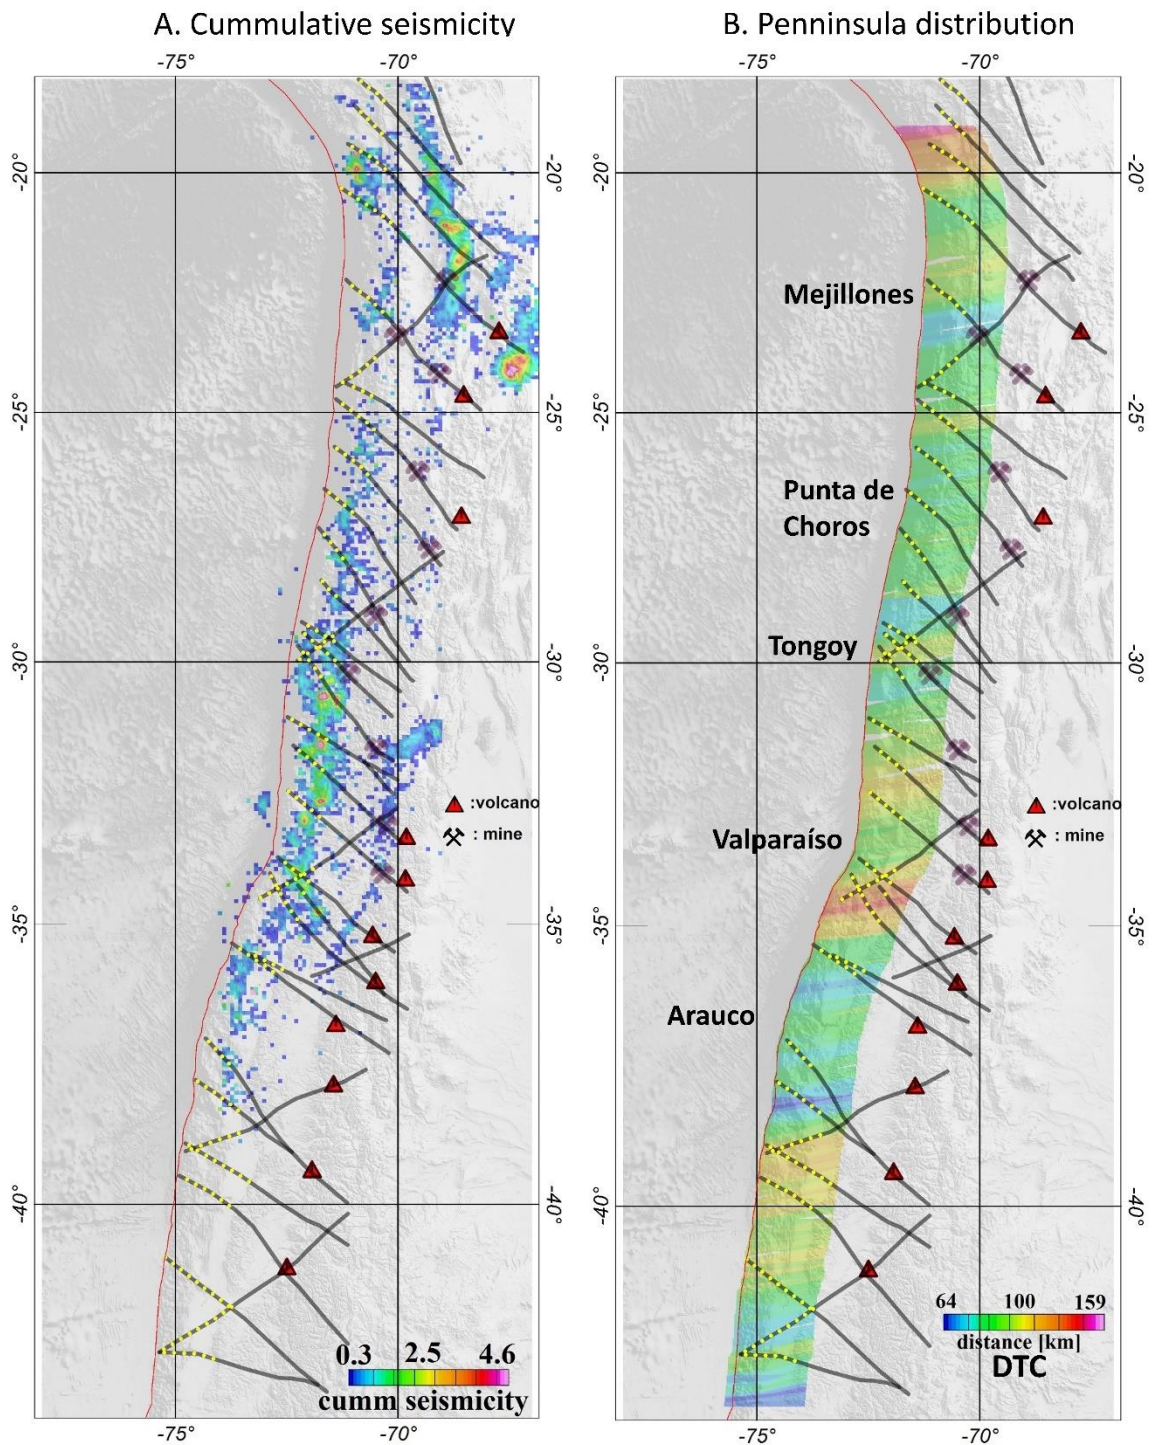
280
281 **Figure 3: Panel A: density distribution of the last 20 years of seismicity in the margin (data from National**
282 **Seismological Centre, CSN); values are normalized to better define the zones where seismicity has been**
283 **concentrated, filtering out all the aftershocks associated with major megathrust activity (Taltal 2001, Maule 2010,**
284 **Iquique 2014, and Illapel 2015). Panel B: distance from the trench to the shelf brake, projected to the convergence**
285 **direction (10E).**

286
287

2.6 Viscous coupling

The negative free-air anomaly along the Chile-Perú Trench is the response to dynamic equilibrium between buoyancy and tectonic forces (Yáñez and Cembrano, 2014). The tectonic force tends to drag the continental plate downwards, whereas buoyancy restores this deformation. Assuming equilibrium between the net tectonic force and the long-term deformation (flow in continuum physics) the observed bathymetry represents this force equilibrium. Therefore, for each bathymetric observation, a given Slip Layer Viscosity (SLV) (Wdowinski, 1992) allows a match between observations and long-term viscous plate coupling. Using the methodology developed by Yáñez and Cembrano (2004), we determine the along-strike SLV in the Nazca-South America plate convergence region, considering across-strike profiles every 20 kilometres. As indicated earlier, zones of maximum slip involve wavelengths larger than 20 kilometres for the megathrust events, and therefore, a sample interval of 20 kilometres ensures appropriate along-strike resolution. In addition, following the same rationale and conclusions of Yáñez and Cembrano (2004), we estimate that the increase of the SLV in the north of the study area is due to a temperature-dependent rheology. This increase in viscous plate coupling in the north is likely to be responsible for the larger crustal shortening observed in the southern Andes in the last 20 Ma. Although other authors (e.g. Lamb and Davies 2003) consider that the deficiency in sedimentary supply in the trench in the northern Andes is the driving mechanism for the larger viscous plate coupling in the region. However, this discussion is beyond the scope of the present work, and since the viscous plate coupling correctly represents the observations we are interested here in the short-wavelength viscous plate response as a potential tool to identify zones with different degrees of coupling along the convergent margin. Therefore, we remove this regional viscous plate coupling to isolate short-wavelength features. This residual slip layer viscosity (RSLV) is included in Figure 4A (see a full discussion in Supplement A). This signal shows positive (high relative viscous plate coupling) and negative (weak relative coupling) zones. Again, we use normalized values to highlight the spatial distribution of the signal. In the supplementary material, we present a full description of the modelling used to obtain the RSLV signal. As the modelling is 1D, we extend the result of each model along the strike of the convergence (10°E).

2.7 Inter-seismic GPS coupling

GPS data provide information on the surface deformation relative to a stable continental reference. During the inter-seismic period, the slip velocity at the intraplate contact, Vinter-seismic, can be determined from a GPS network under the assumption of elastic plate deformation (e.g. Okada, 1985). This inter-seismic velocity depends on the degree of plate coupling, ϕ. At maximum plate coupling (ϕ=1), Vinter-seismic is null, and at minimum plate coupling (ϕ=0), Vinter-seismic is equal to the convergence velocity (Vconvergence) (e.g. Nuvel1a, De Mets, et al., 1994). Or, mathematically (e.g. Metois et al., 2012), Vinter-seismic=(1-ϕ)* Vconvergence. Inter-seismic GPS coupling is presented as GPS locking data in Panel B of Figure 4 (based in a compilation of GPS information derived from different sources, Burgmann et al., 2005; Chlieh et al., 2008; Loveless & Meade, 2011; McCaffrey et al., 2002; Metois et al., 2012, 2016; Moreno et al., 2010, 2012; Wallace et al., 2004)). For the segment between Antofagasta and Copiapo (24-28°S), two new GPS plate coupling models are available (Yáñez-Cuadra et al., (2022) and González-Vidal et al., (2023)), however, we noticed that these new results share similarities do not depart significantly with the model presented in Figure

326 4b, and is therefore not necessarily thus are not included in this case. From 27°S to the north, high GPS plate

327 coupling is generally observed, although some correspondence is observed with the local minimum and TLF

328 distribution. Between 27°–33°S, the GPS coupling shows domains with lower values with better

329 correspondence with TLF segmentation and the minimum in viscous coupling. To the south of 33°S, the GPS

330 plate coupling shows a spatial distribution that again shows some coincidence with the other proxies, but also

331 some discrepancies.   This is not surprising, since GPS inter-seismic plate coupling reflects the quasi-

332 instantaneous coupling of seismo-tectonic segments at different loading stages. Nevertheless, in most of the

333 studied segments, the GPS plate coupling correlates relatively well with the viscous plate coupling, and the

334 location of peninsulas and cumulative seismicity in the last 20 years.

335

336
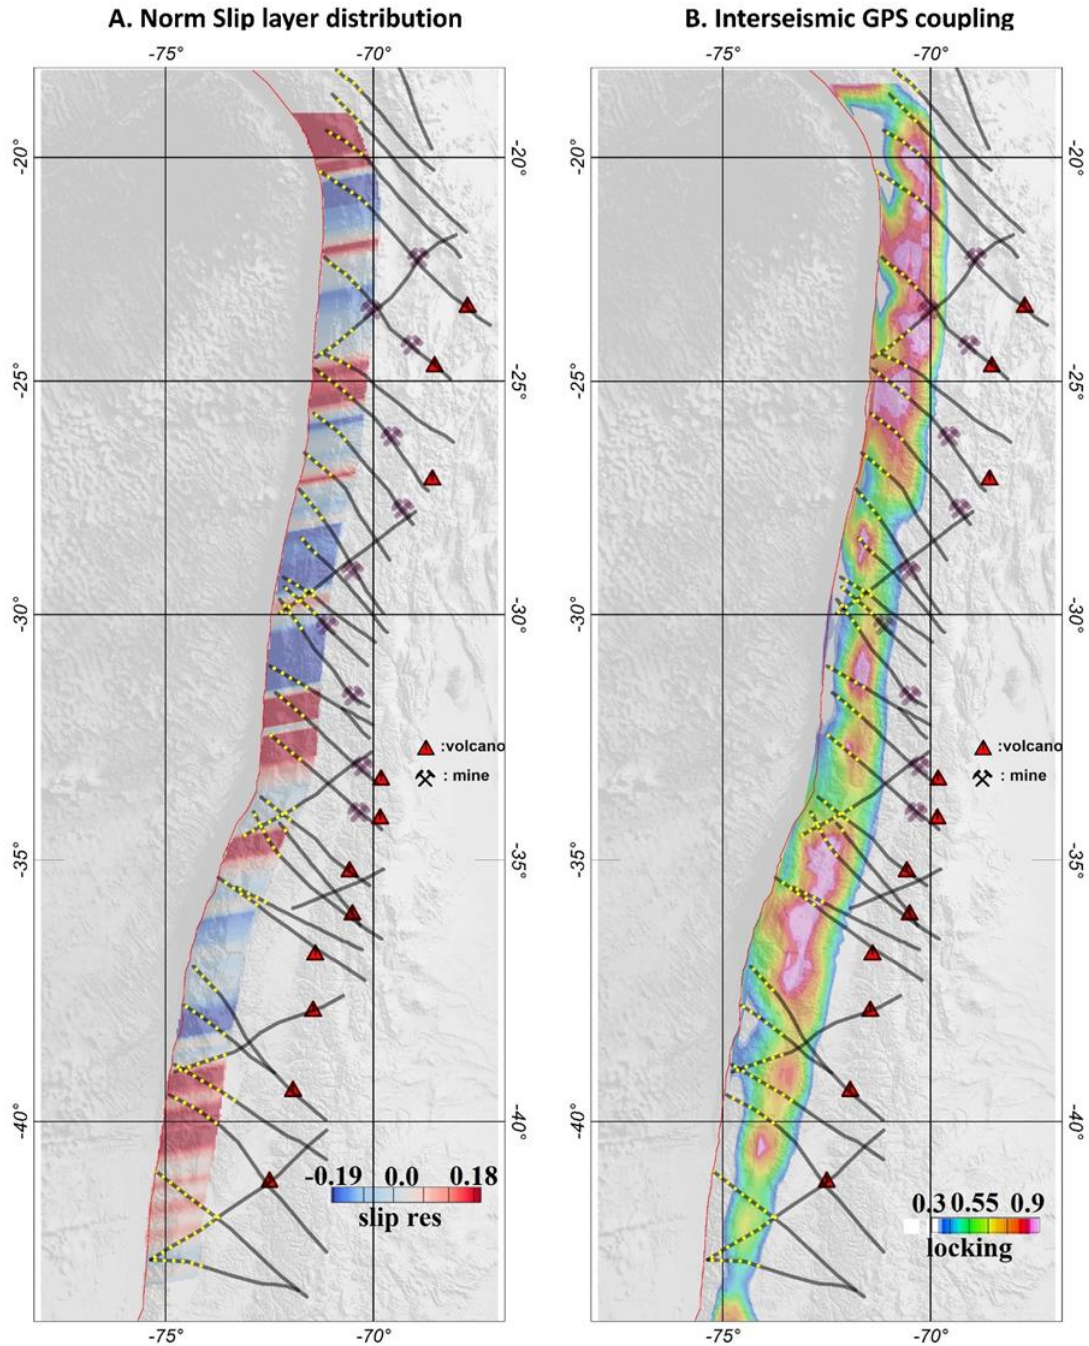
Figure 4: Panel A: Normalized Residual slip layer viscosity (RSLV) derived from 1D modelling along profiles
separated every 10 km and oriented along the Nazca-South American plate convergence (10ºN); as this model
involves all of the slip layer, its spatial distribution is represented from the trench until 150 km landward, high
relative coupling is associated with high residual slip viscosity (see details of this computation in Supplement A) .
Panel B: GPS inter-seismic plate coupling, model 2017 (Burgmann et al., 2005; Chlieh et al., 2008; Loveless &
Meade, 2011; McCaffrey et al., 2002; Metois et al., 2012, 2016; Moreno et al., 2010, 2012; Wallace et al., 2004).
Locking is restricted to the range between 0.3 to 0.9, in order to enhance the relative coupling along the plate
coupling zone.

3. Discussion

3.1 Quantitative correlation between TLF and plate coupling proxies derived from seismicity distribution, GPS and viscous coupling and coastal morphology.

In order to better quantify the correspondence between the spatial distribution of TLF and the indirect estimate of plate coupling described in chapter 3 we present here an objective comparison between them. This task is challenging, taking into consideration the poorly constrained data used: (a) in some cases, regional-scale geological observations (TLF and peninsula distribution); (b) different time-scale coupling estimates (inter seismic GPS locking and long term viscous coupling); (c) poorly resolved GPS solution offshore; (d) 1D modelling of viscous coupling; and (e) The lack of completeness in the seismicity record (historical record of 500 years, instrumental record of megathrust events of 50 years, and cumulative seismicity of 20 years) considering a seismic cycle of a couple of hundred years in the margin. Thus, none independent proxy is capable to produce a reliable estimate by itself, but rather a combination of them. Therefore, a thorough analysis is beyond the capabilities of the data source, and what we present here, though quantitative, should be understood as a guide to determine tendencies from different and independent perspectives that as a whole, provide a more robust estimate on the link between TLF and plate coupling in the margin.

The approach adopted considered the spatial correlation between TLF and the six proxies described in chapter 3, using the Pearson correlation coefficient between two variables (rxy) defined as:

$$r_{xy} = \frac{\sum_{i=1}^{n}(x_i - \bar{x})(y_i - \bar{y})}{\sqrt{\sum_{i=1}^{n}(x_i - \bar{x})^2 \sum_{i=1}^{n}(y_i - \bar{y})^2}} \tag{1}$$

Where $\bar{x}$ and $\bar{y}$ are the average value of each variable. This function r_{xy} has values between -1 (opposite correlation) to 1 (direct correlation). Values near zero mean weak or null correlation. In the application of the Pearson correlation in this case, the spatial distribution of TLF is always the x_i, and the 6 proxies used in this case are the y_i in each case. A key property of the Pearson correlation coefficient is its invariance to spatial distribution of samples and scale of the two variables. This property is particularly useful in this case where we are trying to correlate very different proxies in terms of spatial distribution and scale. The correlation is performed in moving windows bins of 32x32 km^2, with an overlap of 50% between correlation estimate. The correlation is calculated in a domain of 140 km width from the trench to the east, the plate coupling zone where short-term and long-term processes take place.

TLF are defined as line traces, but in order to spatially correlate them with the other variables, we add a width, considering potential spatial uncertainties and zones of influence. Thus, the width of each TLF is treated as a gaussian with a value of 1 in the centre and 0 at the edge, located at 10 km from the centre, representing the deformation zone and the lateral surface covered by the potential fluid release. Such a width of 20 km seems a reasonable number for a fault system of more than 100km length (>20%). In fact, in recorded earthquakes, like the Landers earthquake 1992 (Mw 7.3) where a rupture length of 85 km has been determined, with a shear deformation zone of 12-16 km (Perrin et al., 2020). Outside the TLF domains a value of -1 indicate no spatial distribution of TLF, but in practice is not relevant because the correlation is focussed inside the TLF domain

381 only. The other six proxies are treated in different manner, depending on its nature. GPS plate coupling is a

382 spatial variable covering the whole spatial range of the coupling. Looking at the GPS coupling described in

383 Figure 4b, we can see that most of the plate contact is highly coupled, well above 0.6 almost everywhere, thus

384 in order to identify some differences in coupling we setup the mean value at 0.8. Slip viscosity layer and distance

385 from the shelf brake to the trench are single values varying with latitude which are extended to spatial variables

386 projecting the value landward following the convergence direction ($\sim$10°E). In the case of the slip coupling a

387 mean value is already removed, thus a mean value of 0 is considered. For the shelf brake-trench distance we

388 use the average separation of 100km as the mean value. Seismic cumulative density and slip distribution of

389 megathrust events define restrictive domains along the plate coupling region. These areas are normalized

390 between 1 and zero, and outside the region a value of -1 is assigned (no data). The same procedure is used for

391 the boundary between historic seismicity segmentation, value 1 in the transition, and -1 outside. Since the

392 analysis is restricted to the correlation between TLF's and the six proxies, the correlation only concerns the

393 inner part of the TLF. Given the nature of each proxy, a low coupling at a given TLF implies a negative Pearson

394 correlation at GPS and viscous coupling, distance from the shelf brake to the trench, and slip distribution for

395 megathrust events (maximum slip should lie outside the TLF domain). On the contrary, positive Pearson

396 correlation is expected with the historic segmentation and cumulative seismicity, to reflect low coupling at the

397 TLF domain.

398 The results for each Pearson correlation coefficient spatial distribution are presented in Figure 5 in a

399 plan view. In Figure 6 we present the result for the 32 relevant TLF in terms of the histogram obtained for the

400 Pearson correlation inside the corresponding TLF domain. Over the histograms observations we include an

401 interpretation on the correspondence with a low plate coupling condition, depending on the shape of the

402 histogram, positive (Pearson correlation biased to the left in GPS, VISC, DIST, SLIP histograms; and biased to

403 the right in the CUMM and HIS histograms), unclear (flat for all the proxies) and negative (Pearson correlation

404 biased to the right in GPS, VISC, DIST, SLIP histograms; and biased to the left in the CUMM and HIS

405 histograms) correlation. Based on this analysis we qualify the potential of each TLF in terms of its barrier

406 potential, high, ambiguous, and poor. The criteria to stablish this qualification considers the following: (a) high

407 potential: at most one correlation is negative and by majority are positive correlation; (b) ambiguous: at most

408 two correlations are negative and at least one correlation is positive; (c) poor: when more than three correlations

409 are negative or none of them are positive.

410 Some relevant conclusions arise from the spatial analysis of Figure 5 and histograms of Figure 6:

411 1. From the 32 relevant TLF in terms of plate coupling, 63% (20 of 32) show a high potential for a

412 barrier behaviour, 31% (10 of 32) presents some ambiguity, and only 6% (2 of 32) TLF show a poor

413 chance to become a barrier domain.

414 2. For the case of ambiguous potential, almost all of them present at least 2 positive correlation proxies.

415 3. For individual histograms, 54% histograms show a positive correlation, 28% are considered

416 ambiguous, and 18% present a negative correlation.

417   4.   Five out of seven seismotectonic boundary segments present a strong correlation with TLF spatial
418   distribution (Figure 5a). In terms of particular histogram distribution, 11 out of 13 show a positive
419   correlation and none of them show a negative correlation.

420   5.   The cumulative interseismic seismicity (Figure 5a), perhaps the weakest proxy due to the lack of
421   seismic completeness due to the very restricted time window of observation, still shows an almost
422   100% direct correlation with the TLF traces where inter-seismic activity developed (TLF 14-15-16,
423   TLF 18-20, TLF 22). In terms of the histogram distribution, shows a rather similar pattern, some
424   clear positive correlation in 6 out 18 TLF and a none conclusive solution in 12 out 18 cases.

425   6.   The spatial distribution of the slip zones of the main megathrust events recorded in the last 50 years,
426   show a minimum positive correlation with the spatial distribution of TLF. As we can see in Figure
427   5b, less than 20% of the total slip domains, potential zones of asperities, correlate positively with
428   TLF. The most conspicuous case against the rule is the slip zone of the Antofagasta 1995 that cut
429   two TLF (7: Agua Verde-Exploradora, and 8: Antofagasta-Chonchi) and partially the Tocopilla
430   2007 event (Mejillones-Llullaillaco TLF 6). Two complementary explanations are proposed in this
431   case: (1) both are small events (8Mw) compared to the other megathrust events, (2) not necessarily
432   all TLF behave as barriers all the time. For the case pf Iquique 2014 event, the seaward extension of
433   of Iquique TLF is not well constrained, and most likely run straight from landward segment, leaving
434   the slip zone entirely to the south of TLF 4. The remaining 80% lies outside the zone of influence
435   of TLF. In the histogram distribution, the same pattern is observed, 57% of negative Pearson
436   correlation (or positive correlation in terms of low plate coupling), 26% of ambiguous solution and
437   17% positive Pearson correlation. It is important to note that in several histograms of this proxy a
438   positive correlation is adopted when a low flat response is observed, but in the left side there is a
439   single column saturated at the maximum value for correlation -1 (most of the TLF is empty, or in
440   other words the slip zone lies outside the TLF domain).

441   7.   In the GPS plate coupling-TLF Pearson correlation coefficient (Figure 5b) 50% of the cases show a
442   negative correlation (low relative coupling), whereas 30% show some mix results, with the negative
443   correlation concentrated in the deeper parts of the coupling, and only in 20% of the cases a positive
444   correlation holds, mostly concentrated in the coupling zone of the Antofagasta 1995 and Tocopilla
445   2007 earthquakes, and probably linked with some post seismic effects. Consistently, in 18 out of 32
446   (56%) histograms responses (Figure 6), the low coupling correlation is observed, whereas in 10 out
447   of 32 (31%) the response is ambiguous, and the remaining 13% is associated with relatively high
448   GPS coupling. We acknowledge that these values are very much conditioned by the choice of the
449   threshold of 80% to separate high to low GPS coupling, but the aim is to identify less coupled
450   domains in a signal almost saturated with high values.

451   8.   The same type of analysis was performed for the Slip Layer viscosity – TLF Pearson correlation
452   coefficient (Figure 5c). In 50% of the case the correlation is opposite (low viscosity slip zones

453   corresponds with the location of TLF). In 15% of the cases, we observed mixed results, whereas in

454   35% of the cases the correspondence is positive. Similar results are obtained with histogram

455   responses (Figure 6), in 17 out of 32 (53%) the low coupling correlation is observed, whereas in 6

456   out of 32 (19%) the response is ambiguous, and the remaining 28% is associated with relative high

457   slip viscosity. One important limitation of this approach is the 1D approximation of an inherently

458   3D process. This fact is probably the main reason for its relatively low positive response compared

459   to the other proxies. Finally, figure 5c show the Pearson correlation coefficient for the distance from

460   the shelf brake to the trench. In this case, the closest shelf brake to the trench at TLF intersection is

461   a 36%, the same number of cases show an opposite behaviour and only 28% presenting mixed

462   results. In terms of the histogram distribution (Figure 6), the same tendency is observed, but with a

463   higher predominance of shorter distance shelf brake-trench (44%), whereas the opposite is observed

464   in 34% of the cases and 22% show an ambiguous response. This is the proxy that show the lowest

465   level of positiveness, probably due to the fact that other processes are also involved in the uplift of

466   the peninsula regions, for instance the density of the crust and its relative buoyancy.

467   As we point out earlier in the text, none of the proxies by itself have the merit to account for the degree of

468   coupling along the subduction zone, and the results emanated from the Pearson correlation demonstrate that.

469   However, when we integrated the individual results 63% of the TLF can potentially behave as barrier, and only

470   in two cases (6%) chances are poor. In the remaining 31% of the cases, represented as ambiguous cases, there

471   are still some evidences of positive correlations in more than one proxy. In Figure 5a, panel A, we include a

472   reference for the TLF with high potential to become a barrier (green arrow), and we can see that in almost all

473   the cases they are consistent with the tectonic segmentation derived from the historic seismicity. One peculiar

474   distribution of potentially active barrier domains is observed between 25°-30° S, the zone with less historical

475   seismicity (Figure 2). On the other hand, not necessarily all the TLF behave as barriers, due to lack of favourable

476   orientation, depth extent, age, dip angle, fluid content among other uncertainties. Therefore, we consider that

477   the previous semiquantitative analysis including all the proxies, support the presence of a geological signal of

478   low plate coupling when TLF is present. In the next section we propose a conceptual mechanism to explain

479   this phenomenon.

480

481
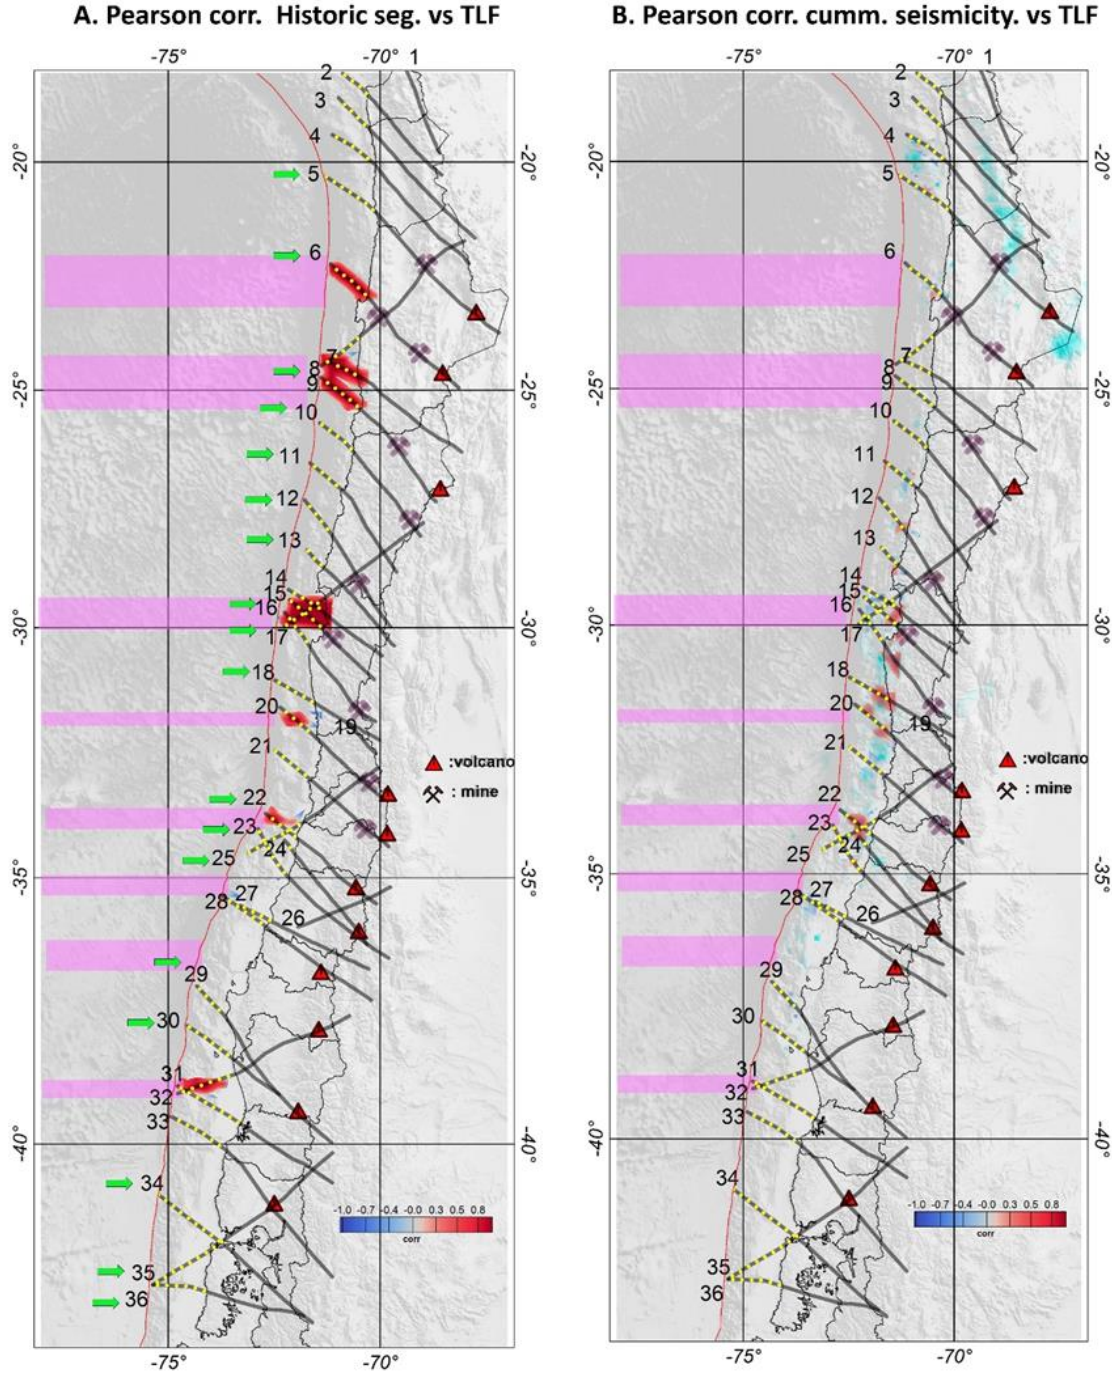
Figure 5a: Pearson correlation coefficient between TLF and (A) tectonic segmentation (from Figure 2a) and (B) cumulative seismicity (from Figure 3a). Colour code range from -1 (opposite correlation, blue colours) to 1 (direct correlation, red colours). In panel A the green arrow shows the TLF with high potential as a barrier, according with the criteria stablished from histograms distribution of Figure 6. Correlation is only determined in the vicinity of TLF.

487
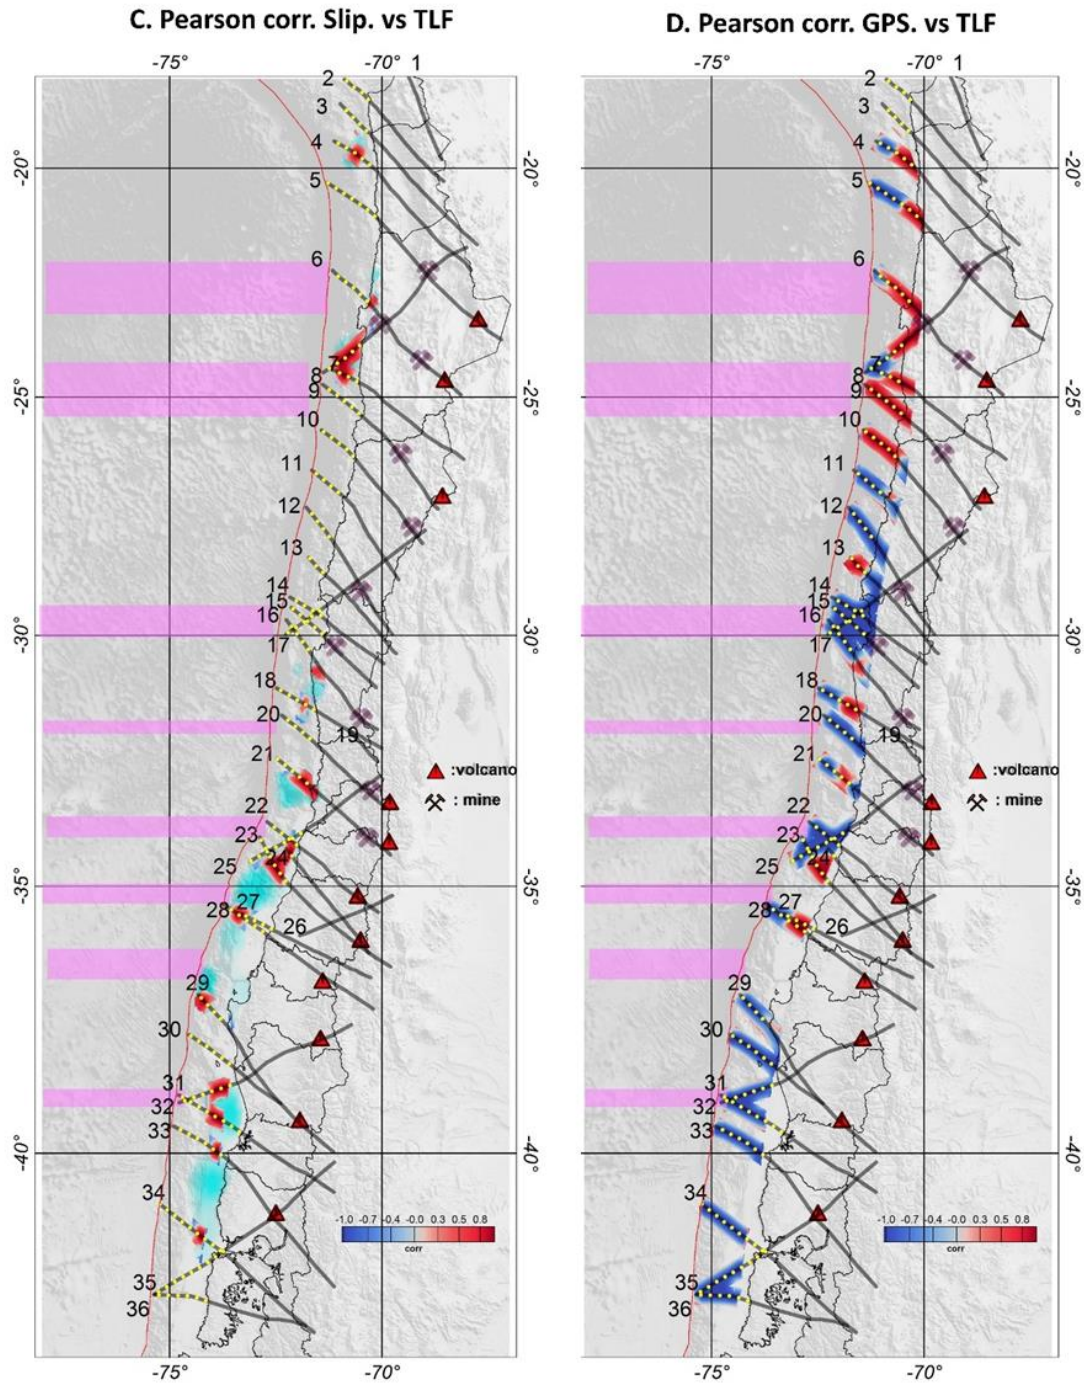
488
489 **Figure 5b: Pearson correlation coefficient between TLF and (c) normalized seismic slip (from Figure 2b) and (d)**
490 **GPS coupling (from Figure 4b). Colour code range from -1 (opposite correlation, blue colours) to 1 (direct**
491 **correlation, red colour). Correlation is only determined in the vicinity of TLF.**
492
493

494
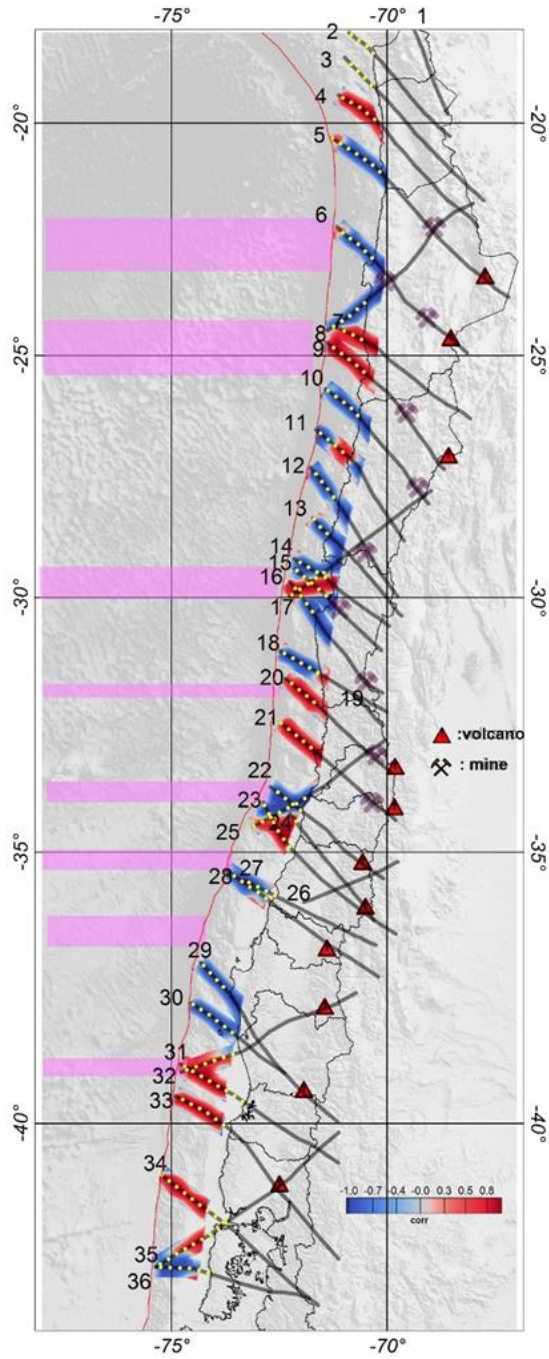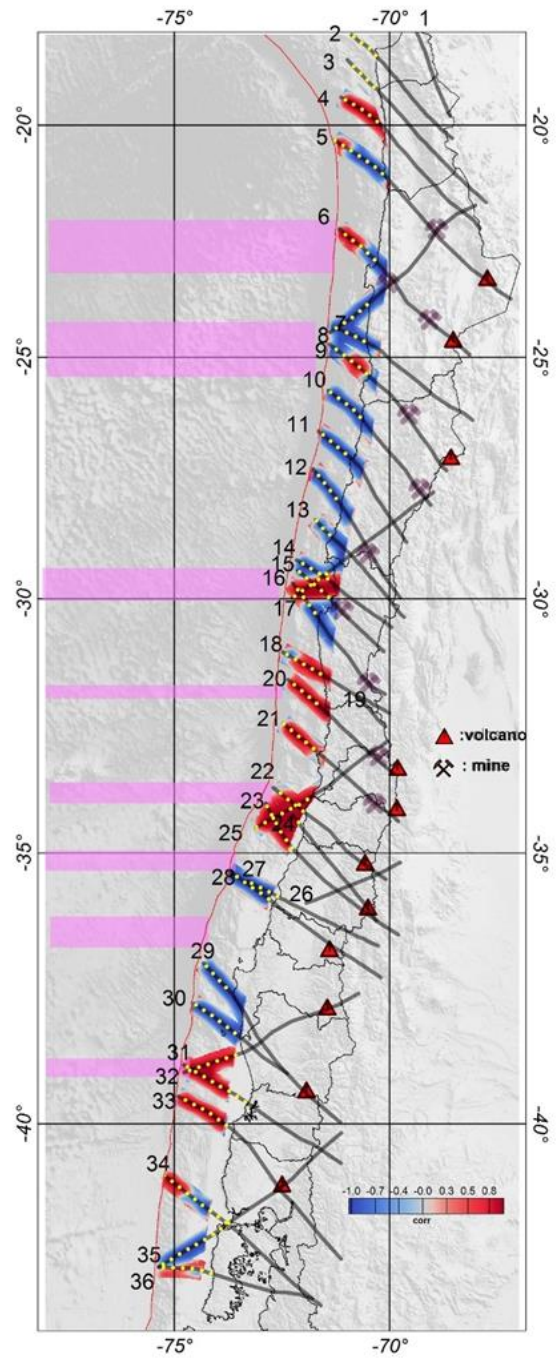
495 **Figure 5c: Pearson correlation coefficient between TLF and tectonic slip viscosity (from Figure 4a) (e), and distance**
496 **from the trench to the shelf brake (from Figure 3b) (f). Colour code range from -1 (opposite correlation, blue colour)**
497 **to 1 (direct correlation, red colour). Correlation is only determined in the vicinity of TLF.**

498
499
500
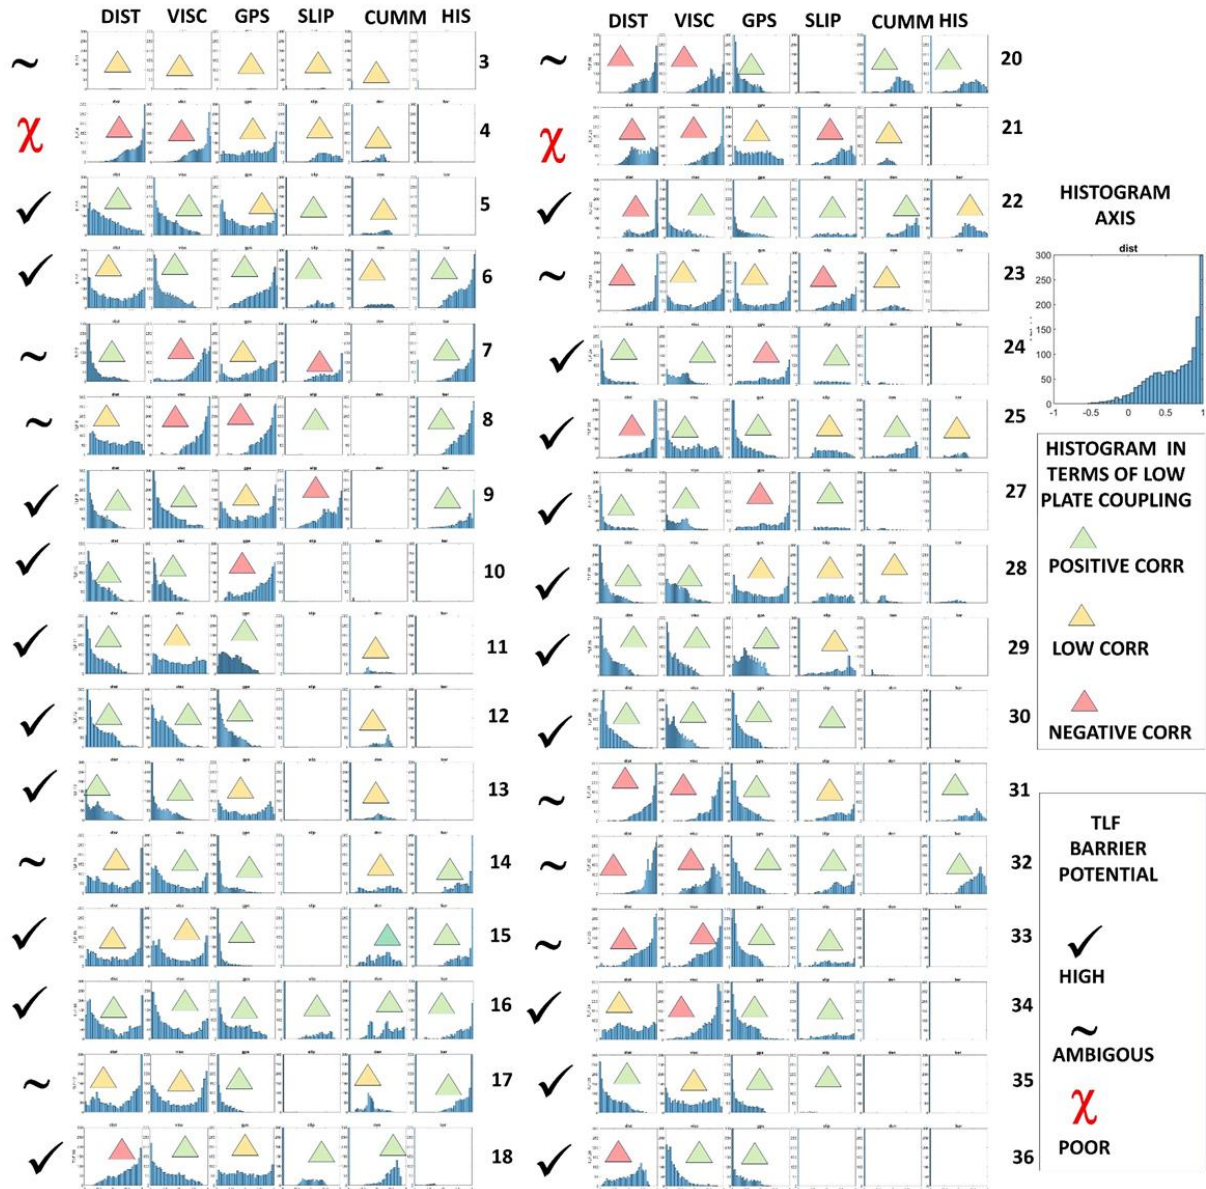
501
502 **Figure 6: Histogram diagrams for Pearson correlation in each TLF (six histograms for each TLF). Histogram**
503 **interpretation and TLF qualification as a potential barrier is indicated in inlet. TLF number is indicated to the left**
504 **of each panel (a good resolution of this image is provided in the supplementary material). Correlation type is**
505 **indicated by triangles in each histogram, while the estimate TLF barrier potential high to poor is indicated by**
506 **symbols in the left side of each histogram.**
507
508

3.2 A simple conceptual barrier model: misoriented TLF as a store/released of fluids during the seismic cycle.

Comparing the spatial distribution of the seaward extension of the TLF and the previously discussed first-order conditioning factors of the tectonic segmentation in the Andes (chapter 2), and the cross correlation described in section 4.1, we can make the following conclusions:

1. The coastal termination of an TLF generally occurs close to a peninsula, where the shortest trench–coast distance is observed, in spatial correspondence with zones of negative RSLV (weak viscous coupling), and in some cases also corresponding to zones of weak GPS coupling. However, it should be noted that the degrees of coupling inferred via RSLV and GPS do not map similar observation time windows, covering geological (Ma) vs seismic cycle (300–500 years) time frames, respectively.

2. During the last 60 years, slip displacements during the major megathrust earthquakes in the margin of Chile tend to be bounded by the coastal termination of an TLF in their northern and southern boundaries. Thus, if these slip zones represent a spatial distribution of asperities, the TLF correspond to zones potentially associated with barriers, consistent with the long-term low coupling inferred from RLSV, GPS plate coupling and distributions of peninsulas. the previous long-term observations.

3. Cumulative seismic activity in the last 20 years tends to nucleate in the vicinity of the seaward termination of the TLF, normally with the development of seismic swarms of 100–300 events of medium to low magnitudes during periods of several weeks at most.

4. The geological record demonstrates that TLF are long-lived structures of high permeability in comparison with the surrounding crust and most likely the underlying mantle as well, and are thus potentially efficient fluid storage structures.

The previous observations provide the grounds to propose a simple conceptual model to understand the role played by TLF in the tectonic segmentation of a convergent margin. These observations consistently show that TLF in the seismogenic zone are spatially correlated with long-term and short-term evidence of weak coupling behaviour. The long-term evidence involves geological processes that build up during many seismic cycles, over a time frame of millions of years, including low values of slip-layer viscosities and correspondence with the spatial distribution of peninsulas. The short-term evidence involves fragments of the seismic cycle over a time frame of less than 500 years, characterized by weak coupling zones as inferred by inter-seismic GPS observations, the flanks of slip zones of recent mega-thrust events, and the boundaries that delimit the historical record of major events. Overall, these observations consistently show that TLF domains are likely candidates for barrier zones.

From basic principles, the strength of a fault is controlled by the friction at the discontinuity plane. According to Amonton's law, the fault strength is proportional to the product of the normal stress and the static or dynamic friction (e.g. Scholz, 1990). In the presence of fluids, pore pressure reduces the normal stress, thereby reducing the strength of the fault (e.g. Scholz, 1990), eventually to zero if the pore pressure reaches the lithostatic pore

545 pressure. Under these supra-lithostatic fluid pressure conditions, even faults that are strongly misoriented for

546 frictional reactivation under the prevailing stress field can be reactivated, focusing the discharge of large

547 amounts of overpressured fluids and acting as a "fault-valve" (Sibson, 1990; Cox, 2016). Indeed, Cox (2016)

548 showed that, under supra-lithostatic fluid pressure conditions, the typical seismic response in the faults

549 corresponds to microseismic swarms, which, according to Sibson (2020), would concentrate at the roots of the

550 fault system. In the case of an TLF, which is a long-lived structure transecting the whole lithosphere (e.g., Lutz

551 et al., 2022), the root of the fault system at the Andean convergent margin corresponds to the subduction

552 channel. Low fault strength at subduction zones can be equated to barrier zones where convergence is mostly

553 accommodated by creep and/or micro-seismicity. The hydration of the subducting slab during its bending in the

554 outer rise region has been widely documented in different subduction margins (e.g., Holbrook et al., 1999;

555 Shillington et al., 2015; Contreras-Reyes et al., 2007; Moscoso and Grevemeyer, 2015; Ranero and

556 Sallarès, 2004; Fujie et al., 2018, among others), as has the slab's subsequent dehydration during subduction

557 (Barriga et al., 1992; Maekawa et al., 1993; Peacock, 1993). Mantle hydrous phases (serpentinites) have also

558 been observed in forearc regions at subduction margins (e.g. Hyndman and Peacock, 2003; Xia et al., 2015;

559 Hansen et al., 2016), further demonstrating that subduction systems transport large amounts of water; however,

560 the amount of water transported is still unknown (Miller et al. 2022). On the other hand, fluid flow in porous

561 media is governed by Darcy's law, in the opposite direction to the hydraulic head and proportional to the

562 hydraulic permeability. Numerical models (Menant et al., 2019) have been used to determine the path of

563 overpressured fluid flow along the subduction channel, and how strong/weak frictional channels condition the

564 flow (weak frictional channel zones percolate more water upwards compared to strong frictional channel zones).

565 These two domains determine the location of weak and strong coupling zones at the plate contact. Thus,

566 according to basic principles and numerical models, water concentrates in zones of high permeability.

567 The geological record on land shows that, in the Andean margin, TLF are associated with ore deposits

568 clustered at the intersection of magmatic arcs that become progressively younger eastward (Piquer et al.,

569 2016; Yáñez and Rivera, 2019; Piquer et al., 2021a; Farrar et al., 2023; Wiemer et al., 2023), covering the full

570 tectono-magmatic history during the Mesozoic and Cenozoic. Local seismic networks deployed in Northern

571 and Central Chile also show alignments of seismic activity along some TLF systems (Yánez and Rivera,

572 2019; Piquer et al., 2019, 2021a; Sielfeld et al, 2019; Pearce et al., 2021). These long- and short-term

573 observations indicate the presence of long-lived high-permeability domains along the TLF systems in the

574 Andean margin of Northern and Central Chile. Therefore, we postulate that TLF act as fluid sinks in the

575 forearc region, following a continental-scale fault-valve behaviour, carrying the fluids released by slab

576 dehydration and transported from distal locations through the subduction channel and discharging the fluids

577 upwards and laterally through the TLF. Thus, if the proposed mechanism operates for long periods of time,

578 the fluid distribution at the plate contact should show an uneven distribution of fluid, delimitating domains of

579 weak and strong friction channels, which would act as seismic barriers and asperities, respectively. In this

580 context, the spatial distribution of TLF would be associated with barriers that delimit the tectonic

581 segmentation. In the proposed model, tremor or swarm seismic activity represent episodic fluid release from

582 TLF that are poorly oriented with respect to the regional tectonic stress — in this case, the NW-striking fault

583 systems oriented at a high angle relative to the ENE convergence direction. This model provides a causal link

584 between the presence of TLF in the upper plate and the distribution of barrier and asperity domains in the

585 plate interface. A schematic cartoon of this model is presented in Figure 7.

586 Our proposed conceptual model in which TLF's promote the development of barrier domains along the

587 subducting margin through the enhancement of fluid pressure complement other process at subduction zones

588 that also enhances the budget of localized fluids at the plate contact, among them the collision of aseismic

589 ridges and fracture zones, bending of the subducting plate (e.g. Ranero et al., 2008, Ranero et al., 2005,

590 Martinez-Loriente et al., 2019; Arai et al., 2024). In the Nazca-South America plate interaction authors had

591 highlighted this increase in fluids at passive ridges such as the Taltal ridge 33°S (Leon-Rios et al., 2014) and

592 the Juan Fernandez ridge 33.5°S (Garrido et al., 2002), and fracture zones such as the Challenger Fracture

593 zone 30°S ((Poli et al., 2017; Maksymowicz, 2015). The volume of fluids in aseismic ridges is enhanced by

594 oceanic water percolation along the thicker oceanic crust, while in fracture zones as a result of the high

595 permeability that provides a mechanism to increase water storage prior to the subduction. These

596 complementary mechanisms share a common origin at the subducting plate, and in the particular case of the

597 Nazca plate they are oblique to the margin (roughly NE). Thus, the main difference with the proposed model

598 is their along strike migration with time, while in the proposed mechanism TLF belongs to the overriding

599 plate.
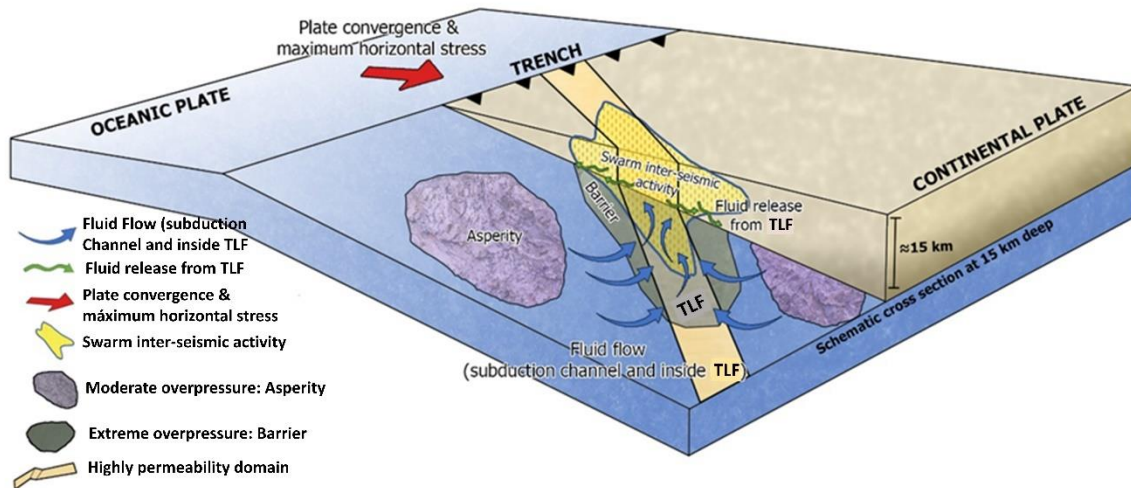
600
601 **Figure 7: Schematic conceptual model of fluid transport towards TLF, following different paths in the subduction**
602 **channel, as well as upwards within the TLF. This model proposes that TLF are sink domains of slab-derived fluids**
603 **that promote the development of barrier zones and dry out the neighbouring domains where asperities develop.**
604 **Swarm clustering in spatial association with the TLF represents a mechanism for the quasi-creep release of energy**
605 **within the barrier zone.**
606
607 **3.3 Implications**

608   If TLF act as low-friction domains (barriers) due to their capacity to store fluids released from the subducting

609   slab and thereby dry out neighbouring zones of the subduction channel, promoting the development of a high-

610   friction domain (asperity), we can envision a series of implications derived from the proposed model.

611   The most relevant implication is the geological control of barrier zones. This geological control exerted by high-

612   permeability domains in the continental lithosphere (TLF) implies a spatial control of barrier zones, and thus

613   the seismotectonic segmentation should be stable for several seismic cycles as long as the capacity of TLF to

614   store fluids is maintained. If this scenario is correct, the estimate of the seismic risk associated with each

615   seismotectonic segment can be assessed based on empirical fault-length laws (e.g. Anderson et al., 2016). In

616   this context, interplate seismic swarms and slow seismic events that develop in the vicinity of TLF zones would

617   be a mechanism for the steady release of seismic energy.

618   As discussed previously, several TLF have been identified in the Andean margin; however, little is known about

619   their origin, width, dip, depth extent, and capacity to behave as a water sink. Therefore, further study is needed

620   to postulate a reliable map of barrier domains in this subduction system.

621   On the other hand, seismic barriers/asperities would be conditioned by the capacity of barrier zones to

622   mobilise and store fluids, and would thus be relatively stable in space but with a variable behaviour during

623   several seismic cycles. If the age of the subducted slab conditions the water budget at the plate interface

624   (Rupke et al., 2004), the progressive age increase from south to north in this margin (from 0 to 45 Ma) would

625   be a controlling factor for the efficiency of the TLF-barrier hypothesis. Although this implication is highly

626   speculative, the historical record shows that the largest megathrust events at the margin have occurred in

627   Southern Chile, including the 9.3Mw 1960 Valdivia Earthquake, the largest event recorded worldwide.

628

629   4.   **Conclusions**

630   Based on first order geological and geophysical observations of the Nazca-South America plate convergence

631   we propose a conceptual model to understand the tectonic segmentation in the Andean region.

632   Observations include historical seismicity and the associated seismotectonic segmentation. Major thrust events

633   occurred in the region in the last 60 years, defining domains of asperities. GPS and viscous plate coupling that

634   provide independent proxies to stablish potential domains of barriers (low plate coupling) and asperities (high

635   plate coupling). Location of low plate coupling domains is further associated with the spatial distribution of

636   peninsulas (less basal erosion) and cumulative seismicity during the inter-seismic period (slow interplate

637   seismic events, creeping, associated with fluid release).

638   Key element in the model is played by trans-lithospheric faults (TLF). Landward, this TLF system concentrate

639   the occurrence of major hydrothermal ore deposits and some active volcanism, denoting their intrinsic high

640   permeability. Thus, at their seaward edge the TLF domains act as sink and release of fluids during the seismic

641   cycle. The fluid is captured from the slab through the subducting channel, and continuously release to the plate

642   contact, promoting the growth of barriers beneath them (excess of fluids), and asperities laterally (reduction in

643   fluid content).

644   If the interaction of first order continental structures and the fluid content of the subducting slab plays a

645   central role in the seismotectonic segmentation of convergence zones, a carefully understanding of the

646 overriding plate geology and associated structures could be instrumental to better understand the associated

647 seismic risk.

648

649 **Competing interests:** The contact author has declared that none of the authors has any competing interests.

650 **Acknowledge**: This research was partially supported by Fondef project D10I1027. J.P. acknowledges support

651 from ANID-FONDECYT grant 11181048 and Amira Global P1249 project. We also would like to thanks Prof.

652 Booth-Rea and one anonymous reviewer for their valuable observations. We think the paper has been improved

653 with the observations made by both reviewers.

654 **Data Availability Statement**: The data used in this paper is derived from published papers, indicated in the

655 text, and topographic/bathymetric data extracted from public source, ETOPO 2022. DOI: 10.25921/fd45-gt74.

References

Aki, K., (1984). Asperities, barriers, characteristic earthquakes and strong motion prediction. Journal of Geophysical Research 89: doi: 10.1029/JB089iB07p05867. Issn: 0148-0227.

660 Angermann, D., J. Klotz, C. Reigber, (1999). Space-geodetic estimation of the Nazca–South America Euler vector. Earth and Planetary Science Letters, 171(3), 329–334. https://doi.org/10.1016/S0012-821X(99)00173-9.

Arai, R., Shiraishi, K., Nakamura, Y. et al. Thick slab crust with rough basement weakens interplate coupling in the western Nankai Trough. Earth Planets Space 76, 73 (2024). https://doi.org/10.1186/s40623-024-02025-4

Arriagada, C., P. Roperch, C. Mpodozis, G. Dupont-Nivet, P.R. Cobbold, A. Chauvin, J. Cortés, (2003). Paleogene clockwise
665 tectonic rotations in the forearc of central Andes, Antofagasta region, northern Chile. Journal of Geophysical Research: Solid Earth, 108(B1).

Aron, F., R. Allmendinger, J. Cembrano, G. González, and G. Yáñez, (2013). Permanent Forearc Extension and Seismic Segmentation: Insights from the 2010 Maule Earthquake, Chile, J. Geophys. Res.,doi:10.1029/2012JB009339,

Avouac, J.P., (2007). Dynamic Processes in Extensional and Compressional Set–ings - Mountain Building: From Earthquakes
670 to Geological Deformation, Treatise on Geophysics, 6 , 377 – 439.

Barrientos S.E. , S. N. Ward, (1990). The 1960 Chile earthquake: inversion for slip distribution from surface deformation, Geophysical Journal International, Volume 103, Issue 3, Pages 589–598, https://doi.org/10.1111/j.1365-246X.1990.tb05673.x.

Barriga F. J. A. S., W.S. Fyfe, L.A, LANDEFELD, A. Ribeiro, (1992). Mantle eduction: Tectonic fluidisation at depth. Earth Science Reviews 32, 123-9.

675 Bilek, S. L., S.Y. Schwartz, H.R. DeShon, (2003). Control of seafloor roughness on earthquake rupture behavior. Geology 31, 455–458

W. F. Brace, J. D. Byerlee ,Stick-Slip as a Mechanism for Earthquakes.Science153,990-992(1966).DOI:10.1126/science.153.3739.990

R. Burridge, L. Knopoff; Model and theoretical seismicity. Bulletin of the Seismological Society of America 1967; 57 (3):
680 341–371. doi: https://doi.org/10.1785/BSSA0570030341Bürgmann, R., Kogan, M. G., Steblov, G. M., Hilley, G., Levin, V. E., & Apel, E. (2005). Interseismic coupling and asperity distribution along the Kamchatka subduction zone. *Journal of Geophysical Research*, **110**, B07405. https://doi.org/10.1029/2005JB003648

Cahill T. and B.L. Isacks, (1992). Seismicity and shape of the subducted Nazca Plate, Journal of Geophysical Researh, vol 97, B12, 17503-17529.

685 Calle-Gardella, D., Comte, D., Farías, M. et al. Three-dimensional local earthquake tomography of pre-Cenozoic structures in the coastal margin of central Chile: Pichilemu fault system. J Seismol 25, 521–533 (2021). https://doi.org/10.1007/s10950-021-09989-w

Carretier, S., Regard, V., Vassallo, R., Aguilar, G., Martinod, J., Riquelme, R., ... & Lagane, C. (2013). Slope and climate variability control of erosion in the Andes of central Chile. Geology, 41(2), 195-198.

690 Cembrano J., and L. Lara, (2009). The link between volcanism and tectonics in the southern volcanic zone of the Chilean Andes: A review, Tectonophysics 471, 96–113.

Chernicoff, C.J., J.P. Richards, E.O. Zappettini, (2002). Crustal lineament control on magmatism and mineralization in northwestern Argentina: geological, geophysical, and remote sensing evidence. Ore Geology Reviews 21, 127-155.

Chlieh M. ,J. B. De Chabalier,J. C. Ruegg,R. Armijo,R. Dmowska,J. Campos,K. L. Feigl, (2004). Crustal deformation and

695 fault slip during the seismic cycle in the North Chile subduction zone, from GPS and InSAR observations, Geophysical Journal InternationalVolume 158, Issue 2 p. 695-711.

Chlieh, M., Avouac, J. P., Sieh, K., Natawidjaja, D. H., & Galetzka, J. (2008). Heterogeneous coupling of the Sumatran megathrust constrained by geodetic and paleogeodetic measurements. *Journal of Geophysical Research*, **113**, B05305. https://doi.org/10.1029/2007JB004981

700 Comte D., A. Eisenberg ,E. Lorca, M. Pardo, L. Ponce, R. Saragoni, S. K. Singh, G. Suárez, (1986). The 1985 Central Chile Earthquake: A Repeat of Previous Great Earthquakes in the Region?, Science, 07-25 233(4762): 449-453.

Contreras-Reyes, E., I. Grevemeyer, E. R. Flueh, M. Scherwath, and M. Heesemann, (2007). Alteration of the subducting oceanic lithosphere at the southern central Chile trench–outer rise, Geochem. Geophys. Geosyst., 8, Q07003, doi:10.1029/2007GC001632.

705 Cox, S.F., (2016). Injection-driven swarm seismicity and permeability enhancement: implications for the dynamics of hydrothermal ore systems in high fluid-flux, overpressured faulting regimes. Economic Geology 111, pp. 559–587.

Creixell, C., Parada, M. A., Morata, D., Vásquez, P., Pérez de Arce, C., Arriagada, C., (2011). Middle-Late Jurassic to Early Cretaceous transtension and transpression during arc building in Central Chile: evidence from mafic dike swarms, Andean Geol. 38, 37-63.

710 B. Delouis, T. Monfret, L. Dorbath, M. Pardo, L. Rivera, D. Comte, H. Haessler, J.P. Caminade, L. Ponce, E. Kausel, A. Cisternas, (1997). The Mw = 8.0 Antofagasta (northern Chile) earthquake of 30 July 1995: A precursor to the end of the large 1877 gap. Bulletin of the Seismological Society of America, 87 (2): 427–445. doi: https://doi.org/10.1785/BSSA0870020427.

Delouis, B., J.M. Nocquet, M. Vallée (2010). Slip distribution of the February 27, 2010 Mw = 8.8 Maule Earthquake, central Chile, from static and high-rate GPS, InSAR, and broadband teleseismic data, Geophys. Res. Lett., 37, L17305,

715 doi:10.1029/2010GL043899.

Demets, C., R. Gordon, D. Argus, S. Stein, (1990). Current Plate Motions. Geophysical Journal International. 101– 425 - 478. 10.1111/j.1365-246X.1990.tb06579.x.

Espinoza, M., Montecino, D., Oliveros, V., Astudillo, N., Vásquez, P., Reyes, R., Celis, C., González, R., Contreras, J., Creixell, C., Martínez, A., (2019). The synrift phase of the early Domeyko Basin (Triassic, northern Chile): Sedimentary,

720 volcanic, and tectonic interplay in the evolution of an ancient subduction-related rift basin. Basin Research 31, 4-32.

Farías M., D. Comte D., S. Roecker, D. Carrizo, M. Pardo, (2011). Crustal extensional faulting triggered by the 2010 Chilean Earthquake: The Pichilemu Seismic Sequence: Tectonics , v. 30, TC6010, doi:10.1029/2011TC002888.

Farrar, A.D., Cooke, D.R., Hronsky, J.M.A., Wood, D.G., Benavides, S., Cracknell, M.J., Banyard, J.F., Gigola, S., Ireland, T., Jones, S.M., Piquer, J, (2023). A Model for the lithospheric architecture of the Central Andes and the localization of giant porphyry copper deposit clusters. Economic Geology 118 (6), 1235–1259, doi: 10.5382/econgeo.5010.

Fedotov, S. A., (1968). On seismic cycle, possibility of quantitative seismic regionalization and long-term seismic prediction. In Seismic Zoning of the USSR (ed. S. Medvedev) (Nauka, Moscow) pp. 121-150.

Fischer, T., (2021)., Control estructural sobre la circulación de magmas y fluidos hidrotermales Miocenos y Cuaternarios en el sector de La Invernada, Región del Maule, Chile. Valdivia: Universidad Austral de Chile, 314.

Forsyth, D. W.,Y. Yang, M.D. Mangriotis, Y. Shen, (2003). Coupled seismic slip on adjacent oceanic transform faults. Geophysical Research Letters, 30(12).

Fujie, G., S. Kodaira, Y., Kaiho, et al., (2018). Controlling factor of incoming plate hydration at the north-western Pacific margin. Nat Commun 9, 3844.

Gana, P., R. Wall, A. Gutiérrez, (1996). Mapa Geológico del Área de Valparaíso – Cuaracaví. Regiones de Valparaíso y Metropolitana, Mapas Geológicos N°1, Escala 1:100.000. Servicio Nacional de Geología y Minería, Chile.

Garrido I., J. Cembrano, A.Siña, P. Stedman, G. Yáñez., (2002), High magma oxidation state and contractional deformation: key factors in the generation of Andean porphyry copper deposits, Central Chile (31-34°S). Revista Geológica de Chile, Vol. 29, No. 1, p. 3-14.

Geersen, J., C. Ranero, U. Barckhausen, U., (2015). Subducting seamounts control intraplate coupling and seismic rupture in the 2014 Iquique earthquake area. Nat Commun 6, 8267. https://doi.org/10.1038/ncomms9267.

Giambiagi, L., Álvarez, P., Creixell, C., Mardonez, D., Murillo, I., Velásquez, R., Lossada, A., Suriano, J., Mescua, J., Barrionuevo, M. (2017). Cenozoic Shift From Compression to Strike-Slip Stress Regime in the High Andes at 30°S, During the Shallowing of the Slab: Implications for the El Indio/Tambo Mineral District. Tectonics, Vol. 36, Issue 11. https://doi.org/10.1002/2017TC004608.

Glodny, J., H. Echtler, S. Collao, M. Ardiles, P. Burón, O. Figueroa, (2008): Differential Late Paleozoic active margin evolution in South-Central Chile (37°S-40°S) -The Lanalhue Fault Zone. Journal of South American Earth Sciences, 26, 4, 397-411 DOI: 10.1016/j.jsames.2008.06.001.

Gutscher M.A., J. Malavielle, S. Lallemand, J.Y. Collot, (1999). Tectonic segmentation of the north Andean margin: impact of the Carnagie Ridge collision, Earth and Planetary Science Letters, 168, 255-270.

González-Vidal, D., Moreno, M., Sippl, C., Baez, J. C., Ortega-Culaciati,F., Lange, D., et al. (2023). Relation between oceanic plate structure, patterns of interplate locking and microseismicity in the 1922 Atacama seismic gap. Geophysical Research Letters, 50, e2023GL103565. https://doi. org/10.1029/2023GL103565

Haberland, C., A. Rietbrock, D. Lange, K. Bataille, S. Hofmann, (2006). Interaction between forearc and oceanic plate at the south-central Chilean margin as seen in local seismic data. Geophysical Research Letters 33: 1-5.

755 Hansen, S., B. Schmandt, A. Levander, et al., (2016). Seismic evidence for a cold serpentinized mantle wedge beneath Mount St Helens. Nat Commun 7, 13242. https://doi.org/10.1038/ncomms13242

Hayes, G., (2018). Slab2 – A Comprehensive Subduction Zone Geometry Model: U.S. Geological Survey data release, https://doi.org/10.5066/F7PV6JNV

Hayes, G., M. Herman, W. Barnhart, et al., (2014). Continuing megathrust earthquake potential in Chile after the 2014 Iquique
760 earthquake. Nature 512, 295–298. https://doi.org/10.1038/nature13677

Heidarzadeh, M., Murotani, S., Satake, K., Ishibe, T., Gusman, A.R., (2016). Source model of the 16 September 2015 Illapel, Chile Mw 8.4 earthquake based on teleseismic and tsunami data. Geophys. Res. Lett. 43, 643–650.

Hyndman R.D., S. M. Peacock, (2002). Serpentinization of the forearc mantle, Earth and Planetary Science Letters 212, 417-432.

765 Kay, S.M., Mpodozis, C., (2002). Magmatism as a probe to the Neogene shallowing of the Nazca plate beneath the modern Chilean flat slab. Journal of South American Earth Sciences 15, 39-57.

Kimura G., A. Yamaguchi, M. Masataka, (2018). Upper-plate tectonic hysteresis and segmentation of the rupture area during seismogenesis in subduction zones—A case study of the Nankai "rough", Geology and Tectonics of Subduction Zones: A Tribute to Gaku Kimura, Timothy Byrne, Michael B. Underwood, III, Donald Fisher, Lisa McNeill, Demian Saffer, Kohtaro
770 Ujiie, Asuka Yamaguchi, https://doi.org/10.1130/2018.2534(05).

J. Kley, C.R. Monaldi, J.A. Salfity. (1999). Along-strike segmentation of the Andean foreland: causes and consequences, Tectonophysics, Volume 301, Issues 1–2, Pages 75-94, ISSN 0040-1951, https://doi.org/10.1016/S0040-1951(98)90223-2.

Kohler, P. A., (2016). Geología 32odelling32 del Complejo Volcánico Laguna del Maule y su control sobre la deformación cortical 32odell. Undergraduate thesis. Concepción: Universidad de Concepción, 225.

775 Koper, K. D., A. R. Hutko, T. Lay, and O. Sufri, (2012). Imaging short-period seismic radiation from the 27 February 2010 Chile (Mw 8.8) earthquake by back-projection of P, PP, and PKIKP waves, J. Geophys. Res. 117, B02308

Lamb, S. and P. Davis. (2003). Cenozoic climate change as a possible cause for the rise of the Andes. Nature. 425. 792-7. 10.1038/nature02049.

Lanza, F., A. Tibaldi, F.L. Bonali, C. Corazzato, (2013). Space–time variations of stresses in the Miocene–Quaternary along
780 the Calama–Olacapato–El Toro Fault Zone, Central Andes. Tectonophysics 593, 33-56.

Lara, L., A. Lavenu, J. Cembrano, C. Rodríguez, C., (2006). Structural controls of volcanism in transversal chains: resheared faults and neotectonics in the Cordón Caulle–Puyehue area (40.5°S), Southern Andes. Journal of Volcanology and Geothermal Research 158, 70–86, https://doi.org/10.1016/j.jvolgeores.2006.04.017.

Lay, T., H. Kanamori and L. Ruff, (1982). The asperity model and the nature of large subduction zone earthquake occurrence,
785 Earthquake Prediction Research, 1, 3-71.

Lay, T., and S. L. Bilek, (2007). Anomalous earthquake ruptures at shallow depths on subduction zone megathrusts, in: The Seismogenic Zone of Subduction Thrust Faults, Edited by T. H. Dixon and J. C. Moore, Columbia University Press, New York, pp. 476-511.

Lay, T., C. J. Ammon, H. Kanamori, K. D. Koper, O. Sufri, and A. R. Hutko, (2010). Teleseismic inversion for rupture process of the 27 February 2010 Chile (Mw 8.8) earthquake, Geophys. Res. Lett., 37, L13301, doi:10.1029/2010GL043379.

Lay, T., H.E.E Yue, E. E. Brodsky, and C. An, (2014). The 1 April 2014 Iquique, Chile Mw 8.1 earthquake rupture sequence, Geophys. Res. Lett., 41, doi:10.1002/2014GL060238

Lay, T., (2015). The surge of great earthquakes from 2004 to 2014, Earth and Planetary Sci. Lett., Invited Frontiers Paper, 409, 133-146.

Lee, S.J., T.Y. Yeh, T.C. Lin, Y.Y. Lin, T.R. Song, B.S. Huang, , (2016), Two-stage composite megathrust rupture of the 2015 Mw8.4 Illapel, Chile, earthquake identified by spectral-element inversion of teleseismic waves, Geophys. Res. Lett., 43, 4979–4985, doi:10.1002/2016GL068843.

Leon-Rios, S., Reyes-Wagner, V., Calle-Gardella, D., Rietbrock, A., Roecker, S., Maksymowicz, A., & Comte, D. (2024). Structural characterization of the Taltal segment in northern Chile between 22°S and 26°S using local earthquake tomography. Geochemistry, Geophysics, Geosystems, 25, e2023GC011197. https://doi.org/10.1029/2023GC011197

Li, L., T. Lay, K. F. Cheung, and L. Ye, (2016). Odellingdeling of teleseismic and tsunami wave observations to constrain the 16 September 2015 Illapel, Chile, MW 8.3 earthquake rupture process, Geophysical Research Letters, 43, 4303-4312, doi:10.1002/2016GL068674

Lin, Y. N. N., A. Sladen, F. Ortega-Culaciati, F., M. Simons, J.P. Avouac, E.J.., Fielding, A. Socquet, (2013). Coseismic and postseismic slip associated with the 2010 Maule Earthquake, Chile: Characterizing the Arauco Peninsula barrier effect. Journal of Geophysical Research: Solid Earth, 118(6), 3142-3159.

Lorito, S., F. Romano, F., S. Atzori, et al., (2011). Limited overlap between the seismic gap and coseismic slip of the great 2010 Chile earthquake. Nature Geosci 4, 173–177 https://doi.org/10.1038/ngeo1073.

Loveless, J. P., & Meade, B. J. (2011). Stress modulation on the San Andreas fault by interseismic fault system interactions. Geology, 39, 1035–1038. https://doi.org/10.1130/G32215.1

Lutz, B.M., Axen, G.J., van Wijk, J.W., Phillips, F.M., (2022). Whole-lithosphere shear during oblique rifting. Geology 50, 412–416, https://doi.org/10.1130/G49603.1.

Maekawa H., M. Shzui, T. Ishii, P. Freyer, J.A. Pearce, (1993). Blueshist metamorphism in active subduction zone, Nature, v. 364, p. 520-523.

Maksymowicz A., (2015), The geometry of the Chilean continental wedge: Tectonic segmentation of subduction processes off Chile, Tectonophysics Volume 659, 30 September 2015, Pages 183-196, https://doi.org/10.1016/j.tecto.2015.08.007.

Martínez-Loriente, S., Sallarès, V., R. Ranero, C., B. Ruh, J., Barckhausen, U., Grevemeyer, I., & Bangs, N. (2019). Influence of incoming plate relief on overriding plate deformation and earthquake nucleation: Cocos Ridge subduction (Costa Rica). Tectonics, 38, 4360–4377. https://doi.org/10.1029/2019TC005586.

Marrett, R.A., R.W. Allmendinger, R.N. Alonso, R.E. Drake, (1994). Late Cenozoic tectonic evolutuion of the Puna Plateau and adjacent foreland, northwestern Argentine Andes. Journal of South American Earth Sciences, Vol. 7, N°2, pp179-207.

Mccaffrey, R., Stein, S., & Freymueller, J. (2002). Crustal block rotations and plate coupling. *Geodynamics Series*, **30**, 101–122.

McCuaig, T.C., Hronsky, J.M.A., (2014). The mineral system concept: the key to exploration targeting. Society of Economic Geologists, Special Publication 18, 153-176.

Melgar, D., W. Fan, S. Riquelme, J. Gengm C. Liang, M. Fuentes, G. Vargas, R. M., Allen, P. M. Shearer, and E. J. Fielding, (2016). Slip segmentation and slow rupture to the trench during the 2015, Mw8.3 Illapel, Chile earthquake, Geophys. Res. Lett., 43, 961–966, doi:10.1002/2015GL067369

Melnick D., H.P. Echtler, (2006). Morphotectonic and Geological digital Map Compilations of the South-Central Chile (36°-42°S), In The Andes active subduction orogeny, Onken et al. editors, Frontiers in Earth Sciences, ,565-568, Elsevier, 569p.

Melnick, D. & B. Bookhagen, M. Strecker, H. Echtler, (2009). Segmentation of megathrust rupture zones from fore-arc deformation patterns over hundreds to millions of years, Arauco Peninsula, Chile. Journal of Geophysical Research. 114. 10.1029/2008JB005788.

Menant, A., S. Angiboust, T. Gerya, T. et al., (2020). Transient stripping of subducting slabs controls periodic forearc uplift. Nat Commun 11, 1823. https://doi.org/10.1038/s41467-020-15580-7.

Mendoza, C., S. Hartzel, and T. Monfret, (1994). Wide-band analysis of the 3 March 1985 central Chile earthquake: Overall source process and rupture history, Bull. Seismol. Soc. Am., 84, 269– 283.

Métois, M., A. Socquet, C. Vigny, , (2012). Interseismic coupling, segmentation and mechanical behavior of the Central Chile subduction zone. Journal of Geophysical Research. 117. 10.1029/2011JB008736.

Métois, M., Vigny, C., & Socquet, A. (2016). Interseismic Coupling, megathrust earthquakes and seismic swarms along the Chilean Subduction Zone (38°–18°S). *Pure and Applied Geophysics*, **173**, 1431–1449. https://doi.org/10.1007/s00024-016-1280-5

Miller, N. C., D. Lizarralde, J.A. Collins, W.S. Holbrook, H.J. Van Avendonk, , (2021). Limited mantle hydration by bending faults at the Middle America Trench. Journal of Geophysical Research: Solid Earth, 126, e2020JB020982. https://doi.org/10.1029/2020JB020982

Moggi, K. (1977). Seismic activity and earthquake prediction, Proc. Earthquake Pred. Res. Syrup., 1976, 203-214, Tokyo.

Moggi, K., (1985), Earthquake Prediction (Academic Press, Tokyo,).

Moreno, M., Rosenau, M., & Oncken, O. (2010). 2010 Maule earthquake slip correlates with pre-seismic locking of Andean subduction zone. *Nature*, **467**, 198–202. https://doi.org/10.1038/nature09349

Moreno, M., D. Melnick, M. Rosenau, J. Baez, J. Klotz, O. Oncken, et al., (2012). Toward understanding tectonic control on the Mw 8.8 2010 Maule Chile earthquake. Earth and Planetary Science Letters, 321, 152-165.

Moreno, M., Haberland, C., Oncken, O. et al. Locking of the Chile subduction zone controlled by fluid pressure before the 2010 earthquake. Nature Geosci 7, 292–296 (2014).

Molina, D., A. Tassara, R. Abarca, R., D. Melnick, A. Madella, (2021). Frictional segmentation of the Chilean megathrust from a multivariate analysis of geophysical, geological, and geodetic data. Journal of Geophysical Research: Solid Earth, 126, e2020JB020647, https://doi.org/10.1029/2020JB020647.

Moscoso, E., I. Grevemeyer, (2015). Bending-related faulting of the incoming oceanic plate and its effect on lithospheric hydration and seismicity: A passive and active seismological study offshore Maule, Chile. Journal of Geodynamics. 90. 58-70. 10.1016/j.jog.2015.06.007.

Mpodozis, C., V. Ramos, (1990). The andes of Chile and Argentina. Circum Pacific Council Publications.

Müller, R. D., S. Zahirovic, S.E. Williams, J., Cannon, M. Seton, D.J. Bower, M.G. Tetley, C. Heine, E. Le Breton, S. Liu, S., S.H.J. Russell, T. Yang, J., Leonard, J., and M. Gurnis, (2019). A global plate model including lithospheric deformation along major rifts and orogens since the Triassic. Tectonics, vol. 38,

Nealy, J. L., M. W. Herman, G. L. Moore, G. P. Hayes, H. M. Benz, E. A. Bergman, and S. E. Barrientos (2017). 2017 Valparaíso earthquake sequence and the megathrust patchwork of central Chile, Geophysical Research Letters 44, doi: 10.1002/2017GL074767.

Niemeyer, H., H. Berrios, R. de la Cruz, (2004). Temperatures of formation in Triassic cataclasites of Cordillera Domeyko, Antofagasta, Chile. Rev. Geol. Chile 31, 3-18.

NOAA National Centers for Environmental Information. (2022): ETOPO 2022 15 Arc-Second Global Relief Model. NOAA National Centers for Environmental Information. [Dataset]. DOI: 10.25921/fd45-gt74

Okada, Y. ,(1985). Surface Deformation due to Shear and Tensile Faults in a Half-Space. Bulletin of the Seismological Society of America, 75, 1135-1154

Palacios, C., Ramírez, L.A., Townley, B., Solari, M., Guerra, N., (2007). The role of the Antofagasta–Calama Lineament in ore deposit deformation in the Andes of northern Chile. Mineralium Deposita 42, 301-308.

Pasten-Araya, F., P. Salazar, S. Ruiz, E. Rivera, B. Potin, A. Maksymowicz,, et al., (2018). Fluids along the plate interface influencing the frictionalregime of the Chilean subduction zone, northern Chile. Geophysical Research Letters, 45. https://doi.org/10.1029/2018GL079283.

Peacock S.M.,(1993). Large-scale hydration of the lithosphere above subducting slabs, Chemical Geology, Volume 108, Issues 1–4, Pages 49-59, ISSN 0009-2541,https://doi.org/10.1016/0009-2541(93)90317 C.

Pearce, R.K., A. Sánchez de la Muela, M. Moorkamp, J.O.S Hammond, T.M. Mitchell, J. Cembrano, J. Araya-Vargas, P.G.Meredith, P. Iturrieta, N. Pérez-Estay, N.R. Marshall, J. Smith, G. Yañez A. Griffith, W., C. Marquardt, A. Stanton-Yonge, R. Núñez, (2020). Reactivation of fault systems by compartmentalized hydrothermal fluids in the Southern Andes revealed by magnetotelluric and seismic data. Tectonics 39, e2019TC005997, .

Peña, M., 2022. Origen de las Rotaciones Tectónicas en el Márgen Occidental de América del Sur: Influencia de Heterogeneidades en las Placas de Nazca y Sudamericana. Tesis para Optar al Grado de Doctor en Ciencias, Mencion Geología. Inédito, 214 p. Universidad de Chile, Facultad de Ciencias Físicas Y Matemáticas, Departamento de Geología. Chile.

Perrin, C., Waldhauser, F., & Scholz, C. H. (2021). The shear deformation zone and the smoothing of faults with displacement. Journal of Geophysical Research: Solid Earth, 126, e2020JB020447. https://doi. org/10.1029/2020JB020447

Philibosian, B., A.J. Meltzner, (2020). Segmentation and supercycles: A catalog of earthquake rupture patterns from the Sumatran Sunda Megathrust and other well-studied faults worldwide. Quaternary Science Reviews 241, https://doi.org/10.1016/j.quascirev.2020.106390.

Poli P., A. Maksymowicz, S. Ruiz; The Mw 8.3 Illapel earthquake (Chile): Preseismic and postseismic activity associated with hydrated slab structures. Geology 2017;; 45 (3): 247–250. doi: https://doi.org/10.1130/G38522.1

Piquer, J., Skármeta, J., Cooke, D.R., (2015). Structural evolution of the Río Blanco-Los Bronces district, Andes of central Chile: controls on stratigraphy, magmatism and mineralization. Economic Geology 110, 1995-2023.

Piquer, J., R.F. Berry, R.J. Scott, D.R. Cooke, (2016). Arc-oblique fault systems: their role in the Cenozoic structural evolution and metallogenesis of the Andes of central Chile. Journal of Structural Geology 89, 101–117, https://doi.org/10.1016/j.jsg.2016.05.008.

Piquer, J.; G. Yáñez, O. Rivera, D. Cooke, (2019). Long-lived damage zones associated with fault intersections in the Andes of Central Chile. Andean Geology 46 (2): [doi:http://dx.doi.org/10.5027/andgeoV46n2-3106]

Piquer J., O. Rivera, G. Yáñez, N. Oyarzun, (2021a). The Piuquencillo Fault System: a long-lived, Andean-transverse fault system and its relationship with magmatic and hydrothermal activity, Solid Earth, (https://doi.org/10.5194/se-2020-142).

Piquer, J., P. Sanchez-Alfaro, P. Pérez-Flores, P., (2021b). A new model for the optimal structural context for giant porphyry copper deposit formation. Geology 49, 597-601, https://doi.org/10.1130/G48287.1.

Poli P., A. Maksymowicz, S. Ruiz (2017). The Mw 8.3 Illapel earthquake (Chile): Preseismic and postseismic activity associated with hydrated slab structures. Geology. 45. 10.1130/G38522.1.

Pritchard, M.E., M. Simons, P.A. Rosen, S. Hensley, F.H. Webb, (2002), Co-seismic slip from the 1995 July 30 Mw= 8.1 Antofagasta, Chile, earthquake as constrained by InSAR and GPS observations. Geophysical Journal International, 150: 362-376. https://doi.org/10.1046/j.1365-246X.2002.01661.x.

Radic, J.P., (2010). Las cuencas cenozoicas y su control en el volcanismo de los Complejos Nevados de Chillán y Copahue-Callaqui (Andes del Sur, 36-39° S). Andean Geology 37 (1): 220-246. Doi: 10.5027/andgeoV37n1-a09.

Ramos, V., (2008). The Basement of Central Andes: The Arequipa and Related Terranes. Annu. Rev. Earth Planet. Sci., 36, pp. 289-324.

Ramos, V., S. Kay, (2006). Overview of the tectonic evolution of southern central Andes of Mendoza and Neuquén (35°-39° S latitude). Geological Society of America, Special Paper 407.

Ranero C. & V. Sallares. (2004). Geophysical evidence for hydration of the crust and mantle of the Nazca plate during bending at the north Chile Trench. Geology. 32. 10.1130/G20379.1.

Ranero, C. R., A. Villaseñor, J. Phipps Morgan, and W. Weinrebe (2005), Relationship between bend-faulting at trenches and intermediate-depth seismicity, Geochem. Geophys. Geosyst., 6, Q12002, doi:10.1029/2005GC000997.

920 Ranero, C. R., Grevemeyer, I., Sahling, H., Barckhausen, U., Hensen, C., Wallmann, K., Weinrebe, W., Vannucchi, P., von Huene, R., & McIntosh, K. (2008). Hydrogeological system of erosional convergent margins and its influence on tectonics and interplate seismogenesis. Geochemistry, Geophysics, Geosystems, 9, Q03S04. https://doi.org/10.1029/2007GC001679

Richards, J.P., Jourdan, F., Creaser, R.A., Maldonado, G., DuFrane, S.A., (2013). Geology, geochemistry, geochronology, and economic potential of Neogene volcanic rocks in the Laguna Pedernal and Salar de Aguas Calientes segments of the Archibarca

925 lineament, northwest Argentina. Journal of Volcanology and Geothermal Research 258, 47–73.

Rivera, O., 2017. Geodynamic Setting for Porphyry Copper Deposits in Central Chile: Role of Translithospheric Structures and Gravimetric Anomalies in Andean Metallogeny. Master Thesis, Department of Geological Sciences, Faculty of Engineering and Geological Sciences. Catholic University of the North, Chile 215 pp.

Rivera, O., J. Cembrano, (2000). Modelo de Formación de Cuencas Volcano-Tectónicas en Zonas de Transferencia Oblicuas

930 a la Cadena Andina: El Caso de las Cuencas Oligo-Miocenas de Chile Central y su Relación con Estructuras WNW-NW (33º00' – 34º30' LS). In: 9º Congreso Geológico Chileno, Actas, vol. Nº2, p. 631-636, Puerto Varas.

Roquer, T., G. Arancibia, J. Rowland, P. Iturrieta, D. Morata, J. Cembrano, (2017). Fault-controlled development of shallow hydrothermal systems: structural and mineralogical insights from the Southern Andes. Geothermics 66, 156-173, http://dx.doi.org/10.1016/j.geothermics.2016.12.003.

935 Roland, E. and J.J. McGuire, (2009), Earthquake swarms on transform faults. Geophysical Journal International, 178: 1677-1690. https://doi.org/10.1111/j.1365-246X.2009.04214.x

Ruegg, J.C., J. Campos, R. Armijo, S. Barrientos, P. Briole, R. Thiele, R., et al., (1996). The Mw = 8.1 Antofagasta earthquake of July 301995: first results from teleseismic and geodetic data. Geophys. Res. Lett. 23 (9),917–920.

Ruiz, S., R. Madariaga, (2018). Historical and recent large megathrust earthquakes in Chile. Tectonophysics.

940 http://dx.doi.org/10.1016/j.tecto.2018.01.015.

Ruiz, S., R. Madariaga, M. Astroza, G.R. Saragoni, M. Lancieri,C. Vigny, J. Campos, (2012). Short Period Rupture Process of the 2010 Mw 8.8 Maule Earthquake in Chile. Earthquake Spectra, Vol 28, N.S1, S1-S18

Ruiz, S., M. Metois, A. Fuenzalida, J. Ruiz, F. Leyton, R. Grandin, C. Vigny, R. Madariaga, J. Campos, (2014). Intense foreshocks and a slow slip event preceded the 2014 Iquique Mw 8.1 earthquake. Science, 345, 1165-1169, DOI:

945 10.1126/science.1256074.

Ruepke, L., J. Morgan, M. Hort, J. Connolly, (2004). Serpentine and the subduction water cycle. Earth and Planetary Science Letters. 223. 17-34. 10.1016/j.epsl.2004.04.018.

Salfity, J. A. (1985). Lineamentos transversales al rumbo andino en el Noroeste Argentino. In: IV Congreso Geológico Chileno, Antofagasta, Chile, Vol. 2, pp. 119–137.

950 Saffer, D.M. & H. Tobin, (2011). Hydrogeology and Mechanics of Subduction Zone Forearcs: Fluid Flow and Pore Pressure. Annu. Rev. Earth Planet. Sci.. 39. 157-186. 10.1146/annurev-earth-040610-133408.

Safer, D. M., (2017). Mapping fuids to subduction megathrust locking and slip behavior: Fluids and Subduction Megathrust Locking, Geophys Res Lett 44, 9337–9340.

Sagripanti, L., Folguera, A., Gimenez, M., Rojas Vera, E.A., Fabiano, J.J., Molnar, N., Fennell, L., Ramos, V.A., (2014).

955   Geometry of Middle to Late Triassic extensional deformation pattern in the Cordillera del Viento (Southern Central Andes): a combined field and geophysical study. J. Iber. Geol. 40, 349-366.

Saillard, M., L. Audin, B. Rousset, J.-P. Avouac, M. Chlieh, S. R. Hall, L. Husson, and D. L. Farber (2017). From the seismic cycle to long-term deformation: linking seismic coupling and Quaternary coastal geomorphology along the Andean megathrust, Tectonics, 36, doi:10.1002/2016TC004156.

960   Sandwell, D. T., Müller, R. D., Smith, W. H., Garcia, E., & Francis, R. (2014). New global marine gravity model from CryoSat-2 and Jason-1 reveals buried tectonic structure. Science, 346(6205), 65-67.

Santibáñez I., J. Cembrano, T. García-Pérez, C. Costa, G. Yáñez, C. Marquardt, G. Arancibia, G. González, (2019). Crustal faults in the Chilean Andes: geological constraints and seismic potential, Andean Geology, 46 (1): 32-65. Doi: 10.5027/andgeoV46n1-3067.

965   Satake, K., M. Heidarzadeh, (2017). A Review of Source Models of the 2015 Illapel, Chile Earthquake and Insights from Tsunami Data. In: Braitenberg, C., Rabinovich, A. (eds) The Chile-2015 (Illapel) Earthquake and Tsunami. Pageoph Topical Volumes. Birkhäuser, Cham. https://doi.org/10.1007/978-3-319-57822-4_1.

Scholz C. H., (1990). The Mechanics of Earthquakes and Faulting (2nd Edition), Cambridge University Press, 504p.

Scholz, C. H., and J. Campos, (2012). The seismic coupling of subduction zones revisited, J. Geophys. Res., 117, B05310,

970   doi:10.1029/2011JB009003.

Schurr, B., G. Asch, M. Rosenau, R. Wang, O. Oncken, S. Barrientos, P. Salazar, and J.-P. Vilotte, (2012). The 2007 M7.7 Tocopilla northern Chile earthquake sequence: Implications for along-strike and downdip rupture segmentation and megathrust frictional behavior, J. Geophys. Res., 117, B05305, doi:10.1029/2011JB009030.

Schurr, B., G. Asch, S. Hainzl, S. et al., (2014). Gradual unlocking of plate boundary controlled initiation of the 2014 Iquique

975   earthquake. Nature 512, 299–302 https://doi.org/10.1038/nature13681

SERNAGEOMIN, (2003). Mapa Geológico de Chile 1:1.000.000: digital version. Servicio Nacional de Geología y Minería, Digital Geological Publication No. 4 (CD-ROM, version 1.0). Santiago, Chile.

Shillington, D., A. Bécel, M. Nedimović, Et al., (2015). Link between plate fabric, hydration and subduction zone seismicity in Alaska. Nature Geosci 8, 961–964. https://doi.org/10.1038/ngeo2586

980   Sibson, R.H., (1990). Conditions for fault-valve behavior, in Knipe, R.J., and Rutter, E.H., eds., Deformation Mechanisms, Rheology and Tectonics: Geological Society [London] Special Publication 54, p. 15–28, https://doi.org/10.1144/GSL.SP.1990.054.01.02.

Sibson, R.H., (2020). Preparation zones for large crustal earthquakes consequent on fault-valve action. Earth, Planets and Space 72:31, https://doi.org/10.1186/s40623-020-01153-x.

985   Sielfeld, G., D. Lange, J. Cembrano, (2019). Intra-Arc Crustal Seismicity: Seismotectonic Implications for the Southern Andes Volcanic Zone, Chile. Tectonics 38, 552–578, https://doi.org/10.1029/2018TC004985.

Stanton-Yonge, A., W.A. Griffith, J. Cembrano, R. St. Julien, P. Iturrieta, (2016). Tectonic role of margin-parallel and margin-transverse faults during oblique subduction in the Southern Volcanic Zone of the Andes: Insights from boundary element 39odelling: Tectonics 35, 1990–2013, https://doi.org/10.1002/2016TC004226.

990   Talwani P., (2014). Intraplate Earthquakes, Cambridge University press, 360p.

Thingbaijam K. K. S., P. M. Mai, K. Goda, (2017). New Empirical Earthquake Source-Scaling Laws. Bulletin of the Seismological Society of America; 107 (5): 2225–2246. Doi: https://doi.org/10.1785/0120170017.

Torres, J., (2021). Caracterización del lineamiento Laguna fea-volcán san Pedro, región del Maule: Relación con actividad magmática e hidrotermal. Undergraduate thesis. Valdivia: Universidad Austral de Chile, 174.

995   Tsuji, T., J. Ashi, Y.Ikeda, Y., (2014). Strike-slip motion of a mega-splay fault system in the Nankai oblique subduction zone. Earth Planet Sp 66, 120. https://doi.org/10.1186/1880-5981-66-120.

Vigny, C., A. Socquet, S. Peyrat,J.C. Ruegg, M. Métois, R. Madariaga, et al., (2011). The 2010 Mw 8.8 Maule Megathrust Earthquake of Central Chile, Monitored by GPS, Science, 1417-1421, 332, 6036, American Association for the Advancement of Science, doi: 10.1126/science.1204132.

1000   Wall, R., P. Gana, A. Gutiérrez, (1996). Mapa Geológico del Área de San Antonio- Melipilla. Regiones de Valparaíso, Metropolitana y del Libertador Bernardo O'Higgins. Mapas Geológicos Nº2, Escala 1:100.000. Sernageomin, Chile.

Wall, R., D. Sellés, P. Gana, (1999). Geología del Área Tiltil-Santiago, Región Metropolitana de Santiago. Serie Mapas Geológicos N°11, Escala 1:100.000. Sernageomin, Chile.

Wallace, L. M., Beavan, J., McCaffrey, R., & Darby, D. (2004). Subduction zone coupling and tectonic block rotations in the

1005   North Island, New Zealand. *Journal of Geophysical Research*, **109**, B12406. https://doi.org/10.1029/2004JB003241

Wang, K. & S.L. Bilek, (2011). Do subducting seamounts generate or stop large earthquakes? Geology 39, 819–822.

Wdowinski, S., (1992). Dynamically supported trench topography, J. Geophys. Res., 97(B12), 17651– 17656, doi:10.1029/92JB01337.

Wiemer, D., Hagemann, S.G., Hayward, N., Begg, G.C., Hronsky, J., Thébaud, N., Kemp, A.I.S., Villanes, C., (2023). Cryptic

1010   trans-lithospheric fault systems at the western margin of South America: implications for the formation and localization of gold-rich deposit superclusters. Frontiers in Earth Science 11, 1159430, doi: 10.3389/feart.2023.1159430.

Xia, S., J. Sun, H. Huang, (2015). Degree of serpentinization in the forearc mantle wedge of Kyushu subduction zone: quantitative evaluations from seismic velocity. Marine Geophysical Research, 36, 101-112.

Yáñez-Cuadra, V., Ortega-Culaciati, F., Moreno, M., Tassara, A., KrummNualart, N., Ruiz, J., et al. (2022).

1015   Interplate coupling and seismic potential in the Atacama Seismic Gap (Chile): Dismissing a rigid Andean sliver. Geophysical Research Letters, 49, e2022GL098257. https://doi.org/10.1029/2022GL098257

Yañez, G., P. Gana, R. Fernández, (1998). Sobre el orígen y significado geológico de la anomalía Melipilla, zona central de Chile. Revista Geológica de Chile, 25, No. 2, 175-198.

Yañez, G., C.R. Ranero, R. Von Huene, J. Díaz, (2001). Magnetic anomaly interpretation across the southern central Andes (32°-34°S): The role of the Juan Fernandez Ridge in the late Tertiary evolution of the margin. Journal of Geophysical Research. 106, 6325-6345

Yañez G., J. Cembrano, (2004). The role of the viscous plate coupling in the late tertiary Andean deformation. Journal of Geophysical Research, vol 106, 6325-6345, 2004.

Yañez G., O. Rivera, (2019). Crustal dense blocks in the fore-arc and arc region of Chilean ranges and their role in the magma ascent and composition. Breaking paradigms in the Andean metallogeny, Journal of South American Earth Sciences,93, pp. 51-66. DOI: 10.1016/j.jsames.2019.04.006.

Yue L.T., , E. Brodsky, C. An, (2014). The 1 April 2014 Iquique, Chile, Mw 8.1 earthquake rupture sequence, Geophys. Res. Lett., 41, 3818– 3825, doi:10.1002/2014GL060238.

Zienkiewicz, O. C., and R. L. Taylor (1991), The Finite Element Method, vol. 2, Solid and Fluid Mechanics Dynamics and Non-linearity, 4th ed., McGraw-Hill, New York.